

**ENVIRONMENTAL SITE REMEDIATION AT
FOX-E – DURBAN ISLAND AND PADLOPING
ISLAND, NUNAVUT**

Spill Contingency Plan

Version 1

(O/Ref.: TP2653) (Y/Ref.: EW699-120225/001/NCS)

**PUBLIC WORKS AND GOVERNMENT
SERVICES CANADA**

June 2012

TABLE OF CONTENTS

1	INTRODUCTION AND PROJECT DETAILS	1
1.1	COMPANY NAME, LOCATION AND MAILING ADDRESS	1
1.2	EFFECTIVE DATE OF SPILL CONTINGENCY PLAN AND REVISION	1
1.3	DISTRIBUTION LIST	1
1.4	PURPOSE AND SCOPE	2
1.5	COMPANY ENVIRONMENTAL POLICY	2
1.6	SITE DESCRIPTION	2
1.7	PROJECT DESCRIPTION	3
1.8	INVENTORY OF MATERIALS OF CONCERN ON-SITE	5
1.9	EXISTING PREVENTATIVE MEASURES	6
1.10	ADDITIONAL COPIES AND MEDIA AND PUBLIC INQUIRIES	7
2	RESPONSE ORGANIZATION AND ACTION PLAN	8
2.1	POTENTIAL SPILL SIZES, SOURCES AND ENVIRONMENTAL IMPACTS	10
2.2	PROCEDURES	11
3	RESOURCE INVENTORY	13
4	TRAINING PROGRAM	14

LIST OF TABLES

Table 1: Estimate of Quantities of Materials of Concern

Table 2: Potential Spill Events

LIST OF APPENDICES

APPENDIX A: Proposed Camp Layout and Fuel Storage Locations

APPENDIX B: MSDS

APPENDIX C: Spill Guidelines

APPENDIX D: Remediation Equipment

1 INTRODUCTION AND PROJECT DETAILS

1.1 COMPANY NAME, LOCATION AND MAILING ADDRESS

Biogénie, a division of EnGlobe Corp. (Biogénie)

Durban Island and Padloping Island, Nunavut

Mailing Address:

1140 rue Levis, Terrebonne, Québec J6W 5S6

Phone: 450-961-3535 Fax: 450 961-0220

Email: grobert@biogenie-env.com

Attention: Guillaume Robert, Team Leader Northern Canada Office

1.2 EFFECTIVE DATE OF SPILL CONTINGENCY PLAN AND REVISION

The effective date of the Spill Contingency Plan will be: August 2012.

The latest revision to the Spill Contingency Plan was completed: May 23, 2012.

1.3 DISTRIBUTION LIST

This plan and its most recent revisions have been distributed to the following people:

Guillaume Robert – Team Leader, Northern Canada Office, Biogénie

Alexandre Leclair – Project Manager, Northern Canada Office, Biogénie

Mathieu Lévesque, Site Superintendent, Northern Canada Office, Biogénie

Hugues Brassard, Off-site Health and Safety Coordinator, Biogénie

Matthew McElwaine, Senior Environmental Engineer, PWGSC – Northern Contaminated Sites

1.4 PURPOSE AND SCOPE

This plan has been developed to provide a procedure for responding to spills of any size that may occur during the Environmental Site Remediation at FOX-E Durban Island and Padloping Island, Nunavut. This plan identifies:

- The roles and responsibilities of key response personnel in regards to spill response
- Resources available to respond to a spill
- Spill response procedures

This plan seeks to minimize potential health and safety hazards, and damage to the environment while providing required time to respond to any spill quickly and efficiently.

1.5 COMPANY ENVIRONMENTAL POLICY

Please refer to Appendix A for Biogénie's Environmental policy.

1.6 SITE DESCRIPTION

FOX-E, Durban Island and Padloping Island are located in Merchants Bay, off the Northeast coast of the Cumberland Peninsula, Baffin Island, Nunavut. Durban Island and Padloping Island are approximately 24 km apart; 95 km and 80 km from Qikiqtarjuaq, Nunavut, respectively. The area is defined by glacial activity, including numerous fjords, glaciers, and mountains.

A relic of the Cold War, FOX-E was an intermediate site of the Distant Early Warning (DEW) Line radar stations. Built in 1957, the station was abandoned 6 years later in 1963. Padloping Island was constructed as a weather station by the United States Air Force in 1943, and was later maintained by the Canadian Department of Transport until it was abandoned in 1956. The sites are lacking infrastructure, as neither possess an airstrip and the access roads are in various states of disrepair. At specific locations on both sites, the soil is contaminated with different substances, such as metals, polychlorinated biphenyl (PCB) and/or hydrocarbons. Dilapidated

buildings containing hazardous materials such as PCB amended paint (PAP) and asbestos remain at FOX-E and are collapsed at Padloping Island. The sites are littered with substantial non-hazardous debris such as heavy equipment, building foundations, tanks, scrap wood, metal, etc. Each site has several major and minor landfills or debris areas consisting of barrels, domestic waste, heavy equipment, vehicle parts, and more.

Due to the presence of contaminated soil, hazardous material, dump sites and scattered non-hazardous debris, both sites are to be cleaned up as part of this project's scope.

Please refer to Appendix A for maps detailing the location of the sites as well as the proposed locations of fuel storage areas and the camp facilities for both islands.

Environmentally sensitive areas will be identified during the site visit and after mobilization.

1.7 PROJECT DESCRIPTION

This project includes the remediation of the former DEW Line Site FOX-E at Durban Island and the former US weather station at Padloping Island Nunavut. The scope of work for this project includes the following:

- **Mobilization and Demobilization**

- Mobilize and demobilize all resources required to complete the work (equipment, manpower, Departmental Representatives [DR], accommodations, food, etc.) to and from site. Demobilization also includes the transport (marine and ground transportation) of all hazardous waste, non-hazardous waste and contaminated soil (not including waste and soil treated or incinerated on-site) to the appropriate off-site disposal facility.

- **Camp Operation**

- Provide lodging and all camp services for the workforce and the DR until the completion of the project.

- **Upgrading of Site Infrastructure**

- Upgrade the roads to provide access to areas of work in a safe and timely manner. Perform regular maintenance to maintain integrity of site roads.
- **Non-Hazardous Waste**
 - Incinerate all non-hazardous, unpainted, and untreated wood on-site.
 - Collect all non-hazardous waste that cannot be incinerated and transport it from FOX-E and Padloping Island to the appropriate recycling and disposal facilities.
- **Buried Debris Areas**
 - Excavate, transport, and process all wastes (including barrels) from the 13 Buried Debris Areas of Padloping Island and one Buried Debris Area of FOX-E, and dispose of these wastes at the appropriate off-site facility.
 - Regrade 9 Buried Debris Areas at FOX-E with the appropriate thickness of material and the desired compaction requirements. Regrades will be shaped to blend with the natural terrain and to provide positive drainage.
 - Construct and operate Material Handling Areas (MHA) to segregate wastes and stockpile soil for sampling by DR.
- **Contaminated Soil**
 - Excavate and transport approximately 720 m³ of contaminated soil (Includes Tier I, Tier II, Type A PHC, Type A PHC/Tier II, Type B PHC, Type B PHC/Tier II and Hazardous) from Padloping Island and 90 m³ of contaminated soil from FOX-E, and dispose of these wastes at the appropriate off-site facility.
- **On-site treatment of Type B Petroleum Hydrocarbon (PHC) Contaminated Soil**
 - To design, construct, operate and decommission a system that will be able to treat the Type B PHC Soil at Padloping Island (80 m³) and FOX-E (1,900 m³) to a PHC concentration below 2500 mg/kg, before the end of the project.
- **Hazardous Waste**
 - Remove, segregate and containerize hazardous waste from site building structures and debris areas. All work to be performed in accordance with site health and safety procedures as well as Transportation of Dangerous Goods (TDG) regulations and dispose of these wastes at the appropriate off-site disposal facility.
 - Construct and operate Hazardous Waste Processing Areas.
 - Construct temporary storage areas for containerized hazardous material gathered from site, until it is shipped south via sealift for disposal.

- **Debris Areas**

- Remove, segregate, and package for off-site disposal, an estimated 17 m³ (crushed) of hazardous materials, 33 m³ of asbestos, 870 barrels, as well as several crushed barrel piles and various non-hazardous debris from the 6 debris areas and roadside debris of Padloping Island.
- Remove, segregate, containerize, and dispose of an estimated 16 m³ (crushed) hazardous materials, and 6,980 barrels, as well as various non-hazardous debris from 6 debris areas, 2 dumps, and the roadside of FOX-E.
- Incinerate unpainted wood debris and applicable barrel contents on-site.

- **Demolition**

- Demolish FOX-E buildings (5) and other structures (6), including the removal of asbestos containing material (20 m³), and the containerization of PCB and lead contaminated building components such as walls, cladding, steel, and concrete floor (145.5 m³).
- Transport, and package the demolition debris to the temporary storage area for off-site disposal.
- Incinerate applicable demolition materials on-site.

- **Site Barrels**

- Collect, segregate, clean barrels and dispose of their contents at the appropriate off-site disposal facility and/or on-site treatment or incineration.

- **Other**

- Reshape borrow areas and other areas as required by the DR.
- Complete potential additional work as per request of the DR.
- Establish staging areas.

1.8 INVENTORY OF MATERIALS OF CONCERN ON-SITE

As procurement of materials and mobilization to site are not yet complete, it is premature to provide an inventory of materials that are of concern to the Spill Contingency Plan. However,

Table 1 below details the best estimate of the quantities of several (but not all) materials of concern that will be on-site in large quantities.

Table 2: Estimate of quantities of materials of concern

Material	Storage Container	Maximum On-Site	Use
Diesel Fuel	205 L Drum	360 000 L	Power equipment and camp generators
Diesel Fuel	40,592-L Tank		
Jet A	205 L Drums	36 000 L	Power the helicopter
Gasoline	205 L Drums	10 000 L	ATVs and pumps
Acetylene	45 kg Cylinders	675 kg (15)	Welding

Diesel, jet A and gasoline will be stored in Insta-berm containment devices, refer to Appendix A for the proposed storage areas of these materials. Propane cylinders will be stored adjacent to the garage in appropriate cages.

Materials of concern that may be present on-site in small quantities include kitchen and cleaning supplies, lubricants for machinery. Waste oil will be incinerated on-site.

MSDS of the materials included in Table 1 are available in Appendix B.

1.9 EXISTING PREVENTATIVE MEASURES

Appropriate Personal Protective Equipment (PPE) will be used while handling all materials of concern. Spill kits will be present at all fuel storage areas and at strategic locations on site (locations TBD). Drip trays will be used during refueling operations, and the site fuel person will complete regular inspections of fuel caches to identify any areas of concern. Routine maintenance will be performed by the site mechanics to help prevent leaks of lubricants or fuel.


1.10 ADDITIONAL COPIES AND MEDIA AND PUBLIC INQUIRIES

Additional copies of the Spill Contingency plan can be obtained by contacting Guillaume Robert at the phone number and email address in Section 1.1. All media and public inquiries are to be made to Guillaume Robert as well.

2 RESPONSE ORGANIZATION AND ACTION PLAN

In the event of a spill the flow chart depicted in Figure 1, below, is to be followed. A major spill is defined as a release of a substance that is above the guidelines set in Appendix C (from the Guideline for Spill Contingency Planning, prepared by the Water Resource Division Indian and Northern Affairs Canada, April 2007) and must be reported immediately to the Nunavut Spill Report Line (867) 920-8130. The office phone can be used for contacting the required authorities.

Figure 1: Response Organization

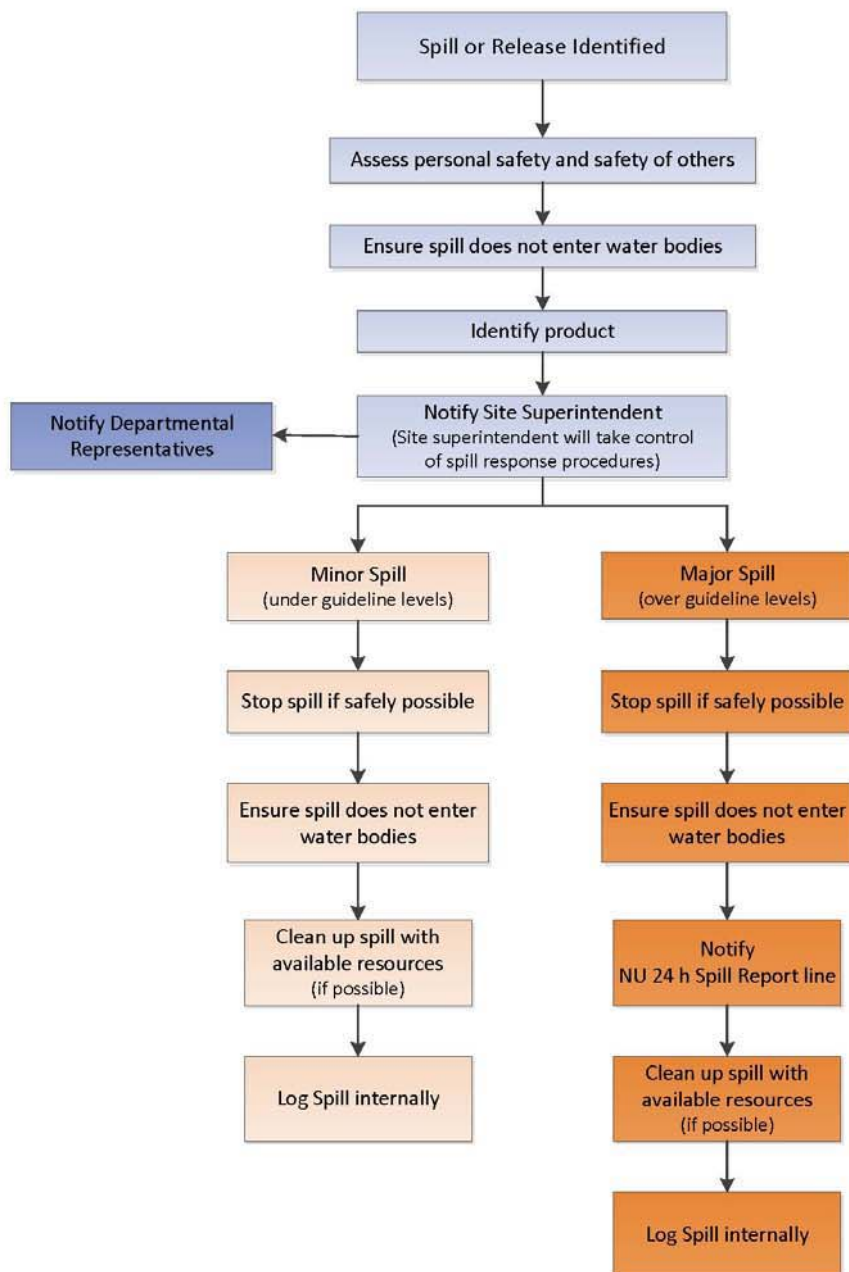

2.1 POTENTIAL SPILL SIZES, SOURCES AND ENVIRONMENTAL IMPACTS

Table 2 below details potential spill events, sources and environmental impact. This section will be finalized as quantities and locations of materials of concern are finalized.

Table 2: Potential Spill Events

Material	Potential Discharge Event	Discharge Volume	Direction of Potential Discharge	Potential Environmental Impact
Diesel Fuel	1. Overfilling of equipment 2. Leaking from equipment 3. Leaking fuel lines for camp generator 4. Punctured drum 5. All drums punctured (Worst Case)	Likely under 205 L Worst case 360,000 L – very unlikely	TBD	May be harmful to animal and plant life. Not readily biodegradable. Must not be allowed to enter water bodies. Have means to clean and treat spills on site.
Jet A	1. Overfilling of helicopter 2. Leaky fuel hose 3. Punctured drum 4. Leaking fuel hose 5. All drums punctured (Worst Case)	Likely under 205 L Worst Case 36,000 L	TBD	May be harmful to animal and plant life. Not readily biodegradable. Must not be allowed to enter water bodies. Have means to clean and treat spills on site.
Gasoline	1. Overfilling of ATVs or pumps 2. Leaky fuel hose 3. Punctured drum 4. Leaking fuel hose 5. All drums punctured (Worst Case)	Likely under 205 L	TBD	May be harmful to animal and plant life. Not readily biodegradable. Must not be allowed to enter water bodies. Have means to clean and treat spills on site.
Acetylene	1. Faulty connection 2. Punctured cylinder	Likely under 45 kg Worst case 675 kg	TBD	Explosive properties are of most concern.

Waste oil will be incinerated on-site, in the event of a spill the resources are available to perform the required clean-up.

2.2 PROCEDURES

In the event of a spill, the first person noticing the incident shall:

- Assess personal safety and safety of others;
- Identify product;
- Isolate or eliminate all sources of ignition and identify the spilled material, if possible;
- If possible, stop the source of the spill;
- Warn people, isolate and/or evacuate the area, as necessary;
- Report the following to the Site Superintendent:
 - the location of the spill;
 - the known or suspected time of the spill;
 - the substance spilled;
 - the estimated volume spilled;
 - the cause of the spill;
 - the flow direction of the spill.
- Ensure adequate use of spill response equipment;
- Contact Nunavut spill Hotline;
- Document all events and measures taken.

Depending on the physical location of the spill, specific supplemental precautions will be taken with regards to the spill response procedures.

➤ ***On Land***

- Prevent dispersion in drainage system and ditch;
- Contain material with sorbent booms, dyke of snow or earth;
- Remove small spills with sorbent pads and dig by hand the impacted soil.

➤ ***Muskeg***

- Ensure integrity of marsh or vegetation;
- Remove free-phase product with pumps and skimmer and low pressure point equipment;
- Minimize damage caused by equipment.

➤ ***Snow and Ice***

- Prevent dispersion into waterways by containment with snow or other material;
- If necessary, pump water surface to recover diesel under ice;
- Remove minor spills with sorbent pads.

➤ *On Water*

- Contain spill as close to release point as possible;
- Use sorbent booms to contain free-phase product;
- Use skimmer or sorbent pads to recover free-phase product;
- Do not deploy personnel or equipment on wetlands.

Verbal notice to DR will be given immediately or as soon as possible in the event of a moderate or higher level spill.

The Departmental Representative will be consulted on how to best remediate the area affected by the spill.

3 RESOURCE INVENTORY

The resource inventory will be finalized prior to mobilization to site. An inventory of the proposed remediation supplies has been included in Appendix D.



4 TRAINING PROGRAM

During the Worker Orientation Seminar (WOS) which all site personnel are required to participate in, the spill contingency plan, emergency response plan and the location of all spill response resourced will be reviewed. Site personnel will also be shown the contents of a spill kit and the function of the contents will be explained.


APPENDIX A

see separate attachment/separate e-mail
for drawings.

Proposed Camp Layout and Fuel Storage Locations

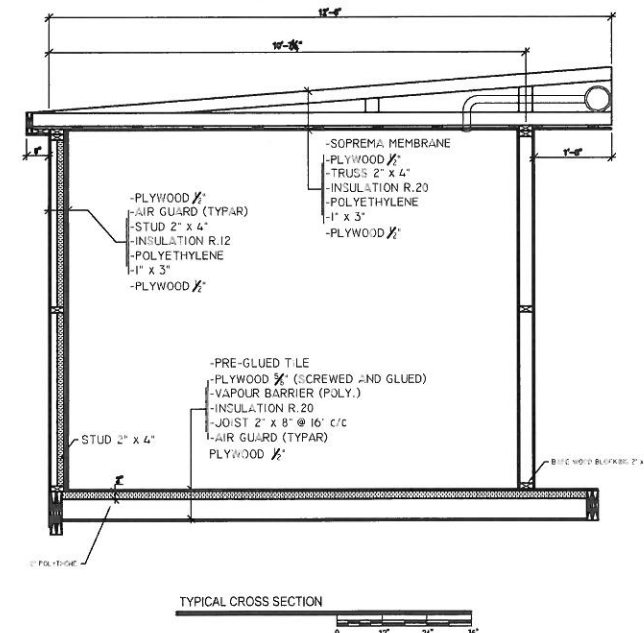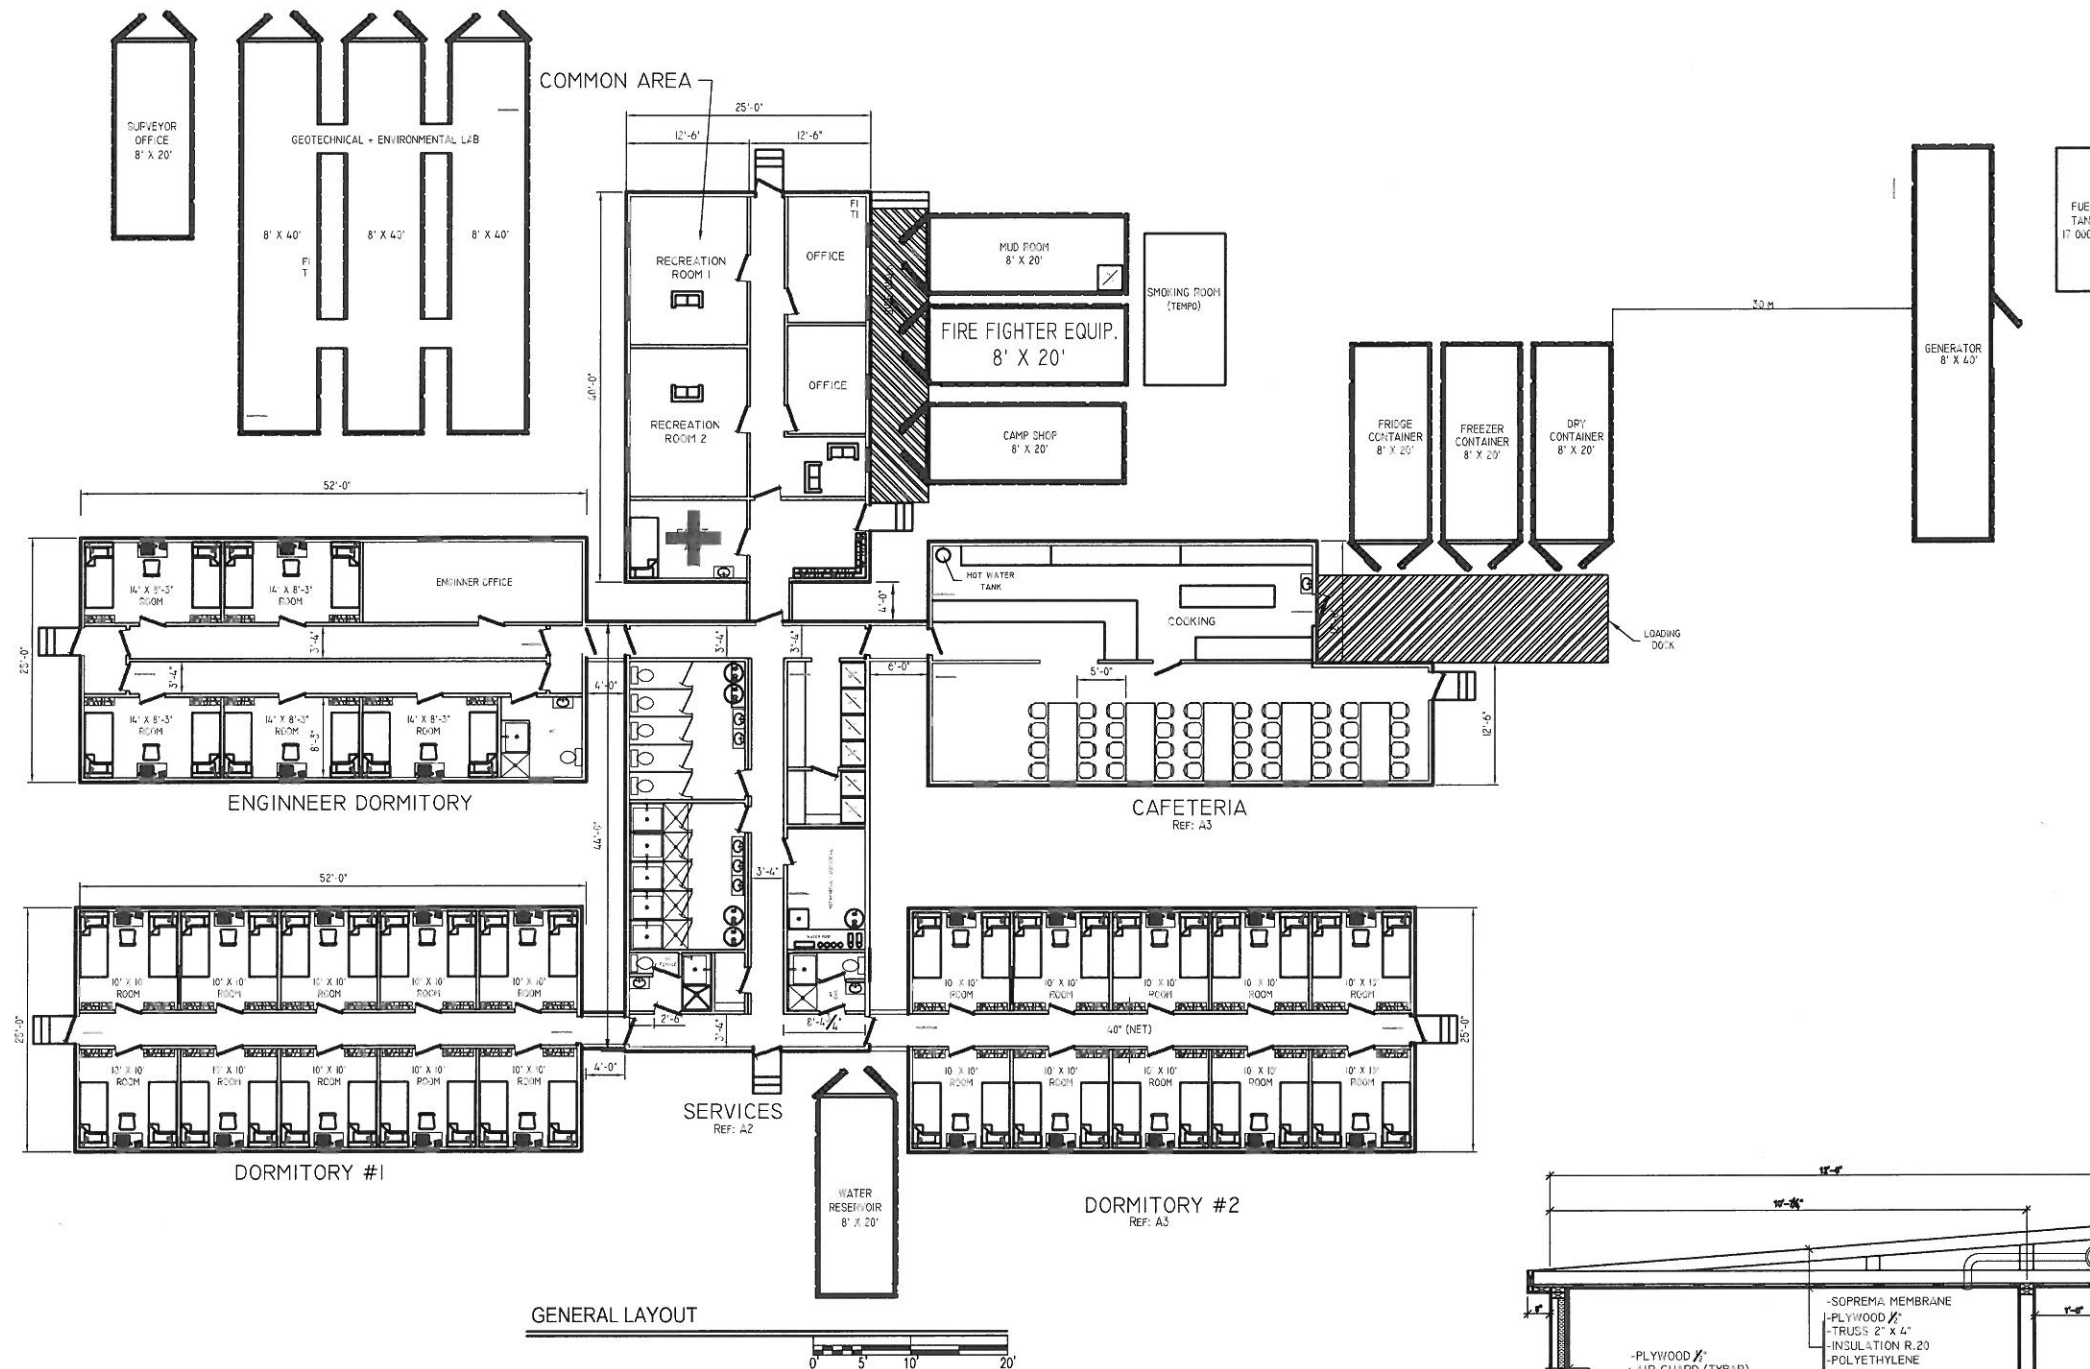

NO.	VERSION	DATE	PAR	VERIF.	APPR.
1	PROPOSITION	2012-03-05	D.D.	G.R.	G.R.
<div> </div>					
<div> FOX-E DURBAN ISLAND AND PADLOPING ISLAND REMEDICATION PROJECT </div>					
<div> CAMP LAYOUT </div>					
<div> SITE REMEDIATION SOLUTIONS </div>					
<div> </div>					
<div> Biogénie, a division of EnGlobe Corp. 1140 Lévis Street, Terrebonne (Quebec) CANADA J6W 5S6 Tel: 450-961-3535 Fax: 450-961-0220 </div>					
DESIGNÉ PAR: D. DAoust	VERIFIÉ PAR: G. ROBERT	APPROUVÉ PAR: G. ROBERT			
ÉCHELLE: Indiquée	DATE (modèle-travaux): FÉVRIER 2012	PLAN GL1			
PROJET: CD8178	REF. INFORMATION: 8178-Fox-E.dwg				

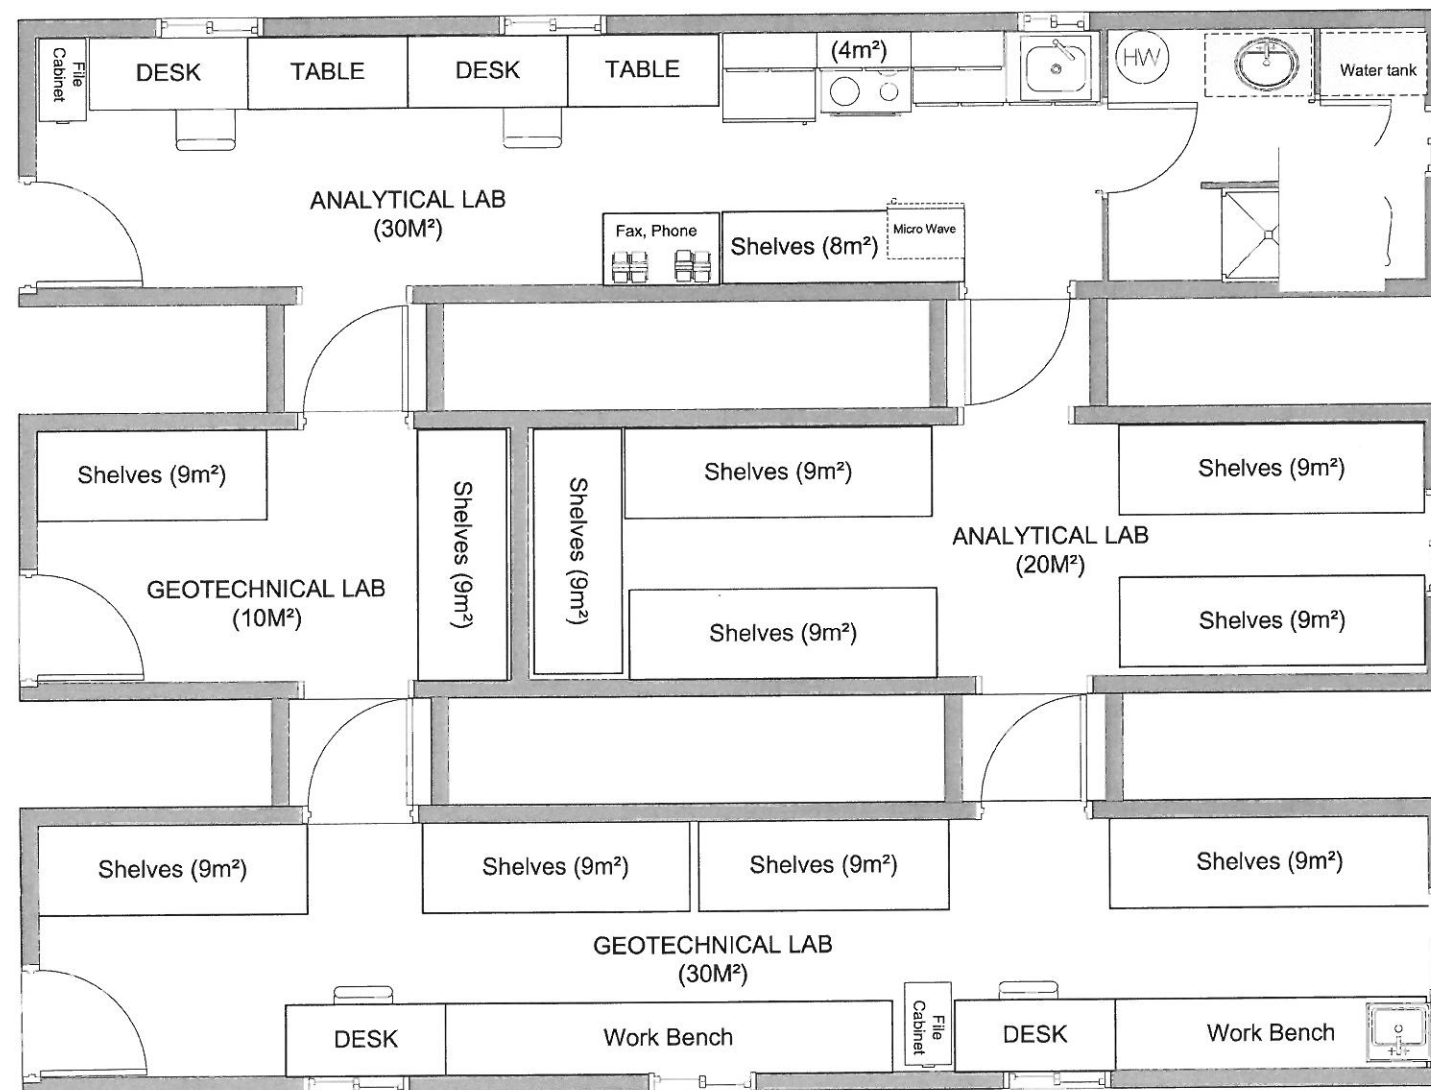

LEGEND

1	PROPOSITION	2012-03-01	D.D.	G.R.	G.R.
NO.	VERSION	DATE	BY	VERIF.	APPR.



PROJECT: FOX-E DURBAN ISLAND AND PADLOPING ISLAND
REMEDATION PROJECT

TITLE: LAYOUT FIELD LABORATORY

SITE REMEDIATION SOLUTIONS



Biogénie, a division of EnGlobe Corp.
1140 Lévis Street, Terrebonne (Quebec) CANADA J6W 5S6
Tel.: 450-961-3535 Fax: 450-961-0220

MEASUREMENT UNIT	SCALE:	DATE (month-year):
MÈTRE	NOT TO SCALE	FEBRUARY 2012
DRAWN BY:	VERIFIED BY:	APPROVED BY:
D. DAoust	G. ROBERT	G. ROBERT
PROJECT NO:	DRAWING NO:	PAGE
6121-124	6121-124-2	1



LEGEND

1	PROPOSITION	2012-03-01	D.D.	G.R.	G.R.
NO.	VERSION	DATE	BY	VERIF.	APPR.



PROJECT: FOX-E DURBAN ISLAND AND PADLOPING ISLAND
REMEDATION PROJECT
TITLE: LAYOUT - REMOTE CAMP SHELTER


SITE REMEDIATION SOLUTIONS

Biogénie, a division of EnGlobe Corp.
1140 Lévis Street, Terrebonne (Quebec) CANADA J6W 5S6
Tel.: 450-961-3535 Fax: 450-961-0220



MEASUREMENT UNIT MÈTRE	SCALE: NOT TO SCALE	DATE (month-year): FEBRUARY 2012
DRAWN BY: D. DAOUST	VERIFIED BY: G. ROBERT	APPROVED BY: G. ROBERT
PROJECT NO: 6121-124	DRAWING NO: 6121-124-2	PAGE 2

LEGEND

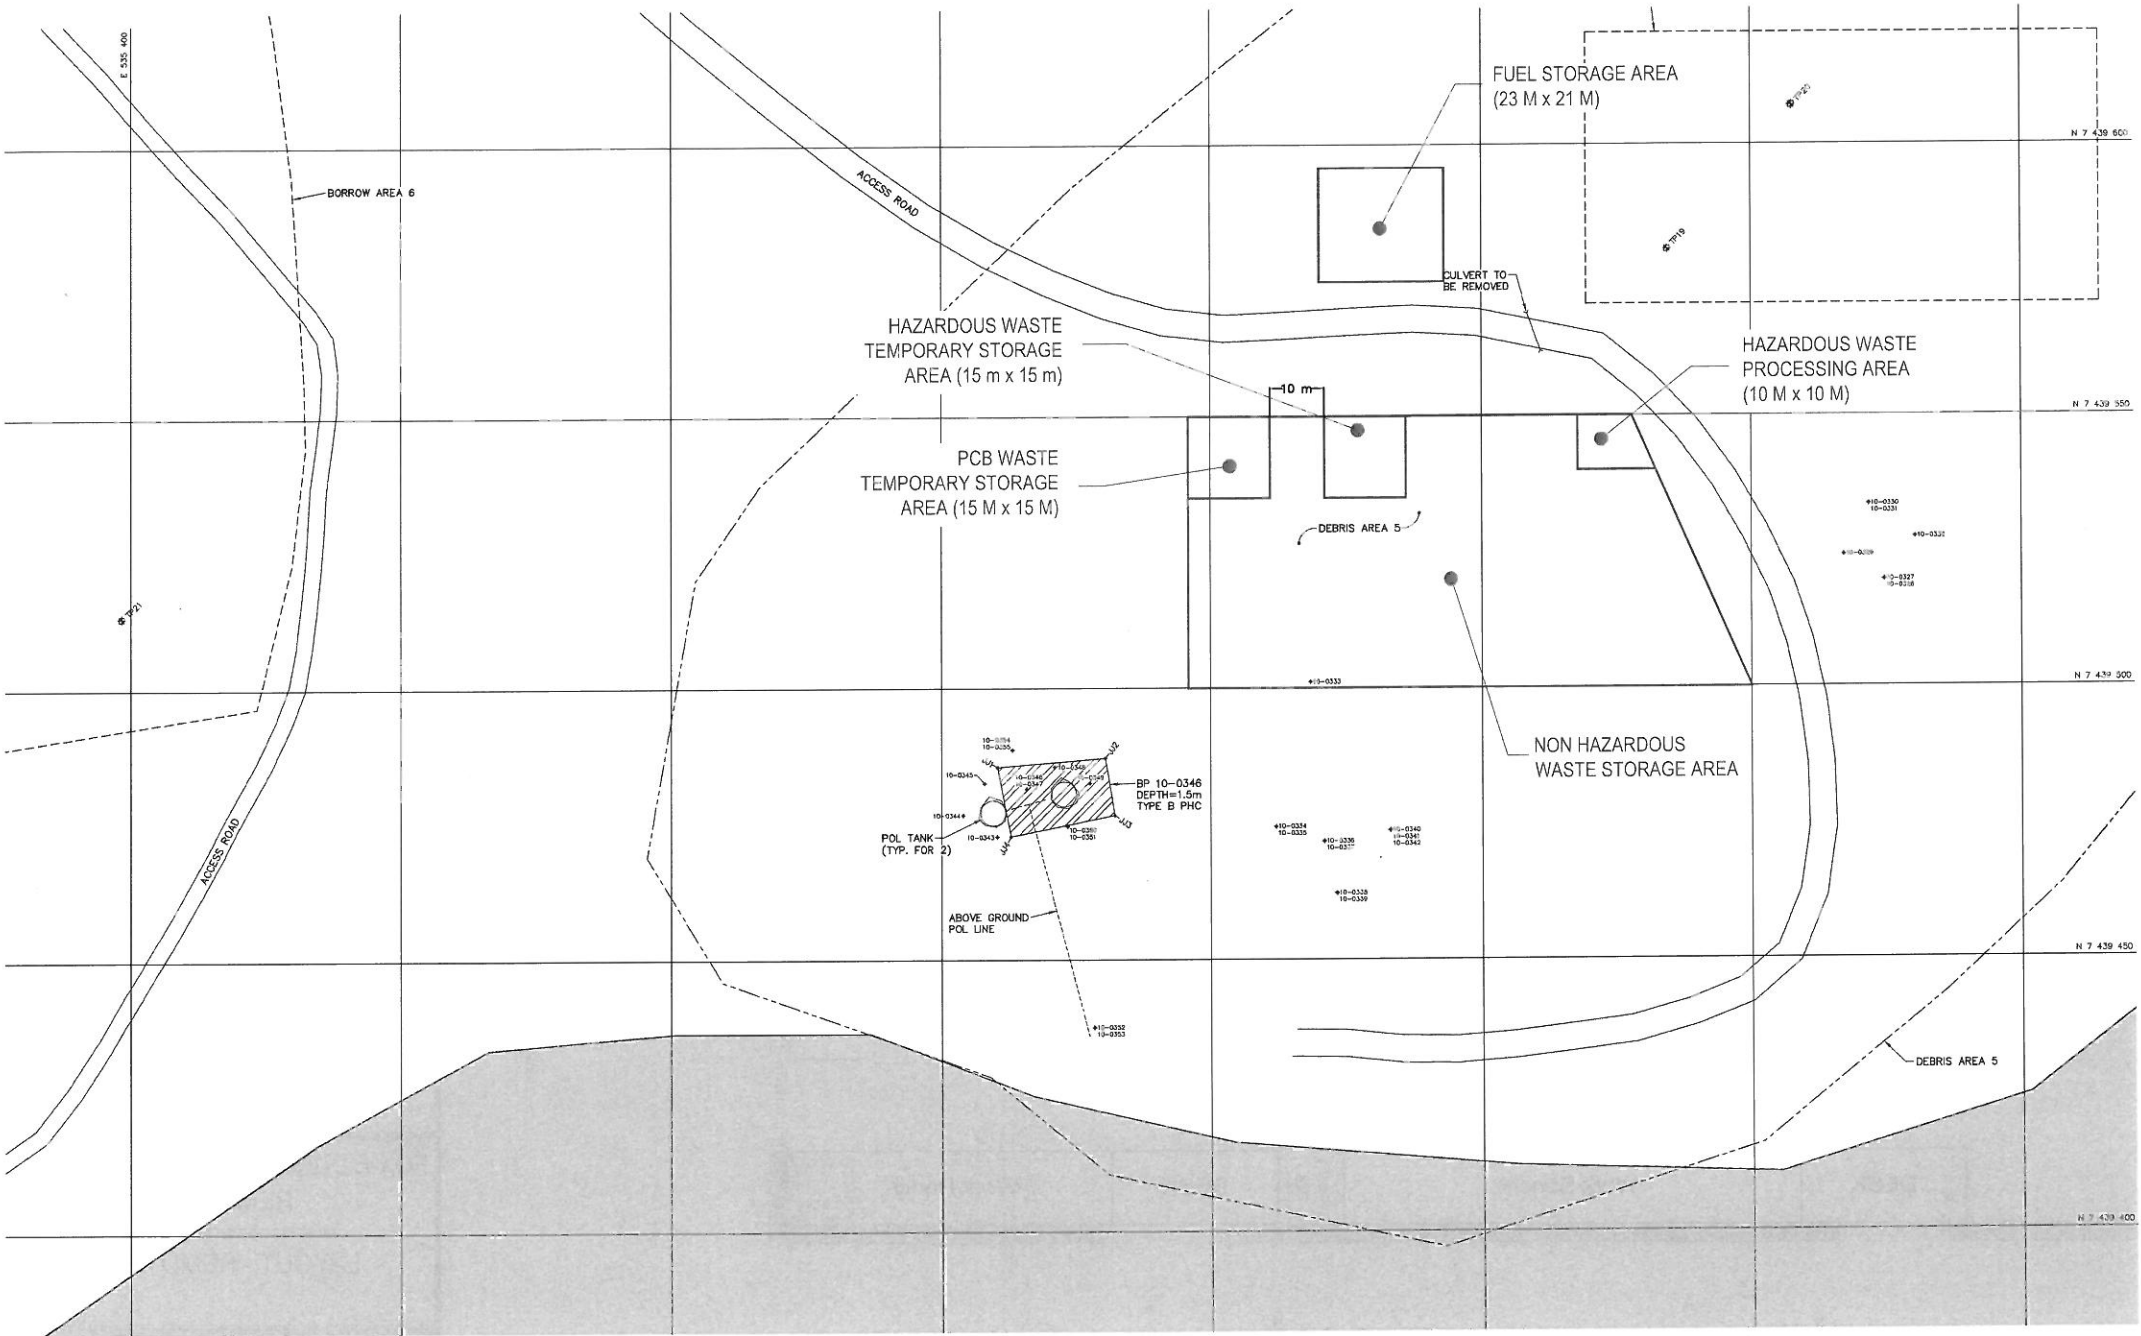

Source :
• Project n°R.048967.001-C08.



1	PROPOSITION	2012-03-01	D.D.	G.R.	G.R.
NO.	VERSION	DATE	BY	VERIF.	APPR.

Public Works and
Government Services
Canada

PROJECT:
FOX-E DURBAN ISLAND AND PADLOPING ISLAND
REMEDATION PROJECT


TITLE:
TEMPORARY FACILITIES - FOX-E
BEACH AREA

SITE REMEDIATION SOLUTIONS

Biogénie, a division of EnGlobe Corp.
1140 Lévis Street, Terrebonne (Quebec) CANADA J6W 5S6
Tel.: 450-961-3535 Fax: 450-961-0220




MEASUREMENT UNIT	SCALE:	DATE (month-year):
MÈTRE	1 : 750	FEBRUARY 2012
DRAWN BY:	VERIFIED BY:	APPROVED BY:
D. DAoust	G. ROBERT	G. ROBERT
PROJECT NO:	DRAWING NO:	PAGE
6121-124	6121-124-2	C08

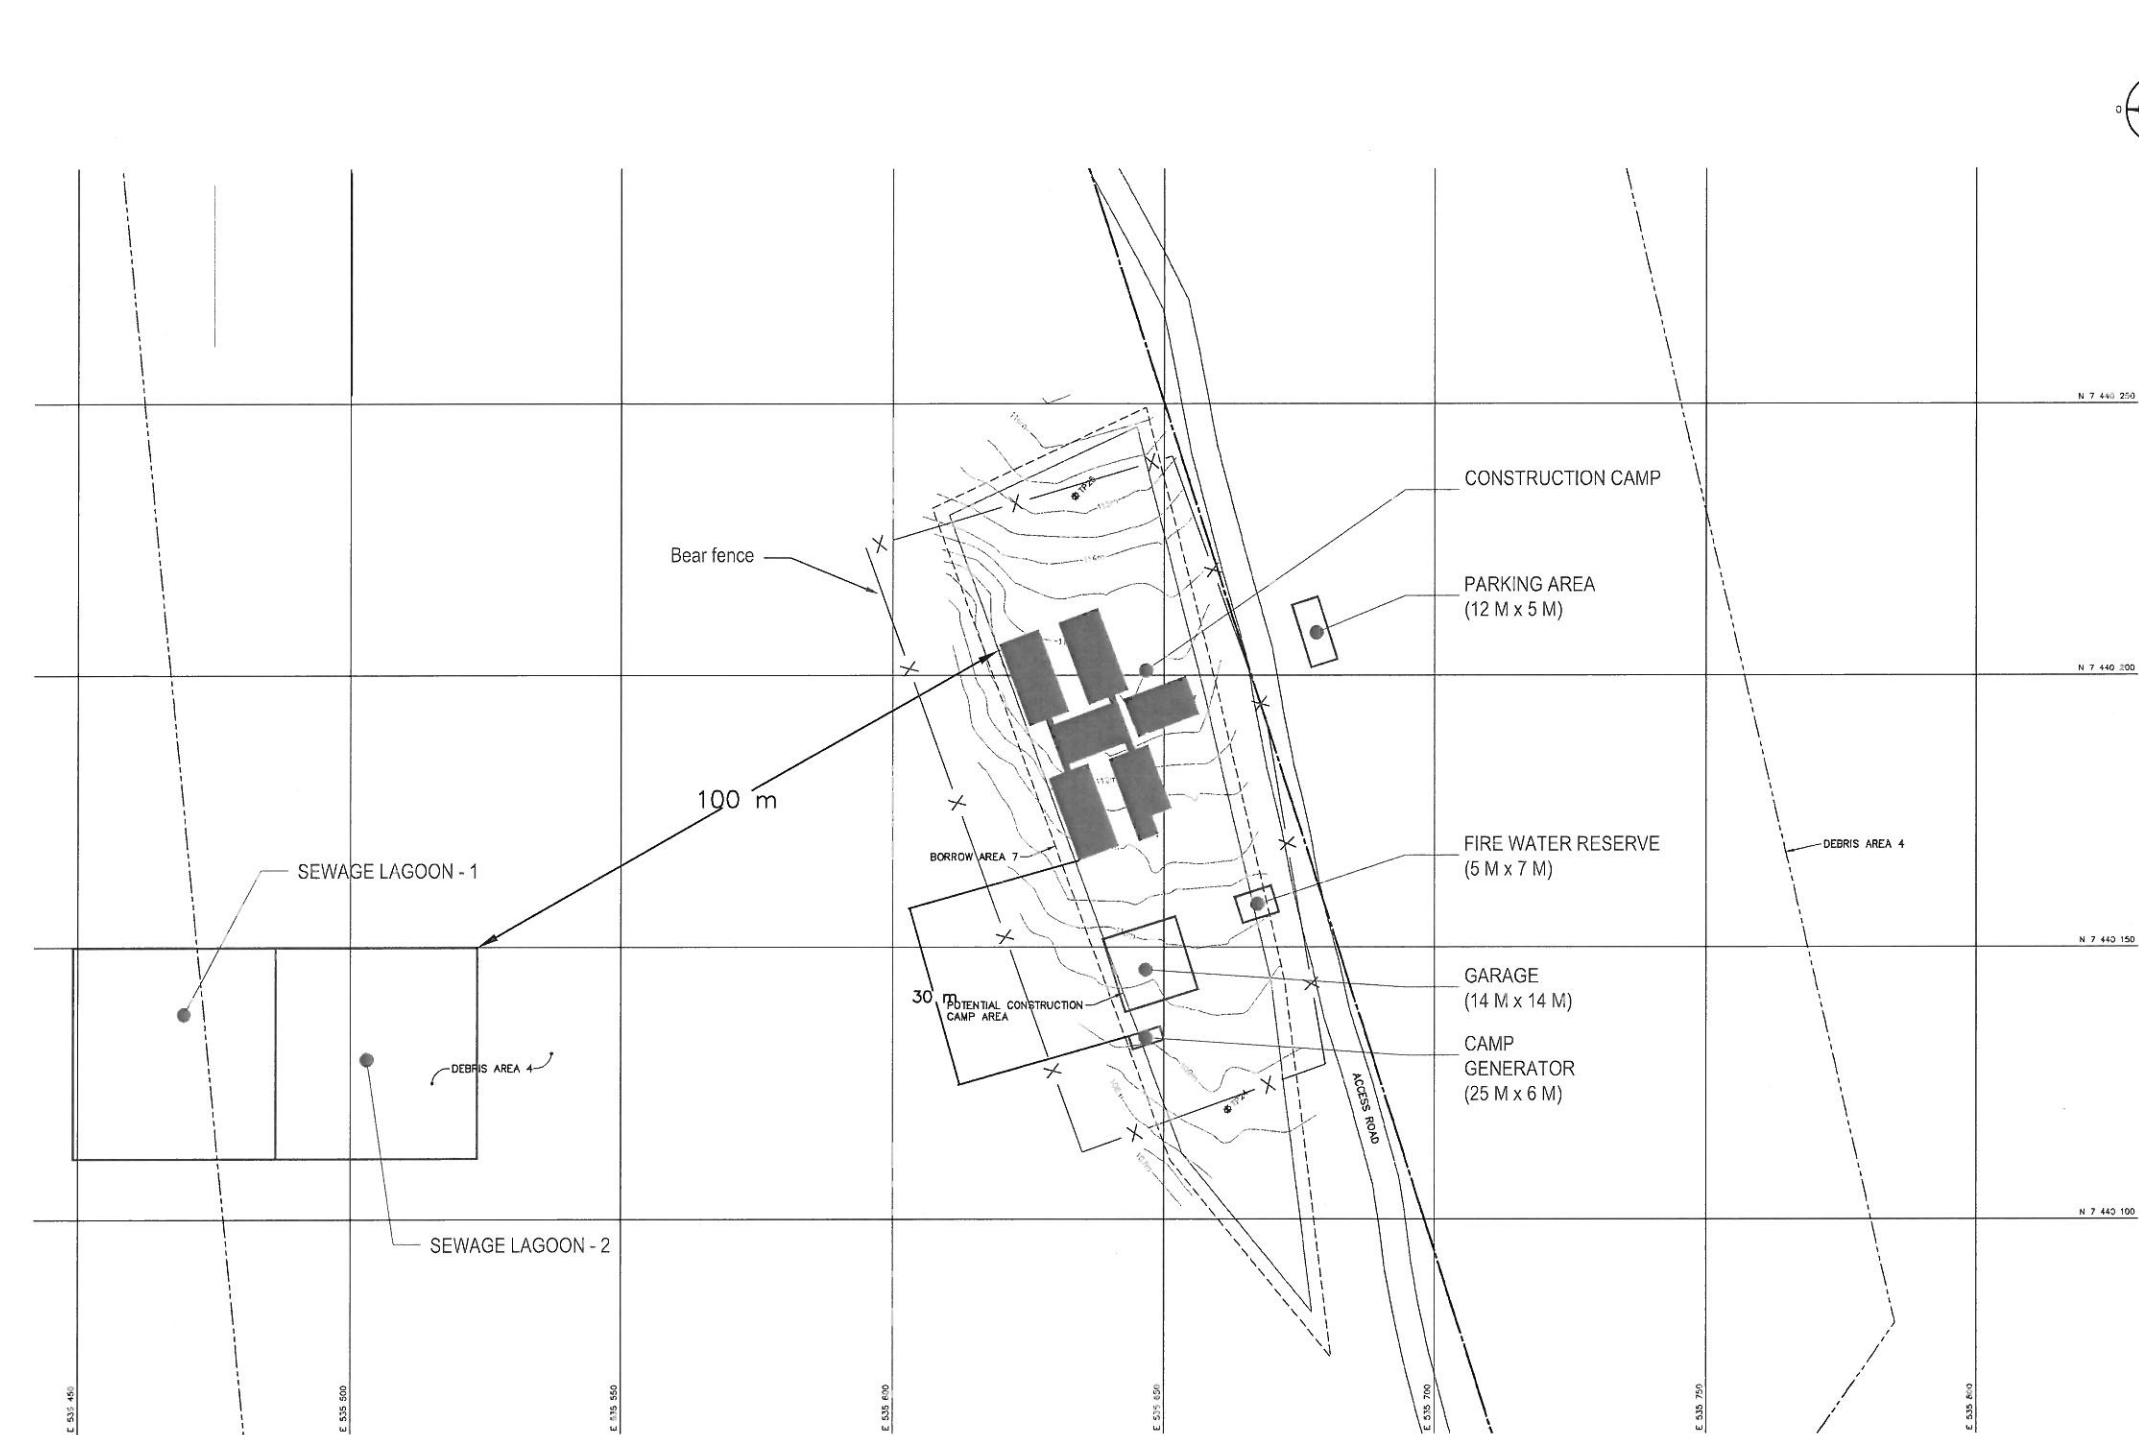

LEGEND

Source :
• Project n°R.048967.001-C07.



1	PROPOSITION	2012-03-01	D.D.	G.R.	G.R.
NO.	VERSION	DATE	BY	VERIF.	APPR.

Public Works and
Government Services
Canada

PROJECT:
FOX-E DURBAN ISLAND AND PADLOPING ISLAND
REMEDATION PROJECT



TITLE:
CONSTRUCTION CAMP PROPOSED
LOCATION PLAN

SITE REMEDIATION SOLUTIONS

Biogénie, a division of EnGlobe Corp.
1140 Lévis Street, Terrebonne (Quebec) CANADA J6W 5S6
Tel.: 450-961-3535 Fax: 450-961-0220



MEASUREMENT UNIT MÈTRE	SCALE: 1 : 750	DATE (month-year): FEBRUARY 2012
DRAWN BY: D. DAOUST	VERIFIED BY: G. ROBERT	APPROVED BY: G. ROBERT
PROJECT NO: 6121-124	DRAWING NO: 6121-124-2	PAGE: C07



1	PROPOSITION	2012-03-01	D.D.	G.R.	G.R.
NO.	VERSION	DATE	BY	VERIF.	APPR.



PROJECT: FOX-E DURBAN ISLAND AND PADLOPING ISLAND
REMEDIATION PROJECT


TITLE: TEMPORARY FACILITIES LOCATION
PLAN - STATION AREA

SITE REMEDIATION SOLUTIONS

Biogénie, a division of EnGlobe Corp.
1140 Lévis Street, Terrebonne (Quebec) CANADA J6W 5S6
Tel.: 450-961-3535 Fax: 450-961-0220



MEASUREMENT UNIT METRE	SCALE: 1 : 750	DATE (month-year): FEBRUARY 2012
DRAWN BY: D. DAQUST	VERIFIED BY: G. ROBERT	APPROVED BY: G. ROBERT
PROJECT NO: 6121-124	DRAWING NO: 6121-124-2	PAGE C0

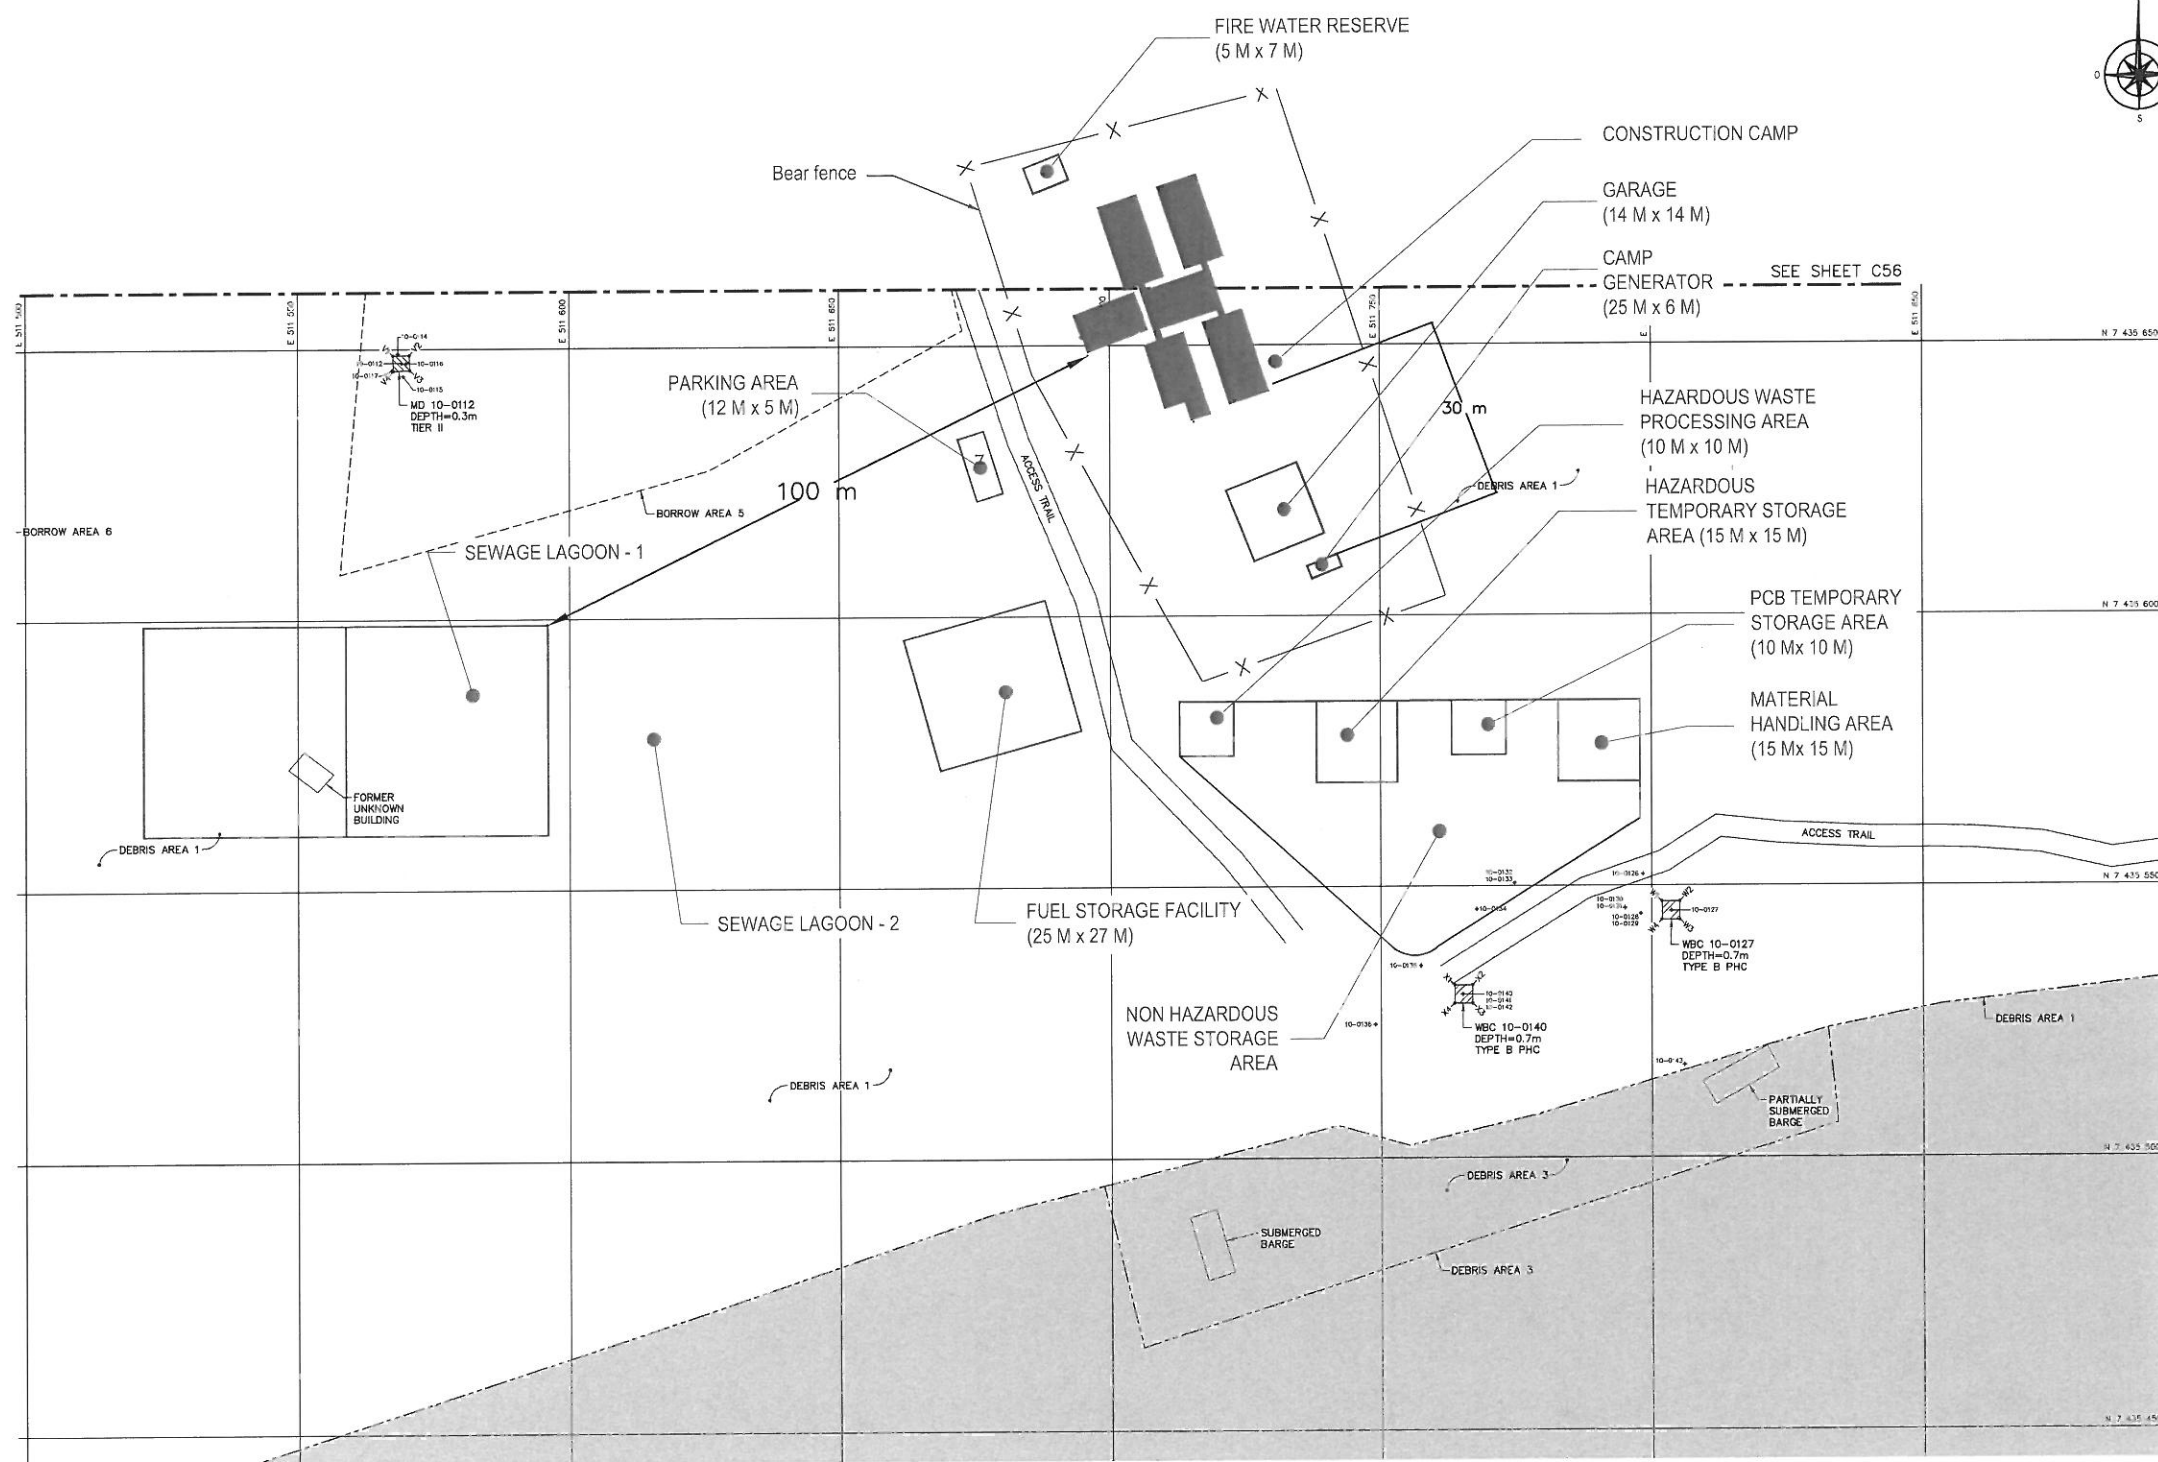

LEGEND



1	PROPOSITION	2012-03-01	D.D.	G.R.	G.R.
NO.	VERSION	DATE	BY	VERIF.	APPR.



PROJECT: FOX-E DURBAN ISLAND AND PADLOPING ISLAND
REMEDATION PROJECT

SITE REMEDIATION SOLUTIONS



MEASUREMENT UNIT MÈTRE	SCALE: 1 : 750	DATE (month-year): FEBRUARY 2012
DRAWN BY: D. DAoust	VERIFIED BY: G. ROBERT	APPROVED BY: G. ROBERT
PROJECT NO: 6121-124	DRAWING NO: 6121-124-2	PAGE C57

APPENDIX B

MSDS

Material Safety Data Sheet



DIESEL FUEL



1 . Product and company identification

Product name	: DIESEL FUEL
Synonym	: Seasonal Diesel, #1 Diesel, #2 Heating Oil, #1 Heating Oil, D50, D60, P40, P50, Arctic Diesel, Farm Diesel, Marine Diesel, Low Sulphur Diesel, LSD, Ultra Low Sulphur Diesel, ULSD, Mining Diesel, Naval Distillate, Dyed Diesel, Marked Diesel, Coloured Diesel, Furnace special, Biodiesel blend, B1, B2, B5, Diesel Low Cloud (LC).
Code	: W104, W293; SAP: 120, 121, 122, 125, 126, 129, 130, 135, 287, 288
Material uses	: Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.
Manufacturer	: PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3
<u>In case of emergency</u>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2 . Hazards identification

Physical state	: Bright oily liquid.
Odour	: Mild petroleum oil like.
WHMIS (Canada)	:   Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F). Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).
OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Emergency overview	: WARNING! COMBUSTIBLE LIQUID AND VAPOUR. CAUSES EYE AND SKIN IRRITATION. Combustible liquid. Severely irritating to the skin. Irritating to eyes. Keep away from heat, sparks and flame. Do not get in eyes. Avoid breathing vapour or mist. Avoid contact with skin and clothing. Use only with adequate ventilation. Wash thoroughly after handling.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
<u>Potential acute health effects</u>	
Inhalation	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Ingestion	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
Skin	: Severely irritating to the skin.
Eyes	: Irritating to eyes.
<u>Potential chronic health effects</u>	
Chronic effects	: No known significant effects or critical hazards.
Carcinogenicity	: Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).
Mutagenicity	: No known significant effects or critical hazards.
Teratogenicity	: No known significant effects or critical hazards.

2 . Hazards identification

- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.
- Medical conditions aggravated by over-exposure** : Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.

See toxicological information (section 11)

3 . Composition/information on ingredients

<u>Name</u>	<u>CAS number</u>	<u>%</u>
Kerosine (petroleum), hydrodesulfurized / Fuels, diesel / Fuel Oil No. 2	64742-81-0 / 68334-30-5 / 68476-30-2	95 - 100
Fatty acids methyl esters	61788-61-2 / 67784-80-9 / 73891-99-3	0 - 5

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

4 . First-aid measures

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.
- Notes to physician** : No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

5 . Fire-fighting measures

- Flammability of the product** : Combustible liquid
- Extinguishing media**
- Suitable** : Use dry chemical, CO₂, water spray (fog) or foam.
- Not suitable** : Do not use water jet.
- Special exposure hazards** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Products of combustion** : Carbon oxides (CO, CO₂), nitrogen oxides (NO_x), sulphur oxides (SO_x), sulphur compounds (H₂S), smoke and irritating vapours as products of incomplete combustion.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

5 . Fire-fighting measures

- Special remarks on fire hazards** : Flammable in presence of open flames, sparks and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Runoff to sewer may create fire or explosion hazard.

6 . Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
- Methods for cleaning up**
- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

7 . Handling and storage

- Handling** : Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage** : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

8 . Exposure controls/personal protection

Ingredient	Exposure limits
Kerosine (petroleum), hydrodesulfurized	ACGIH TLV (United States). Absorbed through skin. TWA: 200 mg/m ³ 8 hour(s).
Fuels, diesel	ACGIH TLV (United States). Absorbed through skin. TWA: 100 mg/m ³ , (Inhalable fraction and vapour) 8 hour(s).
Fuel oil No. 2	ACGIH TLV (United States). Absorbed through skin. TWA: 100 mg/m ³ , (Inhalable fraction and vapour) 8 hour(s).

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

Engineering measures : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal protection

Respiratory

: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Recommended: nitrile, neoprene, polyvinyl alcohol (PVA), Viton. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Eyes

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

Skin

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

9 . Physical and chemical properties

Physical state	: Bright oily liquid.
Flash point	: Diesel fuel: Closed cup: $\geq 40^{\circ}\text{C}$ ($\geq 104^{\circ}\text{F}$) Marine Diesel Fuel: Closed Cup: $\geq 60^{\circ}\text{C}$ ($\geq 140^{\circ}\text{F}$) Mining Diesel: Closed Cup: $\geq 52^{\circ}\text{C}$ ($\geq 126^{\circ}\text{F}$)
Auto-ignition temperature	: 225°C (437°F)
Flammable limits	: Lower: 0.7% Upper: 6%
Colour	: Clear to yellow (This product may be dyed red for taxation purposes).
Odour	: Mild petroleum oil like.
Odour threshold	: Not available.
pH	: Not available.
Boiling/condensation point	: 150 to 371°C (302 to 699.8°F)
Melting/freezing point	: Not available.
Relative density	: 0.80 to 0.88 kg/L @ 15°C (59°F)
Vapour pressure	: 1 kPa (7.5 mm Hg) @ 20°C (68°F).
Vapour density	: 4.5 [Air = 1]
Volatility	: Semivolatile to volatile.
Evaporation rate	: Not available.
Viscosity	: Diesel fuel: 1.3 - 4.1 cSt @ 40°C (104°F) Marine Diesel Fuel: 1.3 - 4.4 cSt @ 40°C (104°F)
Pour point	: Not available.
Solubility	: Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

10 . Stability and reactivity

Chemical stability	: The product is stable.
Hazardous polymerisation	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
Materials to avoid	: Reactive with oxidising agents and acids.
Hazardous decomposition products	: May release COx, NOx, SOx, H2S, smoke and irritating vapours when heated to decomposition.

11 . Toxicological information

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Kerosine (petroleum), hydrodesulfurized	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation Vapour	Rat	>5000 mg/m ³	4 hours
Fuels, diesel	LD50 Dermal	Mouse	24500 mg/kg	-
	LD50 Oral	Rat	7500 mg/kg	-
Fuel oil No. 2	LD50 Oral	Rat	12000 mg/kg	-

Conclusion/Summary : Not available.

Chronic toxicity

Conclusion/Summary : Not available.

Irritation/Corrosion

Conclusion/Summary : Not available.

Sensitiser

Conclusion/Summary : Not available.

Carcinogenicity

Conclusion/Summary : Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).

11 . Toxicological information

Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Kerosine (petroleum), hydrodesulfurized	A3	-	-	-	-	-
Fuels, diesel	A3	3	-	-	-	-
Fuel oil No. 2	A3	3	-	-	-	-

Mutagenicity

Conclusion/Summary : Not available.

Teratogenicity

Conclusion/Summary : Not available.

Reproductive toxicity

Conclusion/Summary : Not available.

12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

Aquatic ecotoxicity

Conclusion/Summary : Not available.

Biodegradability

Conclusion/Summary : Not available.


13 . Disposal considerations

Waste disposal : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
TDG Classification	UN1202	DIESEL FUEL	3	III		-
DOT Classification	Not available.	Not available.	Not available.	-		-

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Combustible liquid
Irritating material

Canada

WHMIS (Canada) : Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).
Class D-2A: Material causing other toxic effects (Very toxic).
Class D-2B: Material causing other toxic effects (Toxic).

15 . Regulatory information

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

- Canada inventory** : All components are listed or exempted.
- United States inventory (TSCA 8b)** : All components are listed or exempted.
- Europe inventory** : All components are listed or exempted.

16 . Other information

Label requirements : COMBUSTIBLE LIQUID AND VAPOUR. CAUSES EYE AND SKIN IRRITATION.

Hazardous Material Information System (U.S.A.) :

Health	2
Flammability	2
Physical hazards	0
Personal protection	H

National Fire Protection Association (U.S.A.) :



References : Available upon request.
™ Trademark of Suncor Energy Inc. Used under licence.

Date of printing : 7/6/2010.

Date of issue : 6 July 2010

Date of previous issue : 7/3/2009.

Responsible name : Product Safety - JDW

Indicates information that has changed from previously issued version.

For Copy of (M)SDS : Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Material Safety Data Sheet



GASOLINE, UNLEADED



1 . Product and company identification

Product name	: GASOLINE, UNLEADED
Synonym	: Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, TQRUL, transitional quality regular unleaded, BOB, Blendstock for Oxygenate Blending
Code	: W102E, SAP: 102 to 117
Material uses	: Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.
Manufacturer	: PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3
<u>In case of emergency</u>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2 . Hazards identification

Physical state	: Clear liquid.
Odour	: Gasoline
WHMIS (Canada)	:   Class B-2: Flammable liquid Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).
OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Emergency overview	: WARNING! FLAMMABLE LIQUID AND VAPOUR. CAUSES RESPIRATORY TRACT, EYE AND SKIN IRRITATION. CANCER HAZARD - CONTAINS MATERIAL WHICH CAN CAUSE CANCER. CONTAINS MATERIAL WHICH CAN CAUSE HERITABLE GENETIC EFFECTS. Flammable liquid. Irritating to eyes, respiratory system and skin. Keep away from heat, sparks and flame. Avoid exposure - obtain special instructions before use. Do not breathe vapour or mist. Avoid contact with eyes, skin and clothing. Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure. Contains material which can cause heritable genetic effects. Use only with adequate ventilation. Keep container tightly closed and sealed until ready for use. Wash thoroughly after handling.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
<u>Potential acute health effects</u>	
Inhalation	: Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Ingestion	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.

2 . Hazards identification

Skin	: Irritating to skin.
Eyes	: Irritating to eyes.
<u>Potential chronic health effects</u>	
Chronic effects	: This product contains an ingredient or ingredients, which have been shown to cause chronic toxic effects. Repeated or prolonged exposure to the substance can produce blood disorders.
Carcinogenicity	: Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure.
Mutagenicity	: Contains material which can cause heritable genetic effects.
Teratogenicity	: No known significant effects or critical hazards.
Developmental effects	: No known significant effects or critical hazards.
Fertility effects	: No known significant effects or critical hazards.
Medical conditions aggravated by over-exposure	: Repeated or prolonged contact with spray or mist may produce chronic eye irritation and severe skin irritation. Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (section 11)

3 . Composition/information on ingredients

<u>Name</u>	<u>CAS number</u>	<u>%</u>
Gasoline	86290-81-5	85-100
Ethanol	64-17-5	0.1-1
Benzene	71-43-2	0.5-1.5
Toluene	108-88-3	15-40*

*Montreal: may vary from 3-40%

*Edmonton: may vary from 1-5%

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

4 . First-aid measures

Eye contact	: Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
Skin contact	: In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
Inhalation	: Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
Ingestion	: Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
Protection of first-aiders	: No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.
Notes to physician	: No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

5 . Fire-fighting measures

Flammability of the product	: Flammable liquid (NFPA) .
Extinguishing media	
Suitable	: Use dry chemical, CO ₂ , water spray (fog) or foam.
Not suitable	: Do not use water jet.
Special exposure hazards	: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
Products of combustion	: Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.
Special protective equipment for fire-fighters	: Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
Special remarks on fire hazards	: Extremely flammable in presence of open flames, sparks, shocks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.
Special remarks on explosion hazards	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.

6 . Accidental release measures

Personal precautions	: No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
Environmental precautions	: Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
Methods for cleaning up	
Small spill	: Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
Large spill	: Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

7 . Handling and storage

Handling	: Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical
-----------------	---

7 . Handling and storage

(ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.

Storage

- : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

8 . Exposure controls/personal protection

Ingredient	Exposure limits
Gasoline	ACGIH TLV (United States). TWA: 300 ppm 8 hour(s). STEL: 500 ppm 15 minute(s).
Ethanol	ACGIH TLV (United States). STEL: 1000 ppm 15 minute(s).
Benzene	ACGIH TLV (United States). Absorbed through skin. TWA: 0.5 ppm 8 hour(s). STEL: 2.5 ppm 15 minute(s).
Toluene	ACGIH TLV (United States). TWA: 20 ppm 8 hour(s).

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures

- : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

Engineering measures

- : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Hygiene measures

- : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal protection

Respiratory

- : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

8 . Exposure controls/personal protection

- Hands** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Recommended: polyvinyl alcohol (PVA), Viton. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.
- Eyes** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.
- Skin** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Environmental exposure controls** : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

9 . Physical and chemical properties

- Physical state** : Clear liquid.
- Flash point** : Closed cup: -50 to -38°C (-58 to -36.4°F) [Tagliabue.]
- Auto-ignition temperature** : 257°C (494.6°F) (NFPA)
- Flammable limits** : Lower: 1.3% (NFPA)
Upper: 7.6% (NFPA)
- Colour** : Clear to slightly yellow or green, undyed liquid. May be dyed red for taxation purposes.
- Odour** : Gasoline
- Odour threshold** : Not available.
- pH** : Not available.
- Boiling/condensation point** : 25 to 220°C (77 to 428°F) (ASTM D86)
- Melting/freezing point** : Not available.
- Relative density** : 0.685 to 0.8 kg/L @ 15°C (59°F)
- Vapour pressure** : <107 kPa (<802.5 mm Hg) @ 37.8°C (100°F)
- Vapour density** : 3 to 4 [Air = 1] (NFPA)
- Volatility** : Not available.
- Evaporation rate** : Not available.
- Viscosity** : Not available.
- Pour point** : Not available.
- Solubility** : Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform and benzene. Dissolves fats, oils and natural resins.

10 . Stability and reactivity

- Chemical stability** : The product is stable.
- Hazardous polymerisation** : Under normal conditions of storage and use, hazardous polymerisation will not occur.
- Materials to avoid** : Reactive with oxidising agents, acids and interhalogens.
- Hazardous decomposition products** : May release CO_x, NO_x, phenols, polycyclic aromatic hydrocarbons, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

11 . Toxicological information

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Gasoline	LD50 Dermal	Rabbit	>5000 mg/kg	-
	LD50 Oral	Rat	13600 mg/kg	-
Ethanol	LD50 Dermal	Rabbit	>15800 mg/kg	-
	LD50 Oral	Mouse	3450 mg/kg	-
	LC50 Inhalation Vapour	Rat	8850 mg/m ³	4 hours
Benzene	LD50 Dermal	Rabbit	>8240 mg/kg	-
	LD50 Oral	Rat	930 mg/kg	-
	LC50 Inhalation Vapour	Rat	13228 ppm	4 hours
Toluene	LD50 Dermal	Rabbit	12125 mg/kg	-
	LD50 Oral	Rat	636 mg/kg	-
	LC50 Inhalation Vapour	Rat	7585 ppm	4 hours

Conclusion/Summary : Not available.

Chronic toxicity

Conclusion/Summary : Not available.

Irritation/Corrosion

Conclusion/Summary : Not available.

Sensitiser

Conclusion/Summary : Not available.

Carcinogenicity

Conclusion/Summary : Not available.

Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Gasoline	A3	2B	-	-	-	-
Ethanol	A3	-	-	-	-	-
Benzene	A1	1	A	+	Proven.	+
Toluene	A4	3	D	-	-	-

Mutagenicity

Conclusion/Summary : Not available.

Teratogenicity

Conclusion/Summary : There is a wealth of information about the teratogenic hazards of Toluene in the literature; however, based upon professional judgement regarding the body of evidence, WHMIS classification as a teratogen is not warranted.

Reproductive toxicity

Conclusion/Summary : Not available.

12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

Aquatic ecotoxicity

Conclusion/Summary : Not available.

Biodegradability

Conclusion/Summary : Not available.


13 . Disposal considerations

Waste disposal : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
TDG Classification	UN1203	GASOLINE	3	II		-
DOT Classification	Not available.	Not available.	Not available.	-		-

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Flammable liquid
Irritating material
Carcinogen

Canada

WHMIS (Canada) : Class B-2: Flammable liquid
Class D-2A: Material causing other toxic effects (Very toxic).
Class D-2B: Material causing other toxic effects (Toxic).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

Canada inventory : All components are listed or exempted.

United States inventory (TSCA 8b) : All components are listed or exempted.

Europe inventory : All components are listed or exempted.

16 . Other information

Label requirements : FLAMMABLE LIQUID AND VAPOUR. CAUSES RESPIRATORY TRACT, EYE AND SKIN IRRITATION. CANCER HAZARD - CONTAINS MATERIAL WHICH CAN CAUSE CANCER. CONTAINS MATERIAL WHICH CAN CAUSE HERITABLE GENETIC EFFECTS.

Hazardous Material Information System (U.S.A.) :

Health	*	2
Flammability		3
Physical hazards		0
Personal protection		H

16 . Other information

National Fire Protection :
Association (U.S.A.)



References : Available upon request.
™ Trademark of Suncor Energy Inc. Used under licence.

Date of printing : 4/21/2010.

Date of issue : 9 April 2010

Date of previous issue : No previous validation.

Responsible name : Product Safety - RS

Indicates information that has changed from previously issued version.

For Copy of (M)SDS : Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Material Safety Data Sheet



Acetylene

Section 1. Chemical product and company identification

Product name : Acetylene
Supplier : AIRGAS INC., on behalf of its subsidiaries
259 North Radnor-Chester Road
Suite 100
Radnor, PA 19087-5283
1-610-687-5253
Product use : Synthetic/Analytical chemistry.
Synonym : acetylen; acetylene ; ethine; ethyne; narcylen
MSDS # : 001001
Date of Preparation/Revision : 5/11/2011.
In case of emergency : 1-866-734-3438

Section 2. Hazards identification

Physical state : Gas.
Emergency overview : WARNING!
FLAMMABLE GAS.
MAY CAUSE FLASH FIRE.
MAY CAUSE TARGET ORGAN DAMAGE, BASED ON ANIMAL DATA.
CONTENTS UNDER PRESSURE.
Keep away from heat, sparks and flame. Do not puncture or incinerate container. May cause target organ damage, based on animal data. Use only with adequate ventilation. Keep container closed.
Contact with rapidly expanding gases can cause frostbite.
Target organs : May cause damage to the following organs: lungs, upper respiratory tract, central nervous system (CNS).
Routes of entry : Inhalation
Potential acute health effects
Eyes : Contact with rapidly expanding gas may cause burns or frostbite.
Skin : Contact with rapidly expanding gas may cause burns or frostbite.
Inhalation : Acts as a simple asphyxiant.
Ingestion : Ingestion is not a normal route of exposure for gases
Potential chronic health effects
Chronic effects : May cause target organ damage, based on animal data.
Target organs : May cause damage to the following organs: lungs, upper respiratory tract, central nervous system (CNS).
Medical conditions aggravated by over-exposure : Pre-existing disorders involving any target organs mentioned in this MSDS as being at risk may be aggravated by over-exposure to this product.

See toxicological information (Section 11)

Section 3. Composition, Information on Ingredients

<u>Name</u>	<u>CAS number</u>	<u>% Volume</u>	<u>Exposure limits</u>
Acetylene	74-86-2	100	NIOSH REL (United States, 6/2009). CEIL: 2662 mg/m ³ CEIL: 2500 ppm

Section 4. First aid measures

No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. To avoid the risk of static discharges and gas ignition, soak contaminated clothing thoroughly with water before removing it. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Frostbite** : Try to warm up the frozen tissues and seek medical attention.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : As this product is a gas, refer to the inhalation section.

Section 5. Fire-fighting measures

- Flammability of the product** : Flammable.
- Auto-ignition temperature** : 305°C (581°F)
- Flash point** : Closed cup: -18.15°C (-0.7°F).
- Flammable limits** : Lower: 2.5% Upper: 100%
- Products of combustion** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
- Fire hazards in the presence of various substances** : Extremely flammable in the presence of the following materials or conditions: open flames, sparks and static discharge, heat and oxidizing materials.
- Fire-fighting media and instructions** : In case of fire, use water spray (fog), foam or dry chemical.

In case of fire, allow gas to burn if flow cannot be shut off immediately. Apply water from a safe distance to cool container and protect surrounding area. If involved in fire, shut off flow immediately if it can be done without risk.

Contains gas under pressure. Flammable gas. In a fire or if heated, a pressure increase will occur and the container may burst, with the risk of a subsequent explosion.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

- Personal precautions** : Immediately contact emergency personnel. Keep unnecessary personnel away. Use suitable protective equipment (section 8). Shut off gas supply if this can be done safely. Isolate area until gas has dispersed.
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.
- Methods for cleaning up** : Immediately contact emergency personnel. Stop leak if without risk. Use spark-proof tools and explosion-proof equipment. Note: see section 1 for emergency contact information and section 13 for waste disposal.

Section 7. Handling and storage

- Handling** : Use only with adequate ventilation. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. High pressure gas. Do not puncture or incinerate container. Use equipment rated for cylinder pressure. Close valve after each use and when empty. Keep container closed. Keep away from heat, sparks and flame. To avoid fire, eliminate ignition sources. Protect cylinders from physical damage; do not drag, roll, slide, or drop. Use a suitable hand truck for cylinder movement.
- Storage** : Keep container in a cool, well-ventilated area. Keep container tightly closed and sealed until ready for use. Avoid all possible sources of ignition (spark or flame). Segregate from oxidizing materials. Cylinders should be stored upright, with valve protection cap in place, and firmly secured to prevent falling or being knocked over. Cylinder temperatures should not exceed 52 °C (125 °F).

Section 8. Exposure controls/personal protection

- Engineering controls** : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapor or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.
- Personal protection**
- Eyes** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.
- Skin** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
- Respiratory** : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
- The applicable standards are (US) 29 CFR 1910.134 and (Canada) Z94.4-93
- Hands** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
- Personal protection in case of a large spill** : Self-contained breathing apparatus (SCBA) should be used to avoid inhalation of the product.

Product name

Ethyne

NIOSH REL (United States, 6/2009).

CEIL: 2662 mg/m³

CEIL: 2500 ppm

Consult local authorities for acceptable exposure limits.

Section 9. Physical and chemical properties

- Molecular weight** : 26.04 g/mole
- Molecular formula** : C₂H₂
- Melting/freezing point** : Sublimation temperature: -81.8°C (-115.2 to °F)
- Critical temperature** : 35.3°C (95.5°F)
- Vapor pressure** : 635 (psig)
- Vapor density** : 0.907 (Air = 1)
- Specific Volume (ft³/lb)** : 14.7058
- Gas Density (lb/ft³)** : 0.0691 (-80°C / -112 to °F)

Section 10. Stability and reactivity

- Stability and reactivity** : The product is stable.
- Incompatibility with various substances** : Extremely reactive or incompatible with the following materials: oxidizing materials.
- Hazardous decomposition products** : Under normal conditions of storage and use, hazardous decomposition products should not be produced.
- Hazardous polymerization** : Under normal conditions of storage and use, hazardous polymerization will not occur.

Section 11. Toxicological information

Toxicity data

- Chronic effects on humans** : May cause damage to the following organs: lungs, upper respiratory tract, central nervous system (CNS).
- Other toxic effects on humans** : No specific information is available in our database regarding the other toxic effects of this material to humans.
- Specific effects**
- Carcinogenic effects** : No known significant effects or critical hazards.
- Mutagenic effects** : No known significant effects or critical hazards.
- Reproduction toxicity** : No known significant effects or critical hazards.

Section 12. Ecological information

Aquatic ecotoxicity


Not available.



- Products of degradation** : Products of degradation: carbon oxides (CO, CO₂) and water.
- Environmental fate** : Not available.
- Environmental hazards** : This product shows a low bioaccumulation potential.
- Toxicity to the environment** : Not available.

Section 13. Disposal considerations

Product removed from the cylinder must be disposed of in accordance with appropriate Federal, State, local regulation. Return cylinders with residual product to Airgas, Inc. Do not dispose of locally.

Section 14. Transport information

Regulatory information	UN number	Proper shipping name	Class	Packing group	Label	Additional information
DOT Classification	UN1001	ACETYLENE, DISSOLVED	2.1	Not applicable (gas).		<p>Limited quantity Yes.</p> <p>Packaging instruction Passenger aircraft Quantity limitation: Forbidden.</p> <p>Cargo aircraft Quantity limitation: 15 kg</p>

Acetylene						
TDG Classification	UN1001	ACETYLENE, DISSOLVED	2.1	Not applicable (gas).		<u>Explosive Limit and Limited Quantity Index</u> 0 <u>Passenger Carrying Ship Index</u> 75 <u>Passenger Carrying Road or Rail Index</u> Forbidden <u>Special provisions</u> 38, 42
Mexico Classification	UN1001	ACETYLENE, DISSOLVED	2.1	Not applicable (gas).		-

“Refer to CFR 49 (or authority having jurisdiction) to determine the information required for shipment of the product.”

Section 15. Regulatory information

United States

U.S. Federal regulations

: TSCA 8(a) IUR: Partial exemption
United States inventory (TSCA 8b): This material is listed or exempted.
SARA 302/304/311/312 extremely hazardous substances: No products were found.
SARA 302/304 emergency planning and notification: No products were found.
SARA 302/304/311/312 hazardous chemicals: Ethyne
SARA 311/312 MSDS distribution - chemical inventory - hazard identification:
Ethyne: Fire hazard, reactive, Sudden release of pressure, Immediate (acute) health hazard

Clean Air Act (CAA) 112 accidental release prevention - Flammable Substances:
Acetylene

State regulations

: Connecticut Carcinogen Reporting: This material is not listed.
Connecticut Hazardous Material Survey: This material is not listed.
Florida substances: This material is not listed.
Illinois Chemical Safety Act: This material is not listed.
Illinois Toxic Substances Disclosure to Employee Act: This material is not listed.
Louisiana Reporting: This material is not listed.
Louisiana Spill: This material is not listed.
Massachusetts Spill: This material is not listed.
Massachusetts Substances: This material is listed.
Michigan Critical Material: This material is not listed.
Minnesota Hazardous Substances: This material is not listed.
New Jersey Hazardous Substances: This material is listed.
New Jersey Spill: This material is not listed.
New Jersey Toxic Catastrophe Prevention Act: This material is not listed.
New York Acutely Hazardous Substances: This material is not listed.
New York Toxic Chemical Release Reporting: This material is not listed.
Pennsylvania RTK Hazardous Substances: This material is listed.

Rhode Island Hazardous Substances: This material is not listed.

Canada

WHMIS (Canada)

: Class A: Compressed gas.
Class B-1: Flammable gas.
Class F: Dangerously reactive material.
CEPA Toxic substances: This material is not listed.
Canadian ARET: This material is not listed.
Canadian NPRI: This material is listed.
Alberta Designated Substances: This material is not listed.
Ontario Designated Substances: This material is not listed.
Quebec Designated Substances: This material is not listed.

Section 16. Other information

United States

Label requirements

: FLAMMABLE GAS.
MAY CAUSE FLASH FIRE.
MAY CAUSE TARGET ORGAN DAMAGE, BASED ON ANIMAL DATA.
CONTENTS UNDER PRESSURE.

Canada

Label requirements

: Class A: Compressed gas.
Class B-1: Flammable gas.
Class F: Dangerously reactive material.

Hazardous Material Information System (U.S.A.)

:

Health	*	1
Flammability		4
Physical hazards		2



Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Material Safety Data Sheet



JET A/A-1 AVIATION TURBINE FUEL



1. Product and company identification

Product name	: JET A/A-1 AVIATION TURBINE FUEL
Synonym	: Jet A-1; Jet A-1-DI; Aviation Turbine Kerosene (ATK); JP-8; NATO F-34; Jet F-34; Turbine Fuel, Aviation, Kerosene Type (CAN/CGSB-3.32)
Code	: W213, SAP: 149
Material uses	: Used as aviation turbine fuel. May contain a fuel system icing inhibitor. In the arctic, Jet A-1 may also be used as diesel fuel and heating oil.
Manufacturer	: PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3
In case of emergency	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2. Hazards identification

Physical state	: Clear liquid.
Odour	: Kerosene-like.
WHMIS (Canada)	:   Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F). Class D-2A: Material causing other toxic effects (Very toxic). The WHMIS classification of Jet A/A-1 is B3. The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A.
OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Emergency overview	: COMBUSTIBLE LIQUID AND VAPOUR. MAY CAUSE EYE AND SKIN IRRITATION. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA. Combustible liquid. Slightly irritating to the eyes and skin. Keep away from heat, sparks and flame. Avoid exposure - obtain special instructions before use. Do not breathe vapour or mist. Avoid contact with eyes, skin and clothing. Contains material which may cause birth defects, based on animal data. Avoid exposure during pregnancy. Use only with adequate ventilation. Wash thoroughly after handling.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
Potential acute health effects	
Inhalation	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Ingestion	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
Skin	: Slightly irritating to the skin.
Eyes	: Slightly irritating to the eyes.
Potential chronic health effects	
Chronic effects	: No known significant effects or critical hazards.
Carcinogenicity	: No known significant effects or critical hazards.
Mutagenicity	: No known significant effects or critical hazards.

2 . Hazards identification

- Teratogenicity** : Contains material which may cause birth defects, based on animal data.
- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.
- Medical conditions aggravated by over-exposure** : Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (section 11)

3 . Composition/information on ingredients

<u>Name</u>	<u>CAS number</u>	<u>%</u>
Complex mixture of petroleum hydrocarbons (C9-C16)*(Kerosene)	8008-20-6	99.9
Fuel System Icing Inhibitor (FSII) (if added**): (Diethylene Glycol Monomethyl Ether)	111-77-3	0.1 - 0.15
Anti-static, antioxidant and metal deactivator additives	Not applicable	<0.1

*Aromatic content is 25% maximum (benzene: nil).

**Please note that Jet A-1-DI, JP-8, Jet F-34 and NATO F-34 all contain Fuel System Icing Inhibitor.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

4 . First-aid measures

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.
- Notes to physician** : No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

5 . Fire-fighting measures

- Flammability of the product** : Class II - combustible liquid (NFPA).
- Extinguishing media**
- Suitable** : Use dry chemical, CO₂, water spray (fog) or foam.
- Not suitable** : Do not use water jet.
- Special exposure hazards** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Products of combustion** : Carbon oxides (CO, CO₂), nitrogen oxides (NO_x), sulphur oxides (SO_x), smoke and irritating vapours as products of incomplete combustion.

5 . Fire-fighting measures

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
- Special remarks on fire hazards** : Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire.

6 . Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
- Methods for cleaning up**
- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

7 . Handling and storage

- Handling** : Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Avoid exposure during pregnancy. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage** : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

8 . Exposure controls/personal protection

Ingredient	Exposure limits
Kerosene	ACGIH TLV (United States). TWA: 200 mg/m ³

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

Engineering measures : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal protection

Respiratory

: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Recommended: polyvinyl alcohol (PVA), Viton. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Eyes

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

Skin

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

9 . Physical and chemical properties

Physical state	: Clear liquid.
Flash point	: Closed cup: $\geq 38^{\circ}\text{C}$ ($\geq 100.4^{\circ}\text{F}$) [Tag. Closed Cup]
Auto-ignition temperature	: 210°C (410°F)
Flammable limits	: Lower: 0.7% Upper: 5%
Colour	: Clear and colourless.

9 . Physical and chemical properties

Odour	: Kerosene-like.
Odour threshold	: Not available.
pH	: Not available.
Boiling/condensation point	: 140 to 300°C (284 to 572°F)
Melting/freezing point	: Not available.
Relative density	: 0.775 to 0.84 (Water=1)
Vapour pressure	: 0.7 kPa (5.25 mm Hg) @ 20°C (68°F).
Vapour density	: 4.5 [Air = 1]
Volatility	: Volatile.
Evaporation rate	: Not available.
Viscosity	: 1.0 - 1.9 cSt @ 40°C (104°F)
Pour point	: <-51°C (<-60°F)
Solubility	: Insoluble in water. Partially miscible in some alcohols. Miscible with other petroleum solvents.

10 . Stability and reactivity

Chemical stability	: The product is stable.
Hazardous polymerisation	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
Materials to avoid	: Reactive with oxidising agents, acids and alkalis.
Hazardous decomposition products	: May release COx, NOx, SOx, aldehydes, acids, ketones, smoke and irritating vapours when heated to decomposition.

11 . Toxicological information

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Kerosene	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation	Rat	>5000 mg/m ³	4 hours
	Vapour			
Diethylene Glycol Monomethyl Ether	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	4000 mg/kg	-
	LC50 Inhalation	Rat	>50000 mg/m ³	4 hours
	Vapour			

Conclusion/Summary : Not available.

Chronic toxicity

Conclusion/Summary : Not available.

Irritation/Corrosion

Conclusion/Summary : Not available.

Sensitiser

Conclusion/Summary : Not available.

Carcinogenicity

Conclusion/Summary : Not available.

Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Kerosene	A3	3	-	-	-	-

Mutagenicity

Conclusion/Summary : Not available.

Teratogenicity

Conclusion/Summary : Not available.

11 . Toxicological information

Reproductive toxicity

Conclusion/Summary : Not available.

12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

Aquatic ecotoxicity

Conclusion/Summary : Not available.

Biodegradability

Conclusion/Summary : Not available.


13 . Disposal considerations

Waste disposal : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
TDG Classification	UN1863	FUEL, AVIATION, TURBINE ENGINE	3	III		-
DOT Classification	Not available.	Not available.	Not available.	-		-

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Combustible liquid

Canada

WHMIS (Canada) : Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).
Class D-2A: Material causing other toxic effects (Very toxic).

The WHMIS classification of Jet A/A-1 is B3.

The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

Canada inventory : All components are listed or exempted.

United States inventory (TSCA 8b) : All components are listed or exempted.

Europe inventory : All components are listed or exempted.

16 . Other information

Label requirements : COMBUSTIBLE LIQUID AND VAPOUR. MAY CAUSE EYE AND SKIN IRRITATION. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA.

Hazardous Material Information System (U.S.A.) :

Health	*	2
Flammability		2
Physical hazards		0
Personal protection		H

National Fire Protection Association (U.S.A.) :



References

: Available upon request.
TM/MC Marque de commerce de Petro-Canada - Trademark

Date of printing

: 11/20/2009.

Date of issue

: 20 November 2009

Date of previous issue

: No previous validation.

Responsible name

: **Product Safety - DSR**

Indicates information that has changed from previously issued version.

For Copy of (M)SDS

: Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

APPENDIX C

Spill Guidelines

Immediately Reportable Spill Quantities

TDG Class	Substance for NWT 24 Hour Spill Line	Immediately Reportable Quantities
1 2.3 2.4 6.2 7 None	Explosives Compressed gas (toxic) Compressed gas (corrosive) Infectious substances Radioactive Unknown substance	Any amount
2.1 2.2	Compressed gas (flammable) Compressed gas (non-corrosive, non-flammable)	Any amount of gas from containers with a capacity greater than 100 L
3.1 3.2 3.3	Flammable liquids	> 100 L
4.1 4.2 4.3	Flammable solids Spontaneously combustible solids Water reactant	> 25 kg
5.1 9.1	Oxidizing substances Miscellaneous products or substances excluding PCB mixtures	> 50 L or 50 kg
5.2 9.2	Organic peroxides Environmentally hazardous	> 1 L or 1 kg
6.1 8 9.3	Poisonous substances Corrosive substances Dangerous wastes	> 5 L or 5 kg
9.1	PCB mixtures of 5 or more ppm	> 0.5 L or 0.5 kg
None	Other contaminants (e.g. crude oil, drilling fluid, produced water, waste or spent chemicals, used or waste oil, vehicle fluids, waste water, etc.)	> 100 L or 100 kg
None	Sour natural gas (i.e. contains H ₂ S) Sweet natural gas	Uncontrolled release or sustained flow of 10 minutes or more

Appendix D

Remediation Equipment

Remediation Supply Inventory	<i>Quantity</i>
Power & Temporary Utilities Equipment	
Generator 2 to 6 kw	2
Tower lights	3
Fuel heater	2
Scaffolding	2
Erosion Protection Equipment	
Silt Fences and stakes	50 m
Geo-Textile	2 rolls
Culverts	6
6 inches Drainage piping	20 m
Environment Protection	
Fish exclusion nets	1
Fish nets	3
200 mm Hydrophobic Sorbent Booms	Minimum 50 lineal m
Floating Silt Curtain	Minimum 100 m
Absorbent pads	30 pack s
Spill intervention kits (tools + containment bags)	2
Spill Kits	6
Pumps and Water treatment	
2 inch pump	2
3 inch pump	2
2 inch sump pump	3
Hoses various size	1000ft
Steam Cleaning unit	1
Pressure Washer	1
Demolition & hazardous removal tools supply	
Asbestos HEPA vacuum	2
Negative air unit	1
Polyethylene sheeting 6 mil	15
Asbestos disposal bags	100
water sprayer	2
Various hand tools	1
Duct tape	60 rolls
paint thinner, and Scrapers	1 lot
Plasma cutting device	1
Jig saw & spare blades	3
Concrete breaker	1
Concrete scarifier	1
chain saw & spare chain	2
Treatment / Incineration device	
20 GPM water treatment unit	1
Activated carbon media	Quantity for 15 media changes
Filter sand	
Bag filter 25 micron	100
Bag filter 50 micron	100
Smart ash incinerator included	1

INSTA-BERM™

SECONDARY CONTAINMENT BERM FEATURING L-ROD DESIGN

Guard against toxic spillage with the Insta-Berm: a fully collapsible, rapidly deployable fabric berm made from custom chemical-resistant materials. Use the Insta-Berm virtually anywhere for secondary containment that's durable and reliable. Comply with today's strict environmental rules – let an Insta-Berm be the impenetrable barrier between dangerous liquids and the environment.

Complies with EPA CFR 40 part 112



L-ROD DESIGN FEATURES

- L-shaped rods hold up the walls, yet fold down easily for vehicle entry and exit
- Fully collapsible for compact storage and easy transport
- Instant deployment without any tools
- Wide range of standard sizes and custom sizes available
- Easily cleaned and maintained
- Includes eyelet patches for staking down the berm
- Appropriate for secondary containment of waste water, petroleum products and various chemicals

BERM OPTIONS

- **Drain fitting** – this fitting can be opened to let out accumulated rainwater, or connected to a hose to pump out spilled product
- **Over-fill protection** – allows precipitation to be drained from the Insta-Berm while containing spilled chemicals
- **RainDrain** – removed hydrocarbons and additives from capture water through gravity drainage
- **High Wind Stakes** – anchors the berm to the ground

FABRIC OPTIONS

- **CHEM-SHIELD** – Chemical-resistant fabric
- **ARCTIC-SHIELD** – Chemical resistant fabric for temperatures to -50 degrees Fahrenheit / -45.6 degrees Celcius (Arctic-Shield fabric is not suitable for acids)



Drain fitting



RainDrain



Eyelet patches for staking down berm



L-Rod Setup Stage 1



L-Rod Setup Stage 2



L-Rod Setup Stage 3



Bomb Bucket



Fireflex



Dragon



Remuda Site



Environmental



Emergency Response



P: (250) 652.4549
F: (250) 652.5052
TF: 1.888.548.3800
E: info@spillsupply.com


Manufactured by:



MAXIMUM OPERATING FLOW: 20 GPM

PROJECT NUMBER:

OPERATED BY:

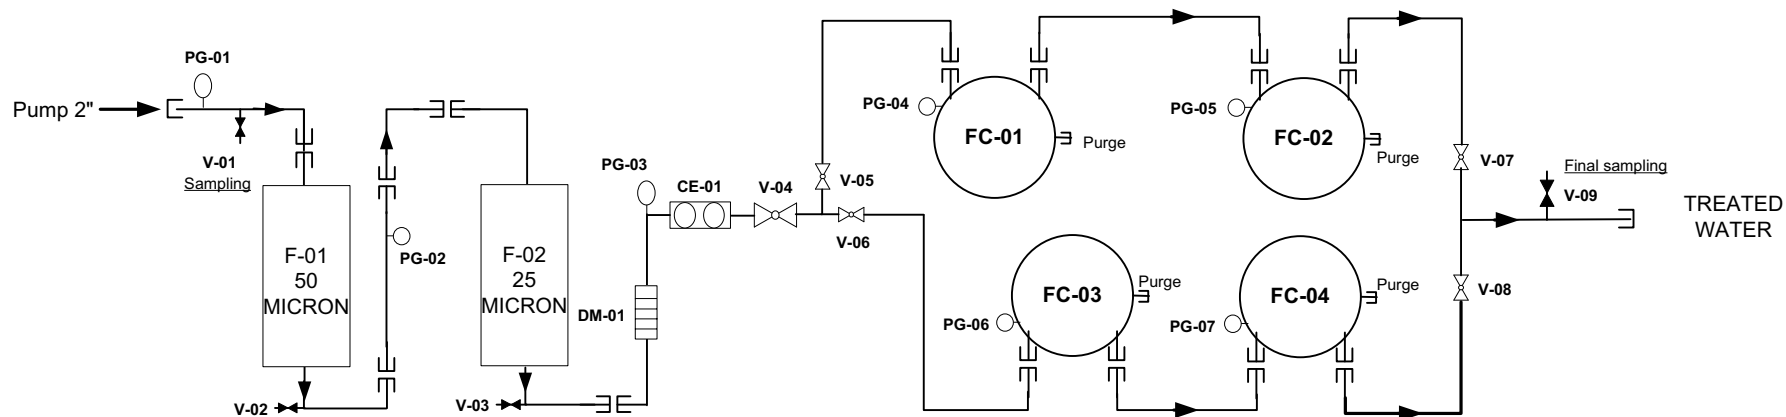

Date	Time	PG-01	PG-02	PG-03	PG-04	PG-05	PG-06	PG-07	DM-01	CE-01
		(psi)	(psi)	(psi)	(psi)	(psi)	(psi)	(psi)	(gpm)	(m ³)

: V-00 : normally closed valve

: V-00 : normally open valve

DM-00 : flowmeter

PG-00 : Pressure gauge

CE-00 : Water meter

FC-00 : Carbon filter

F-00 : Bag filter

Inlet sampling (V-01)

Time	# Sample

Outlet sampling (V-09)

Time	# Sample

PURGE :

- ☐ YES
☐ NO
☐ See Observations



EQUIPMENTS CHECK-UP

ITEM	CHECK-UP	CLEANING	REPLACEMENT
F-01 Filter (bag filter)	<input type="checkbox"/>	N/A	<input type="checkbox"/>
F-02 Filter (bag filter)	<input type="checkbox"/>	N/A	<input type="checkbox"/>
FC-01 Filter	<input type="checkbox"/>	N/A	<input type="checkbox"/>
FC-02 Filter	<input type="checkbox"/>	N/A	<input type="checkbox"/>
FC-03 Filter	<input type="checkbox"/>	N/A	<input type="checkbox"/>
FC-04 Filter	<input type="checkbox"/>	N/A	<input type="checkbox"/>



enGlobe Corp
350 Franquet Street, Ste-Foy, QC, G1P 4P3
Tel.: (418) 653-2074 Fax: (418) 653-1598

**Water Treatment Unit
4374**

**Piping Diagram and
Follow-up Sheet**

Units: None	Scale: None	Date: 07/08/20
Drawn by: Y.Tremblay	Verified by: Y.Tremblay	Approved by: Y.Tremblay
Project: EQ6021-374	Identification Code : 1560-300-EN05	Drawing No: SUIV14374 ang.pdf

INCINERATOR PRODUCTS

Portable incinerators for debris or hazardous medical waste.



Elastec > Incinerator Products > SmartAsh

- [Oil Spill Products](#)
- [Incinerator Products](#)
- [Vacuum Products](#)
- [Power Packs](#)
- [Pumps](#)
- [Specialized Vehicles](#)
- [Baffles](#)
- [Custom Containment](#)
- [Turbidity Curtains](#)
- [Portable Tanks](#)
- [Multipurpose Boats](#)
- [Fumigation Tarps](#)
- [Employment Opportunities](#)



WENDY SCHMIDT
OIL CLEANUP



SmartAsh - Cyclonic Barrel Burner

SmartAsh is an innovative combustion system that meets EPA requirements for burning non-hazardous refuse. Simply load a 55 gallon (208 liter) open head steel drum, light the load and clamp on the lid. A whirlwind of fire and intense heat is created inside the drum, burning refuse without smoke or smell. Combustion is complete, leaving 3% ash.

Thousands of satisfied customers are currently using SmartAsh around the world to eliminate a wide variety of burnable waste materials.

This innovative little incinerator can be shipped by parcel post. The SmartAsh can be used with or without fuel. For dry loads that support combustion, SmartAsh incinerates waste with incredible efficiency. For loads having a moisture content above 15%, the SmartAsh with OilAway Attachment provides a unique fuel injection system that allows the incineration of a large variety of refuse and waste materials. SmartAsh with the OilAway Attachment also eliminates waste oil at rates up to 6 gallons/hr. (23 L). Available in 110 volt and 220 volt versions.

SmartAsh uses what is specified by ISO Standards as a removable head or "open-end" drum. The measurement of this drum type is standard around the world. ISO 15750, published in 2002, traditionally identifies this drum as being 55 American Gallon.

US Norm ANSI/ASC MH2-1985 • 22 1/2 in ± 1/16 I.D.

European Standard EN 209 • 571.5mm +1/-0.5 I.D.

Accessories

The OilAway Attachment is an accessory for the SmartAsh Cyclonic Barrel Burner that injects waste oil into the barrel during the burn cycle. This allows the SmartAsh to burn "wet" loads typically not burnable in the SmartAsh.

The Document Burner is an insert that fits into the oil drum. This insert insures complete incineration of paper products and important documents when no other high BTU material is added.

[SmartHeat](#) - for capturing heat generated by the SmartAsh.

You can view a partial [customer list](#) [here](#).

