

2-FUEL AND LUBE REQUIREMENTS AND STORAGE CAPACITY

A variety of fuels, oils and other hazardous materials will be used during clean up activities at the Ekalugad Fjord site. The greatest volumes involved consist in diesel fuel. Other substances such as aviation fuel, lubricant oils, hydraulic fluid, antifreeze, fuel additives, gasoline, engine coolants, cleaning solvent (DIPSOL and SUPREX) are used but their volumes are small compared with diesel fuels. All these products are to be considered as potential environmental and safety hazards.

The following table summarizes the estimated quantities mobilized on site.

Table-1: Quantities of Petroleum Products stored on site

Liquids to be used	Estimated Volumes (Litres)
diesel fuel	356,640
Aviation Fuel (Jet A1)	41,000
Gasoline	10,250
Engine oil	4000
Transmission oil	1000
Differential oil	600
Hydraulic oil	1000
Coolant	600
DIPSOL	205
SUPREX	205

The MSDS of all these products are found in appendix 1. All petroleum products were delivered to the site (by marine shipment) in 205-Litre drums strapped on pallets. Once used, all these UN approved drums will be either sent back down south by marine shipping during site demobilization to the supplier to recover the deposit, or crushed and landfilled on site, if damaged. A variety of intermediate fuel tanks will also be used to:

- Supply the camp generator: 2 above ground fuel tanks having a capacity of 1360 litres each (i.e. 300 gal) located within the seacans in which gensets are installed. These fuel tanks will be filled from drums using a 12-Volt fuel pump (20gpm).

- Supply the different heavy equipments on the field: One 683 litre tank (150 gal) and two 1140 litres (250 gal) installed in the back of Ford F250 pick up trucks. These fuel tanks will be filled from drums using a 12-Volt fuel pump (20gpm). A 12-Volt fuel pump will also be used to transfer the fuel from these tanks for equipment reservoirs.

For all petroleum products stored in drums, the following storage facility is to be used: The drum storage will be installed about mid way between the beach area and the water lake area, near borrow are #4, at distance away from highwater mark and traffic to comply with all conditions of permits (see figure 3 for location). Small berms will be constructed around the storage area (to contain spills from accidents), spill kits (see below) will be installed in the vicinity and restricted area/no smoking area placards will be posted. The area will be graded to have a smooth gravel pad prior to haul pallets from the beach (sealift unloading) to the storage area.

Hand operated pumps are to be used for fuel transfer operations with drums of gasoline, oils and lubricants.

3-DUTIES AND RESPONSIBILITIES

As part of the spill emergency response, the Contractor is responsible of implementing, through its site superintendent or its authorized representative, the following procedures:

- a- To communicate immediately the spill event to the PWGSC official (immediately shall mean upon discovery).
- b- To authorize the use of personnel and applicable equipment to contain the spill using the most reliable method.
- c- To eliminate all fire hazards and potential ignition sources near the spill area.
- d- To implement all required safety and security procedures at the site of the spill.
- e- To eliminate the source of the spill or reduce the rate of discharge, if such procedures can be implemented with respect to health and safety requirements.
- f- To contain the spill using the most appropriate methods for the situation (dykes, ditches, sorbent materials, containment booms and other barriers).
- g- To evaluate the possibilities of recovering spilled chemicals.
- h- To mobilize all available personnel, equipment and tools, as required.
- i- To obtain assistance from PWGSC (through its official), from DIAND (the owner) and/or from Environment Canada, if required. To consult and, if required, request assistance from the Canadian Coast Guard and/or and Fisheries and Oceans

- Canada if the spill affects water.
- j- To obtain additional assistance by hiring northern residents from local communities and/or specialized spill response firms, if required.
 - k- To comply with all applicable guidelines and regulations.
 - l- To assess on a preliminary basis, environmental impacts on marine, freshwater and terrestrial wildlife and on the general ecosystem and then to communicate with relevant authorities.
 - m- To provide documentation for all events and actions.
 - n- To report the event to the GN Spill Report Line and to prepare and submit a written spill report using the appropriate form (see below for the list of information required for such submittals).

As part of the spill emergency response, the Site Superintendent is responsible for the implementation of the following procedures:

- a- To ensure that appropriate resources required to respond and clean up the spill are made available.
- b- To supervise containment, clean up and restoration operations.
- c- To provide documentation for all events and actions.
- d- To notify relevant government authorities.

The site superintendent, acting as the incident commander, will have authority over the following department/unit, each having a specific role for the spill response operations:

Table-2: Roles of Key personnel under the site superintendent for spill response

Department/Unit	Responsibility
Fire Chief	Ensure existing conditions do not present a fire/explosion hazard
Health & Safety Officer	Ensure spill response workers are not exposed to health and safety risks
Contractor's Site Engineer	Coordinate spill response methods and procedures
Medical / Rescue Unit	Provide assistance to victims (if required)
Spill Response Team Leader	Implement the containment and clean up activities
Containment Unit	Perform spill response
Clean up Unit	Conduct remediation

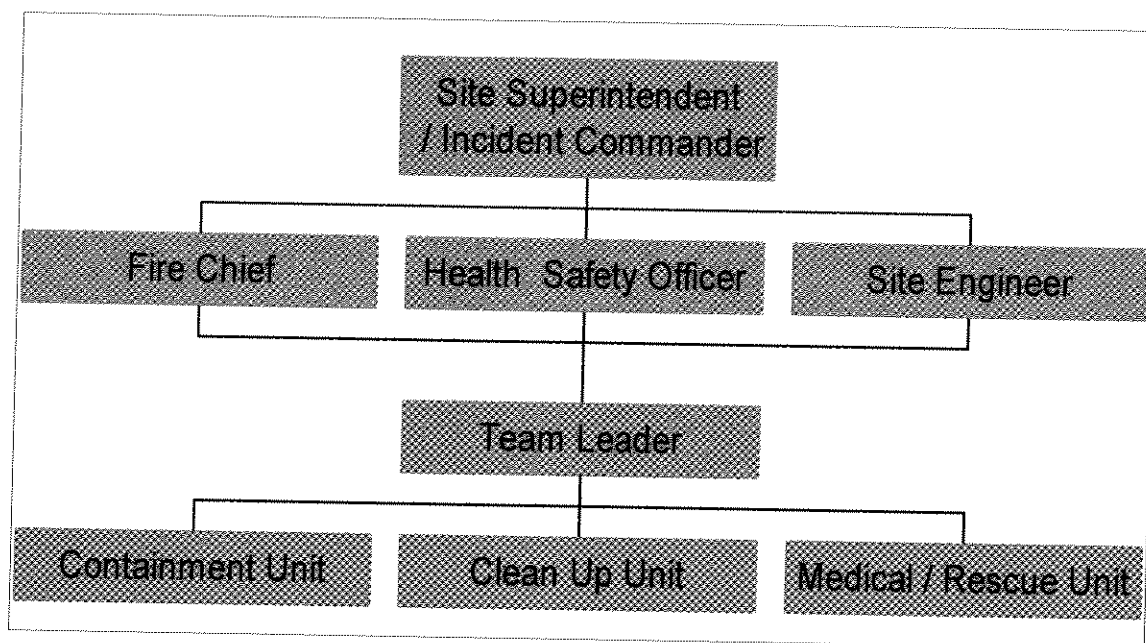


Figure-2: Emergency Response Team

Once a spill event is reported, the site superintendent, fire chief, health & safety officer and site engineer shall meet to establish a specific strategy for containing and controlling the spill and to initiate the clean up activities. They shall delegate a person - the Spill Response Team Leader - to oversee the implementation of the strategy. Members of the Ekalugad Fjord Fire / Rescue Team, under the direction of the Spill Response Team Leader shall then coordinate the activities of the Containment and Clean up Units. Figure-2 shows a graphic representation of the emergency team and chain of command.

Otherwise, the Contractor will ensure that any selected shipment company have prepared the contingency plans (emergency response plans {ERP}) required to face spill events, and that they can comply with all applicable regulations. The shipment company will be responsible to register their ERP, if required, with the Director General of the Transport of Dangerous Goods Directorate if materials identified for transport are exceeding volumes listed on schedule XII of the TDG regulations. The ERP shall contain information on the nature of risks from dangerous goods and contact names and numbers for emergency assistance.

If during transport, a spill of hazardous materials exceeds the volumes listed in Part 9, Table I of the TDG regulations, the shipment company authorities will have to immediately notify the relevant authorities using the contact lists defined in Table II of the same regulations. The shipment authority will also have to inform his/her employer, the owner of the transport vehicle, and the dangerous goods owner. The shipment authority's employer will then be required to submit a written report to the TDG Director General within 30 days following the spill event.

The Contractor will ensure that the selected shipment company reports the spill events, if those occur, using the appropriate spill response line. Quantities of substances which represent "a spill" are listed in schedule B of the NWT Spill Contingency and Reporting Regulation.

If a spill occurs on water during shipment of material, the shipment company will be responsible to deploy containment booms and recover as much fuel as possible with required and available equipment.

4-TRAINING AND DRILLS

All personnel on site shall be informed that any spill of fuel and/or hazardous liquids or solids, whatever the extent, has to be reported immediately to the site superintendent or his authorized representative.

The site superintendent and the health and safety officer shall select a group of 4 to 6 on-site workers to be assigned to spill containment in case of emergency. These persons shall be aware of available spill containment equipment, protective clothing and containers and shall be responsible to implement procedures and coordinate other workers if required. These persons shall also be aware that defensive actions and techniques employed will depend on a variety of factors. These include, but are not limited to:

- a- type of pollutant;
- b- degree of loss;
- c- topography of the nearby area; and
- d- proximity to water.

Also, they should know that the most common pollution incident potentially occurring at the Ekalugad Fjord site will probably be caused by fuel, oil or other hazardous fluid spills onto land or water resulting from:

- a- human error during transfer operations of fuel from storage drums to day tanks;
- b- rupture of lines, tanks or valves from accidental damage, deterioration or equipment

- failure; and
- c- leaks from fittings or valves.

Finally, the spill containment team shall be aware that, if a spill occurs, the protection of human health and safety shall be a priority. Even if emergency procedures are attempted to rapidly clean, contain and dispose released contaminants to minimize further environmental impact, human exposure during spill event is to be considered as a real concern and be prevented.

The Contractor site superintendent shall organize a drill with each rotating spill containment team near the beginning of each season. These drills shall mainly be used to determine the time required to mobilize equipment at the drum storage area.

5-MATERIAL AND EQUIPMENT

In order to prevent spills and provide an appropriate response in case of spill events, the Contractor maintains on-site appropriate equipment and material required. These equipment and materials are present on site. A list of spill prevention and spill containment equipment including protective clothing is presented below. Figure-3 presents the locations of hazardous material and spill kits on site.

5.1 Spill Prevention

The materials and equipment used for spill prevention are essentially related to waste oil incineration, temporary fuel tank inspection, and temporary containment basin construction:


<u>Qty</u>	<u>Description</u>
1	roll of HDPE geomembrane
2	Westland waste oil burner

5.2 Spill Containment

The material and equipment to be used for spill containment and emergency response including protective clothing are:

<u>Qty</u>	<u>Description</u>
5	Containerized spill kits having 10 sorbent booms, 2 safety glasses. 2 Nitrile gloves, 100 sorbent sheets
10	Rolls of (38" x 144') sorbent sheets

5	100 metre long/8 inch diameter oil sorbent booms
1	Vacuum suction hose/tank installed on a trailer
2	1 ½" and 2" x 25 ft oil hose c/w kamlock fittings
10	Emergency eye wash station c/w saline solution
10	First aid kit
2	Case of disposable coveralls (50 per case)
2	Cat bulldozer (D6)
2	Cat excavators (320L and 322BL)
2	Cat integrated tool carriers (950 and IT38) c/w snow/gravel bucket, 4 ft forks, material handling arm
1	Cat dump trucks (D250)
3	Dump trucks (Mack and GMC)
1	Bobcat 763 skid loader
25	Fire extinguishers
4	Fire extinguishers, class ABC, 20 lbs dry chemical
1	high pressure air compressor c/w moisture separator, low pressure regulator, adaptor to recharge fire extinguishers and Scott paks
4	Scott air pak (Draeger)
8	spade nose shovels
1	Electric fuel pump - stationary 115 V, approx. 15 USGAL/min , explosion proof switch, water sediment filter
200	Leather work gloves
100	Rubber gloves
20	Nitrile gloves
15	Cartridge half mask respirator
1	Cartridge full face respirator
40	Organic vapour cartridges
120	Pre-filters and filter clips
500	Disposable dust masks
40	Rubber boots steel toe and shank
40	Safety goggles
100	Saranek & Tyvek suits

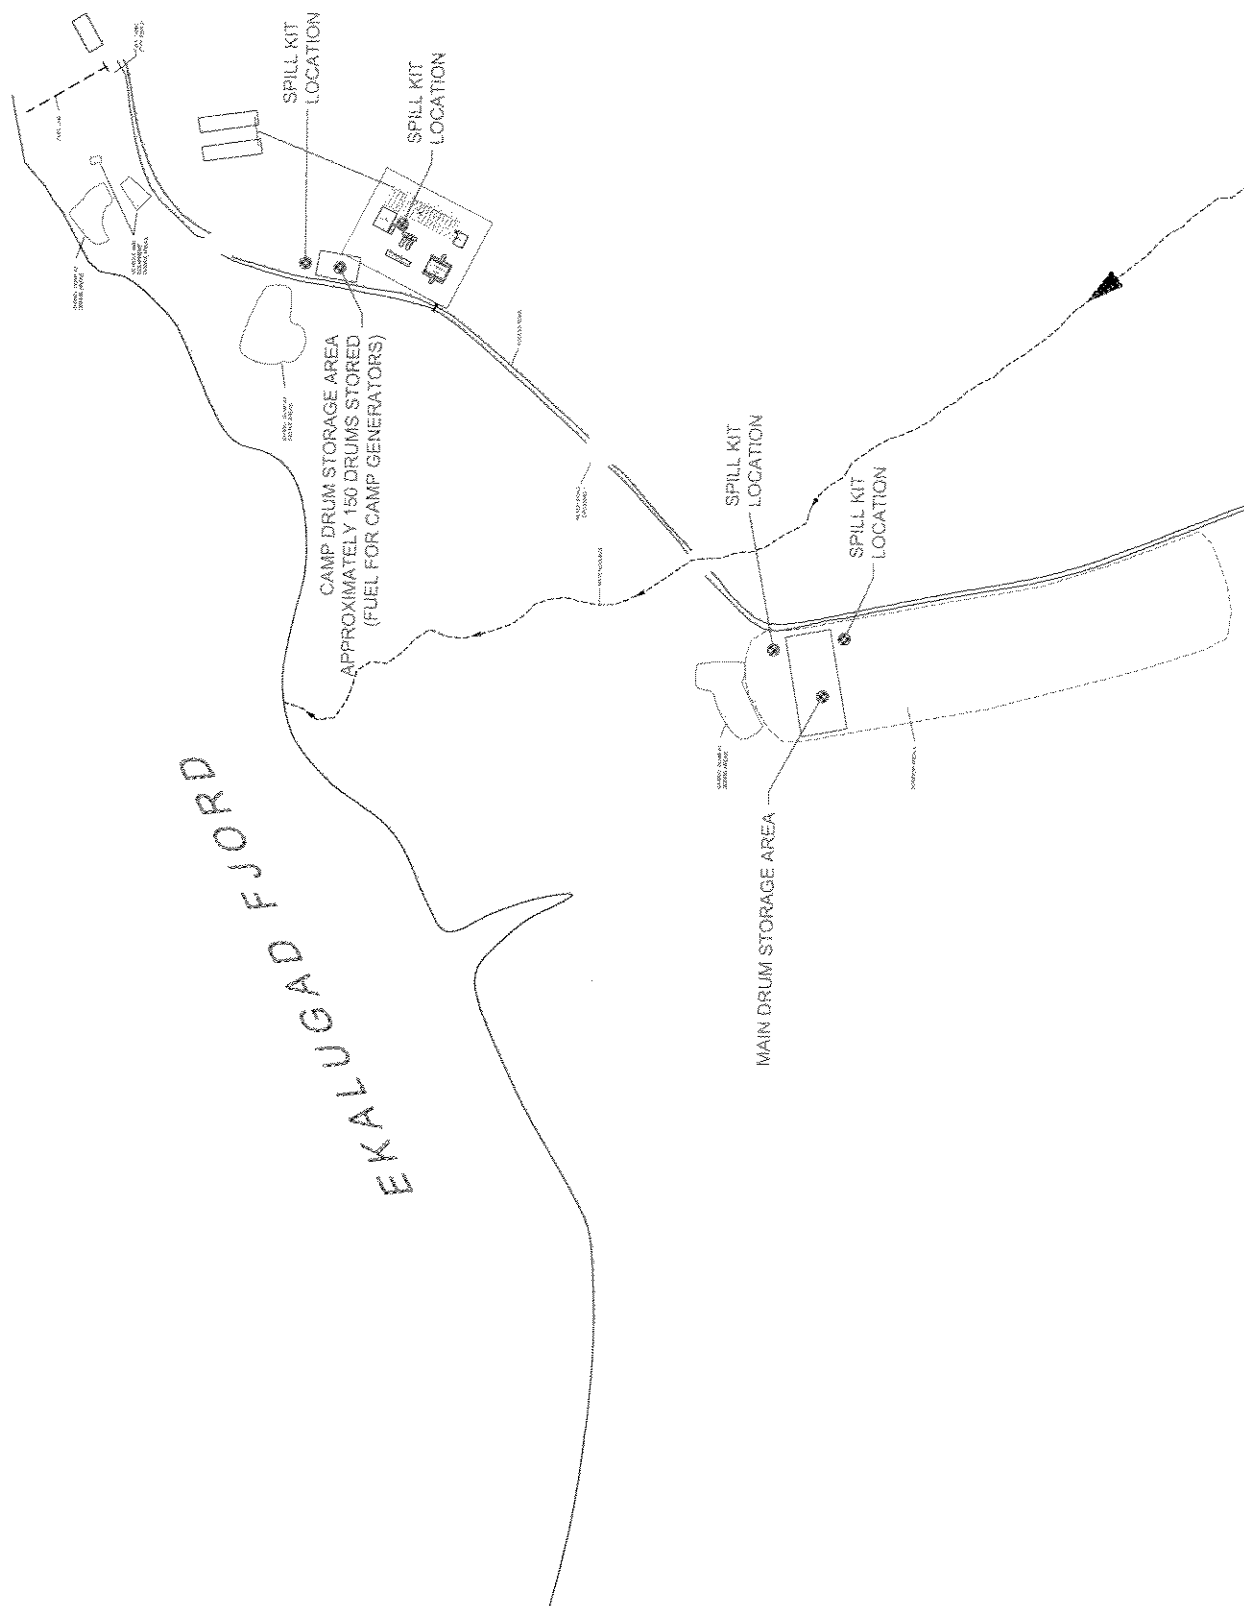

6-SPILL RESPONSE PROCEDURES

Following a spill event, specific procedures shall be implemented by the person who first noticed the emergency situation. These procedures are as follows:

- a- Immediately warn other personnel working near the spill area.
- b- Evacuate the area if health and safety are judged to be threatened.
- c- If not, take appropriate measures to stop, contain and identify the nature of the spill.
- d- Report to the PWGSC site representative and the Contractor's site superintendent all relevant information concerning the spill event such as the type and volume of contaminant, the location and approximate size of the spill, the actions already taken to stop and contain the spill and all other observations including the presence of wildlife and meteorological conditions.

The spill clean up approaches shall be discussed with PWGSC and INAC. INAC will communicate with Environment Canada. The selected methods shall be based on criteria where the impacts on human health and safety, wildlife, land, water and other environmental parameters are minimized.

To manage a spill incident, some emergency clean up guidelines shall be followed by the Contractor when applicable. These incorporate some of the material previously described and include:

- e- Sorbent materials will be used to contain the spill and/or to minimize its movement.
- f- Appropriate protective clothing and other safety devices will be used to handle spilled materials.
- g- When the spill occurs on land, dykes may be constructed to limit the spill movement providing granular material is sufficiently available. Snow dikes covered with an impermeable liner may also be used if snow still remains. Otherwise, containment booms will be installed in front of the plume and secured to make sure these sorbent barriers do not get saturated.
- h- Any free product settled in ditches, trenches or any other ground cavities will be removed using equipment such as pumps, buckets or skimmers. Recovered fluids will be temporarily stored in appropriate containers.
- i- Any spill areas will be cleaned up to an extent where land, water and other disturbed environmental systems are restored and the site is left as close as possible to its original state.

7-POTENTIAL SPILL ANALYSIS

As part of the analysis of potential spills, their fates and effects, three potential sources of spills have been identified for the Ekalugad Fjord clean up and camp service projects. The first is the drum storage area located at the middle site. The second is related to the management of scattered waste drums (to be cleaned up) located everywhere on-site. The third consists in the fuel delivery using fuel tanks on pick-up trucks. Each of these three sources are analysed in detail in the following pages.

7.1- Scenario #1: Drum Storage Area

The drum storage area will consist of a levelled pad where pallets will be staged/stockpiled. All pallets of drums will be somewhat independent and, therefore the spillage of one drum should not affect the others.

Two potential situations could occur that would cause a spill:

- 1) the accidental spillage of fuel during transfer into temporary tanks;
- 2) the rupture of drums, possibly from a violent impact caused by the collision of a vehicle or piece of heavy equipment.

In the first case, the spilled volume would be, at worst, 45 gallons, which represents the entire volume of one drum. In the other case, we can assume that the impact would occur at mid-height on two stacked pallets and, at worst, sixteen drums would be affected. Therefore the spilled volume should not exceed a total volume of 720 gallons.

In either case the spillage flowrate would be moderate to high and we can assume that the entire volume would be spilled within 15 to 20 minutes.

The general direction of migration would be along the natural drainage pathway. The high water mark is to be located minimum 100 metres down-gradient from the drum storage area. It is unlikely that the spilled fuel would reach the lake because the porous sandy soil along the way would soak up part of fuel, and also because the low slope will not allow for rapid flow of fuel, thereby providing enough time for the spill response procedures to take effect.

The spill would be communicated by the witness of the scene to the site superintendent, or in his absence, the assistant site superintendent. The latter would then go down the chain of command

and advise the appropriate persons of the immediate actions to be taken. Radio communication is to be used at all times on the site and key team members will carry a radio with them at all times.

The personnel responsibilities are outlined in previous sections of this document. The witness of the spill would be advised to try to stop the source of the spill, while waiting for backup help to arrive; his actions would be immediate. The Contractor site engineer would coordinate the spill response activities carried out by the containment unit. Members of this unit would be mobilized to the spill site. The drum storage area can be reached from any other area of the site within a maximum of 25 minutes.

Mobilization of containment equipment to the spill site can be carried out rapidly. A bulldozer and bucket loader will be present in close proximity and can reach the site of the spill within a matter of minutes. A sand and gravel pit is also located in the vicinity, if required for berm construction. Spill response kits containing sorbent material will be kept next to the drum storage location. Containment would be carried out by the construction of soil berms and the installation of sorbent booms. After containment, clean up equipment can be mobilized to the site. A list of equipment is presented in previous sections of this document.

Safety hazards associated with the spill event includes the risk of fire. This can be minimized by preventing personnel from smoking near the spill scene. Risks to personnel (from inhalation and dermal contact) can be prevented by the proper use of personnel protective equipment.

Measures and procedures to prevent such events from occurring include regular inspection of the drum storage area and containment system, and safety rules concerning the use of vehicles and heavy equipment on site, especially in close proximity of this area (e.g., speed limits, training of heavy equipment operators, restricted area posting, safety orientation of workers, etc.).

7.2- Scenario #2: Management of Waste in Scattered Drums

Various abandoned fuel caches, waste drums and dumps potentially containing contaminated petroleum products and/or solvent are to be managed/remediated. During operations, the likelihood of spillage exists.

Two potential situations could occur that would cause a spill:

- 1) the sudden breakage of tank piping or fittings containing POL product during clean up;

2) the rupture of a drum/tank found in dumps, possibly from a violent impact caused by the collision of a vehicle or piece of heavy equipment.

Any incident causing the spillage of one drum or a remaining unknown small tanks, would bring the fuel to flow onto the surrounding area.

The rupture of unknown tanks during clean up operations might cause the loss of most significant volume, but based on previous investigations, this is unlikely. In this case, the spilled fluid would probably flow towards the natural cavity formed by the waste landfill which would serve as natural containment

In either case, it is most unlikely that any sensitive receptor would be impacted from the spills because of the fuel infiltrating into the soil and bedrock, as well as the rapidity of response measures.

The spill would be communicated by the witness of the scene to the site superintendent, or in his absence, the assistant site superintendent. The latter would then go down the chain of command and advise the appropriate persons of the immediate actions to be taken. Radio communication will be used at all times on the site and key team members will carry a radio with them at all times.

The personnel responsibilities are outlined in previous sections of this document. The witness of the spill would be advised to try to stop the source of the spill, while waiting for backup help to arrive; his actions would be immediate. The Contractor site engineer would coordinate the spill response activities carried out by the containment unit. Members of this unit would be mobilized to the impacted site. All impacted site can be reached from any other area of the site within a maximum of 25 minutes. Response to a spill at any clean up site would probably be more rapid when compared with potential impacts knowing that mitigating measures are to be implemented.

Mobilization of containment equipment to the spill site can be carried out rapidly. Bucket loaders and other heavy equipment shall be present in close proximity and can reach the site of the spill within a matter of minutes. Sand and gravel pits/stockpiles are also located in the vicinity, if required for berm construction. Spill response kits, sorbent material, pumps, hose and many other equipment are located in the storage warehouse nearby. Containment would be carried out by the construction of soil berms and the installation of sorbent booms. After containment, clean up equipment can be mobilized to the site. A list of equipment is presented in previous sections of this

document.

Safety hazards associated with the spill event includes the risk of fire. This can be minimized by preventing personnel from smoking near the spill scene. Risks to personnel (from inhalation and dermal contact) can be prevented by the proper use of personnel protective equipment.

Measures and procedures to prevent such events from occurring include training of staff (Hazwoper) and safety rules concerning the use of vehicles and heavy equipment on site, especially while in operations with waste/scattered drum handling, and landfill excavation (e.g., speed limits, training of heavy equipment operators, etc.).

7.3- Scenario #3: Fuel Delivery

The fuel delivery operations (small tanks - 250-350 gal - installed on pick-up trucks) to supply fuel to heavy equipment and to carry fuel from the drum storage area to the upper site operations are carrying some risks of spillage.

Any accident involving the fuel delivery pick-up trucks could result in the loss of its entire volume of fuel. Such an accident could occur almost anywhere on site, any place the pick-up trucks have access to.

Heavy equipment works at least 30 metres away from any body of water. Therefore the fuel delivery should not ever get closer than 30 metres from bodies of water. Any fuel spill at that distance would not rapidly reach the receptor.

Any spills would be communicated by the witness of the scene to the site superintendent, or in his absence, the assistant site superintendent. The latter would then go down the chain of command and advise the appropriate persons of the immediate actions to be taken. Radio communication will be used at all times on the site and key team members will carry a radio with them at all times.

The personnel responsibilities are outlined in previous sections of this document. The witness of the spill would be advised to try to stop the source of the spill, while waiting for backup help to arrive; his actions would be immediate. The Contractor site engineer would coordinate the spill response activities carried out by the containment unit. Members of this unit would be mobilized to the spill area. All areas at Ekalugad Fjord can be reached from any other area of the site within a maximum of 15-25 minutes (once roads will all be repaired/maintained).

Mobilization of containment equipment to the spill site can be carried out rapidly. Sorbent booms may be required to contain the oil slick and prevent further spreading or migration to any discharge stream; those are present at the middle site and the lower site. If the construction of an oil-water separator in the discharge stream is necessary, the following equipment and materials would be required: heavy equipment (loader or excavator), sand and gravel, piping, and tarp/geomembrane. All these equipment and materials could be mobilized within 20 to 30 minutes. If the fuel reaches the discharge stream, spill response measures may have to be implemented further down stream. After containment, clean up equipment will be mobilized to the area. A list of equipment is presented in previous sections of this document. However, due to the size of temporary fuel tanks used for delivery/supply, potential impact from spill are likely to be rapidly contained.

Safety hazards associated with the spill event includes the risk of fire. This can be minimized by preventing personnel from smoking near the spill scene. Risks to personnel (from inhalation and dermal contact) can be prevented by the proper use of personnel protective equipment.

Measures and procedures to prevent such events from occurring include regular safety rules concerning the use of vehicles site, especially in close proximity to sensitive areas (e.g., speed limits, training of truck drivers, etc.).

8-REPORTING REQUIREMENTS

Spills will be immediately reported using the **24 Hour Spill Report Line (867) 920-8130 (NWT)**. Immediately shall mean upon discovery. Failure to report can lead to fines. A written spill report will then be prepared by the Contractor with the assistance of the Engineer and submitted to the PWGSC site representative and the Spill Report Line supervisor (see Appendix 2). This report will include:

- a- date and time of the incident;
- b- location or map coordinates and direction of spill movement if not at steady-state;
- c- party responsible for the spill;
- d- type and estimated quantities of spilled contaminant(s);
- e- specific cause of the incident;
- f- status of the spill indicating if spilled materials are still moving or now at steady-state;
- g- approximate surface of contaminated area;
- i- factors affecting spill or recovery such as temperature, wind, etc.;
- j- status on containment actions indicating whether a) naturally, b) booms, dykes or

- other, c) no containment has been implemented;
- k- corrective action taken or proposed to clean, contain or dispose spilled material;
- l- whether assistance is required and in what form;
- m- whether the spill poses a hazard to persons or property (*i.e.*, fire, drinking water);
- n- comments and recommendations;
- o- name, position and employer of the person reporting the spill; and
- p- name, position department of the person to whom the spill is reported.

Apart from reporting requirements, the Contractor, through its site superintendent, may require special assistance. These could be implemented for the following reasons:

- .1 If assistance and coordination are required for spill response, Environment Canada (Nunavut Office) and the Environmental Protection Service of the Government of Nunavut can be contacted at:

Environment Canada	(867) 979-6808
GN Environmental Protection Service	(867) 975-5910 or 975-5907

- .2 If medical assistance and coordination are required when injuries occurred during spill incident/spill response and/or critical incident stress is observed after an event, the Baffin Regional Hospital (general enquiries) shall be contacted at:

Baffin Regional Hospital	(867) 979-7300
---------------------------------	-----------------------

Other emergency assistance numbers are found in the Ekalugad Project Clean Up and Camp Service Health and Safety Plan.

APPENDIX -1-

MSDS of petroleum products and chemicals stored on site

LOW SULPHUR DIESEL CP-43

320-043
Revision Number: 0



Shell Canada Limited Material Safety Data Sheet

Effective Date: 2006-11-07
Supersedes: 2002-11-05



Class 83 Combustible Class D2B Other Toxic
Liquid Effects - Skin Irritant

1. PRODUCT AND COMPANY IDENTIFICATION

PRODUCT: LOW SULPHUR DIESEL CP-43
SYNONYMS: Diesel
Automotive Gas Oil
PRODUCT USE: Fuel Solvent
MSDS Number: 320-043

MANUFACTURER
Shell Canada Limited
P.O. Box 100, Station M
400-4th Ave. S.W.
Calgary, AB Canada
T2P 2H5

TELEPHONE NUMBERS
Shell Emergency Number 1-800-661-7378
CANUTEC 24 HOUR EMERGENCY NUMBER 613-696-6666
For general information: 1-800-661-1600
For MSDS information: 403-691-3582
(From 7:30 to 4:30 Mountain Time) 403-691-2220

This MSDS was prepared by the Toxicology and Product Stewardship Section of Shell Canada Limited.

*An asterisk in the product name designates a trade-mark(s) of Shell Canada Limited, used under license by Shell Canada Products.

2. COMPOSITION/INFORMATION ON INGREDIENTS

Component Name	CAS Number	% Range	WHMIS Controlled
Fuels, Diesel, No. 2	68475-34-6	100	Yes

See Section 8 for Occupational Exposure Guidelines.

3. HAZARDS IDENTIFICATION

Physical Description: Liquid Clear To Yellow Hydrocarbon Odour

Routes of Exposure: Exposure will most likely occur through skin contact or inhalation.
Hazards:

Vapour concentrations above the recommended exposure level are irritating to the eyes and respiratory tract, may cause headaches and dizziness, are anesthetic and may have other central nervous system effects.

Combustible Liquid.

Irritating to skin.

Vapours are moderately irritating to the eyes.

Ingestion may result in vomiting. Avoid aspiration of vomitus into lungs as small quantities may result in aspiration pneumonia.

Vapours are moderately irritating to the respiratory passages.

Handling:

Eliminate all ignition sources.

Avoid prolonged exposure to vapours.

Wear suitable gloves and eye protection.

Bond and ground transfer containers and equipment to avoid static accumulation.

Empty containers are hazardous, may contain flammable / explosive dusts, liquid residue or vapours. Keep away from sparks and open flames.

For further information on health effects, see Section 11

4. FIRST AID

- Eyes:** Flush eyes with water for at least 15 minutes while holding eyelids open. If irritation occurs and persists, obtain medical attention.
- Skin:** Wash contaminated skin with mild soap and water for 15 minutes. If irritation occurs and persists, obtain medical attention.
- Ingestion:** DO NOT INDUCE VOMITING! OBTAIN MEDICAL ATTENTION IMMEDIATELY. Guard against aspiration into lungs by having the individual turn on to their left side. If vomiting occurs spontaneously keep head below hips to prevent aspiration of liquid into the lungs. Do not give anything by mouth to an unconscious person.
- Inhalation:** Remove victim from further exposure and restore breathing, if required. Obtain medical attention.
- Notes to Physician:** The main hazard following accidental ingestion is aspiration of the liquid into the lungs producing chemical pneumonitis. If more than 2.0 mL/kg has been ingested, vomiting should be induced with supervision. If symptoms such as loss of gag reflex, convulsions or unconsciousness occur before vomiting, gastric lavage with a cuffed endotracheal tube should be considered.

5. FIRE FIGHTING MEASURES

- Extinguishing Media:** Dry Chemical
Carbon Dioxide
Foam
Water Fog
- Firefighting Instructions:** Caution - Combustible. Do not use a direct stream of water as it may spread fire. Do not enter confined fire space without adequate protective clothing and an approved positive pressure self-contained breathing apparatus. Vapour forms a flammable/explosive mixture with air between upper and lower flammable limits. Vapours may travel along ground and flashback along vapour trail may occur. Avoid inhalation of smoke. Product will float and can be reignited on surface of water. Delayed lung damage can be experienced after exposure to combustion products, sometimes hours after the exposure.

Hazardous Combustion Products: A complex mixture of airborne solid, liquid, particulates and gases will evolve when this material undergoes pyrolysis or combustion. Carbon dioxide, carbon monoxide and unidentified organic compounds may be formed upon combustion.

6. ACCIDENTAL RELEASE MEASURES

Issue warning "Combustible". Eliminate all ignition sources. Isolate hazard area and restrict access. Handling equipment must be grounded. Try to work upwind of spill. Avoid direct contact with material. Wear appropriate breathing apparatus (if applicable) and protective clothing. Stop leak only if safe to do so. Dike and contain (and spills); contain water spills by booming. Use water fog to knock down vapours; contain runoff. Absorb residue or small spills with absorbent material and remove to non-leaking containers for disposal. Recommended materials: Clay or Sand Flush area with water to remove trace residue. Dispose of recovered material as noted under Disposal Considerations. Notify appropriate environmental agency(ies).

7. HANDLING AND STORAGE

Handling: Combustible. Avoid excessive heat, sparks, open flames and all other sources of ignition. Fixed equipment as well as transfer containers and equipment should be grounded to prevent accumulation of static charge. Vapours are heavier than air and will settle and collect in low areas and pits, displacing breathing air. Extinguish pilot lights, cigarettes and turn off other sources of ignition prior to use and until all vapours are gone. Vapours may accumulate and travel to distant ignition sources and flashback. Do not cut, drill, grind, weld or perform similar operations on or near containers. Empty containers are hazardous, may contain flammable/explosive dusts, residues or vapours. Do not pressurize drum containers to empty them. Wash with soap and water prior to eating, drinking, smoking, applying cosmetics or using toilet facilities. Launder contaminated clothing prior to reuse. Use good personal hygiene.

Storage: Store in a cool, dry, well ventilated area, away from heat and ignition sources. Keep container tightly closed.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

THE FOLLOWING INFORMATION, WHILE APPROPRIATE FOR THIS PRODUCT, IS GENERAL IN NATURE. THE SELECTION OF PERSONAL PROTECTIVE EQUIPMENT WILL VARY DEPENDING ON THE CONDITIONS OF USE.

OCCUPATIONAL EXPOSURE LIMITS (Current ACGIH TLV/TWA unless otherwise noted):

Diesel fuel, as total hydrocarbons: 100 mg/m³

Skin Notation: Absorption through skin, eyes and mucous membranes may contribute significantly to the total exposure.

Mechanical Ventilation: Concentrations in air should be maintained below the recommended threshold limit value if unprotected personnel are involved. Use explosion-proof ventilation as required to control vapour concentrations. Make up air should always be supplied to balance air exhausted (either generally or locally). For personnel entry into confined spaces (i.e. bulk storage tanks) a proper confined space entry procedure must be followed including ventilation and testing of tank atmosphere. Local ventilation recommended where mechanical ventilation is ineffective in controlling airborne concentrations below the recommended occupational exposure limit.

PERSONAL PROTECTIVE EQUIPMENT:

Eye Protection: Chemical safety goggles and/or full face shield to protect eyes and face, if product is handled such that it could be splashed into eyes. Provide an eyewash station in the area.

Skin Protection: Impervious gloves (viton, nitrile) should be worn at all times when handling this material. In confined spaces or where the risk of skin exposure is much higher, impervious clothing should be worn. Safety showers should be available for emergency use.

Respiratory Protection: If exposure exceeds occupational exposure limits, use an appropriate NIOSH-approved respirator. Use a NIOSH-approved chemical cartridge respirator with organic vapour cartridges or use a NIOSH-approved supplied-air respirator. For high airborne concentrations, use a NIOSH-approved supplied-air respirator, either self-contained or airline breathing apparatus, operated in positive pressure mode.

9. PHYSICAL DATA

Physical State:	Liquid
Appearance:	Clear To Yellow
Odour:	Hydrocarbon Odour
Odour Threshold:	Not available
Freezing/Pour Point:	Cloud Point -43 °C
Boiling Point:	150 - 330 °C
Density:	< 850 kg/m ³ @ 15 °C
Vapour Density (Air = 1):	Not available
Vapour Pressure (absolute):	Not available
pH:	Not available
Flash Point:	Pensky-Martens CC > 40 °C
Lower Explosion Limit:	1 % (vol.)
Upper Explosion Limit:	8 % (vol.)
Autoignition Temperature:	250 °C
Viscosity:	1.3 - 2.1 cSt @ 40 °C
Evaporation Rate (n-BuAc = 1):	Not available
Partition Coefficient (log K _{ow}):	Not available
Water Solubility:	Insoluble
Other Solvents:	Hydrocarbon Solvents

10. STABILITY AND REACTIVITY

Chemically Stable:	Yes
Hazardous Polymerization:	No
Sensitive to Mechanical Impact:	No
Sensitive to Static Discharge:	Yes