

50mm DIA MIN. SLOTTED STAINLESS STEEL WITH FILTER SOCK. MAX. 1m LONG PIPE SECTIONS.

FILTER SAND

50mm DIA. MIN. NON—SLOTTED STAINLESS STEEL

50mm DIA. MIN. NON—SLOTTED STAINLESS STEEL

BENTONITE CHIPS TO 0.3m DEPTH

BENTONITE SEAL

150mm DIA. MIN. STEEL PROTECTIVE CASING WITH HINGED LOCKING CAP

FLANGE AT GROUND LEVEL

-MOUND SOIL TO PROMOTE DRAINAGE AWAY FROM WELL APPROX, EXISTING GROUND

CONTROL MONUMENT (BENCHMARK) TYPICAL PERMANENT SURVEY

BACKGROUND MONITORING WELL


TYPICAL MONITORING WELL/

WATERTIGHT END CAP

(FOR BEDROCK DEPTH > 0.7m)

TYPICAL CONTAMINATED SOIL EXCAVATION SECTION

TYPE 3 GRANULAR MATERIAL TO BE PLACED IN EXCAVATION, COMPACTED AND MOUNDED TO 100mm ABOVE GROUND SURFACE TO PROMOTE DRAINAGE, UNLESS NOTED OTHERWISE.

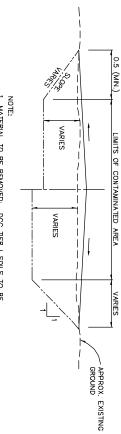

1. MATERIAL TO BE REMOVED: DCC TIER I SDILS TO BE DISPOSED OF IN THE NON-HAZARDOUS WASTE LANDFILL DCC TIER I SDILS TO BE DISPOSED OF IN THE TIER II SOIL DISPOSAL FACILITY. HYDROCARBON TYPE B SOILS PLACED IN THE LANDFARM AND TREATED.

FOR DEPTHS
FOR DEPTHS
LESS THAN 0.5
GREATER THAN 0.5m

+ National Défense Defence nationale