



□□□□ □□□□□□□□□□
NUNATTA ENVIRONMENTAL SERVICES INC.

□□□□□□□□ □□□□□□□□ □□□□
PROTECTING OUR ARCTIC ENVIRONMENT

Quality Assurance and Quality Control Plan

**Hydrocarbon-Impacted Soil Landfarm Facility
1575 Federal Road.
City of Iqaluit, Nunavut**

Water Licence Number - NWB4NUN0511-Type “B”

Prepared for:

**Nunavut Water Board
P.O. Box 119
Gjoa Haven, NU
X0B 1J0**

Prepared by:

**Nunatta Environmental Services Inc.
P. O. Box 267
Iqaluit, Nunavut. X0A-0H0
Phone 1-867-979-1488
Fax 1-867-97-1478
Email Nunatta@northwestel.net**

Dated: December, 2011

Table of Contents

| | |
|------|--|
| 1.0 | INTRODUCTION |
| 2.0 | WATER TREATMENT AND DISCHARGE |
| 3.0 | ROCK DISPOSAL |
| 4.0 | TREATED SOIL |
| 5.0 | STANDARD PROCEDURE FOR WATER SAMPLING |
| 5.1 | Test Well Sampling |
| 5.2 | Surface Water Sampling |
| 6.0 | WATER TESTING |
| 7.0 | STANDARD PROCEDURE SOIL SAMPLING |
| 8.0 | SOIL SAMPLING |
| 9.0 | SAMPLE HANDLING AND STORAGE |
| 10.0 | CHAIN OF CUSTODY REQUIREMENTS |
| 11.0 | PACKAGING AND HANDLING OF SAMPLES |
| 12.0 | MONITORING CRITERIA |
| 13.0 | MONITORING DATA |
| 14.0 | LANDFARM MAP |
| 15.0 | LOCATION OF PROPOSED MONITORING STATIONS |
| 16.0 | BIOGRAPHY: PROF STEVEN SISCILLIANO |
| 17.0 | LIST OF LAB REPORTS |
| 18.0 | LABORATORY ACCREDITATION |

1.0 INTRODUCTION

Nunatta Environmental Services Inc. (Nunatta) owns and operates a Hydrocarbon-Impacted Soil Landfarm Facility within the City of Iqaluit, Nunavut.

On August 4, 2004, an application for a water license was filed with the Nunavut Water Board by Nunatta for water use and waste disposal activities at Nunatta's Hydrocarbon-Impacted Soil Landfarm Facility located at 1575 Federal Road, Industrial Park, within the City of Iqaluit, Nunavut (City of Iqaluit Lot 1, Block 229)

The NWB License number for the Hydrocarbon-Impacted Soil Landfarm Facility is NWB4NUN0511 "B"

This treatment facility is commonly referred to as the 'landfarm'. Nunatta's operations consist of accepting soils impacted with petroleum products at various concentrations at the landfarm's geosynthetic lined platform (Cells) and with addition of fertilizers, aeration, and moisture control, allow indigenous soil microorganisms to degrade petroleum products to break them down into compounds such as water, carbon dioxide and hydrogen sulphide. Soils accepted at the landfarm are contaminated with diesel, gasoline and various automotive and construction/mining oils.

The site where the land farm is located is in the industrial part adjacent the old metal dump where all old equipment and cars and trucks were junked. Many rotting barrels of unknown products are still visible on adjacent properties around the landfarm and through out the dump site to the west. Records show the landfarm site was used as crushing grounds for any old waste barrels and storage of unclaimed or rejected freight. One water test well located in the north east corner of the lot has always tested high in hydro carbons it is believed this is contamination from a previous operation conducted at this site.

2.0 Water Treatment and Discharge

Melt water collected from treatment Cells will have been in contact with contaminated soil. Due to the fact the snow melts before the ground thaws the contact time is minimal. This melt water will contain low concentrations of hydrocarbons but must be tested and treated prior to releasing it.

Water is brought to the land farm to be polished so it can be released into the environment. This water is from contaminated sites where water has pooled and must be removed in order to allow excavation to continue.

Contaminated water is transported to the landfarm in either barrels (205 litre barrels) or large tanks (5000 litre) which will be passed through a water/fuel separator and the water either polished and released to the environment or will be dumped into one of our cells to be used for dust control or for moisture control within the soil piles.

Each year prior to freeze up all separated hydrocarbon contaminant is containerized and shipped south to an approved disposal company.

Prior to releasing any water into the environment, it must be polished clean. We accomplish this by passing it through a filtering medium of modified clay and or activated Carbon. The clay has the ability to remove as much as 5 times the hydrocarbons as activated carbon but it does not polish the waters to meet CCME standards. Carbon will polish the waters to meet the 15ppm requirements so it has to be used as a final filter to assure the CCME requirements are met. Discharge water is tested to be sure the carbon filter has not reached its breaking point.

Nunatta Environmental Services keeps activated carbon in stock and is able to replace spent carbon when the breaking point is near. Filtering vessels are purchased as complete units from ERE and Nunatta they are maintained by Nunatta.

When concentrations of hydrocarbons are low we have been able to use only carbon filtering.

All water to be discharged is sampled, (Be it runoff or filtered water) and when CCME levels are achieved, test results are forwarded to Inspectors at INAC and when granted permission all waters will be pumped out through activated carbon filters even if it meets CCME standards to guard against accidental contamination.

Water stored in the holding tanks for the summer months is pumped out before winter. This allows room for spring runoff/melt containment and prevents tanks from being ruptured by the freezing action of the water.

3.0 Rock Disposal Plan

Impacted soils enter the landfarm into Cell #1 where cobbles and rocks are screened out.

Rocks and cobbles are screened down to $\frac{3}{4}$ inch.

These rocks are piled into cell #2 to weather off any soils or hydrocarbons that might be adhered to them. The freezing, thawing and wetting, drying action as well as movement of air expels hydrocarbons and contaminated soils from the stones. These stones are screened again at a later date to remove all rocks larger than 2 inches. These will be tested and when confirmed clean will go to the crushers to be used in gravel for road construction. The smaller rocks will require additional time to expel contaminants and will be re screened to further reduce soil and when found to be clean will be used around land farm for levelling, road building, and backfilling excavated work sites.

The screened soil removed from the rock piles will be added to one of the cells being remediated as it will take longer to expel hydrocarbons than the cobbles and stones.

This procedure was developed from speaking with Dr. Steve Siciliano, Professor of Soil Toxicology, University of Saskatchewan.

Since 2009 approximately 800 m³ of rock rejects have been extracted from the Cells.

4.0 Treated Soil Disposal

Nunatta anticipates that the contaminated soil treatment will require 5-6 summer seasons to lower TPH concentrations to CCME's residential or commercial levels. Once treated, if acceptable according to the applicable legislation and regulations, the remediated soil will be disposed of as follows:

Sent to the municipal landfill for daily cover use

Foundation material for road construction

Used to back fill excavation sites where spills have occurred and are being cleaned up

**Used as inoculants for incoming soils.

**Proper hydrocarbon breakdown is difficult to achieve without the proper microorganisms. Once these microorganisms have become established in the soil it is faster to inoculate incoming soil.

This will speed up the breakdown of hydrocarbons and allow soil to be removed from the Landfarm much quicker than waiting for these organisms to develop on their own each time new soil is added to the pile.

To date no soils have been removed from the landfarm.

5.0 Standard Operating Procedure for Water Sampling

5.1 Test Well Sampling

An inertia system such as Waterra is used for purging and sampling a groundwater monitoring well. Equipment required includes polyethylene tubing and a foot valve. Nitrile gloves are worn to handle the tubing and to attach a foot valve to the bottom of the polyethylene tube.

The foot valve and tubing are inserted into the well until it reaches the bottom of the well.

The tube is cut so that approximately 0.5 to 1 m extend above top of the well.

The polyethylene tubing is not permitted to touch the ground.

The tubing is moved up and down, forcing water up the tubing.

The foot valve and tubing are stored inside the well for subsequent use by folding the tube to fit inside the well.

5.2 Surface Water Sampling

Depending upon the depth of the water body, one or more samples may be collected at each location.

Clean, laboratory-supplied containers should be immersed in the water body just below the surface and be allowed to fill.

Disturbance of bottom sediments is avoided.

Samples are packed carefully into laboratory-supplied containers of the appropriate type and with the appropriate preservative for the test parameters.

Any information on colour, turbidity, and odour is noted.

Shallow sub surface samples may also be obtained by immersing the bottle to the desired depth and open the lid.

Surface water samples for laboratory analysis are collected in appropriately labelled containers and stored in coolers with ice (at approximately 4°C) while in transit to an accredited laboratory.

6.0 Water testing must include the following

- Total Petroleum Hydrocarbons (CCME PHC- F1 to F4 fractions)
- B-tex
- Total Petroleum Hydrocarbons (TPH)
- Poly Aromatic Hydrocarbons (PAH)
- Heavy Metals (HM - Cd, Cr, Cu, Ni, Zn and Pb)
- PCB

7.0 Standard Operating Procedure for Soil Sampling

There are two common methods of soil sampling: grab samples and composite samples. A grab sample is a sample taken from one specific location, at one time. A composite sample is a combination of smaller samples taken at different locations or at different times. For the identification of hydrocarbon contamination, grab samples are taken.

The sampling proceeds from the least contaminated to the most contaminated site.

The number of field samples that are required, as well as the type and size of the sample vial is dependent upon the type of contaminant that is being sampled

To prevent loss of volatiles, samples are gathered from freshly exposed soil and preserved as soon as possible after the excavation.

- Clean gloves are worn and \changed before each new sample is collected.
- Each sample vial is completely filled so that no headspace exists. Minimize aeration and air contact.
- Jar threads are cleaned thoroughly.
- Vials are capped.
- Vials are labelled.
- Ice is placed in a covered cooler or refrigerated (not frozen)

The necessary documentation is completed

8.0 Soil Sampling

All soils have been impacted with fuel oil typically from residential or commercial fuel spills (i.e. heating oils and diesel fuels.)

Most of the soils brought to land farm are from spill sites Nunatta is cleaning up and tests are taken at the site. Results of these tests confirm the hydrocarbon content. Chemical testing is done on all soils where contamination is not a known source. These soils are kept separate until lab results confirm contamination.

Additional testing is done in spring and fall on all soils at the landfarm to determine degradation rate and fertilizer requirements. Sample results are used to determine the correct measures to be taken in the remediation process and if changes are required to make process more effective.

In order to document the chemical characteristics of the soil, samples will be analyzed for the parameters set out below twice yearly. The samples will be sent to an approved Laboratory for analysis and results kept on file at landfarm.

- Total Petroleum Hydrocarbons (CCME PHC- F1 to F4 fractions)
- Heavy metals (6)
- Mercury
- PCB
- PAH
- Microbial type and count
- Nitrogen, Phosphorus, Potassium

If reluctant contaminants are encountered that do not respond to our remediation process, these soils will be containerized and shipped to an approved disposal facility.

9.0 Sample Handling and Storage Procedures

Keep samples cool (4 degrees C) and in the dark. Use ice cubes or crushed ice to chill samples as soon as they are collected, and ice packs to maintain internal temperatures in shipping containers. Deliver samples to the laboratory as soon as possible after collection.

10.0 Chain of Custody Requirements

This procedure describes the requirements for completing a chain of custody for environmental sampling.

To ensure timely and complete laboratory analysis, the chain of custody must be properly completed. Records of the chain of custody must also be kept for auditing purposes. The following is a guideline to proper recording practices.

Project Contact information includes address where results and invoice are to be sent, telephone and fax numbers of the contact in case the laboratory has questions regarding the sample(s) or analytical request.

Site and Sampler information includes site name and/or location, project number and name(s) of individuals collecting the samples.

Additional information includes submission date, laboratory quote number and any additional forms in which the results are required (e.g. fax, electronic).

Sample Details include for each sample: submitted sample identification, sample date and time, sample matrix (groundwater, surface water, soil, sediment, etc.), number of containers filled, any field filtering and preservation completed, any lab filtering and/or preservation required and requested analyses.

Special Instructions include any required detection limits, specific methodology, hazards of the sample(s) to laboratory personnel.

Required Guidelines include indicating to which criteria or guidelines the results will be compared, which allows the laboratory to aim for the required detection limits.

Include the date that the results are required, be specific (not 'ASAP' or 'next week').

Also include any other information that may be useful to the laboratory in the 'Notes' area.

When the sampler gives the samples to another individual (e.g. courier, laboratory staff) he/she must complete the 'Relinquished by' section including the date, time and signature and the person who accepts the samples must complete the 'Received by' section including the date, time and signature.

Every time the samples are given to another individual the 'Relinquished by' and the 'Received by' sections must be completed until the samples are received by the laboratory.

11.0 Procedures for Packaging and Handling of Samples

11.1 Packing Bottles for Transportation

- Label all the bottles to be sent to the lab for analyses. Double check that the labels are properly filled out using a pen or marker that is not water-soluble. Do not write on the septum of 40mL BTEX/Vials. If you do write on the cover always double check, so that the bottle and cap have the same sample ID.
- 40 ml vials should be wrapped in bubble wrap. Three 40 ml vials usually fit into the laboratory supplied bubble wrap pouch. To prevent breakage, place the vials so that there is no room for movement.
- 1 litre or 500 ml bottles should be wrapped individually in small bubble wrap.
- 150 ml soil jars should be placed one on top of each other in a ziplock bag. Seal the bags and tape tight.
-

11.2 Packing Coolers for Shipment

- Check the cooler to see if it has a water drain outlet at the bottom; seal it with tape to prevent water from leaking out. (Couriers will refuse to ship a leaking cooler)
- Place a large piece of thick bubble wrap on the bottom of the cooler; make sure there is adequate bubble wrap so as to extend up the sidewalls of the cooler.
- Line the cooler with two large industrial strength garbage bags (one inside the other) so that all the packing will be performed in the bags.
- The bottles should be placed in such a way that they do not touch each other. As a general rule all bottles should be placed in an upright position.
- If you are packing soil jars, placing a layer of bubble wrap between every row of samples.
- If there is any void space it should be filled with a layer of bubble wrap.
- Remove the last sheet from the filled out Chain of Custody form (COC). Place the remaining page of the COC in a ziplock bag and place it inside the cooler on top of everything. Only one COC is required even if there are more than one cooler.
- Close the lid, wrap the cooler with sufficient packing tape at all points of entry.
- Place a shipping label (usually supplied by lab), indicate 1 of 2, or 1 of 3, etc. if there is more than one cooler being sent on the same way bill.

NUNATTA ENVIRONMENTAL SERVICES INC.

12. Monitoring Requirements

| Station | Location | Parameter ¹ | Frequency | Flow Measurement Required (cu.m) |
|---------|--|---------------------------------|--|--|
| MW 1 | Monitoring Well South West of Cell 3 (Downgradient) | TPH BTEX HM PAH PCB | Twice per year (after freshet and end of treatment season) | NA |
| MW 2 | Monitoring Well North West of Cell 3 (Upgradient) | TPH BTEX HM PAH PCB | Twice per year (after freshet and end of treatment season) | NA |
| MW 3 | Monitoring well North of Cell 3 (Downgradient) | TPH BTEX HM PAH PCB | Twice per year (after freshet and end of treatment season) | NA |
| MW 4 | Monitoring Well North East of Cell 2 (Upgradient) | TPH BTEX HM PAH PCB | Twice per year (after freshet and end of treatment season) | NA |
| MW 5 | Monitoring Well North East of Cell 1 (downgradient) | TPH BTEX HM PAH PCB | Twice per year (after freshet and end of treatment season) | NA |
| MW 6 | Monitoring Well South West of Cell 1 | TPH BTEX HM PAH PCB | Twice per year (after freshet and end of treatment season) | NA |
| NUN 1 | Discharge from the Activated Carbon Treatment Facility | | EC once per year | Required volume discharged to the Cells and/or the Receiving Environment |
| NUN 2 | Discharge from Cell 1 | | EC once per year | Required Volume discharged to the Receiving Environment |

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

| Station | Location | Parameter ¹ | Frequency | Flow Measurement Required (cu.m) |
|---------|---|---|--|--|
| NUN 3 | Discharge from Cell 2 | | EC once per year | Required Volume discharged to the Receiving Environment |
| NUN 4 | Discharge from Cell 3 | | EC once per year | Required Volume discharged to the Receiving Environment |
| NUN 5 | Incoming Soils to the Landfarm Treatment Facility | TPH C ₁₀ -C ₅₀ Heavy Metals (6) Mercury PCB PAH | For every 500 cubic metres, prior to deposition in the LTF unless they originate from a well-documented spill. | . |
| | | Nitrogen Phosphorus Potassium | | To assess nutrient content optimal for biodegradation assess amount of fertilizer needed |
| | | PAH PCB | Testing only if soil suspected of containing contaminants other than heating fuel, Diesel or gasoline. | |
| NUN 6 | Soils within LTF Cell No. 1 | TPH C ₁₀ -C ₁₅ C ₁₆ -C ₃₅ C ₃₆ -C ₅₀ Total Micro-organism count and type Nitrogen Phosphorus Potassium | 1 sample at the end of the field season (end of September) | |

Parameters:

- TPH (Total Petroleum Hydrocarbons)
- PAH (Polycyclic aromatic hydrocarbons)
- PCB (Polychlorinated biphenyls) Total
- BTEX (Benzene, toluene, ethylbenzene and xylene)
- HM (Heavy Metals) as defined by CCME

13. Monitoring Data

Nunatta Environmental Services Inc was given a list of items to report on. These items are referred to as stations.

Station MW 1 through MW 6 (Refers to monitoring wells 1 through 6.)

These wells were installed in 2004 and ended up dry in 2005, 2006, 2007 and 2008. (map #1) Franz Environmental from Ottawa were commissioned to install new wells in 2008. These wells were assigned the designation of MW08-01 to MW08-04. A complete report from Franz is included in the Monitoring wells Installation report, included with this renewal application

These wells were put in late season and samples were available from 2 of the four wells MW08-03 and MW08-04.(Map # 2). Sample results are included in the Franz report.

In 2009 Nunatta Environmental began the construction of cell 4 and monitoring well MW08-04 was removed to permit construction equipment to make ready the land and build the new cell walls. The last sample taken from MW08-04 was July 14 of 2009: Lab report **0929063**. Report indicates levels within CCME standards.

Since MW08-04 was the well which contained enough water for yearly testing. Since removing it, has rendered us unable to provide test results for this side of the land farm. In summer of 2012 plans are to install 2 new wells on east side of property. As shown in Map #3

On September 20, 2010 a sample was taken from the MW08-03 well (referred to in report as well #1 in the report due to its close proximity to cell 1). The results from this test indicate all is below CCME standards.

This summer 2011 it was very wet but the temperatures were cool and the ground did not thaw enough to allow ample water for sampling. Water which is present in the wells is not yet present in enough quantity to fill the sample jars to capacity for testing purposes.

Testing requires the wells be purged first but again this is not possible. This includes MW08-01 MW08-02 and MW08-03. These wells have been checked into November with not enough water present to sample.

Plans for 2012 include installation of 2 new monitoring wells on the east side of the property: one in the approximate location of the previous MW08-04 and one at the opposite end of the new cell 4 along the east fence. (Map #3)

NUN 1:

Discharge from Active Carbon Treatment Facility

2010. We discharged water and took post discharge samples. This occurred when we were pumping out a cell full of melt water June 1st. Laboratory Order number **1023110** and again on June 21st, Laboratory Order number **1026067**. These results are attached to end of this document.

In 2011 water to be discharged from tanks tested below CCME standards so samples were not taken post pumping, but water was passed through a new unused active carbon filter

□□□□ □□□□□□□□ □□□□
NUNATTA ENVIRONMENTAL SERVICES INC.

nonetheless. There was no reason to take sample of water, which met CCME standards without activated carbon filtering.

NUN 2:

Discharge from Cell 1

Since 2010 Water from cell 1 was discharged into cell 4. No water was discharged from this cell into the environment. As this cell is the receiving cell for incoming soils it is expected have the highest concentrations of Hydrocarbons so it is not put into holding tanks but is put into cell #4

NUN 3:

Discharge from cell 2

Cell 2 is the smallest cell and it typically is kept full of rocks, this keeps snow from collecting and keeps melt water to a minimum.

As cell 2 shares a common wall with cell 3 and the low point allows water from cell 3 to flow into the south west corner of cell 2 a lot of water is collected in this corner and pumped into the storage tanks. As soon as tanks are full the balance goes into cell 4. This cell is the rock storage cell where stones are placed to weather off. The rocks fall into a rounded shape and snow does not have a place to lodge so it blows clear.

NUN 4:

Discharge from Cell 3

This cell is the finishing cell for remediated soil. Concentrations of hydrocarbons are lowest in this cell. This cell is located on the west side of the land farm and winds blow snow into this cell more than the other cells. This cell accumulates a lot of melt water.

Samples of the discharge water and water contained in the cell: Lab report Sample Order **1023110** shows water from the cell and a sample of the water discharged from the carbon filter referred to as post pumped water. Results show the water was below CCME standards for discharge.

Water test results shown in Sample Order **1023110** indicate the water in cell 3 could have been discharged without the use of active carbon filtering. Discharge from cell 3 was 2724 L per hour and pumping lasted 48 hours releasing 130,750 L. Or 130 cubic meters

Water sample taken at the end of 48 hours show no breach. Results: Sample Order **1026067** Later that month we put water from cell 4 (which tested high in Volatiles) through activated carbon filters and sampled it, results prove active carbon filter removed hydrocarbons down to acceptable CCME levels.

Since 2010 all water is pumped into tanks or cell 4 until the rush of melt water is over then water is filtered (polished) and tested. Should release be required inspectors are notified in advance. Otherwise, water is kept contained until end of season and discharged prior to freeze up.

□□□□ □□□□□□□□ □□□□
NUNATTA ENVIRONMENTAL SERVICES INC.

Nun 4 (a)
Cell number 4

This cell was constructed with the intention of using it to hold excessive water from other cells until the spring rush of melt water is over. Cells and dirt piles are in the path of blowing snow so this cell does not collect much snow.

It has had ice form across its whole width and winds blew most snow out of the cell.

Contaminated snow is dumped into this cell to melt and water brought in from excavation sites is also dumped into this cell.

Water from this cell is discharged into other cells over the summer months. In order to handle large volumes of water it was necessary to dig deep holes into the piles of earth in cell #1, our storage cell, and then water is pumped into these holes and the surrounding earth slowly absorbs the water. Much of this water is wicked off into the atmosphere or contained by the soil as none appears to run out into containment area along cell walls. Water is added to these pits every couple days.

Summer of 2010: water was pumped out of cell 4 into soil piles in cell 1 and 2 totalling 145,500 L or 145 cubic meters

| Date | From | To | Liters | m ³ | Notes |
|------------------|--------|--------------|---------|----------------|-------------------------------------|
| September | Cell 4 | cell 2 | 20,000 | 20 | Pump out of cell 4 into soil piles |
| | Cell 4 | Cell 2 | 20,000 | 20 | Dug big pools in top of soil piles |
| | Cell 4 | cell 1 | 20,000 | 20 | with excavator down to frost layer |
| October | Cell 4 | cell 2 | 20,000 | 20 | and filled with water as often as |
| | Cell 4 | Cell 1 | 25,000 | 25 | soil would hold water. |
| | Cell 4 | cell 1 | 20,000 | 20 | want to lower cell 4 for winter |
| | Cell 4 | Cell 1 | 20,000 | 20 | to have capacity for spring of 2011 |
| | | Total | 145,000 | 145 | |

□□□□ □□□□□□□□ □□□□
NUNATTA ENVIRONMENTAL SERVICES INC.

In 2011 water was pumped out of cell 4 into cell 1 soils 135,000 L or 135 cubic metres. This was late season and this was done to lower volume of water in cell 4 to make room for spring melt water.

| Date | Activity | From | To | Liters | m ³ | Notes |
|--------------|----------------|---------|---------|--------|----------------|---------------------------------------|
| August | pump out extra | Cell #4 | Cell #1 | 30,000 | 30 | Dug hole in cell #1 filled with water |
| | pump extra | Cell #4 | Cell #1 | 20,000 | 20 | Filled hole again with water |
| Sept | pump extra | Cell #4 | Cell #1 | 20,000 | 20 | Filled hole again with water |
| | pump extra | Cell #4 | Cell #1 | 25,000 | 25 | Filled hole again with water |
| | pump extra | Cell #4 | Cell #1 | 20,000 | 20 | Filled hole again with water |
| | pump extra | Cell #4 | Cell #1 | 20,000 | 20 | Filled hole again with water |
| total | | | | | 135 | |

NUN 5:

Most Soils brought into landfarm are either from diesel fuel/home heating oil spills that Nunatta has been contracted to clean up or they are from a known source such as water delivery truck losing hydraulic oil or a fuel delivery company overfilling a tank. Spills we are working on are tested in order to assist us to delineate the size of the contaminated area so what enters the landfarm is well documented.

The soil at the landfarm is sampled in spring and again in the fall. The spring test is to help us determine the correct amount of fertilizer we require to balance the soil to achieve optimum degradation. The using a formula supplied to us by Steven Siciliano of the University of Saskatchewan. (Biography at end of this report). It was determined by sample testing that a ratio of 100:9:1 for C:N:P: would be the best ratio for soil in our landfarm

The fall sample allows us to see how effective the degradation process was over the summer months.

To confirm soil needs and microbial activities in summer of 2010 we took soil samples every 2 weeks and kept them at the Arctic College Lab at -20 C until they were packaged and shipped to the University of Saskatchewan Labs for analysis. There, Professor Siciliano and his team analysed the samples and came up with suggestions for accelerating the break down of hydrocarbons at the landfarm. Plans are to study microbial activity with different variables to see if it is possible to extended microbial activity after freeze up. Ideas such as increasing un frozen water content from 8% to 10 % suggests microbial activity would be sustained by as much as 100% longer after freeze up and introducing organic matter such as manure, wood chips or Biochar would add this additional 2-3% of liquid water. If it does work as hoped it would increased microbial activity and would extend the degradation period by a couple of months over the entire year.



NUNATTA ENVIRONMENTAL SERVICES INC.

In the summer of 2011, we were to start trial studies at the landfarm in Iqaluit but due to budget cuts at the University this project did not happen and everything thing has been pushed ahead into 2012. Cold temperatures account for a considerable amount of the year at this geographic location and this information would be useful to all landfarm owners in Nunavut.

This project is planned to be run over 3 years using soils from Nunatta's landfarm. This information will be valuable to other landfarms in cold climates. Too often soil additives used in the warm climates to accelerate remediation do not work in the Arctic and some even become carcinogenic when exposed to deep cold.

Mines have expressed interest in the outcome of this experiment as they often maintain landfarms with little or no degradation and they would like to find a process to reduce soil content and to save having to build more containment cells.

NUN 6

Cell 1

This cell is the receiving cell. All new product is dumped here; the soil is piled up and large rocks removed or set aside. This soil is turned with an excavator to melt frost and to stir heavy concentrations into other soils to blend concentrated soil with other lesser soil. The soils are screened to remove stones and construction debris. (Wood, steel, wire, concrete) Soil is piled up to 4 meters to accommodate trucks dumping new material and this allows mixing of soil and later in summer month permits digging of holes to dump excess water pumped from cell 4. Water is pumped into these holes to increase water content in soil and the soil wicks the moisture off to the atmosphere and this reduces water level in cell 4 before freeze up and makes room for melt water in the spring.

NUN 7

Cell 2

Rock/stone containment cell. Stones removed from incoming soils are put in this cell to weather off hydrocarbons. These stones are screened again to separate anything larger than 2 inches and when they meet CCME standards they will be delivered to a gravel crushing plant to be used in road building products. Stones smaller than 2 inches will be screened again to remove remaining soil. This soil will be placed in another holding cell to finish remediation. Soil in this cell is sampled as an indicator to soil health and to guide in deciding where to place the soil removed from the rocks

NUN 8

Cell 3

This is the finishing cell where weathered soils are kept and will undergo extensive aeration. Fertilizers are added to the soil when it is piled in this cell. The soil is stored here in tall windrows most of the year. The tall windrows allow thawed soils to be scraped down exposing frozen core to warm temperatures and this will speeds up the breakdown of hydrocarbons. This is repeated until all soil is thawed and then it is put through the rotary screening plant and restacked into

□□□□ □□□□□□□□ □□□□
NUNATTA ENVIRONMENTAL SERVICES INC.

long windrows. Samples taken in the spring are used to determine the correct amount of fertilizers to be added for that season. Samples taken in the fall are used to determine what rate of degradation was achieved over the summer thaw and to set in motion plans for next summer's soil activities.

In the past no soil has left the land farm. Continuous dumping of fresh hydrocarbons onto this flat cultivated soil in Cell 3: When summer activities were at their peak it was easier to dump soil where ever possible and the flat level surface of cell three attracted truck drivers. For this reason soils exhibited high readings of Hydrocarbons.

A specific plan has been laid out for dealing with this soil to in order to ensure this does not hinder progress of the landfarm as it has in the past.

NUN8 A:

Cell number 4

This is the newest cell at the landfarm.

It has been used to contain spring melt water and used as a melting place for fuel or oil contaminated snow.

In the future this cell will be used as a finishing cell much like cell 3 where soil will be fertilized and aerated frequently. This will allow landfarm to increase its output to double what one cell will produce. For the present time this cell will have room for surplus water storage until melt water can be filtered or stored in a more efficient manner.

Nun 9:

Rock Reject Stockpile


Rocks have not been addressed prior to 2009. They were left in the soil piles and only picked out and placed along the sides of the berms while soil was being cultivated in cell 3.

In 2009 a large shaker was purchased and a lot of soil was put through this screening plant removing stones larger than 2 inches. Up to 30 % of the total mass was stones 2 inches or bigger. In 2010 a new Rotary screening plant was purchased. It has a smooth action which mixes soils and breaks up lumps and has a screen sized to 3/4 inch; by adjusting the speed of rotation of the drum it is possible to screen down to about 5/8 of an inch. This removes an additional 20-25% of bulk, which reduced the soil pile size dramatically.

This plant has a belt stacker so soils are delivered into cone shaped stacks which offer more surface area and better aeration than soils handled by loader which can become compacted. Stones are placed in cell 2 to weather off hydrocarbons. Stones will be tested and when CCME standards are met, authorities will be notified - rocks and stones will be released from the landfarm to go to gravel crushers to make clear stone products. Gravel crushers are very keen to get clean rock products. Blasting rock is their only other option.


To Date no stones have been removed from the landfarm.

14.0 Landfarm Map

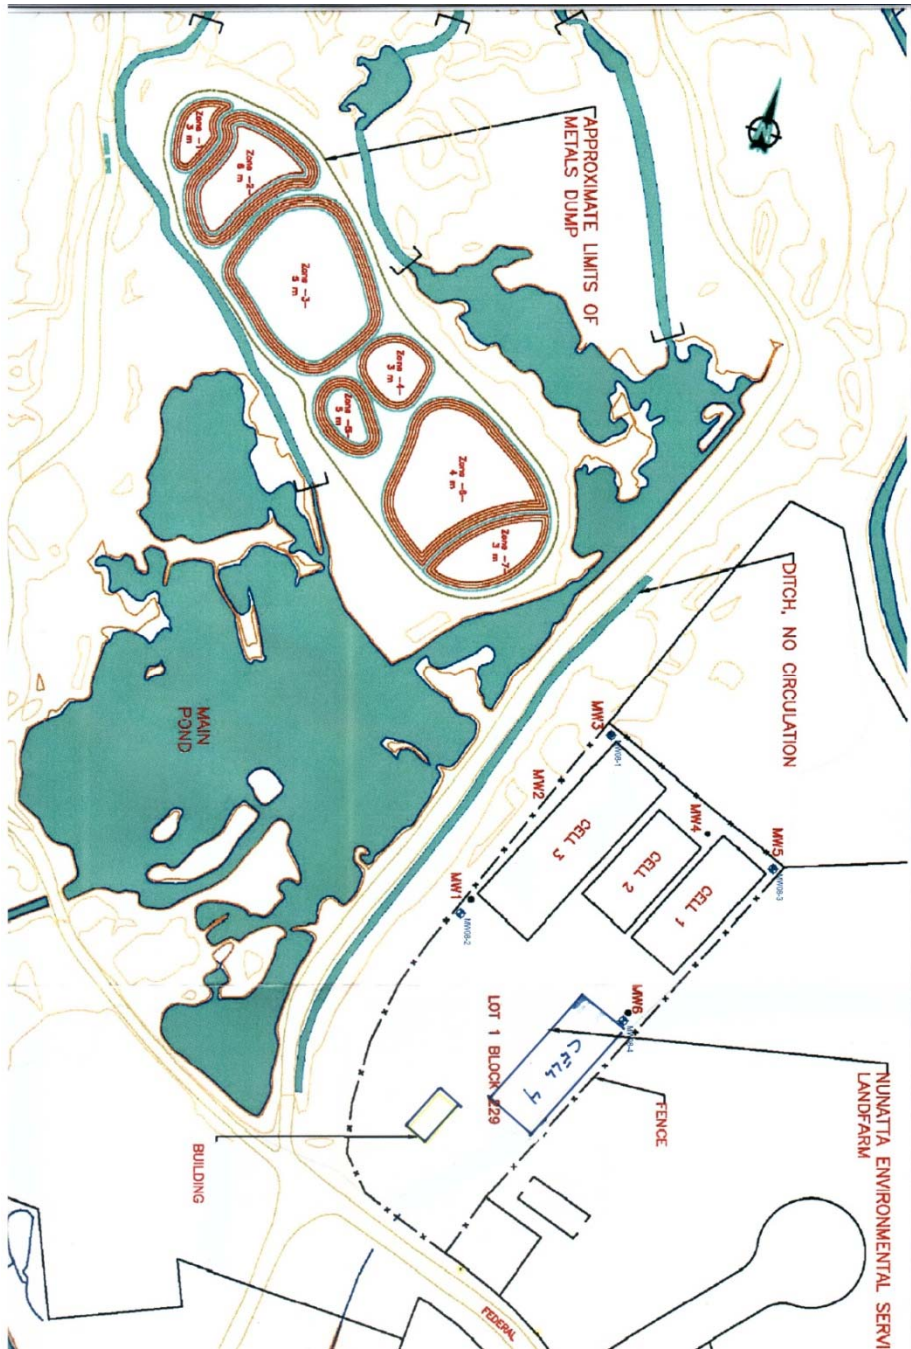

Cells constructed in 2004 shown in Red
Cells constructed in 2008 shown in Blue

15.0 New Monitoring Stations

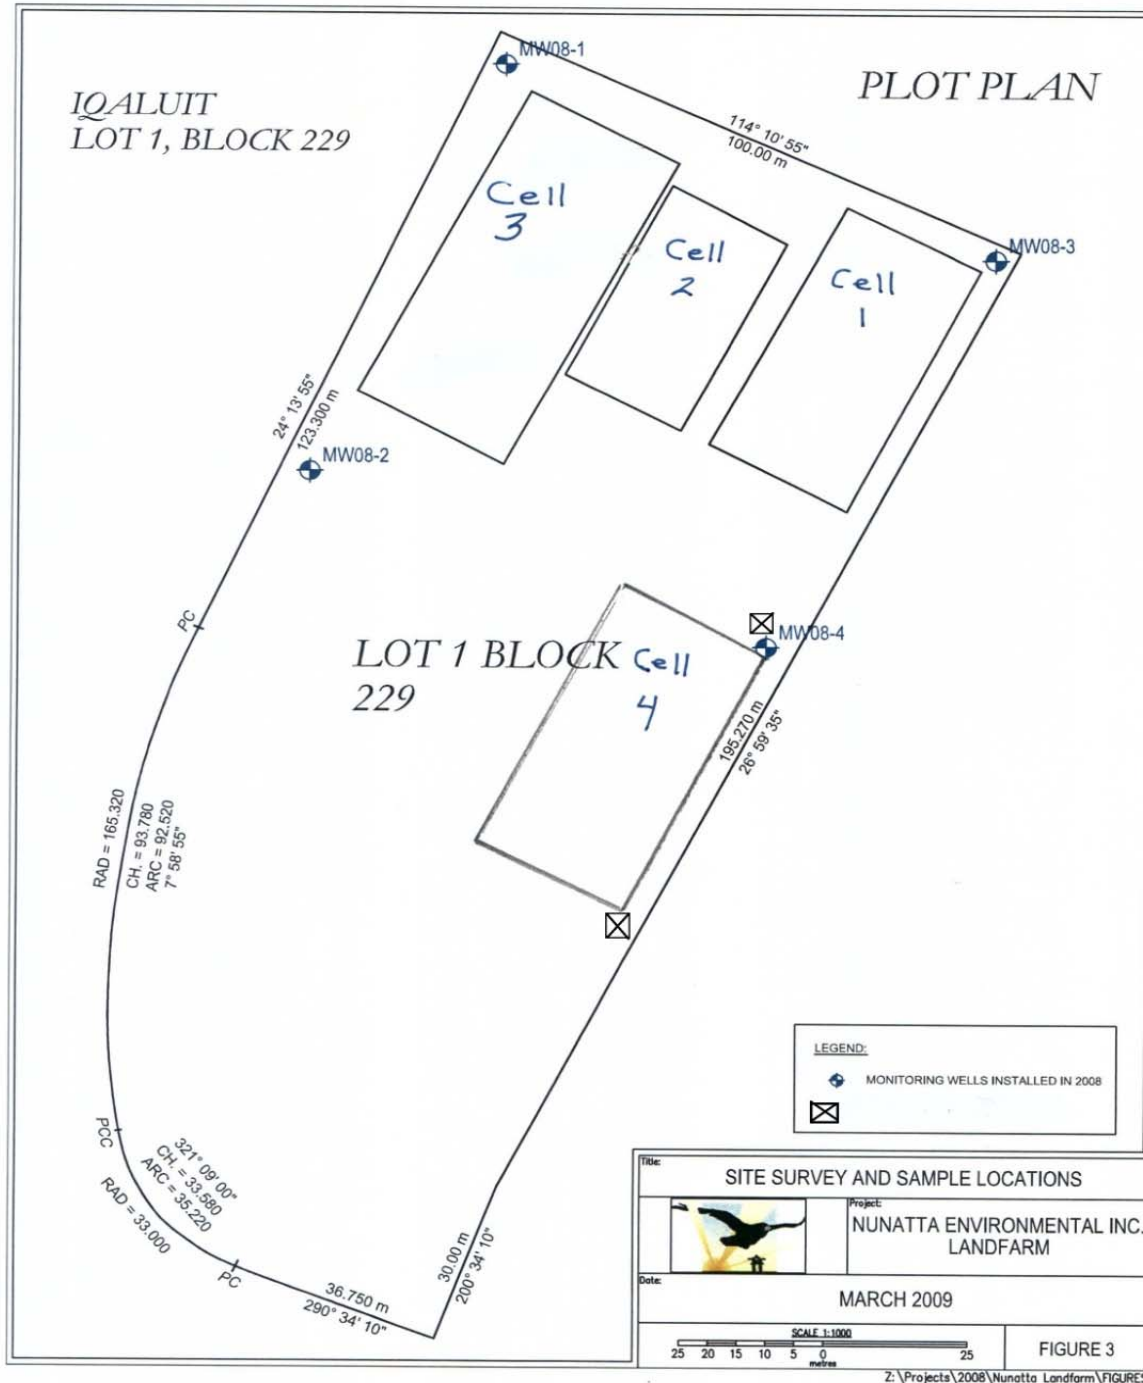

**Black boxes with X at ends of cell 4 are locations for monitoring wells
To be installed in summer of 2012**

16.0 Biography

Biography: **Professor Steven Sisciliano,
University of Saskatchewan, Canada**

Position: Professor

Email: steven.siciliano@usask.ca

Website: <http://soiltox.com/>

Department: [Soil Science](#)

Expertise: [Arctic Soils](#), [microbial ecology](#), [toxicology](#)

Bio:

Education: B.Sc. Biochemistry (Concordia), Ph.D. Toxicology (Saskatchewan)

Research:

We have four key initiatives in the Poles devoted to exploring how soil and human health are linked.

- Exploring how soil ecosystems communicate with one another.
- Understanding how the amount of liquid water in frozen affects pollutants and biogeochemistry.
- Working with the citizens of the City of Iqaluit in the Lower Base Region to investigate what sort of and how many pollutants are in the soil around their homes.
- Archiving polar soil samples for future generations.

Not all of our research projects involve traveling across the globe! We are also active in studies involving soil and water quality and greenhouse gases in Saskatchewan and across the prairies.

Selected Publications:

Siciliano SD, AN Schafer, MAM Forgeron, I Snape. 2008. Hydrocarbon contamination increases the liquid water content of frozen Antarctic soils. Environmental Science and Technology 42:8324-8329.



NUNATTA ENVIRONMENTAL SERVICES INC.

17.0 List of lab reports (Soil and Water)

Soil reports for Landfarm

2008

November Analysis Order 0845175

Covers cell # 3 soils..... HM, TPH, PAH, Btex

And test pits for water well MW08-1. MW08-03 and MW08-04

2009

September Analysis Order 0938209

Covers cell # 1, 2, 3, Soils..... HM, TPH, PAH, Btex

2010

June Analysis Order 1023109

Covers cells 1, 2 SoilsHM, TPH, PAH, Btex

August Analysis Order 1035041

Covers soils rotary screened cell 3.... N, P, K, Organism count HM, TPH, PAH, PCB, Btex

August Analysis Order 1035089

Covers soils in cell 3 in different piles.. HM, TPH, PAH, Btex

November Analysis Order 1049097

Covers soils in Cells 1, 2, 3, N, P, K, and Organism count, HM, TPH, PAH, PCB, Btex

Analysis Order 1035089

Covers cell 3 and different piles with in that cell

2011

July Analysis Order 1127164

Covers cell 1, 2, 3, 4 Soils N, P, K, Organism count HM, TPH, PAH, PCB, Btex

October Analysis Order 1142097

Covers Cells 1, 2, 3, 4 Soils. N, P, K, Organism count HM, TPH, PAH, PCB, Btex

□□□□ □□□□□□□□ □□□□
NUNATTA ENVIRONMENTAL SERVICES INC.

**Water
2009**

July Analysis Order 0929063
Covers Monitoring well MW08-04

2010

June Analysis Order 1023110
Covers water in cell 4, water in cell 3 (referred to as 1 berm) and post pump water from discharge vessel.

June Analysis Order 1026067
Covers water from cell 4 and water from filtering vessel (Post WTR cell #4) refers to testing carbon filter after 48 hours of pumping from cell #3. Shows filter was performing its duties.

Sept Analysis Order 103084
Covers tanks 1(black), 3(red), cell #4, and Test well MW08-03 (referred to as well #1, due to its close proximity to cell #1.)
This was to permit pumping out, prior to winter freeze up and to test monitoring well water. Sample #2 was missing from package.

Sept Analysis Order 1039165
Covers tank 1(black), 2(green), 3(red), and cell 4 not enough water to retest well MW08-03
Retest of samples sent to Lab earlier when sample turned up missing.

2011

August Analysis Order # 1132189
Covers Tank 1(Black), 2(green), and cell #4 Tank 3(red) was not filled this year.



NUNATTA ENVIRONMENTAL SERVICES INC.

18.0 Laboratory Accreditation

Canadian Association for Laboratory Accreditation Inc. Certificate of Accreditation



Parceel Laboratories Ltd.
Unit 300
2319 St. Laurent Blvd
Ottawa, Ontario

This laboratory is accredited in accordance with the recognised International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer Joint ISO-ILAC-AF Communiqué dated 18 June 2005).



| | |
|---------------------|-------------------|
| Accreditation No. | A 1262 |
| Issued on: | September 9, 2009 |
| Accreditation Date: | January 3, 2005 |
| Expiry Date: | September 9, 2012 |

Chief Executive Officer



This certificate is the property of the Canadian Association for Laboratory Accreditation Inc. and must be returned on request, regardless of how
provided. Upon date of issue. For the specific tests to which the accreditation applies, please refer to the laboratory's scope of accreditation at www.cala.ca.



NUNATTA ENVIRONMENTAL SERVICES INC.



CALA

Canadian Association for
Laboratory Accreditation Inc.

CALA Directory of Laboratories

Membership Number: 1262

Laboratory Name: Paracel Laboratories Ltd.

Parent Institution:

Address: Unit 300 2319 St. Laurent Blvd Ottawa ON K1G 4J8

Contact: Mr. Dale Robertson

Phone: (613) 731-9577

Fax: (613) 731-9064

Email: drobertson@paracellabs.com

Standard: Conforms with requirements of ISO/IEC 17025

Clients Served: All Interested Parties

Revised On: July 7, 2011

Valid To: September 9, 2012

Scope of Accreditation

Air (Inorganic)

Asbestos - Air (Occupational Health) (Ottawa West Laboratory) (066)

PM-003; modified from NIOSH 7400

PCM FIBRE COUNTING

Asbestos-Mr. Blair Schildknecht

Asbestos-Ms. Marcia Bertrand

Air (Inorganic)

Metals - Air (Occupational Health) (036)

PI-020; modified from NIOSH 7300

ICP/MS - DIGESTION

Arsenic

Beryllium

Cadmium

Chromium

Copper

Lead

Silver

Zinc

† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directories.html

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

Solids (Mycology)

Fungi (Contact Plate) - Solids (Ottawa West Laboratory) (047)
PM-001; modified from AIHA GUIDELINES
CULTURE
Fungal Speciation

Solids (Mycology)

Fungi (Tape Lift) - Solids (Ottawa West Laboratory) (043)
PM-002; modified from ASTM D7391
MICROSCOPIC
Fungal Propagule - Genus

Solids (Organic)

Semi-Volatile Organic Compounds (SVOC) - Solids (074)
PO-003 SVOC; modified from SW-846 8270
GC/MS - EXTRACTION
1-methylnaphthalene
1,2,4-Trichlorobenzene
2-Chloronaphthylene
2-Chlorophenol
2-methylnaphthalene
2-nitrophenol
2,3,4,5-Tetrachlorophenol
2,3,4,6-Tetrachlorophenol
2,4-Dichlorophenol
2,4-Dimethylphenol
2,4-Dinitrophenol
2,4-Dinitrotoluene
2,4,5-Trichlorophenol
2,4,6-Trichlorophenol
2,6-dinitrotoluene
3,3-dichlorobenzidine
4-Chloro-3-Methylphenol
4-Chloroaniline
4-chlorophenyl phenyl ether
4-nitrophenol
Acenaphthene
Acenaphthylene
Anthracene
Benzo (a) anthracene
Benzo (a) pyrene
Benzo (b) fluoranthene
Benzo (g,h,i) perylene
Benzo (k) fluoranthene
Benzylbutylphthalate
Biphenyl
Bis(2-chloroethoxy)methane

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

Bis(2-chloroisopropyl)ether
Bis(2-ethylhexyl)phthalate
Chrysene
Di-n-butyl phthalate
Di-n-octyl phthalate
Dibenzo (a,h) anthracene
diethyl phthalate
Dimethyl phthalate
Fluoranthene
Fluorene
hexachlorobenzene
Hexachlorobutadiene
Hexachlorocyclopentadiene
Hexachloroethane
Indeno (1,2,3 - cd) pyrene
Indole
m/p-Cresol (3/4-Methylphenol)
N-Nitroso-di-n-propylamine
N-Nitrosodiphenylamine
Naphthalene
Nitrobenzene
o-Cresol (2-methylphenol)
Pentachlorophenol
Phenanthrene
Phenol
Pyrene
Quinoline

Solids (Organic)

Total PCBs - Soil (029)

PO-002

; modified from EPA SW

8080A

GC/ECD - EXTRACTION

Total PCB

Solids (Organic)

Total Petroleum Hydrocarbons (TPH) - Soil (020)

PO-007

; CCME PHC TIER 1 METHOD, REV. 1

GC/FID - EXTRACTION

F2: C10-C16

F3: C16-C34

F4: C34-C50

TPH (C10-C24)



Solids (Organic)

PO-009

: modified from MOE E33!

F4: Gravimetric

Total Petroleum Hydrocarbons (heavy oil)

Solids (Organic)

: modified from EPA SV

PO-001

846 8240. 624

GC/MS - PURGE AND TRAP

1,1-Dichloroethane

1,1-dichloroethylene

1,1,1-Trichloroethane

1,1,2-Trichloroethane

1,1,2,2-Tetrachloroethane

1,2-Dibromomethane

1,2-dichlorobenzene

1,2-dichloroethane

1,2-Dichloropropane

1,3-Dichlorobenzene

1,3,5-Trimethylbenzene

1,4-dichlorobenzene

Benzene

Bromodichloromethane

Bromoform

Bromomethane

Carbon Tetrachloride

Chlorobenzene

Chlorodibromomethane

Chloroethane

Chloroform

Chloromethane

cis-1,2-Dichloroethylene

cis-1,3-Dichloropropene

Dichlorodifluoromethane

Dichlorometha

Ethylbenzene

Hexane

m/p-xylene

† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directories.html

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

trans-1,2-Dichloroethylene
trans-1,3-Dichloropropene
Trichloroethylene
Trichlorofluoromethane
Vinyl Chloride

Swab

Fungi - Swab (Ottawa West Laboratory) (048)
PM-001; modified from AIHA GUIDELINES
CULTURE
Fungal Speciation

Water (Inorganic)

Alkalinity - Water (001) OSDWA †
PI-003; modified from EPA 310.1
TITRIMETRIC
Alkalinity (pH 4.5)

Water (Inorganic)

Ammonia - Water (062) OSDWA †
PI-004; modified from EPA 351.2
AUTO COLOR
Ammonia

Water (Inorganic)

Anions - Water (034) OSDWA †
PI-016 ; modified from EPA 300.1
ION CHROMATOGRAPHY
Bromide
Chloride
Fluoride
Nitrate
Nitrite
Phosphate
Sulfate

Water (Inorganic)

Biochemical Oxygen Demand (BOD) - Water (055)
PI-014; modified from SM 5210 B
D.O. METER
BOD (5 day)

† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directory.html

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

| | |
|--|--------------------------------------|
| Water (Inorganic) Carbon - Water (056) PI-011; modified from MOE E3247 B IR - COMBUSTION Organic Carbon | OSDWA † |
| Water (Inorganic) Chemical Oxygen Demand (COD) - Water (054) PI-009; modified from SM 5220 D REFLUX - COLORIMETRIC COD | |
| Water (Inorganic) Chlorine - Water (053) PI-005; modified from SM 4500-Cl G COLORIMETRIC Free Chlorine | OSDWA † |
| Water (Inorganic) Colour - Water (042) PI-019; modified from HACH 8025 SPECTROPHOTOMETRIC Apparent Colour True Colour | OSDWA † |
| Water (Inorganic) Conductivity - Water (003) PI-006 CONDUCTIVITY METER Conductivity (25°C) | OSDWA † ; modified from EPA 120.1 |
| Water (Inorganic) Cyanide - Water (052) PI-008; modified from MOE E3015 AUTO COLOR - DISTILLATION Cyanide (SAD) Free Cyanide | OSDWA † |
| Water (Inorganic) Dissolved and Extractable Metals - Water (004) PI-020 ICP/MS | OSDWA † ; modified from EPA 200.8 |



Antimony
Arsenic
Barium
Beryllium
Bismuth
Boron
Cadmium
Calcium
Chromium
Cobalt
Copper
Iron
Lead
Magnesium
Manganese
Molybdenum
Nickel
Potassium
Selenium
Silver
Sodium
Strontium
Thallium
Tin
Titanium
Tungsten
Uranium
Vanadium
Zinc

; modified from EPA 340.2

Hexavalent Chromium

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directories.html

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

Water (Inorganic)

Oil and Grease - Water (032)
 PO-004; modified from EPA 9070A, EPA 3510 SILICA GEL CLEANUP
 GRAVIMETRIC - EXTRACTION
 F4G
 Oil and Grease, Mineral
 Total Oil and Grease

Water (Inorganic)

pH - Water (013) OSDWA †
 PI-010 ; modified from EPA 150.1
 pH METER
 pH

Water (Inorganic)

Phenols - Water (064) OSDWA †
 PI-002; modified from EPA 420.2
 AUTO COLOR - DISTILLATION
 Total Phenolics

Water (Inorganic)

Solids - Water (040) OSDWA †
 PI-012; modified from SM 2450 C/D
 GRAVIMETRIC
 Total Dissolved Solids
 Total Suspended Solids

Water (Inorganic)

Sulphide - Water (041) OSDWA †
 PI-019; modified from SM 4500-S2D
 COLORIMETRIC (METHYLENE BLUE)
 Sulphide

Water (Inorganic)

Total Kjeldahl Nitrogen (TKN) - Water (061) OSDWA †
 PI-004; modified from EPA 351.2
 AUTO COLOR - DIGESTION
 Total Kjeldahl Nitrogen

Water (Inorganic)

Total Mercury - Water (014) OSDWA †
 PI-015 ; modified from EPA 7245.1
 COLD VAPOUR AA - DIGESTION
 Mercury

† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directories.html

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

Water (Inorganic)
 Total Metals - Water (065)
 PI-020; modified from EPA 200.8
 ICP/MS - DIGESTION
 Aluminum
 Barium
 Boron
 Chromium
 Cobalt
 Copper
 Iron
 Lead
 Manganese
 Molybdenum
 Nickel
 Strontium
 Thallium
 Titanium
 Vanadium
 Zinc

| | |
|---|---------|
| Water (Inorganic) Total Phosphorus - Water (060) PI-011; modified from EPA 365.1 AUTO COLOR - DIGESTION Total Phosphorus | OSDWA † |
|---|---------|

| | |
|---|---------|
| Water (Inorganic) Turbidity - Water (051) PI-017; modified from HACH 2100 P NEPHELOMETRY Turbidity | OSDWA † |
|---|---------|

| | |
|--|---------|
| Water (Microbiology) Coliforms - Water (057) PW-001; modified from MOE E3407 MEMBRANE FILTRATION (DC-AGAR) Background Counts Escherichia coli (E. coli) Total Coliforms | OSDWA † |
|--|---------|

† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directories.html

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

Water (Microbiology)
 Fecal (Thermotolerant) Coliforms - Water (058) OSDWA †
 PW-002; modified from SM 9222 D
 MEMBRANE FILTRATION (mFC)
 Fecal (Thermotolerant) Coliforms

Water (Microbiology)
 Heterotrophic Plate Count (HPC) - Water (059) OSDWA †
 PW-003; modified from SM 9215 C
 SPREAD PLATE (PCA)
 Heterotrophic Plate Count (HPC)

Water (Organic)
 Petroleum Hydrocarbons (PHC) - Water (038) OSDWA †
 PO-006; prep: modified from MOE E3421; quat: CCME PHC Tier I
 GC/FID - PURGE AND TRAP
 F1: C6-C10

Water (Organic)
 Petroleum Hydrocarbons (PHC) - Water (039) OSDWA †
 PO-007; prep: modified from MOE E3421; quat: CCME PHC Tier I
 GC/FID - EXTRACTION
 F2: C10-C16
 F3: C16-C34
 F4: C34-C50

Water (Organic)
 Semi-Volatile Organic Compounds (SVOC) - Water (075)
 PO-003 SVOC; modified from SW-846 8270
 GC/MS - EXTRACTION
 1-methylnaphthalene
 1,2,4-Trichlorobenzene
 2-Chloronaphthylene
 2-Chlorophenol
 2-methylnaphthalene
 2-nitrophenol
 2,3,4,5-Tetrachlorophenol
 2,3,4,6-Tetrachlorophenol
 2,4-Dichlorophenol
 2,4-Dimethylphenol
 2,4-Dinitrophenol
 2,4-Dinitrotoluene
 2,4,5-Trichlorophenol
 2,4,6-Trichlorophenol
 2,6-dinitrotoluene
 4-Chloro-3-Methylphenol
 4-Chloroaniline

† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directories.html

□ □ □ □ □ □ □ □ □ □ □ □ □ □ □ □

NUNATTA ENVIRONMENTAL SERVICES INC.

4-chlorophenyl phenyl ether
 4-nitrophenol
 7H-dibenzo(c,g)carbazole
 Acenaphthene
 Acenaphthylene
 Acridine
 Anthracene
 benzo(j)fluoranthene
 Benzo (a) anthracene
 Benzo (a) pyrene
 Benzo (b) fluoranthene
 benzo(e)pyrene
 Benzo (g,h,i) perylene
 Benzo (k) fluoranthene
 Benzylbutylphthalate
 Biphenyl
 Bis(2-chloroethoxy)methane
 Bis(2-chloroethyl)ether
 Bis(2-chloroisopropyl)ether
 Bis(2-ethylhexyl)phthalate
 Chrysene
 Di-n-butyl phthalate
 Di-n-octyl phthalate
 Dibenzo (a,h) anthracene
 dibenzo(a,i)pyrene
 dibenzo(a,j)acridine
 diethyl phthalate
 Dimethyl phthalate
 Fluoranthene
 Fluorene
 hexachlorobenzene
 Hexachlorobutadiene
 Hexachlorocyclopentadiene
 Hexachloroethane
 Indeno (1,2,3 - cd) pyrene
 Indole
 m/p-Cresol (3/4-Methylphenol)
 N-Nitrosodiphenylamine
 Naphthalene
 Nitrobenzene
 o-Cresol (2-methylphenol)
 Pentachlorophenol
 Perylene
 Phenanthrene
 Phenol
 Pyrene
 Quinoline

† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at http://www.cala.ca/cala_directories.html



| | |
|--|-------------------------|
| Water (Organic) | OSDWA † |
| Volatile Organic Compounds (VOC) - Water (007) | ; modified from EPA 624 |
| PO-001 | |
| GC/MS - PURGE AND TRAP | |
| 1,1-Dichloroethane | |
| 1,1-dichloroethylene | |
| 1,1,1-Trichloroethane | |
| 1,1,2-Trichloroethane | |
| 1,2-dichlorobenzene | |
| 1,2-dichloroethane | |
| 1,2-Dichloropropane | |
| 1,3-Dichlorobenzene | |
| 1,4-dichlorobenzene | |
| Benzene | |
| Bromodichloromethane | |
| Bromoform | |
| Bromomethane | |
| Carbon Tetrachloride | |
| Chlorobenzene | |
| Chlorodibromomethane | |
| Chloroethane | |
| Chloroform | |
| cis-1,3-Dichloropropene | |

The list of tests and measurement capabilities for which a laboratory is accredited can change at any time due to circumstances such as scope extensions, voluntary withdrawal of tests by the laboratory and suspension. Scopes are published by the CALA via the Internet at: http://www.cala.ca/cala_directories.html



† "OSDWA" indicates the appendix is used for the analysis of Ontario drinking water samples, which is subject to the rules and related regulations under the Ontario "Safe Drinking Water Act" (2002).

15