

FUEL TRANSPORT AND STORAGE MANAGEMENT PLAN

MEADOWBANK GOLD PROJECT NUNAVUT TERRITORY

**Cumberland Resources Ltd.
950 – 505 Burrard Street
Vancouver, B.C.
V7X 1M4**

May, 2006

This product is owned and produced by Cumberland Resources Ltd. Do not reproduce without prior consent.

TABLE OF CONTENTS

I.	INTRODUCTION.....	4
	PURPOSE.....	4
	SCOPE.....	4
	ENVIRONMENTAL POLICY.....	6
	SITE DESCRIPTION.....	7
	FACILITY DESCRIPTION.....	7
	TYPE AND AMOUNT OF CONTAINMENT.....	8
	FIGURE – LOCATION MAP – NUNAVUT.....	9
	FIGURE – LOCATION MAP – WINTER HAUL ROUTE.....	10
	FIGURE – CAMP MAP / FACILITIES.....	11
	RESPONSIBILITIES	12
II.	SPILL RESPONSE – ACTION PLAN	13
III.	SPILL RESPONSE – FUEL TYPES	14
	PRODUCT GUIDE	14
A1.	FLAMMABLE IMMISCIBLE LIQUIDS	14
	GASOLINE SPILL RESPONSE.....	15
	PHYSICAL PROPERTIES.....	16
	MATERIAL SAFETY DATA SHEET	17
	JET-A SPILL RESPONSE.....	22
	PHYSICAL PROPERTIES.....	23
	MATERIAL SAFETY DATA SHEET	24
	JET-B SPILL RESPONSE	29
	PHYSICAL PROPERTIES.....	30
	MATERIAL SAFETY DATA SHEET	31
	DIESEL (P-50) SPILL RESPONSE.....	37
	PHYSICAL PROPERTIES.....	38
	MATERIAL SAFETY DATA SHEET.....	39
A2.	FLAMMABLE GASES.....	44
	ACETYLENE SPILL RESPONSE.....	45
	PHYSICAL PROPERTIES.....	45
	MATERIAL SAFETY DATA SHEET	47
	PROPANE SPILL RESPONSE	52
	PHYSICAL PROPERTIES.....	52
	MATERIAL SAFETY DATA SHEET	54
	WASTE OIL	59
	PHYSICAL PROPERTIES.....	60
	MATERIAL SAFETY DATA SHEET	61

IV. SPILL RESPONSE CONTACTS	65
V. LOCAL TRANSPORTATION.....	65
VI. EQUIPMENT SUPPLIERS.....	65
VII. INTERNAL RESOURCES	66
VIII. EXTERNAL RESOURCES	67
IX. REFERENCES / ACKNOWLEDGEMENTS.....	68

APPENDIX A: SPILL RESPONSE KITS
 APPENDIX B: RISK ASSESSMENT / PREVENTION
 APPENDIX C: SPILL REPORT FORMS
 APPENDIX D: LOAD MANIFEST
 APPENDIX E: STORAGE MONITORING

I. INTRODUCTION

Cumberland Resources developed the original Fuel Transport and Storage Management Plan in 1999, prior to the installation of bulk fuel storage vaults at the Meadowbank site. Since the original document was prepared, several changes have occurred in the location and number of installed fuel vaults at the site, as well as the volumes and types of fuel stored. This document has been updated to account for these changes as well as changes that have occurred in Cumberland personnel and their responsibilities.

PURPOSE

This Transportation Spill Contingency Plan is designed to promote environmental awareness and safety, as well as facilitate the efficient cleanup of spills as the result of transportation incidents while in transit between Baker Lake and Cumberland Resources Ltd. exploration site at the Meadowbank project, and at Cumberland's fuel storage facilities at the Meadowbank project involving the following substances:

- P-50 Diesel
- Jet A and/or Jet B turbo fuel
- Hydraulic Oil
- Lube Oil
- Waste Oil
- Propane
- Other materials hazardous to the safety of personnel and the environment

Principal objectives of the Spill Contingency Plan are:

1. To provide readily accessible emergency information to cleanup crews, Meadowbank project personnel, KIA, and government agencies in the event of a spill.
2. To comply with Cumberland Resources Ltd. environmental policy.
3. To comply with federal and territorial regulations pertaining to the preparation of contingency plans and notification requirements.
4. To promote the safe and effective recovery of spilled materials.
5. To minimize the environmental impacts of spills to water and/or land.
6. To facilitate the management of wastes according to environmental legislation.

SCOPE

This plan addresses the organization of Cumberland Resources Ltd. Meadowbank Gold Project spill response and related emergency measures. Alerting and notification procedures and cleanup strategies are outlined along with the duties and responsibilities of key spill response personnel. Emergency contacts are listed for Cumberland Resources Ltd., Cumberland contractors, and local government agencies. Emergency response equipment is listed that is available immediately (should a spill occur) from local freighting contractors, such as Peter's Expediting in Baker Lake.

Detailed information in support of this Transportation Spill Contingency Plan and ensuing spill response actions, is provided in the following appendices:

- Appendix A contains an up-to-date inventory of spill response equipment and kits available at various locations.
- Appendix B contains risk assessment and preventive measures.
- Appendix C contains NWT Spill Report Forms that are to be used to report spills.
- Appendix D contains load manifest forms with disclosure for TDG.
- Appendix E contains a fuel storage monitoring plan.

Environmental Policy - Cumberland Resources

Cumberland Resources Ltd. is committed to achieving a high standard of environmental care in conducting its mineral exploration activities.

Cumberland's environmental policy includes:

- Compliance with all applicable legislation including laws, regulations and standards. Where laws do not exist, appropriate standards will be applied to minimize environmental impacts resulting from exploration activities.
- Open communication with government, the community and employees on environmental issues.
- Development and adherence to management systems that adequately identify, monitor and control environmental risks associated with Cumberland's exploration activities.
- Assurance the employees are aware of their responsibilities and comply with Cumberland's environmental policy and field guide.

ON BEHALF OF
THE BOARD OF DIRECTORS

Kerry M. Curtis, P. Geo.
President and C.E.O.

January, 2006

SITE DESCRIPTION

The Meadowbank Gold Project is located at 65° 01' 30" N latitude and 96° 04' 20" W longitude, approximately 70km north of the Hamlet of Baker Lake, Nunavut (Figure 1). The transportation of fuel to the site is accomplished over a winter road that begins at Baker Lake and ends at the exploration site. The route covers a combination of lake ice and tundra most of which is under federal jurisdiction. The portion of the route closest to the Project Site lies within Inuit owned land (IOL BL-14) and land use in the area is administered by the Kivalliq Inuit Association. The haul route distance from Baker Lake to the Meadowbank Project exploration camp is approximately 100 km (figure 2). This transportation route has been used by Cumberland to transport fuel and other supplies for eleven years (1995 - 2005) with negligible environmental impacts.

The facility description provided below includes both the 5.6 million litre bulk diesel fuel storage tank (proposed for construction in 2006), as well as, the nine skid mounted 50,000 and 75,000 litre double-walled fuel vaults. The nine smaller tanks currently in use at the site will be decommissioned after the installation of the 5.6 million litre tank is complete and the tank is operational.

FACILITY DESCRIPTION

Nine skid-mounted double-walled cylindrical fuel vaults are currently in use at the Meadowbank site. See figure 3 below for a map showing the camp and the current location of the fuel storage vaults. A 5.6 million litre tank, located within a bermed and lined facility, is proposed to be constructed at the site in 2006. This tank will substitute or replace eight of the existing double-walled fuel vaults. It is expected that this tank will be operational for the start of the 2007 field season.

The 5.6 million litre tank is 24.2 metres in diameter and 12.1 metres high, with a nominal fill capacity of approximately 5 million litres. The tank is erected within a bermed and HDPE (high density poly ethylene) lined enclosure approximately 74m X 63.5m in size. The bermed and lined enclosure is capable of containing 110% of the tank volume. This large tank has a separate dispensing unit, located in it's own bermed and lined area adjacent to the large tank pad, which houses the pumps for filling the tank and dispensing fuel as required.

Five 50,000l tanks and four 75,000l tanks are currently in use at the site. The 50,000 litre tanks have the following dimensions: Length - 7.34 m (secondary tank), 6.48 m (primary tank), Diameter - 3.20 m (outside secondary), Maximum fill capacity - 47,500 l, Skid assembly - 8.48 m X 2.44 m.


The 75,000 litre tanks, have the following dimensions: Length – 11.71 m (secondary tank), 10.59 m (primary tank); Diameter – 2.90 m (outside secondary); Maximum fill capacity – 71,250 l; Skid assembly – 13.04 m X 2.90 m. Both sizes of tanks are mounted on steel skids, which are supported by timbers resting on a bed of gravel and sand. All tanks are double-walled, with a secondary internal containment area and interstitial monitoring capability. Filling and pumping sites have additional surface and spill containment capabilities.



The main tank farm at the site contains four 50,000 litre and four 75,000 litre tanks. One 50,000 litre tank is installed approximately 500 metres east of camp near the equipment lay down area.

TYPE AND AMOUNT OF CONTAINMENT


The five 50,000 litre fuel vaults are used exclusively for diesel fuel storage and have a total combined capacity of 237,500 litres. Three of the four 75,000 litre fuel vaults are used for diesel storage (combined 213,750 litre capacity), while the fourth tank is used for Jet-A aviation fuel and has a capacity of 71,250 litre. Therefore, the storage facilities at the Meadowbank camp are currently capable of containing 454,870 litres of bulk diesel fuel and 71,250 litres of Jet-B aviation fuel. Other fuel supplies such as gasoline is stored in 205 litre metal drums, as the amount required at present does not justify the use of fuel vaults.

The 5.6 million litre tank will not be used for fuel storage until it can be filled with fuel transported overland to the site in the spring of 2007. The tank has a nominal storage capacity of approximately 5,000,000 litres. As a condition of the approval for tank construction from the Nunavut Impact Review Board, the small fuel vaults currently in use at the site will be decommissioned once the large tank is operational. Therefore, commencing in 2007, the fuel storage facilities at Meadowbank will be capable of storing 5,000,000 litres of diesel fuel and 71,250 litres of Jet-A aviation fuel.

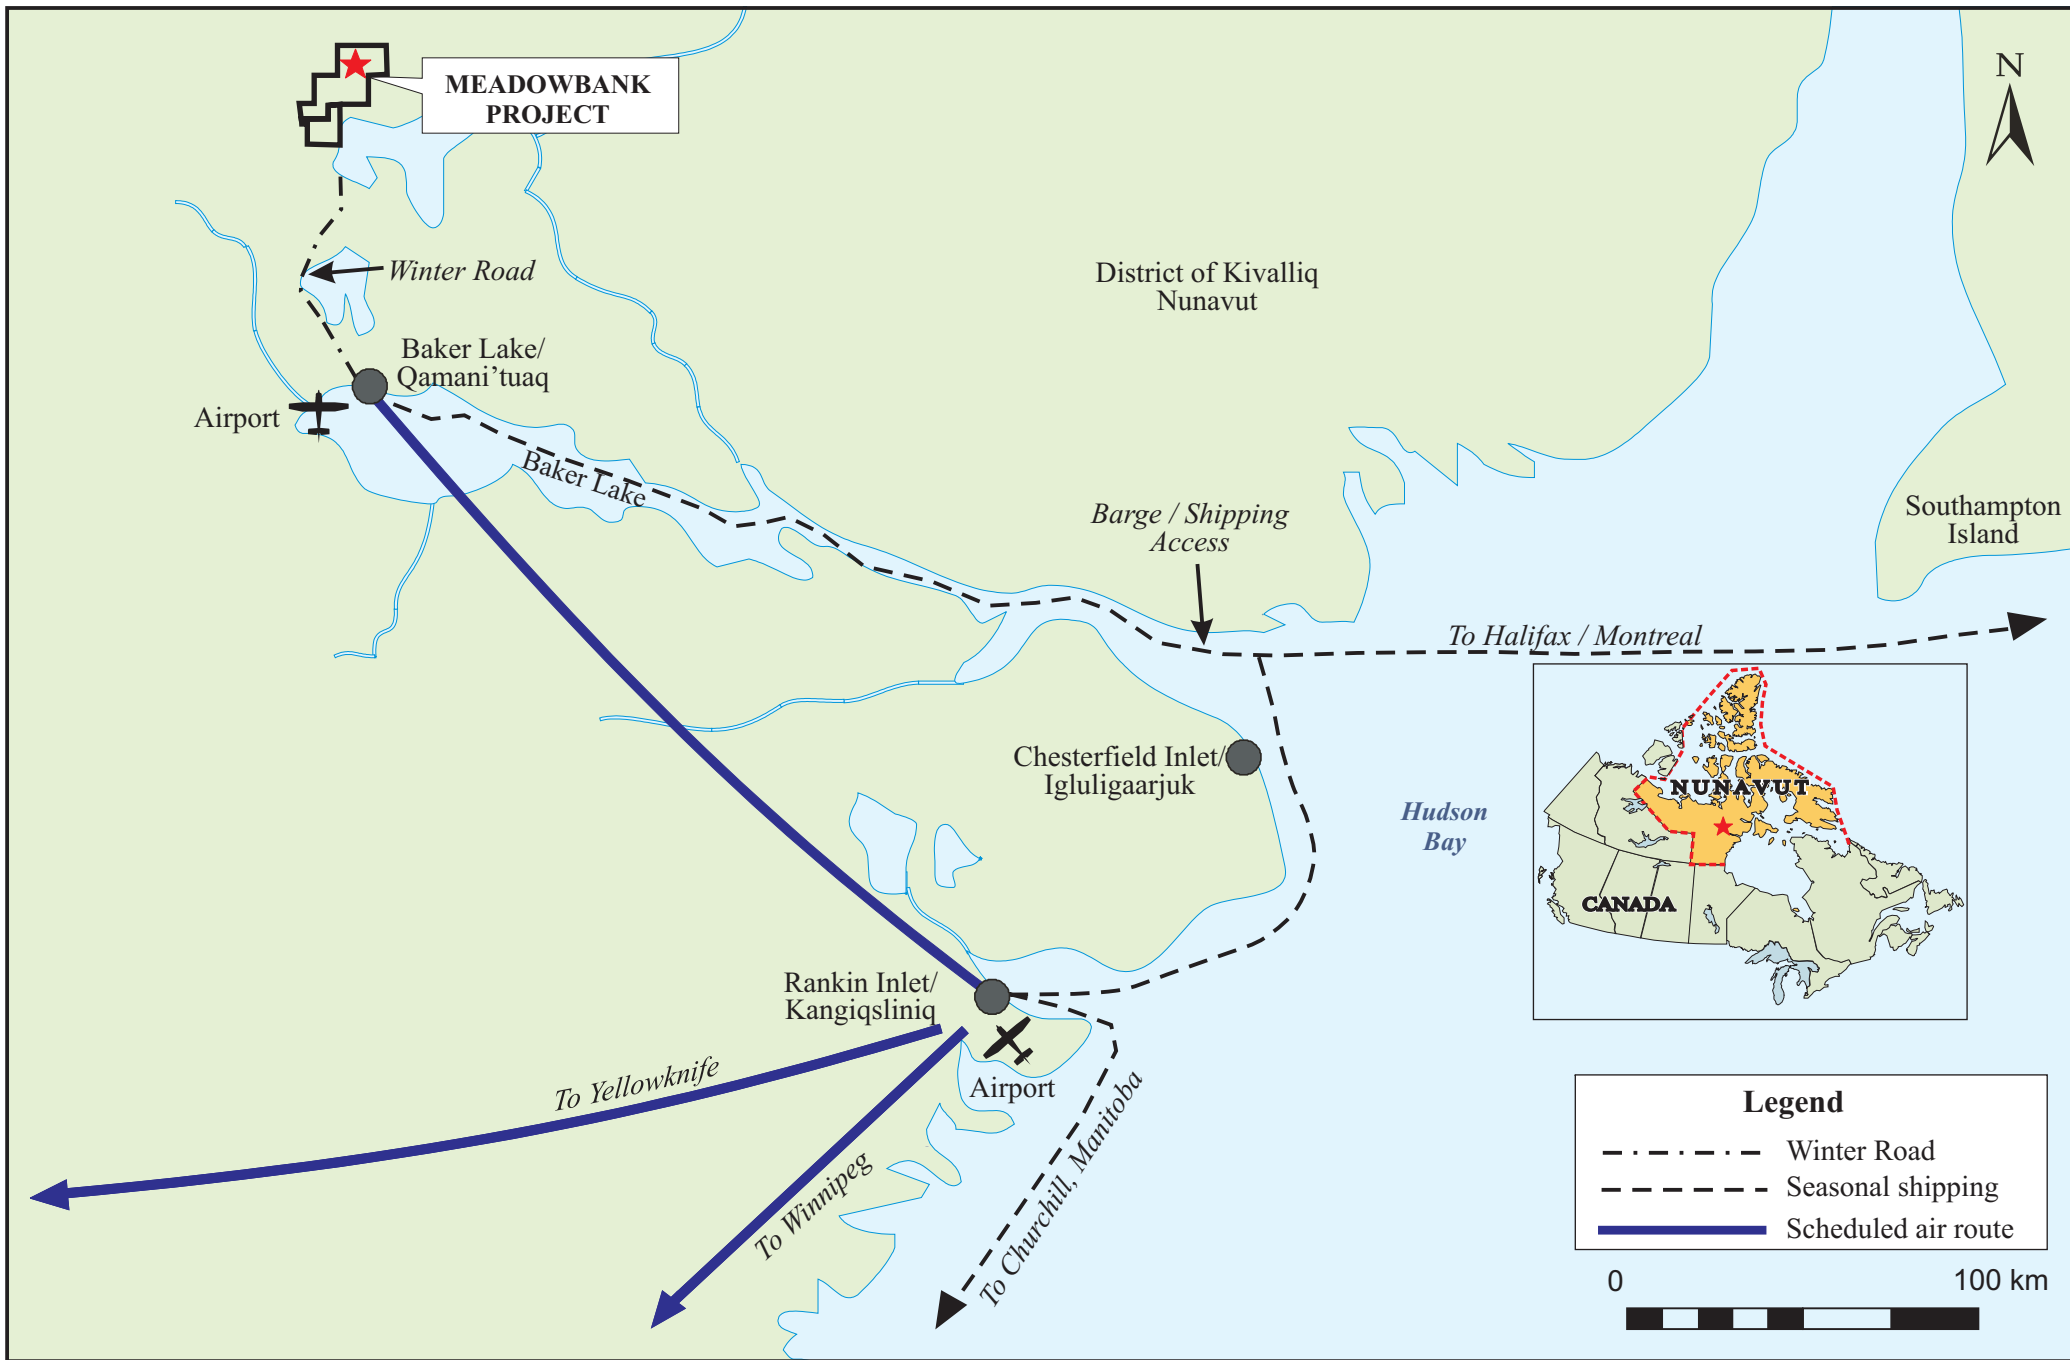

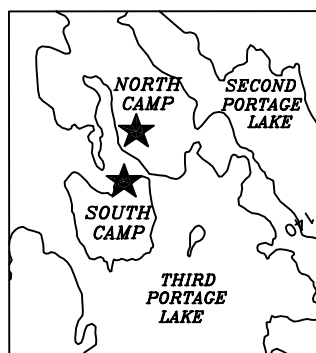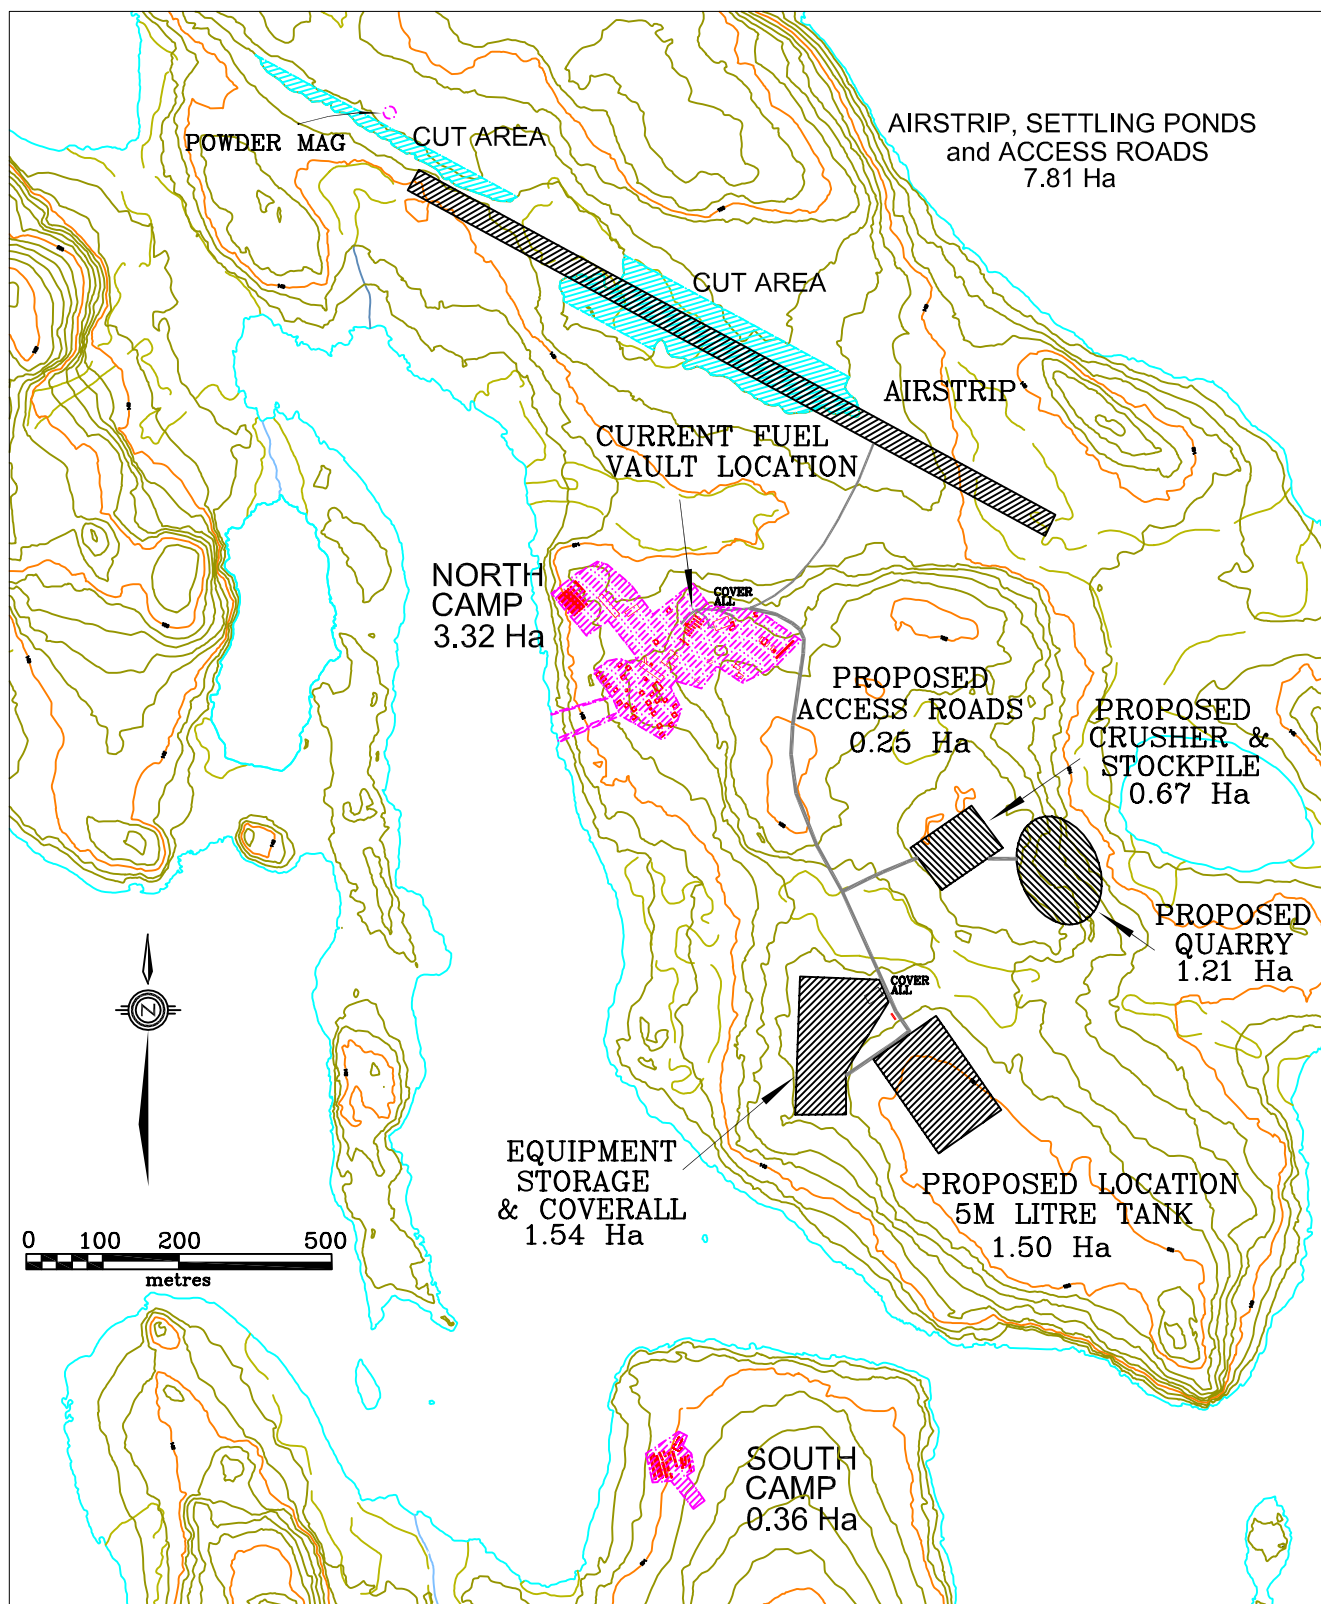

LEGEND



CUMBERLAND
RESOURCES LTD

MEADOWBANK PROJECT
Nunavut

2006 Meadowbank Camp Site Plan

Scale: as shown	N.T.S. 66A,H	Date: Dec 2005
Revised by: JT Kellner	I.O.L. BL-14	Map No.
Filename:	Datum: NAD83Z14	Fig 2

RESPONSIBILITIES

SHIPPER:

- Ensures proper loading and containment and documentation, which complies with TDG guidelines.
- Ensures goods are classified and labeled appropriately. Provide placards if required.
- Ensures safety at all times.
- Ensures proper communication with carrier.

CARRIER:

- Supervises and ensures proper loading and containment and documentation which complies with all TDG guidelines.
- Ensures correct volumes for transport, attach placards if necessary, maintains or replaces safety marks.
- Checks and delivers TDG manifest to receiver.
- Ensures safety of all personnel and equipment.

RECIEVER:

- Supervises unloading procedures.
- Complies with TDG guidelines.
- Ensures safety of containment facilities.
- Ensures maintenance of all pumps and loading / unloading equipment on site.
- Provides on-site emergency communications (telephone, radio).
- Completes regular site inspections of storage facilities.
- Records all shipment manifests.
- Keeps on-site inventory of all dangerous goods.
- Maintains safety procedures at all times.

SPILL SITE COORDINATOR:

- Supervises and organizes spill containment equipment and personnel.
- Reports to internal and external resources.
- Ensures proper safety equipment is available.
- Notifies all personnel of current hazards.
- Maintains proper safety procedures at all times.
- Must be compliant with all TDG guidelines.

II. SPILL RESPONSE ACTION PLAN

SPILL RESPONSE SEQUENCE

1. REPORT ALL SPILLS TO:

Project Manager	<u>or</u>	Phone: (604) 608-2557
Senior Project Geologist		Phone: (604) 608-2557
Camp manager		Phone: (604) 608-2557

Note: Telephone numbers for the camp change year-to-year, but current numbers can be obtained through the Vancouver office number listed above.

The reporting requirement applies to all spills: on land, on water and on ice.

The reporting requirement applies equally to all substances covered by this contingency plan; fuels, hydraulic oil, lubricants, and waste oil.

All reports by telephone must be followed with a fax of the completed report form (see Appendix D for copies) to the number indicated on the reporting form.

Reporting and notification described below must be made by the first observer of the spill or the observer's supervisor immediately upon the spill being under control, or on failure to gain control of the situation.

2. ALERT Cumberland Personnel:

SPILL OBSERVER

IMMEDIATE SUPERVISOR or Meadowbank Camp manager

- Meadowbank Project Manager
- Contractors (clean up)

3. NOTIFY AGENCIES:

24 HOUR NWT SPILL REPORT LINE PHONE	(867) 920 8130
FAX	(867) 873 6924
KIVALLIQ INUIT ASSOCIATION	(867) 645 2810
DIAND – Rankin Inlet	(867) 645 2831
Iqaluit	(867) 979 4405
Environment Canada – Yellowknife	(867) 920 6060
Fisheries and Oceans Canada	(867) 645 2871
GNWT DRWED – Rankin Inlet	(867) 645 5067

4. RECORD THE FACTS Use Spill Report Form from Appendix D

NOTE:	If the On-Scene Coordinator is not available when a spill is detected then the spill must be reported directly to NWT 24-hour spill report line without delay.
--------------	---

III. SPILL RESPONSE – FUEL TYPE

The procedure of dealing with a spill is dependent on the type of material spilled. The following sheets summarize the correct procedures for dealing with spills of the materials transported and stored at the Meadowbank project site – gasoline, Jet A and Jet B aviation fuel, P-50 diesel (stove oil), propane and acetylene.

The MSDS sheets for each product are also included after the spill response information.


PRODUCT GUIDES

The materials included in this Plan can generally be divided into two categories:

- Flammable immiscible liquids
- Flammable compressed gases

A-1. Flammable Immiscible Liquids

These substances are all hydrocarbon-based and will ignite under certain conditions. Gasoline and aviation fuel pose the greatest fire (and safety) hazard and usually cannot be recovered when spilled on water. The remaining materials generally do not pose a hazard at ambient temperatures. They are all insoluble, float unless mixed into the water column and can be recovered when safety allows.

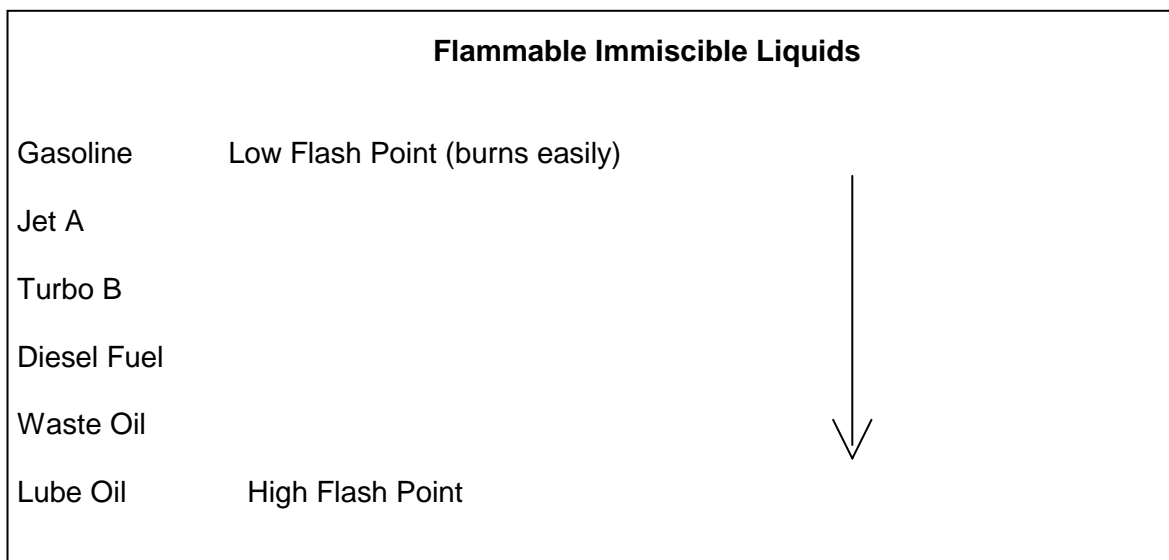

GASOLINE SPILL RESPONSE ACTIONS

CONSIDER ACTION ONLY IF SAFETY PERMITS

GASOLINE FORMS VAPOURS THAT CAN IGNITE AND EXPLODE

NO SMOKING

Refer to Product Guide below for:
Physical/Chemical Properties
Response to Fires
First Aid

- ELIMINATE IGNITION SOURCES
- STOP SOURCE OF GASOLINE IF SAFE TO DO SO

ON LAND

- Block entry into waterways by diking with earth, snow or other barrier(s).
- Do not contain spill if there is any chance of igniting vapours.
- On shop floors and in work/depot yards, apply particulate absorbents.
- On tundra use peat moss and leave to degrade if feasible to do so.

ON SNOW & ICE

- Block entry into waterways by diking with snow or other barrier.
- Do not contain spill if there is any chance of igniting vapours.
- In work/depot yards, apply particulate absorbents.
- Snow has natural absorbent properties. Shovel contaminated snow into suitable container and use absorbent matting to remove gasoline from melt water.

ON MUSKEG

- Remove pooled gasoline with pumps, if safe to do so.
- Do not deploy personnel and equipment on marsh or vegetation.
- Low pressure flushing can be tried to disperse small spills.
- Use absorbent pads to withdraw surface contaminants.
- Collect and burn contaminated material ONLY in localized areas, e.g., trenches, piles, windrows or incinerator.
- Do not burn if root systems can be damaged (low water table).
- Minimize damage caused by equipment and digging.

ON WATER

- Contain or remove spills ONLY AFTER VAPOURS DISSIPATE.
- Use booms to protect water intakes.
- Skimming can be tried once light ends evaporate.

STORAGE/TRANSFER

- Store closed, labeled containers in cool, ventilated areas away from incompatible materials.
- Electrically ground containers and vehicles during transfer.

DISPOSAL

- Segregate waste types, if necessary.
- Place contaminated materials into marked containers.
- Consult camp manager on transportation and disposal requirements.

GASOLINE

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE:	Colourless Liquid (can be dyed)	FLASH POINT:	-50° C
ODOUR:	Gasoline / Petroleum	FREEZING PT:	-60° C
SOLUBILITY:	Insoluble	VISCOSITY:	Not viscous (< 1 cSt)
VAPOUR		SPECIFIC	
DENSITY:	Will sink to ground levels	GRAVITY:	Floats on water (0.7 – 0.8)

SAFETY MEASURES

WARNINGS

- Vapours form instantaneously, and are heavier than air.
- Empty containers can contain explosive vapours.
- Vapours can travel to distant sources of ignition and flash back.
- Eye contact causes irritation.
- Material can accumulate static charges.
- Inhalation of vapours can cause irritation of the respiratory tract, headache, vomiting, and unconsciousness.

PERSONAL PROTECTION

- Always wear impervious, chemical-resistant clothing, gloves, footwear, and goggles; nitrile and Viton are suitable protective materials (DO NOT USE NATURAL RUBBER, NEOPRENE, OR PVC).
- Wear full-face organic vapour cartridge respirator where oxygen is adequate; otherwise wear positive pressure SCBA.

PRECAUTIONS

- Monitor for explosive atmosphere.
- Avoid contact with strong oxidizers, such as nitric acid, sulphuric acid, chlorine, ozone, and peroxides.
- Eliminate ignition sources.
- Restrict access and work upwind of spill.








RESPONSE TO FIRES

CONSIDER ACTION ONLY IF SAFETY PERMITS!

- Wear SCBA in confined areas.
- Shut off fuel supply.
- Extinguish fire with CO₂, dry chemical, alcohol foam or water fog. Use water to cool containers exposed to fire.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	   	

Section 1. Chemical Product and Company Identification

Product Name	GASOLINE, UNLEADED	Code	W102E
Synonym	Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, Super Premium (94 RO)	Validated on	6/9/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Gasoline	8006-61-9	85-100	300 ppm (890 mg/m ³)	500 ppm (1480 mg/m ³)	Not established
Methyl tert-butyl ether	1634-04-4	0-15	40 ppm (144mg/m ³)	Not established	Not established
Note: Petro-Canada does not use MTBE in the manufacturing of its gasoline, however MTBE can be introduced from time to time through the use of external gasoline blendstocks.					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Possible cancer hazard. Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Skin and eye contact can cause irritation. Toxic if ingested. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention if irritation persists.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	Lower: 1.3%; Upper: 7.6% (NFPA).
Flash Points	Closed Cup: -50 to -38°C (-58 to -36°F), ASTM D56 Standard Test Method for Flash Point by Tag Closed Tester.	Auto-Ignition Temperature	257°C (495°F) (NFPA).
Fire Hazards in Presence of Various Substances	Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). CAUTION: This product has a very low flash point, use of water spray when fighting fire may be inefficient. SMALL FIRE: Use DRY chemicals, CO ₂ , water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. Avoid flushing spilled material into sewers, streams or other bodies of water. Self-contained breathing apparatus (SCBA) will be required if approaching the fire from downwind, or to enter enclosed areas or buildings.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). Evacuate in a downwind direction for at least 300 meters (1000 feet). ELIMINATE ALL IGNITION SOURCES. Ventilate closed spaces before entering. By forced ventilation, maintain concentration of vapour below the range of explosive mixture. Avoid contact, fully-encapsulating, vapour-protective clothing should be worn for spills and leaks with no fire. Stop leak if without risk. Use vapour suppressing foam or water spray to reduce vapours; it may reduce vapour, but it may not prevent ignition in closed spaces; isolate area until vapour has dispersed. Contain spill. Absorb with inert absorbents such as dry clay, or diatomaceous earth, or recover using electrically grounded explosion-proof pumps. Avoid inhaling dust of diatomaceous earth for it may contain silica (very fine particle size), making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Keep away from heat, spark and other sources of ignition. Empty container may contain flammable/explosive residues or vapours. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT USE AS CLEANING FLUID OR SIPHON BY MOUTH. Wear proper protective equipment. Avoid inhalation and contact with skin or eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in cool, dry, isolated, well-ventilated area, and away from direct sunlight, sources of ignition and incompatibles. Flammable materials should be stored in a separate safety storage cabinet or room. Ground all equipment containing material.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available
Colour	Clear to slightly yellow, undyed liquid. May be dyed red for taxation purposes.	Pour Point	Not applicable.
Odour	Gasoline. MTBE has a terpene-like odour.	Softening Point	Not applicable.
Odour Threshold	Less than 1 ppm.	Dropping Point	Not applicable.
Boiling Point	25 to 220°C (77 to 428°F) Initial boiling point by ASTM D86 Standard Test Method.	Penetration	Not applicable.
Density	0.7 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3 to 4 (Air = 1) (NFPA).	Ionicity (in water)	Insoluble in water.
Vapour Pressure	<107 kPa @ 37.8°C (100°F)	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins.

Section 10. Stability and Reactivity

Corrosivity	Non corrosive.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids.	Decomposition Products	May release COx, NOx, phenols, polynuclear aromatic hydrocarbons, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Gasoline: Acute oral toxicity (LD50): 13 600 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >300 000 mg/m ³ /4h (rat). MTBE: Acute oral toxicity (LD50): 29630 mg/kg (rat). Acute dermal toxicity (LD50): >6800 mg/kg (rabbit). Acute inhalation toxicity (LC50): 23 576 ppm/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product can cause skin irritation. Prolonged or repeated contact with skin may cause dermatitis.
Inhalation Route:	Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death.
Oral Route:	Swallowing or vomiting of the liquid may result in aspiration into the lungs. Can cause CNS depression. (See Inhalation Route for symptoms).
Eye Irritation/Inflammation:	Can cause irritation to the eyes.
Immunotoxicity:	Not available

Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not considered to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not considered to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not considered to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Gasoline, MTBE]
Carcinogenicity (IARC):	IARC Group 2B: possibly carcinogenic to humans. [Gasoline]
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Unleaded gasoline caused kidney effects in male rats and liver effects in female mice.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	Not available		


Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	GASOLINE, 3, UN1203, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	------------------------------------	---	--

Section 15. Regulatory Information

Other Regulations		CEPA: This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). EPA: All components of this formulation are listed on the US EPA-TSCA Inventory.																			
This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. Please contact Product Safety for more information.																					
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Irritating substance. CLASS: Target organ effects.																	
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 																	
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(4)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr></table>		Health Hazard	(2*)	Fire Hazard	(4)	Reactivity	(0)	NFPA (U.S.A.) Health <table><tr><td>4</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr></table> <table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr></table>		4	Fire Hazard	2	Reactivity	Rating	0 Insignificant		1 Slight		2 Moderate
Health Hazard	(2*)																				
Fire Hazard	(4)																				
Reactivity	(0)																				
4	Fire Hazard																				
2	Reactivity																				
Rating	0 Insignificant																				
	1 Slight																				
	2 Moderate																				

Personal Protection

(H)

Specific hazard

3 High

4 Extreme

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCl - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS**Fuels & Solvents:**

Western Canada, telephone: 403-296-4158; fax: 403-296-6551

Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 6/9/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

JET A – SPILL RESPONSE ACTIONS

CONSIDER ACTION ONLY IF SAFETY PERMITS!

Refer to Product Guide below for:

Physical/Chemical Properties
Response to Fires
First Aid

- ELIMINATE IGNITION SOURCES
- STOP SOURCE OF JET A IF SAFE TO DO SO

ON LAND

- Do not flush into ditches or drainage systems.
- Do not contain spill if there is any chance of igniting vapours.
- Block entry into waterways and contain with earth, snow or other barrier.
- Remove small spills with absorbent pads.
- On tundra use peat moss and leave in place to degrade, if practical.

ON SNOW & ICE

- Block entry into waterways and contain with snow or other barrier.
- Do not contain spill if there is any chance of igniting vapours.
- Remove minor spills with absorbent pads and/or snow.
- Scrape up and collect the contaminated snow – fuel mixture in suitable container for future disposal.

ON MUSKEG

- Do not deploy personnel and equipment on marsh or vegetation.
- Remove pooled Jet B with pumps and skimmers if it is safe to do so.
- Flush with low-pressure water to herd Jet B to collection point.
- Use absorbent pads to withdraw surface contaminants.
- Collect and burn contaminated material ONLY in localized areas, e.g., trenches, piles, windrows or incinerator.
- Do not burn if root systems can be damaged (low water table).
- Minimize damage caused by equipment and excavation.

ON WATER

- Contain spill ONLY AFTER VAPOURS DISSIPATE.
- Use spill containment boom to concentrate slicks for recovery.
- Do not deploy personnel and equipment onto mudflats or into wetlands.

STORAGE/TRANSFER

- Store closed, labeled containers outside away from flammable items.
- Electrically ground containers and vehicles during transfer.

DISPOSAL

- Segregate waste types.
- Place contaminated materials into marked containers.
- Consult camp manager on disposal procedures.

JET A

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: White or Pale Yellow liquid	FLASH POINT: 38° C
ODOUR: Gasoline / Petroleum	FREEZING PT: -50° C
SOLUBILITY: Negligible	VISCOSITY: Not viscous (<7 cSt)
VAPOUR	SPECIFIC
DENSITY: Will sink to ground levels	GRAVITY: Floats on water (0.81)

SAFETY MEASURES

WARNINGS

- Vapours form instantaneously, and are heavier than air.
- Low-lying areas can trap explosive vapours.
- Vapours can travel to distant sources of ignition and flash back.
- Eye contact causes irritation.
- Material can accumulate static charges.
- Inhalation of vapours can cause irritation of the respiratory tract, headache, vomiting, and unconsciousness.

PERSONAL PROTECTION

- Always wear impervious, chemical-resistant clothing, gloves, footwear, and goggles; nitrile and Viton are suitable protective materials (DO NOT USE NATURAL RUBBER, NEOPRENE, OR PVC).
- Wear full-face organic vapour cartridge respirator where oxygen is adequate; otherwise wear positive pressure SCBA.

PRECAUTIONS

- Monitor for explosive atmosphere.
- Avoid contact with strong oxidizers, such as nitric acid, sulphuric acid, chlorine, ozone, and peroxides.
- Eliminate ignition sources.
- Restrict access and work upwind of spill.








RESPONSE TO FIRES

CONSIDER ACTION ONLY IF SAFETY PERMITS!

- Wear SCBA in confined areas.
- Shut off fuel supply.
- Extinguish fire with CO₂, dry chemical, alcohol foam or water fog.
- Use water to cool containers exposed to fire.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B, (D-2A)* (See Section 15)	   	

Section 1. Chemical Product and Company Identification

Product Name	JET A/A-1 AVIATION TURBINE FUEL	Code	W213, SAP: 149
Synonym	Jet A-1; Jet A-1-DI; Aviation Turbine Kerosene (ATK); JP-8; NATO F-34; Jet F-34; Turbine Fuel, Aviation, Kerosene Type (CAN/CGSB-3.32)	Validated on	11/8/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as aviation turbine fuel. May contain a fuel system icing inhibitor. In the arctic, Jet A-1 may also be used as diesel fuel and heating oil.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Complex mixture of petroleum hydrocarbons (C9-C16)**(Kerosene) **Aromatic content is 25% maximum (benzene: nil).	8008-20-6	99.9	200 mg/m ³ (***)	Not established	Not established
Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether	111-77-3	≤0.15	Not established	Not established	Not established
Anti-static, antioxidant and metal deactivator additives. *Please note that Jet A-1-DI, JP-8, Jet F-34 and NATO F-34 all contain Fuel System Icing Inhibitor.	Not applicable	<0.1	Not applicable	Not applicable	Not applicable
Manufacturer Recommendation	***Application of this TLV is restricted to conditions in which there are negligible aerosol exposures.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. May cause teratogenicity/embryotoxicity. Contact with this product may cause skin irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Aspiration of liquid drops into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	Quickly and gently, blot or brush away excess chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for at least 20-30 minutes, by the clock, while holding the eyelid(s) open.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	Lower: 0.7% Upper: 5%
Flash Points	Closed cup: >38°C (100.4°F). (Tag. Closed Cup)	Auto-Ignition Temperature	210°C (410°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Ventilate area. Stop leak if safe to do so. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Ensure clean-up personnel wear appropriate personal protective equipment. Collect used absorbent for later disposal. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Avoid breathing vapours or mists of material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Wear proper personal protective equipment (See Section 8). Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product.
Storage	Store away from heat and sources of ignition. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).

Respiratory A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): polyvinyl alcohol (PVA) and fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	1.0-1.9 cSt @ 40°C (104°F)
Colour	Clear and colourless.	Pour Point	<-51°C (<-60°F)
Odour	Kerosene-like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150 to 300°C (302 to 572°F)	Penetration	Not applicable.
Density	0.8 to 0.82 (Water = 1)	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not available
Vapour Pressure	0.7 kPa at 20°C (5.25 mm Hg @ 68°C)	Dispersion Properties	Not available
Volatility	Low than gasoline.	Solubility	Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, nitric acid, chlorosulfonic acid and calcium hypochlorite.	Decomposition Products	May release COx, NOx, SOx, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<p>Kerosene Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >5000 mg/m³/4h (rat).</p> <p>Diethylene Glycol Monomethyl Ether Acute oral toxicity (LD50): 4140-5180 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).</p>
Chronic or Other Toxic Effects	<p>Dermal Route: This product contains a component (at >= 1%) that can cause skin irritation (Kerosene, CASRN 8008-20-6). Therefore, this product is considered to be a skin irritant.</p> <p>Inhalation Route: Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; headache, nausea, dizziness, light-headedness and vomiting.</p> <p>Oral Route: Aspiration of liquid drops into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure.</p> <p>Eye Irritation/Inflammation: Eye contact causes irritation.</p> <p>Immunotoxicity: Not available</p> <p>Skin Sensitization: Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.</p> <p>Respiratory Tract Sensitization: Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.</p>

Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product contains a component(s) at $\geq 0.1\%$ that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests (Diethylene Glycol Monomethyl Ether, CASRN 111-77-3). Therefore, this product is considered to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	ACGIH A3: Confirmed animal carcinogen with unknown relevance to human (Kerosene, CASRN 8008-20-6)
Carcinogenicity (IARC):	IARC Group 3: Not classifiable as a human carcinogen (Kerosene, CASRN 8008-20-6).
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Chronic exposure to some of the hazardous components of this product may result in damage to the following organs and/or systems: kidney.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			

Section 13. Disposal Considerations


Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	--	---	--

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>The WHMIS classification of Jet A/A-1 is B3, D2B. The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A, D2B.</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>		
DSD/DPD (Europe)	Not evaluated.	HCS (U.S.A.)	<p>CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).</p> <p>CLASS: Irritating material.</p> <p>Target Organ Effects* (Only applies to: Jet A/A-1-D1, JP8, Jet F-34 and NATO F-34)</p>

ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)																				
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2/2*)</td></tr><tr><td>Fire Hazard</td><td>(2)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table>		Health Hazard	(2/2*)	Fire Hazard	(2)	Reactivity	(0)	Personal Protection	(H)	NFPA (U.S.A.)		<table><tr><td rowspan="3">Health</td><td>2</td><td>Fire Hazard</td></tr><tr><td>2</td><td>0 Reactivity</td></tr><tr><td></td><td>Specific hazard</td></tr></table>		Health	2	Fire Hazard	2	0 Reactivity		Specific hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	(2/2*)																							
Fire Hazard	(2)																							
Reactivity	(0)																							
Personal Protection	(H)																							
Health	2	Fire Hazard																						
	2	0 Reactivity																						
		Specific hazard																						

Section 16. Other Information

References Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List CNS - Central Nervous System COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPA - Environmental Protection Agency EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazard Communication Standard HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer	IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act RTECS - Registry of Toxic Effects of Chemical Substances SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLM - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System
---	---

For Copy of MSDSInternet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - TLM on 11/8/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

JET B – SPILL RESPONSE ACTIONS

CONSIDER ACTION ONLY IF SAFETY PERMITS!

Refer to Product Guide below for:

Physical/Chemical Properties
Response to Fires
First Aid

- ELIMINATE IGNITION SOURCES
- STOP SOURCE OF JET B IF SAFE TO DO SO

ON LAND

- Do not flush into ditches or drainage systems.
- Do not contain spill if there is any chance of igniting vapours.
- Block entry into waterways and contain with earth, snow or other barrier.
- Remove small spills with absorbent pads.
- On tundra use peat moss and leave in place to degrade, if practical.

ON SNOW & ICE

- Block entry into waterways and contain with snow or other barrier.
- Do not contain spill if there is any chance of igniting vapours.
- Remove minor spills with absorbent pads and/or snow.
- Scrape up and collect the contaminated snow – fuel mixture in suitable container for future disposal.

ON MUSKEG

- Do not deploy personnel and equipment on marsh or vegetation.
- Remove pooled Jet B with pumps and skimmers if it is safe to do so.
- Flush with low-pressure water to herd Jet B to collection point.
- Use absorbent pads to withdraw surface contaminants.
- Collect and burn contaminated material ONLY in localized areas, e.g., trenches, piles, windrows or incinerator.
- Do not burn if root systems can be damaged (low water table).
- Minimize damage caused by equipment and excavation.

ON WATER

- Contain spill ONLY AFTER VAPOURS DISSIPATE.
- Use spill containment boom to concentrate slicks for recovery.
- Do not deploy personnel and equipment onto mudflats or into wetlands.

STORAGE/TRANSFER

- Store closed, labeled containers outside away from flammable items.
- Electrically ground containers and vehicles during transfer.

DISPOSAL

- Segregate waste types.
- Place contaminated materials into marked containers.
- Consult camp manager on disposal procedures.

JET B

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: White or Pale Yellow liquid FLASH POINT: -20 to -250° C

ODOUR: Gasoline / Petroleum FREEZING PT: -18° C

SOLUBILITY: Negligible VISCOSITY: Not viscous (0.6 cSt)

VAPOUR SPECIFIC

DENSITY: Will sink to ground levels GRAVITY: Floats on water (0.78)

SAFETY MEASURES

WARNINGS

- Vapours form instantaneously, and are heavier than air.
- Low-lying areas can trap explosive vapours.
- Vapours can travel to distant sources of ignition and flash back.
- Eye contact causes irritation.
- Material can accumulate static charges.
- Inhalation of vapours can cause irritation of the respiratory tract, headache, vomiting, and unconsciousness.

PERSONAL PROTECTION

- Always wear impervious, chemical-resistant clothing, gloves, footwear, and goggles; nitrile and Viton are suitable protective materials (DO NOT USE NATURAL RUBBER, NEOPRENE, OR PVC).
- Wear full-face organic vapour cartridge respirator where oxygen is adequate; otherwise wear positive pressure SCBA.

PRECAUTIONS

- Monitor for explosive atmosphere.
- Avoid contact with strong oxidizers, such as nitric acid, sulphuric acid, chlorine, ozone, and peroxides.
- Eliminate ignition sources.
- Restrict access and work upwind of spill.







RESPONSE TO FIRES

CONSIDER ACTION ONLY IF SAFETY PERMITS!

- Wear SCBA in confined areas.
- Shut off fuel supply.
- Extinguish fire with CO₂, dry chemical, alcohol foam or water fog.
- Use water to cool containers exposed to fire.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	JET B AVIATION TURBINE FUEL	Code	W219 SAP: 150, 151, 152
Synonym	Jet B; Jet B DI; JP-4; Jet F-40; NATO F-40; Turbine Fuel, Aviation, Wide Cut Type (CAN/CGSB-3.22).	Validated on	2/8/2005.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as aviation turbine fuel. May contain a fuel system icing inhibitor.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Complex mixture of petroleum hydrocarbons (C6-C14).	64741-41-9	>99	Not established	Not established	Not established
Benzene	71-43-2	<0.5	0.5 ppm	2.5 ppm	Not established
Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether	111-77-3	≤0.15	Not established	Not established	Not established
Anti-static, antioxidant, corrosion inhibitor and metal deactivator additives. * Please note that Jet B DI, JP-4, Jet F-40 and NATO F-40 all contain Fuel System Icing Inhibitor (FSII).corrosion inhibitor	Not applicable	<0.1	Not applicable	Not applicable	Not applicable
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Flammable liquid. Exercise caution when handling this material. Skin and eye contact can cause irritation. Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. May cause cancer. May cause teratogenicity/embryotoxicity. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately.
Skin Contact	Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 5 minutes or until chemical is removed.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). Remove source of contamination or move victim to fresh air. If breathing is difficult, oxygen may be beneficial if administered by trained personnel, preferably on a doctor's advice. DO NOT allow victim to move about unnecessarily. Immediately transport victim to an emergency care facility.

Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water.
------------------	---

Note to Physician Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	LOWER: 1.3% UPPER: 8% (NFPA)
Flash Points	CLOSED CUP: -31°C (-24°F) (NFPA)	Auto-Ignition Temperature	240°C (464°F) (NFPA)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Ventilate area. Stop leak if safe to do so. Avoid contact with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Ensure clean-up personnel wear appropriate personal protective equipment. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Collect used absorbent for later disposal. Avoid breathing vapours or mists of material. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	FLAMMABLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Wear proper personal protective equipment (See Section 8). Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product.
Storage	Store away from heat and sources of ignition. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).
Respiratory	A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): neoprene, polyvinyl alcohol (PVA), and fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available (similar to gasoline)
Colour	Clear and colourless.	Pour Point	Freezing Point: <-51°C (<-60°F) for Jet B/Jet B DI; <-58°C (<-72°F) for Jet Fuel F-40.
Odour	Gasoline like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	50 to 270°C (122 to 518°F)	Penetration	Not applicable.
Density	0.75 to 0.80 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3.5 (Air = 1)	Ionicity (in water)	Not available
Vapour Pressure	21 kPa (158 mmHg) @ 37.8°C (100°F).	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Can react with strong oxidizing agents, uranium hexafluoride, diborane. Incompatible with halogens and halogen compounds.	Decomposition Products	May release COx, NOx, SOx, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: Based on toxicity of similar product. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >5000 mg/m³/4h (rat).

Benzene

Acute oral toxicity (LD50): 930 mg/kg (rat).
 Acute dermal toxicity (LD50): >9400 mg/kg (rabbit).
 Acute inhalation toxicity (LC50): 13200 ppm/4h (rat).

Diethylene Glycol Monomethyl Ether

Acute oral toxicity (LD50): 4140-5180 mg/kg (rat).
 Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).
 Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).

Chronic or Other Toxic Effects

Dermal Route:	Skin contact can cause irritation. Prolonged or repeated contact may defat and dry skin, and cause dermatitis.
Inhalation Route:	Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs).
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	Benzene is tumorigenic by RTECS criteria.
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin [Diethylene Glycol Monomethyl Ether].
Carcinogenicity (ACGIH):	ACGIH A1: confirmed human carcinogen. [Benzene]
Carcinogenicity (IARC):	IARC Group 1: carcinogenic to Humans. [Benzene]
Carcinogenicity (NTP):	NTP Group 1: known to be a carcinogen. [Benzene]
Carcinogenicity (IRIS):	EPA/IRIS Class A: human carcinogen.
Carcinogenicity (OSHA):	Benzene is an OSHA known carcinogen.

Other Considerations No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	--	---	--

Section 15. Regulatory Information**Other Regulations**

This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).

All components of this formulation are listed on the US EPA-TSCA Inventory.

All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

Please contact Product Safety for more information.

DSD/DPD (Europe) Not evaluated.

HCS (U.S.A.)

CLASS: Contains material which may cause cancer.
CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F).
CLASS: Toxic.
CLASS: Irritating substance.
CLASS: Target organ effects.

ADR (Europe) (Pictograms)

NOT EVALUATED FOR EUROPEAN TRANSPORT

NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.

DOT (U.S.A) (Pictograms)




HMIS (U.S.A.)

Health Hazard	(2*)
Fire Hazard	(3)
Reactivity	(0)
Personal Protection	(H)

NFPA (U.S.A.)

Health



Fire Hazard

Reactivity

Specific hazard

Rating	
0	Insignificant
1	Slight
2	Moderate
3	High
4	Extreme

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
CNS - Central Nervous System
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPA - Environmental Protection Agency
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
RTECS - Registry of Toxic Effects of Chemical Substances
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Prepared by Product Safety - JDW on 2/8/2005.

Internet: www.petro-canada.ca/msds

Fuels & Solvents:

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

DIESEL – P50 - SPILL RESPONSE ACTIONS

CONSIDER ACTION ONLY IF SAFETY PERMITS!

Refer to Product Guide below for:

Physical/Chemical Properties
Response to Fires
First Aid

- ELIMINATE IGNITION SOURCES
- STOP SOURCE OF DIESEL IF SAFE TO DO SO

ON LAND

- Do not flush into ditches or drainage systems.
- Block entry into waterways and contain with earth, snow or other barrier.
- Remove small spills with absorbent pads.
- On tundra use peat moss and leave in place to degrade, if practical.

ON SNOW & ICE

- Block entry into waterways and contain with snow or other barrier.
- Remove minor spills with absorbent pads and/or snow.
- Use ice augers and pump to recover diesel under ice.
- Slots in ice can be cut over slow moving water to contain oil.
- Burn accumulated diesel from the surface using Tiger Torches if feasible and safe to do so.
- Scrape up and collect the contaminated snow – fuel mixture in suitable container for future disposal.

ON MUSKEG

- Do not deploy personnel and equipment on marsh or vegetation.
- Remove pooled diesel with pumps and skimmers.
- Flush with low-pressure water to herd diesel to collection point.
- Use absorbent pads to withdraw surface contaminants.
- Collect and burn contaminated material ONLY in localized areas, e.g., trenches, piles, windrows or incinerator.
- Do not burn if root systems can be damaged (low water table).
- Minimize damage caused by equipment and excavation.

ON WATER

- Contain spill as close to release point as possible.
- Use spill containment boom to concentrate slicks for recovery.
- On small spills, use absorbent pads to pick up contained oil.
- On larger spills, use skimmer on contained slicks.
- Do not deploy personnel and equipment onto mudflats or into wetlands.

RIVERS & STREAMS

- Prevent entry into water, if possible, by building berm or trench.
- Intercept moving slicks in quiet areas using (absorbent) booms.
- Do not use absorbent booms/pads in fast currents and turbulent water.

STORAGE/TRANSFER

- Store closed, labeled containers outside away from flammable items.
- Electrically ground containers and vehicles during transfer.

DISPOSAL

- Segregate waste types.
- Place contaminated materials into marked containers.
- Consult camp manager on disposal procedures.

DIESEL P50

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: White or Pale Yellow liquid; may be dyed.	FLASH POINT: 40° C
ODOUR: Petroleum	FREEZING PT: -50° C
SOLUBILITY: Negligible	VISCOSITY: Not viscous (1.8 cSt)
VAPOUR	SPECIFIC
DENSITY: Will sink to ground levels	GRAVITY: Floats on water (0.85)

SAFETY MEASURES

WARNINGS

- In warm temperatures, vapours form instantaneously, and are heavier than air.
- Eye contact causes irritation.
- Inhalation of vapours can cause irritation of the respiratory tract, headache, vomiting, and unconsciousness.

PERSONAL PROTECTION

- Always wear impervious, chemical-resistant clothing, gloves, footwear, and goggles; nitrile and Viton are suitable protective materials (DO NOT USE NATURAL RUBBER, NEOPRENE, OR PVC).
- Wear full-face organic vapour cartridge respirator where oxygen is adequate; otherwise wear positive pressure SCBA.

PRECAUTIONS

- Monitor for explosive atmosphere.
- Avoid contact with strong oxidizers, such as nitric acid, sulphuric acid, chlorine, ozone, and peroxides.
- Eliminate ignition sources.
- Restrict access and work upwind of spill.







RESPONSE TO FIRES

CONSIDER ACTION ONLY IF SAFETY PERMITS!

- Wear SCBA in confined areas.
- Shut off fuel supply.
- Extinguish fire with CO₂, dry chemical, alcohol foam or water fog.
- Use water to cool containers exposed to fire.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	DIESEL FUEL	Code	W104, W293 SAP: 120, 121, 122, 287
Synonym	Diesel 50, Diesel 50 LS, #1 Diesel, #1 Diesel LS, Diesel LC, Seasonal Diesel, Seasonal Diesel LS, Diesel AA, Domestic Marine Diesel, International marine Diesel, Seasonal Diesel Locomotive, Domestic Marine diesel LS, diesel -20°C (LS), LSD, Low Sulphur Diesel, dyed diesel, marked diesel, coloured diesel, Naval Distillate, Ultra Low Sulphur Diesel, ULS Diesel, Mining Diesel, Mining Diesel Special, Mining Diesel Special LS, High Flash Mining Diesel, Furnace Oil, Stove Oil.	Validated on	2/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Diesel oil.	68334-30-5	>99.9	100 mg/m ³ (as total hydrocarbons) *	Not established	Not established
2) Proprietary additives.	Not available	<0.1	Not established	Not established	Not established
Aromatic content is 50% maximum (benzene: nil). Sulphur content is 0-0.50%.					
Manufacturer Recommendation	* Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	LOWER: 0.7%, UPPER: 6% (NFPA)
Flash Points	Diesel Fuel: Closed Cup: >40°C (>104°F) Marine Diesel Fuel: Closed Cup: >60°C (>140°F) Mining Diesel: Closed Cup: 52°C (126°F)	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Vapour explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), water vapour (H ₂ O), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Wear proper personal protective equipment (See Section 8).
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Bright oily liquid.	Viscosity	1.3 - 4.1 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown (may be dyed for taxation purposes).	Pour Point	Variable, -50°C to 0°C (-58°F to -32°F)
Odour	Petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150 - 371°C (302-700°F)	Penetration	Not applicable.
Density	0.80 - 0.85 kg/L @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not applicable.
Vapour Pressure	Not available	Dispersion Properties	Not available
Volatility	Semivolatile to volatile.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, H2O, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information



Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Acute oral toxicity (LD50): 7500 mg/kg (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations)
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Diesel oil] (See Other Considerations)
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.

DIESEL FUEL		Page Number: 4
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	<p>Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.</p> <p>Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).</p>	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations	
Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information			
TDG Classification	DIESEL FUEL, 3, UN1202, PGIII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.

Section 15. Regulatory Information														
Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). All components of this formulation are listed on the US EPA-TSCA Inventory. All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS). This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. Please contact Product Safety for more information.												
DSD/DPD (Europe)		Not evaluated.	HCS (U.S.A.) CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).											
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms) 											
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>2</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>	Health Hazard	2*	Fire Hazard	2	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard			Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	2*													
Fire Hazard	2													
Reactivity	0													
Personal Protection	H													

Section 16. Other Information	
References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
Glossary	<div> ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials (BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) </div> <div> IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) </div>
Continued on Next Page	Internet: www.petro-canada.ca/msds Available in French

DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 2/6/2004.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

A-2. Flammable Gases

These substances are all hydrocarbon-based and will easily ignite under virtually any conditions. This ease of ignition renders these substances extremely dangerous to deal with, and extreme caution is required when dealing with these substances.

ACETYLENE RESPONSE ACTIONS

GAS STORED IN CYLINDERS THAT EXPLODE WHEN IGNITED!

CONSIDER ACTION ONLY IF SAFETY PERMITS

KEEP ALL VEHICLES INCLUDING SNOWMOBILES AWAY FROM ACCIDENT AREA

Refer to Product Guide below for:

Physical/Chemical Properties

Response to Fires

First Aid

- Vapours cannot be contained when released.
- Water spray can be used to knock down vapours if there is NO chance of ignition.
- Small fires can be extinguished with dry chemical or CO.
- Personnel should withdraw immediately from area unless a small leak is stopped immediately after it has been detected.
- If tanks are damaged, gas should be allowed to disperse and no attempt at recovery should be made.
- Personnel should avoid touching release point on containers since frost quickly forms.
- Stay clear of tank ends.

ACETYLENE

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: Colourless Gas

ODOUR: Garlic – like

SOLUBILITY: Slightly soluble

VAPOUR

DENSITY: Will sink to ground levels

FLASH POINT: -18° C

FREEZING PT: -82° C

VISCOSITY: n/a

SPECIFIC

GRAVITY: (0.6) Liquid floats on water

SAFETY MEASURES

WARNINGS

- Vapours form instantaneously, and are heavier than air.
- Empty containers can contain explosive vapours.
- Vapours can travel to distant sources of ignition and flash back.
- Eye contact causes irritation.
- Material can accumulate static charges.
- Inhalation of vapours can cause irritation of the respiratory tract, headache, vomiting, and unconsciousness.

PERSONAL PROTECTION

- Always wear impervious, chemical-resistant clothing, gloves, footwear, and goggles; nitrile and Viton are suitable protective materials (DO NOT USE NATURAL RUBBER, NEOPRENE, OR PVC).
- Wear full-face organic vapour cartridge respirator where oxygen is adequate; otherwise wear positive pressure SCBA.

PRECAUTIONS

- Monitor for explosive atmosphere.
- Avoid contact with strong oxidizers, such as nitric acid, sulphuric acid, chlorine, ozone, and peroxides.
- Eliminate ignition sources.
- Restrict access and work upwind of spill.

RESPONSE TO FIRES**CONSIDER ACTION ONLY IF SAFETY PERMITS!**

- Wear SCBA in confined areas.
- Shut off fuel supply.
- Extinguish fire with CO₂, dry chemical, alcohol foam or water fog.
Use water to cool containers exposed to fire

FaxBack Doc. # : 1009

**AIR LIQUIDE****MATERIAL SAFETY DATA SHEET****PRODUCT INFORMATION**

PRODUCT: Acetylene
TRADE NAME: Acetylene
CHEMICAL NAME: Acetylene
SYNONYMS: Ethyne
FORMULA: C₂H₂
CHEMICAL FAMILY: Alkyne
MANUFACTURER'S NAME: Air Liquide Canada Inc.
MANUFACTURER'S ADDRESS: 1250 René-Lévesque Blvd. West
Montréal (Québec) Canada H3B 5E6
SUPPLIER'S NAME: Air Liquide Canada Inc.
SUPPLIER'S ADDRESS: 1250 René-Lévesque Blvd. West
Montréal (Québec) Canada H3B 5E6
EMERGENCY PHONE NUMBER: (514) 878-1667
MOLECULAR WEIGHT: 26.04
PRODUCT USE: Fuel
**PRODUCT IDENTIFICATION UN 1001, Acetylene, Dissolved
NUMBER:**

HAZARDOUS INGREDIENTS

CHEMICAL ID	CONCENTRATION	CAS #	LD(50)	LC(50)
Acetylene	100%	74-86-2	None	None

MSDS for: Acetylene / FaxBack Doc. # : 1009

PHYSICAL DATA

PHYSICAL STATE: Gas
APPEARANCE: Pure acetylene gas is colorless with an ethereal odor. Commercial (carbide) acetylene has a distinctive garlic-like odor.
ODOR: See above
ODOR THRESHOLD: Unknown
SPECIFIC GRAVITY (H₂O = 1): See Vapor Density (air = 1)
VAPOR PRESSURE: @ 15°C = 4378 kPa
VAPOR DENSITY (air = 1): 0.906
EVAPORATION RATE: Not Applicable (Gas)
BOILING POINT: Sublimation Point = -83.8°C

FREEZING POINT: Triple Point = -80.55°C

pH: Not applicable (Gas)

GAS DENSITY: 1.10 kg/m³ @ 15°C, 101.3 kPa

COEFFICIENT OF WATER/OIL @ 15°C, Bunsen Coefficient = 1.163

DISTRIBUTION:

FIRE OR EXPLOSION HAZARD

CONDITIONS OF FLAMMABILITY: As a gas in air, oxygen or other oxidizers. GASEOUS ACETYLENE IS SPONTANEOUSLY COMBUSTIBLE IN AIR AT PRESSURES ABOVE 207 kPa.

MEANS OF EXTINCTION: Carbon Dioxide; dry chemical. Use water spray to cool surrounding containers.
"Stop flow of gas before extinguishing fire".

FLASHPOINT AND METHOD OF DETERMINATION: -17.8°C, CC

UPPER EXPLOSION LIMIT (% BY VOL): 80-100

LOWER EXPLOSION LIMIT (% BY VOL): 2.2

AUTO-IGNITION TEMPERATURE: 305°C

FLAMMABILITY CLASSIFICATION: Class 1, Group A

HAZARDOUS COMBUSTION PRODUCTS: None

EXPLOSION DATA: Ignites by decomposition above 207 kPa

SENSITIVITY TO STATIC DISCHARGE: Yes

MSDS for: Acetylene / FaxBack Doc. #: 1009

REACTIVITY DATA

CHEMICAL STABILITY: See Explosion Data, above

INCOMPATIBLE MATERIALS: Oxygen and other oxidizers. Forms explosive acetylides with copper, mercury and silver.

CONDITIONS OF REACTIVITY: As a gas at normal pressures and temperatures.

HAZARDOUS DECOMPOSITION PRODUCTS: None other than metal acetylides.

TOXICOLOGICAL PROPERTIES

ROUTES OF ENTRY:

SKIN CONTACT: None

SKIN ABSORPTION: None

EYE: None

INHALATION: Acetylene is defined as a simple asphyxiant. Oxygen levels should be maintained at greater than 18 molar percent at normal atmospheric pressure which is equivalent to a partial pressure of 135 mm Hg. (ACGIH, 2003).

INGESTION: Unlikely route of entry (gas).

ACUTE OVER EXPOSURE EFFECTS: Inhalation: Low concentrations (10-20% in air) cause symptoms similar to that of being intoxicated. Higher concentrations so as to exclude an adequate supply of oxygen to the lungs cause unconsciousness and death.

CHRONIC OVER EXPOSURE EFFECTS: None

EXPOSURE LIMITS: A simple asphyxiant (ACGIH 1995-1996)

IRRITANCY OF PRODUCT: None

SENSITIZATION TO MATERIAL: None

CARCINOGENICITY, REPRODUCTIVE EFFECTS: None

TERATOGENICITY, MUTAGENICITY: None

TOXICOLOGICALLY SYNERGISTIC PRODUCTS: None

MSDS for: Acetylene / FaxBack Doc. # : 1009

PREVENTIVE MEASURES

PERSONAL PROTECTIVE EQUIPMENT: Gloves: as required in welding. Eye Protection: Safety goggles or glasses. Other: Safety shoes, safety shower.

SPECIFIC ENGINEERING CONTROLS: Follow Air Liquide Canada's instructions for the maximum withdrawal rate for each size cylinder so that solvent is not withdrawn with the acetylene. Most metals, except silver, copper, mercury or brasses with more than 66% copper, are compatible (non corrosive) with acetylene.

LEAK AND SPILL PROCEDURES: EVACUATE ALL PERSONNEL FROM AFFECTED AREA.

Use appropriate protective equipment. If leak is in user's equipment, be certain to purge piping with an inert gas prior to attempting repairs. If leak is on container or container valve, contact the closest Air Liquide Canada location.

WASTE DISPOSAL: Do not attempt to dispose of waste or unused quantities. Return in the shipping container properly labelled, with any valve outlet plugs or caps secured and valve protection cap in place to Air Liquide Canada for proper disposal. For emergency disposal, contact the closest Air Liquide Canada location.

HANDLING PROCEDURES AND EQUIPMENT: USE ONLY IN WELL-VENTILATED AREAS. Valve protection caps must remain in place unless container is secured with valve outlet piped to the point of use. Do not drag, slide or roll cylinders. Use a suitable hand truck for cylinder

movement. Use a pressure reducing regulator when removing gas from the cylinder. DO NOT ALLOW THE FREE GAS TO EXCEED 207 kPa at 21.1°C. Do not heat cylinder by any means to increase the discharge rate of product from the cylinder. Use a check valve or trap in the discharge line to prevent hazardous back flow into the cylinder.

Earth-ground and bond all lines and equipment associated with the acetylene system. Electrical equipment should be non-sparking or explosion proof.

STORAGE REQUIREMENTS: Protect cylinders from physical damage. Store in cool, dry, well-ventilated area of non combustible construction away from heavily trafficked areas and emergency exits. Do not allow the temperature where cylinders are stored to exceed 52°C. Cylinders must be stored upright and firmly secured to prevent falling or being knocked over. Full and empty cylinders should be segregated. Use a "first in - first out" inventory system to prevent full cylinders being stored for excessive periods of time. Post "No Smoking or Open Flames" signs in the storage or use area. There should be no sources of ignition in the storage or use area.

TDG CLASSIFICATION: 2.1

WHMIS CLASSIFICATION: A, B1, F

SPECIAL SHIPPING INFORMATION: Since acetylene cylinders contain a porous mass and a solvent in which the acetylene is dissolved, the cylinders should always be shipped in an upright position.

Always secure cylinders in an upright position before transporting them. NEVER transport cylinders in trunks of vehicles, enclosed vans, truck cabs or in passenger compartments. Transport cylinders secured in open flatbed or in open pick-up type vehicles.

MSDS for: Acetylene / FaxBack Doc. #: 1009

FIRST AID MEASURES

SPECIFIC FIRST AID PROCEDURES: PROMPT MEDICAL ATTENTION IS MANDATORY IN ALL CASES OF OVEREXPOSURE TO ACETYLENE. RESCUE PERSONNEL SHOULD BE EQUIPPED WITH SELF-CONTAINED BREATHING APPARATUS AND BE COGNIZANT OF EXTREME FIRE AND EXPLOSION HAZARD.

INHALATION: Conscious persons should be assisted to an uncontaminated area and inhale fresh air. Quick removal from the contaminated area is most important. Unconscious persons should be moved to an uncontaminated area, given assisted resuscitation and supplemental oxygen. Medical assistance should be sought immediately.

EYE CONTACT: PERSONS WITH POTENTIAL EXPOSURE TO ACETYLENE SHOULD NOT WEAR CONTACT LENSES.

*Note: Acetylene is dissolved in acetone although the risk may be small, acetone has a defatting and drying effect.

Flush contaminated eye(s) with copious quantities of water. Part eyelids to assure complete flushing. Continue for a minimum of 15 minutes.

SKIN CONTACT: Not applicable

MSDS for: Acetylene / FaxBack Doc. # : 1009

PREPARATION INFORMATION

PREPARED BY: Safety Department

DATE PREPARED: 01/01/88

LAST REVISION DATE: 05/27/2004

FOR INFORMATION OR MSDS, CONTACT YOUR LOCAL A.L.C. OFFICE OR DISTRIBUTOR.

MAIN ALC SALES LOCATIONS:

Newfoundland	St.John's	Tel : 709 758-2765	Fax : 709 758-2800
Nova Scotia	Dartmouth	Tel : 902 468-5152	Fax : 902 468-5782
New Brunswick	Moncton	Tel : 506 857-3280	Fax : 506 857-9734
New Brunswick	Saint John	Tel : 506 634-8960	Fax : 506-646-1021
Quebec	Vanier	Tel : 418 683-1917	Fax : 418 683-7088
Montreal	Anjou	Tel : 514 356-7600	Fax : 514 351-0531
Toronto	Bramalea	Tel : 905 793-2000	Fax : 905 793-9257
Eastern Ontario	Oshawa	Tel : 905 576-1860	Fax : 905 571-3779
Lake Ontario	Burlington	Tel : 905 335-4877	Fax : 905 335-0301
South West Ontario	London	Tel : 519 455-3990	Fax : 519 455-3828
Northern Ontario	Sudbury	Tel : 705 674-7777	Fax : 705 674-0517
Manitoba & N.W. Ont.	Winnipeg	Tel : 204 989-9353	Fax : 204 779-1047
Saskatchewan	Saskatoon	Tel : 306 933-2722	Fax : 306 931-6641
Calgary	Calgary	Tel : 403 777-4700	Fax : 403 777-4727
Edmonton	Edmonton	Tel : 780 438-5600	Fax : 780 438-2801
Vancouver	Vancouver	Tel : 604 606-4300	Fax : 604 606-4246
Vancouver Island	Nanaimo	Tel : 250 758-1761	Fax : 250 758-1911
Okanagan	Kelowna	Tel : 250 769-4222	Fax : 250 769-7224

THE INFORMATION, RECOMMENDATIONS AND DATA CONTAINED IN THIS DOCUMENT ARE INTENDED TO BE USED BY PROPERLY TRAINED AND QUALIFIED PERSONNEL ONLY AND AT THEIR SOLE RISKS AND DISCRETION. THE INFORMATION, RECOMMENDATIONS AND DATA HEREIN CONTAINED ARE DERIVED FROM SOURCES WHICH WE BELIEVE TO BE RELIABLE. HOWEVER, AIR LIQUIDE CANADA INC. MAKES NO REPRESENTATION AND GIVES NO WARRANTY OF ANY KIND WHATSOEVER WITH RESPECT TO THEIR ACCURACY OR COMPLETENESS AND ASSUMES NO LIABILITY FOR DAMAGES OR LOSS ARISING DIRECTLY OR INDIRECTLY FROM THEIR USE, WHETHER PROPER OR IMPROPER.

v2.0

PROPANE RESPONSE ACTIONS

GAS STORED IN CYLINDERS THAT EXPLODE WHEN IGNITED!

CONSIDER ACTION ONLY IF SAFETY PERMITS

KEEP ALL VEHICLES INCLUDING SNOWMOBILES AWAY FROM ACCIDENT AREA

Refer to Product Guide below for:

Physical/Chemical Properties

Response to Fires

First Aid

- Vapours cannot be contained when released.
- Water spray can be used to knock down vapours if there is NO chance of ignition.
- Small fires can be extinguished with dry chemical or CO.
- Personnel should withdraw immediately from area unless a small leak is stopped immediately after it has been detected.
- If tanks are damaged, gas should be allowed to disperse and no attempt at recovery should be made.
- Personnel should avoid touching release point on containers since frost quickly forms.
- Stay clear of tank ends.

PROPANE

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: Colourless Gas

ODOUR: Natural Gas odour

SOLUBILITY: Insoluble

VAPOUR

DENSITY: Will sink to ground levels

FLASH POINT: -104° C

FREEZING PT: -190° C

VISCOSITY: n/a

SPECIFIC

GRAVITY: Liquid floats on water

SAFETY MEASURES

WARNINGS

- Vapours form instantaneously, and are heavier than air.
- Vapours can travel to distant sources of ignition and flash back.
- Eye contact causes irritation.
- Material can accumulate static charges.
- Inhalation of vapours can cause irritation of the respiratory tract, headache, vomiting, and unconsciousness.

PERSONAL PROTECTION

- Always wear impervious, chemical-resistant clothing, gloves, footwear, and goggles; nitrile and Viton are suitable protective materials (DO NOT USE NATURAL RUBBER, NEOPRENE, OR PVC).
- Avoid frostbite burn to skin and eyes from contact with propane.
- Wear full-face organic vapour cartridge respirator where oxygen is adequate; otherwise wear positive pressure SCBA.

PRECAUTIONS








- Monitor for explosive atmosphere.
- Avoid contact with strong oxidizers, such as nitric acid, sulphuric acid, chlorine, ozone, and peroxides.
- Eliminate ignition sources.
- Restrict access and work upwind of spill.

RESPONSE TO FIRES **CONSIDER ACTION ONLY IF SAFETY PERMITS!**

- Wear SCBA in confined areas.
 - Shut off fuel supply.
 - Extinguish fire with CO₂, dry chemical, alcohol foam or water fog.
- Use water to cool containers exposed to fire.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	A, B-1	   	

Section 1. Chemical Product and Company Identification

Product Name	PROPANE	Code	W222 SAP: 169
Synonym	Propane HD-5, Propane commercial, Liquefied Petroleum Gas (LPG), C3H8, CGSB Propane Grade 1, CGSB Propane Grade 2, odourized propane, stench propane, automotive propane.	Validated on	3/17/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Propane is used as a fuel gas, refrigerant, automotive fuel and as a raw material for organic synthesis. The grade determines the propane content. It is supplied as pressurized liquid in tanks.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) HD-5 Propane					
Propane	74-98-6	>90	2500 ppm	Not established	Not established
Propene	115-07-1	<5	Simple Asphyxiant	Not established	Not established
2) Commercial Propane					
Propane	74-98-6	>75	2500 ppm	Not established	Not established
Propene	115-07-1	<20	Simple Asphyxiant	Not established	Not established
3) Both grades may contain:					
Ethane	74-84-0	<6	Simple Asphyxiant	Not established	Not established
Butane +	106-97-8	<5	800 ppm	Not established	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	The product is contained under pressure. Do not puncture, incinerate or heat container as contents may explode. Flammable gas. Exercise caution when handling this material. Propane may displace oxygen and cause asphyxiation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Contact with gas or liquified gas may cause burns and frostbite to eyes and skin. Ingestion is not an expected route of exposure. For more information, refer to Section 11.
--------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	Ingestion is not an applicable route of exposure for gases.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class I - flammable gas (NFPA).	Flammable Limits	Lower: 2.1%; Upper: 9.5%, (NFPA).
Flash Points	CLOSED CUP: -104°C (-155°F).	Auto-Ignition Temperature	450°C (842°F), (NFPA).
Fire Hazards in Presence of Various Substances	Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapours may generate static charge causing ignition. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapour explosion hazard indoors, outdoors or in sewers. Propane may form explosive mixtures with air.
Products of Combustion	Carbon oxides (CO, CO ₂), acrid smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG2000, GUIDE 115, Flammable Gas: CAUTION: This product has a low flash point, use of water spray when fighting fire may be inefficient. SMALL FIRE: Use DRY chemicals, CO ₂ , water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. Self-contained breathing apparatus (SCBA) will be required if approaching the fire from downwind, or to enter enclosed areas or buildings. Handle damaged cylinders with extreme care.		

Section 6. Accidental Release Measures

Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid breathing vapours of material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	EXTREMELY FLAMMABLE GAS. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours. Wear proper personal protective equipment (See Section 8). Rapid escape of vapour may generate static charge causing ignition. Use spark-proof electrical equipment. Do not allow escaping compressed gas or liquid to come in contact with skin or eyes as it can cause frostbite. SPECIAL PRECAUTIONS: Sludges and tank scale from propane storage tanks, trucks and rail cars, and filters/screens may contain naturally occurring radioactive material ("NORM") in the form of lead 210. Similarly, equipment used for the transfer of propane such as product pipelines, pumps and compressors, may have detectable levels of radioactive lead 210 on inner surfaces. Workers involved in cleaning, repair or other maintenance on inner surfaces of such equipment should avoid breathing dust generated from such activities. Suitable codes of practice should be developed for these activities, detailing appropriate occupational hygiene and disposal practices.
Storage	Store away from incompatible and reactive materials (See section 5 and 10). Store away from heat and sources of ignition. Store as flammable material. Compressed gases should be stored in a separate safety storage cabinet or room. Avoid direct sunlight. Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Eye protection (i.e. safety glasses, safety goggles, and/or face shield) should be based on the condition of use. As a minimum, safety glasses with side shields should be worn when handling this material.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. Wear insulated gloves to prevent from frostbite.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Gas at room temperature; liquid when stored under pressure.	Viscosity	Not applicable.
Colour	Colourless.	Pour Point	Not applicable.
Odour	Propane is an odourless gas. Odourized propane will contain up to 28 g ethyl mercaptan per 1000 L of propane.	Softening Point	Not applicable.
Odour Threshold	Odour is not an adequate warning to prevent overexposure to propane. Prolonged exposure to mercaptans can cause olfactory desensitization.	Dropping Point	Not applicable.
Boiling Point	-42°C (-44°F)	Penetration	Not applicable.
Density	508 kg/m³ @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available
Vapour Density	1.56 (air=1)	Ionicity (in water)	Not available
Vapour Pressure	10763 mmHg (1435 kPa) @ 38°C (100°F).	Dispersion Properties	Not available
Volatility	Volatile	Solubility	Slightly soluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents.	Decomposition Products	May release COx, acrid smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Inhalation, skin contact and eye contact.
Acute Lethality	Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: <u>Propene (115-07-1):</u> Acute inhalation toxicity (LC50): >50000 ppm/4h (rat). <u>Butane (106-97-8):</u> Acute inhalation toxicity (LC50): 202000 ppm/4h (mouse).
Chronic or Other Toxic Effects	
Dermal Route:	Contact with gas or liquefied gas may cause burns and frostbite to the skin.
Inhalation Route:	Propane may displace oxygen and cause asphyxiation. Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion is not an applicable route of exposure for gases.
Eye Irritation/Inflammation:	Contact with gas or liquefied gas may cause burns and frostbite to the eyes.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.

Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	---

Section 14. Transport Information

TDG Classification	PROPANE, 2.1, UN1978 (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	-------------------------------	---	--

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).											
		All components of this formulation are listed on the US EPA-TSCA Inventory.											
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).											
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.											
		Please contact Product Safety for more information.											
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Flammable gas. CLASS: Compressed gas. CLASS: Target organ effects.									
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 									
HMIS (U.S.A.)		<table border="1"><tr><td>Health Hazard</td><td>1*</td></tr><tr><td>Fire Hazard</td><td>4</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>		Health Hazard	1*	Fire Hazard	4	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard	
Health Hazard	1*												
Fire Hazard	4												
Reactivity	0												
Personal Protection	H												
				Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme									

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
Glossary	<div> ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) </div> <div> IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) </div>

DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Fuels & Solvents:

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 3/17/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

WASTE OIL - SPILL RESPONSE ACTIONS

CONSIDER ACTION ONLY IF SAFETY PERMITS!

Refer to Product Guide below for:

Physical/Chemical Properties
Response to Fires
First Aid

- ELIMINATE IGNITION SOURCES
- STOP SOURCE OF LEAKING OIL IF SAFE TO DO SO

ON LAND

- Do not flush into ditches or drainage systems.
- Block entry into waterways and contain with earth, snow or other barrier.
- Remove small spills with absorbent pads.
- On tundra use peat moss and leave in place to degrade, if practical.

ON SNOW & ICE

- Block entry into waterways and contain with snow or other barrier.
- Remove minor spills with absorbent pads and/or snow.
- Burn accumulated oil from the surface using Tiger Torches if feasible and safe to do so.
- Scrape up and collect the contaminated snow – fuel mixture in suitable container for future disposal.

ON MUSKEG

- Do not deploy personnel and equipment on marsh or vegetation.
- Remove pooled oil with pumps and skimmers.
- Flush with low-pressure water to herd oil to collection point.
- Use absorbent pads to withdraw surface contaminants.
- Collect and burn contaminated material ONLY in localized areas, e.g., trenches, piles, windrows or incinerator.
- Do not burn if root systems can be damaged (low water table).
- Minimize damage caused by equipment and excavation.

ON WATER

- Contain spill as close to release point as possible.
- Use spill containment boom to concentrate slicks for recovery.
- On small spills, use absorbent pads to pick up contained oil.
- On larger spills, use skimmer on contained slicks.
- Do not deploy personnel and equipment onto mudflats or into wetlands.

RIVERS & STREAMS

- Prevent entry into water, if possible, by building berm or trench.
- Intercept moving slicks in quiet areas using (absorbent) booms.
- Do not use absorbent booms/pads in fast currents and turbulent water.

STORAGE/TRANSFER

- Store closed, labeled containers outside away from flammable items.
- Electrically ground containers and vehicles during transfer.

DISPOSAL

- Segregate waste types.
- Place contaminated materials into marked containers.
- Consult camp manager on disposal procedures.

WASTE OIL

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: Black to brown liquid
ODOUR: Petroleum
SOLUBILITY: Generally insoluble
VAPOUR: Few vapours emitted
DENSITY:

FLASH POINT: 100 to 200° C
FREEZING PT: -30 to -400° C
VISCOSITY: Medium (200-300cSt)
SPECIFIC
GRAVITY: Floats on water (0.9)

SAFETY MEASURES

WARNINGS

- Vapours are heavier than air but are unlikely to form.
- Toxic gas can form in fire and at high temperatures.
- CO, CO₂ and dense smoke are produced upon combustion.
- Oil mist or vapour from hot oil can cause irritation of the eyes and respiratory tract.

PERSONAL PROTECTION

- Always wear impervious, chemical-resistant clothing, gloves, footwear, and goggles; nitrile and Viton are suitable protective materials (DO NOT USE NATURAL RUBBER, NEOPRENE, OR PVC).
- Use of organic vapour cartridge respirator is highly unlikely.

PRECAUTIONS

- Avoid excessive heat, which can cause formation of vapours.
- Avoid contact with strong oxidizers, such as nitric acid, sulphuric acid, chlorine, ozone, and peroxides.
- Eliminate ignition sources.
- Restrict access and work upwind of spill.

RESPONSE TO FIRES

CONSIDER ACTION ONLY IF SAFETY PERMITS!

- Wear SCBA and eye protection when responding to waste oil fires.
 - Shut off fuel supply.
 - Extinguish fire with CO₂, dry chemical, alcohol foam or water fog.
- NOTE: Water or foam may cause frothing.
- Use water to cool containers exposed to fire.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	DURON* XL 0W-30 ENGINE OIL	Code	420-050, DXL03
Synonym	RDL3293	Validated on	8/9/2002.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	DURON* XL 0W30 is an engine oil for use in 4-stroke compression and spark ignition engines under extended ambient conditions, including temperatures below -40°C. Mobile equipment applications include heavy duty highway and off-highway operations, as well as smaller trucks and cars. The product may also be used in many types of wet clutch transmissions and hydraulic systems.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked base oil, synthetic hydrocarbons and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	OPEN CUP: 231°C (447.8°F) (Cleveland)	Auto-Ignition Temperature	Fire Point: 249°C (480.2°F)
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), sulphur oxides (SO _x), CaO _x , ZnO _x , smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.
---	---

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid inhalation and skin contact especially when handling used oil. Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	69 cSt @ 40°C
Colour	Amber.	Pour Point	<-51°C
Odour	Mild petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available.	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.8427 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available.	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 100°C (ASTM D0130): 1a.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Incompatible with oxidizing agents, acids, halogens and halogen compounds.	Decomposition Products	CO _x , H ₂ S, aldehydes, alkyl mercaptans, sulfides, methacrylate monomers, smoke and irritating vapours as products of incomplete combustion.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m ³ /4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	All components listed in Annex 1 to which Note L applies, and contained in the product, have been shown to contain less than 3% DMSO extractables as measured by IP346.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Spent/used/waste oil may meet the requirements of a hazardous waste. Consult your local or regional authorities. Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations.
-----------------------	---

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).												
		All components of this formulation are listed on the US EPA-TSCA Inventory.												
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).												
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.												
		Please contact Product Safety for more information.												
DSD/DPD (Europe)		Not classified under the Dangerous Substances or Dangerous Preparations Directives.		HCS (U.S.A.) Not controlled under the HCS (United States).										
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 										
HMIS (U.S.A.)		<table border="1"><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard		Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	1													
Fire Hazard	1													
Reactivity	0													
Personal Protection	B													

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark	
Glossary	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCL - Dangerous Substances Classification and Labeling (Europe)</p> <p>DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)</p> <p>DSL - Domestic Substance List</p> <p>EEC/EU - European Economic Community/European Union</p> <p>EINECS - European Inventory of Existing Commercial Chemical Substances</p> <p>EPCRA - Emergency Planning and Community Right to Know Act</p> <p>FDA - Food and Drug Administration</p> <p>FIFRA - Federal Insecticide, Fungicide and Rodenticide Act</p> <p>HCS - Hazardous Communication System</p> <p>HMIS - Hazardous Material Information System</p> <p>IARC - International Agency for Research on Cancer</p> </div> <div style="width: 48%;"> <p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> <p>TDG - Transportation Dangerous Goods (Canada)</p> <p>TDLo/TCLo - Lowest Published Toxic Dose/Concentration</p> <p>TLm - Median Tolerance Limit</p> <p>TLV-TWA - Threshold Limit Value-Time Weighted Average</p> <p>TSCA - Toxic Substances Control Act</p> <p>USEPA - United States Environmental Protection Agency</p> <p>USP - United States Pharmacopoeia</p> <p>WHMIS - Workplace Hazardous Material Information System</p> </div> </div>	
For Copy of MSDS Internet: www.petro-canada.ca Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564 Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285 Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285 For Product Safety Information: (905) 804-4752	Prepared by Product Safety - JDW on 8/9/2002.	
	Data entry by Product Safety - JDW.	

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

IV. SPILL RESPONSE CONTACTS

Cumberland Resources Ltd., Meadowbank Project

TITLE	NAME	OFFICE	FAX
Corporate Office, Vancouver			
President	Kerry Curtis	(604) 608-2557	(604) 608-2559
On-Scene Coordinators			
Camp Manager	Jeffrey T. Kellner	(604) 608-2557	(604) 608-2559
Project Manager	Gord Davidson	(604) 608-2557	(604) 608-2559
Senior Project Geologist	Roger March	(604) 608-2557	(604) 608-2559
Government Agencies			
Water Resource Officer - INAC	Constantine Bodykevich	(867) 975-4298	
Hazardous Materials Specialist – Environment Canada	Magnus Bourke	(867) 669-4729	
Hazardous Materials Officer – Environment Canada	David Tilden	(867) 669-4728	
Contractors			
Fuel Transportation Manager	Peter Tapatai	(867) 793-2703	(867) 793-2988

V. LOCAL TRANSPORTATION

Air Lines - Scheduled
Calm Air (867) 793-2873

Helicopters
Custom Helicopters (Rankin Inlet)
Staff House (867) 645-3885
Hanger (867) 645-3939

Overland Transportation - Delta Foremost
Peter's Expediting (867) 793-2703

VI. EQUIPMENT SUPPLIERS

Frontier Mining - Yellowknife (867) 920-7617 spill kits & various absorbents

Acklands - Yellowknife (867) 873-4100 spill kits & various absorbents

VII. INTERNAL RESOURCES - CUMBERLAND RESOURCES LTD.

Senior Management - President, Senior Vice President

- Responsible for all communication with the media
- Ensures that all press releases are accurate and in accordance with company policy
- Coordinates and exercises overall direction to Spill Response Team in the case of a major spill

Project Manager, Senior Project Geologist

- Project Manager, or in his or her absence, the Senior Project Geologist is responsible for the in-field operation of the Spill Response Team.
- Assists senior management in the preparation of news releases
- Updates and distributes Contingency Plan
- Ensures that there are follow up reports prepared on the spill event, clean-up and environmental impacts

Camp Manager

- Develops safe and effective spill management and prevention practices
- Responsible for management and regular inspection of fuel storage facilities at Meadowbank camp

Environmental Consultant

- Provides advisory services to the Spill Response Team as well as management

Legal Counsel

- Advises senior management and the project manager as requested on issues related to:
 - Legislative authority of various government agencies
 - Questions of due diligence
 - Costs/fines and liabilities, regulations including penalties associated with regulations
 - Consults with the corporate insurance coordinator and advises senior management on matters related to insurance

Board of Directors

- Establishes corporate environmental policy based on the recommendations of senior management

VIII. EXTERNAL RESOURCES – GOVERNMENT

Department of Indian and Northern Affairs (DIAND)

The Northern Affairs program of DIAND administers the Territorial Lands Act and Regulations. Through this legislation land use permits are issued. One of the conditions of land use permits is the requirement to report all spills to a 24 hour government run report line (867-920-8130). Land Use Permits may also address matters of environmental conservation and protection including waste disposal, sources of borrow materials, open pit mining, road alignments, land reclamation and closure requirements. Enforcement of the provisions of the land use permits is carried out by the Operations Division of DIAND through Resource Management Officers located at the District Offices.

Inspection of Cumberland project activities located on Crown Land by Resource Management Officers is conducted periodically.

Environment Canada (EC)

The Environmental Protection Service of Environment Canada administers the Canadian Environmental Protection Act (CEPA) and Section 36 of the Fisheries Act. For the latter this specifies that unless authorized by regulation, any effluents discharged into fish bearing water must be non-toxic. Environment Canada officials have in the past laid charges in the NWT under the Fisheries Act for spills of oil and other hazardous material.

EC is responsible for providing environmental advice to federal and territorial government agencies and for the preservation and enhancement of environmental quality.

Department of Fisheries and Oceans (DFO)

The Department of Fisheries and Oceans (DFO) administers the habitat protection provisions of the Fisheries Act. This includes provisions for prohibiting the blocking of fish passageways and the destruction of fish habitat. DFO operates under a Habitat Management Policy whereby the objective is to achieve a net gain of fish habitat within the NWT. On occasion DFO Inspectors visit spill sites to investigate possible impacts to fish habitat.

IX. REFERENCES

WMC International Limited Transportation Spill Contingency Plan - Meliadine West Project. August, 1998.

BHP Diamonds Inc. Transportation Spill Contingency Plan. January 1997.

Department of Transportation. Environmental Guidelines for the Construction, Maintenance and Closure of Winter Roads in the Northwest Territories. Prepared by Stanley Associates Engineering Ltd. 1993.

Northwest Territories Water Board. Guidelines for Contingency Planning. 1987.

ACKNOWLEDGMENTS

Cumberland Resources Ltd. gratefully acknowledges the use of the Transportation Spill Contingency Plans developed initially by BHP Diamonds Inc. and subsequently by WMC International, which was used as the model and template in developing this plan for the Meadowbank Gold Project. The generosity of WMC International in providing their document is greatly appreciated.

APPENDIX A - INVENTORY OF SPILL RESPONSE KITS

Cumberland Resources uses “Sphag Sorb” for spill response kits. This product is composed of dried and filtered sphagnum moss, which has the ability to absorb oils without absorbing water. Once used, Sphag Sorb can be safely disposed of in conventional land fill facilities since all oils will continue to be held within the capillaries of the peat moss until they naturally decompose. In addition, this product will not leach contaminants in landfill sites. For disposal of material from smaller spills, Sphag Sorb is ideal for incineration.

Four Spill Response Kits are presently located near the fuel storage facilities at the Meadowbank Project. Two kits are located next to the pumping station for the tank farm and two kits are located near the helicopter pad. These response kits consist of the following equipment:

- 1 Case containing 30 Sphag Sorb pads (SS-PAD). Each pad can absorb approximately 5 - 7 litres of contaminant. These pads are to be used for cleaning up minor spills.
- 3 ECP Emergency Spill Response Kits containing the following:
 - 1 - 72”X36”X33” safety yellow polyethylene containment kit with decals
 - 1 - bag activated Sphag Sorb, covers 40 cu. ft.
 - 1 - 22 SS 14 Sphag Sorb pillow
 - 1 - 4 litres Plug It emergency seal
 - 2 - pairs rubber gloves
 - 1 - pair chemical goggles
 - 5 - disposal bags
 - 1 - waterproof flashlight
- 2 shovels
- 2 rakes
- 2 waterproof flashlights

Appendix B - Risk Assessment, Preventative Measures, and Contingency Plans

Potential Problem	Preventative Measure	Contingency Plan
Fuel Spill from Fuel Vaults in Camp	<ul style="list-style-type: none"> Fuel vaults are double-walled. Risk of leakage from vault outlet reduced by not using gravity feed. Portable electric pumps are required to fill from fuel vaults. Fuel vaults are to be inspected weekly to ensure there are no leaks in inner tank. 	<p>For fuel spills during fueling to or from fuel vaults:</p> <ol style="list-style-type: none"> Follow instructions as outlined in Section II of this Contingency Plan. <p>For fuel leakage from fuel vaults:</p> <ol style="list-style-type: none"> Attempt to localize and control the leak. Pump the contents of the fuel vault into the spare fuel vault. Follow instructions as outlined in Section II of this Contingency Plan for isolating and disposing of fuel. To ensure safety, depending on the severity of the spill, notification follows the procedure laid out in this contingency plan with the appropriate personnel contacted - External and Internal.
Delta Mishap - General	<ul style="list-style-type: none"> Peter's Expediting is expected to enforce a safe operating code for all Delta operators delivering fuel to the Meadowbank camp. Strict rules of the road are enforced: no drinking is allowed on or around the transportation route. Drivers should be required to complete checklists and document all matters that require servicing & repair; mechanics should carry out the work as appropriate. 	<p>Driver knows what to do:</p> <ol style="list-style-type: none"> Major freight carriers (i.e. Peter's Expediting) should have a contingency plan. Cumberland will provide each vehicle that will haul fuel with a copy of this contingency plan. Each driver should have a roll of plastic, shovel, absorbent material, metal buckets and knife in order to contain small spills. <p>Clear lines of communication:</p> <ol style="list-style-type: none"> To ensure safety, depending on the severity of the spill, notification follows the procedure laid out in this contingency plan with the appropriate personnel contacted - External and Internal.

		<p>Response team knows what to do:</p> <ol style="list-style-type: none"> 1. Freight carriers have to demonstrate to Cumberland adequate spill response experience and training. 2. Cumberland Emergency Response Team receives training as new members are added. <p>Approvals are obtained to burn spilled and recovered fuels at previously selected disposal sites - usually borrow pits.</p>
--	--	---

Appendix C - NWT Spill Report Forms

APPENDIX D – LOAD MANIFEST

APPENDIX D – LOAD MANIFEST

CUMBERLAND RESOURCES LTD.
MEADOWBANK PROJECT

DATE:

LOAD MANIFEST FORM

VEHICLE TYPE: _____
ESTIMATED DEPARTURE
ESTIMATED ARRIVAL

OWNER
FROM:
TO:

SUPPLY LIST

VOLUMES

FUEL P-50
 GASOLINE
 JET-B/A
 PROPANE
 ACETELENE

SALT
CORE/BOXES
CORE RACKS
GRAVEL
LUMBER
DRILL SUPPLIES
OTHER

TOTAL WEIGHT: _____

DRIVER/ASSISTANT:

Appendix E - Fuel Storage Monitoring Plan

The fuel storage monitoring plan will consist of the following daily and weekly inspections conducted by Cumberland personnel that have been trained in the use of fuel pumping equipment and fuel spill response.

The following inspections will be conducted and recorded on a daily basis:

1. All tanks, lines, pumps, hoses, valves and fittings will be inspected for leaks or damage
2. Ensure proper fuel only is dispensed into the correct tanks and barrels for use in the camp and associated exploration work sites.
3. Ensure that the “No Smoking” signs posted in the area of the fuel tanks are always clearly visible.
4. Ensure that all personnel on site abide by the “No Smoking” rule within the distances outlined in the regulations for fuel tanks.
5. Ensure that all fuel pumping and spill response equipment is clearly visible and easily accessed.

The following inspections will be conducted and recorded on a weekly basis:

1. Fuel levels in all primary tanks checked and compared against the fuel dispensed from each primary tank for each week.
2. Outer tanks checked for fuel leakage from the primary tank.
3. Spill response equipment checked.
4. Pumping equipment checked.