


APPENDIX B18 - AMMONIA MANAGEMENT PLAN, VERSION1 (FEB. 2013)



APPENDIX C

AMMONIA MANAGEMENT PLAN

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0003	00	February 20 th , 2013	i

Title of document: **Ammonia Management Plan**

Client : **AGNICO-EAGLE MINES**

Project : **Meadowbank Gold Project**

Prepared by: Anh-Long Nguyen, ing., M.Sc.




Reviewed by: Stéphanie Trottier, ing., M.Eng.



Approved by: Patrick Scholz, ing., M.Eng.



 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0003	00	February 20 th , 2013	ii

REVISION INDEX

Revision				Pages Revised	Remarks
#	Prep.	App.	Date		
PA	ALN	PS	Feb. 6, '13	All	For internal review
PB	ALN	PS	Feb. 8, '13	All	For Client review
00	ALN <i>ALN</i>	PS <i>P.S.</i>	Feb. 20, '13	All	Final document


 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	iii

TABLE OF CONTENTS

1.0	INTRODUCTION.....	1
2.0	EXPLOSIVE MANAGEMENT AND BLASTING PRACTICES	2
2.1	Site description	2
2.1.1	Explosive Storage	2
2.1.2	Roads	2
2.1.3	Pits.....	2
2.2	Ammonia Pathways	2
2.3	EXPLOSIVES AND BLASTING	3
2.3.1	Explosive Products	3
2.3.2	Procedures and Practices	4
2.4	Monitoring	5
3.0	MILL EFFLUENT.....	6
3.1	Site description	6
3.2	Ammonia Pathway	6
3.3	Monitoring	7
4.0	WATER MANAGEMENT	8
5.0	REPORTING.....	10
6.0	REVIEW OF AMMONIA MANAGEMENT PLAN	11
7.0	REFERENCES	12


LIST OF APPENDICES

APPENDIX C1: ENVIRONMENT FIELD STATIONS – MINE SITE VIEW

APPENDIX C2: DYNO NOBEL SPILL CONTROL AND LOADING PROCEDURE PLAN

APPENDIX C3: DYNO NOBEL EMERGENCY RESPONSE PLAN – MAGAZINE, PLANT AND WORK SITES

APPENDIX C4: MSDS FOR BULK EMULSION AND PRESPLIT

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	1

1.0 INTRODUCTION

The previous version of the Water Management Plan (WMP) for the Mine was presented in 2009 (Doc. 833), updating the first edition of the WMP, support document (Doc. 500) to the Type-A Water License Application for the Mine. The WMP was then updated in 2011 (Doc. 1270). This technical note was produced as an appendix to the 2012 WMP update and covers the ammonia management plan for the mine site.

This technical note provides guidance for monitoring ammonia levels at the mine site, as part of the conditions applying to waste disposal and management listed in the water license (NWB 2008) for this water quality parameter.


Ammonia is a naturally occurring nitrogen compound found in the environment. However, there are two sources at the mine site that can contribute to the mobilization of ammonia in the groundwater or surface runoff:

1. Blasting of ammonium-nitrate (AN) explosives is typically the primary source of ammonia in areas of mining operations. AN readily absorbs water and dissolves easily, thereby mobilizing ammonia in either groundwater or surface runoff.
2. In gold mine operations using a cyanidation process to extract the gold from the ore, the cyanide in solution is oxidized to cyanate (CNO^-) using a sulfur dioxide (SO_2)-air process before discharge to the Tailings Storage Facility. The cyanate can then hydrolyze to ammonia in the Tailings Storage Facility reclaim pond.

Ammonia dissolved in water exists in equilibrium of interchanging un-ionized (NH_3) and ionized (NH_4^+) forms. The equilibrium is influenced by pH, temperature, and ionic strength (salinity) where the amount of un-ionized ammonia is favoured as the pH becomes more basic or as the water temperature or salinity increases. Un-ionized ammonia can readily pass across the gill surface and enter into the bloodstream of fish, while ionized ammonia passes with greater difficulty. Once inside the fish, both forms of ammonia can cause toxic effects (CCME, 2010). Furthermore, it should be noted that ammonia oxidizes to nitrite (NO_2) and nitrate (NO_3), the former being particularly toxic to fish and humans. Both nitrite and nitrate are regulated by the CMME for the Protection of Aquatic Life.

This ammonia management plan (AMP) proposes monitoring of blasting practices for the assessment of explosive quantity used and blast performance, and monitoring of water quality to determine ammonia levels in waters within the mine site. The monitoring results can be used to review and adjust blasting practices or water management if ammonia levels need to be reduced.

In addition to ammonia, monitoring of nitrate and nitrite is also considered in the AMP, as both water quality parameters are signature compounds of AN explosives. NO_3 is listed with a discharge level threshold in the conditions applying to waste disposal and management in the water license (NWB 2008).

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	2

2.0 EXPLOSIVE MANAGEMENT AND BLASTING PRACTICES

2.1 SITE DESCRIPTION

2.1.1 Explosive Storage

Storage of explosive products will be located at the mine site emulsion plant area. The explosive products arrive by barge at the Baker Lake marshalling area. They are then transported by ground to the emulsion plant located at the Meadowbank mine site.

The emulsion plant area is located approximately four kilometers north of the mine plant and camp site, and is accessible from the All Weather Private Access Road (AWPAR). This area consists of an emulsion plant for the preparation of bulk emulsion explosives, two buildings for the storage of AN, and four explosive magazines along the access road to the plant.

Explosive products at the storage facilities are packed in sea containers, which limit the possibility of spillage. The products are only removed from these containers at the mine site emulsion plant area. Surface areas are graded to collect water runoff within the storage facilities.

2.1.2 Roads

The AWPAP is a restricted access road constructed and operated by AEM for ground transportation between the Meadowbank mine site and Baker Lake. This road is used to transport explosive products from the Baker Lake site facilities to the emulsion plant area at the mine site. In preparation for blasting operations, explosive products are transported from the emulsion plant area to the appropriate blasting locations via local site roads and the Vault Haul Road (when completed).


Spillage control protocols, procedures and handling of spilled material, and explosive management for both storage and transport have been established by Dyno Nobel Inc. (Dyno) and are provided in Appendix C2.

2.1.3 Pits

The development sequence of the mine site is provided in Table 2-1 of the Water Management Plan 2012 report (610756-0000-40ER-0001). Explosives are used for the excavation of waste rock and mining of the ore at the Portage, Goose pits and eventually the Vault open pit.

2.2 AMMONIA PATHWAYS

Ammonia not fully detonated within the in-pit blasting operations mobilizes through several pathways on the mine site. Water from drainage runoff is the primary mechanism of mobilization for ammonia residuals remaining within the pits. This water is collected at pit sumps and then pumped to the Portage Attenuation Pond, until it becomes the TSF Reclaim Pond (March 2015), after that it will be pumped to the South Cell TSF (former Attenuation

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	3

Pond). Blasting residuals are also expected to be attached to waste rock and ore materials, which are transported from the open pits to their respective storage and processing facilities. Residuals from waste rock may be washed off by precipitation and be ultimately conveyed to the Portage Attenuation Pond or the future South Cell TSF (former Attenuation Pond), or the Vault Attenuation Pond. Residuals from the ore may eventually be carried in the tailings to the Tailings Storage Facility.

2.3 EXPLOSIVES AND BLASTING

Based on experience at other open pit mines in the Canadian Arctic, the largest potential source of ammonia in mine water will be from explosive residue from blasting. Depending on the wetness of the site, water may leach explosives from blastholes prior to the blast. Other forms of ammonia released from AN are explosives flowing into cracks and fissures in the rock and not detonating, or leading to an incomplete detonation of the explosive column and misfired blastholes. An AN based emulsion is used as a blasting agent at the Meadowbank site. This material is designed to repel water thus minimizing the potential for ammonia to impact mine water.

Blasting operations on site include monitoring of explosive quantities and blast design, procedures and practices. Combined with water monitoring, the compilation of these data is used to assess blasting performance. The results of this assessment are used to adjust blasting practices as needed to:

- a) Optimize the use of explosives
- b) Increase the completion and efficiency of explosive detonations

Any modifications to blast design are intended to decrease the amount of ammonia that may become available for mobilization in mine water.


This section summarizes the explosive products and blasting design parameters, procedures and practices employed at Meadowbank. Associated monitoring is also discussed.

2.3.1 Explosive Products

Explosive products used at the mine site include bulk explosives (bulk emulsion), packaged explosives, cast boosters, detonating cords, non-electric delay detonators and non-electric lead lines. The material safety data sheets (MSDS) for these products are provided in Appendix C4. Of these products, the greatest potential for water contamination comes from the bulk explosives. Presently, Meadowbank uses emulsion as the primary bulk explosive for its blasting operations.

Bulk emulsions typically contain some or all of the following components:

- Ammonium, sodium and/or calcium nitrate
- Fuel and/or mineral oil

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	4

- Methylamine nitrate
- Emulsifiers
- Ethylene glycol

Although bulk emulsions are water resistant, contaminants can be leached from the product if it is left in contact with standing or flowing water for extended periods of time. The performance of the explosive, and hence the potential for post-blast contaminations, deteriorates with the length of time that the emulsion remains in the blasthole after it has been loaded (i.e., sleep time). Blast procedures currently in use are designed to minimize sleep time so that standing or flowing water is not in contact with the bulk emulsion for extended periods of time.

2.3.2 Procedures and Practices


Quality control procedures are in place to verify AN content in bulk explosives. Quality control procedures for the emulsion occur at the plant and density tests are done at the blast site (on the trucks). Loading procedures specify that blastholes be loaded with emulsion from the bottom of the blastholes to provide a continuous explosive column. Details on the explosive quality control and loading procedures have been established by Dyno and are provided in Appendix C2.

The primary factors that may reduce the amount of ammonia available for mobilization in mine water are:

- Explosives handling
- Completeness of detonation

Bulk emulsion spillage during blasthole loading could (as bulk emulsion is resistant to water) be a source of ammonia that could be carried by water collected in the pits. Spillage control protocols, procedures and handling of spilled material, and explosive management for storage and transport, as well as the emergency response plan, have been established by Dyno and are provided in Appendix C2 and C3.

Incomplete detonation results in higher ammonia residue on the blasted rock. Evidence of incomplete detonation is often observed as an orange fume after a blast and sometimes an orange pigment on the blasted rock. Explosives that have failed to detonate may be observed in the muckpile. Muckpiles are routinely inspected by Meadowbank staff for signs of incomplete detonation.


 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	5

2.4 MONITORING

Monitoring of explosive handling and blasting is as follows:

- a) Explosive quantities: Records of explosive quantities used for in-pit blasting are kept for each blasting event and will be conserved throughout the mine life. Furthermore, a record of blast location (i.e., pit and elevation), blast date, and bulk explosive type and name used (emulsion, with the corresponding ratio of AN over emulsion) is kept for all events.
- b) Design parameters: Blast design parameters, as well as changes in the blast design parameters from the standard are recorded and dated.
- c) Loading instructions: Loading instruction forms are completed for each blast event and provide a record of the as-loaded parameters for all blastholes in the blast pattern including:
 - Hole depth
 - Collar height
 - Priming (single or double)
 - Other observations made by the blast crew (e.g., wetness of holes, use of liners, collapsing holes or difficulty loading)
- d) Video footage: Videos are taken of each blast. This practice provides a visual, qualitative record of the results of each blast and provides insight into potential problems such as incomplete detonation (e.g. orange fumes) and misfires, as well as areas of poor muckpile heave and forward movement.
- e) Blast audits: Blast audits are conducted on a monthly basis to ensure that best practices are being followed in the field (audits may be adjusted to a lesser frequency if low ammonia levels are consistently observed, or conversely may be adjusted to a higher frequency if high ammonia levels are consistently observed).

An additional monitoring technique commonly used is the measurement of the Velocity of Detonation (VOD), which has been shown to be directly related to the volumetric fraction of the explosive that has been consumed. This technique will be implemented if poor or incomplete detonation is consistently suspected.

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	6

3.0 MILL EFFLUENT

3.1 SITE DESCRIPTION

The mill effluent consists of tailings produced at the mill that is pumped as slurry and deposited in the Tailings Storage Facility (TSF) where the tailings particles are allowed to settle and consolidate. The reclaim water is pumped back to the mill for re-use.

Prior to discharge of the mill effluent to the TSF, the effluent is sent to the cyanide destruction process. The cyanide destruction process at Meadowbank uses the sulfur dioxide (SO₂) and air process to oxidize weak acid dissociable cyanide (CN-WAD) to a less toxic form: cyanate (CNO⁻) based on the following reactions:



The process can also use sodium metabisulfite (Na₂S₂O₅) instead of sulfur dioxide in case there are operating issues with the dosing of sulfur dioxide gas in the process. This ensures that chemicals required for the cyanide destruction process (either SO₂ or Na₂S₂O₅) are always available.

3.2 AMMONIA PATHWAY


Cyanate produced from the oxidation of CN-WAD can readily hydrolyze to ammonia (NH₃) and carbon dioxide (CO₂) based on the following reaction:



Thus, the mill effluent provides an ammonia loading to the TSF reclaim water.

During the operation of the TSF, the reclaim water will be pumped to the mill for re-use in a closed loop system. Consequently, there will be no discharge of reclaim water to the environment during this period. Furthermore, it is expected that the ammonia concentration will gradually increase in the TSF reclaim pond over time, even though (1) there may be some slight attenuation of ammonia due to microbial/algae activity in the summer and (2) ammonia may oxidize to nitrite and nitrate, particularly near the top of the pond where oxygen is most present.

The Water Quality Forecasting for the Portage Area 2012-2025 Report (610756-0000-40ER-0002) provides a forecast of the concentration for ammonia in the TSF reclaim pond during the life of the mine. Furthermore, the report provides a forecast of the ammonia concentration in the Portage and Goose Island Pit once flooding activities has started.

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	7


3.3 MONITORING

Concentrations of ammonia, nitrate and nitrite are parameters that are monitored on a monthly basis as part of this sampling campaign of the TSF reclaim water at station ST-21.

In the Water Quality Forecasting for the Portage Area 2012-2025 Report (610756-0000-40ER-0002), a maximum ammonia concentration in the TSF reclaim water is evaluated in order to meet the CCME guidelines for the Protection of Aquatic Life in the Portage and Goose Island Pits once flooding activities are completed. If this concentration is exceeded before the end of the flooding operation, measures could be undertaken to lower the ammonia concentration, as well as nitrate and nitrite if required, in the TSF reclaim pond prior to the transfer of TSF reclaim water to the pits.

Ammonia treatment technologies that could be further investigated, if the need arises, include:

- i) Biological nitrification / denitrification during the summer months.
- ii) In-situ volatilization of ammonia during the summer months.
- iii) Ammonia removal by snow making.


 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	8

4.0 WATER MANAGEMENT

Water quantity and quality monitoring assist in the monitoring of ammonia loadings from explosive residuals, as well as ammonia concentration found in the Tailings Storage Facility reclaim pond. The Meadowbank water quality and flow monitoring plan (AEM 2009) and water license (NWB 2008) includes monitoring stations that are used for the monitoring of ammonia loadings. The stations that specifically monitor for ammonia are listed in Table 1 and are shown in the Figures in Appendix C1.

Table 1: Water Monitoring Station Included Under the Meadowbank Water License

Station	Description	Phase	Parameters ^(c)	Frequency
ST-9	Portage Attenuation Pond prior to discharge through Third Portage Lake outfall diffuser	Early operation	Ammonia, nitrate, nitrite Water volume	Prior to discharge and weekly during discharge Daily during period of discharge
ST-10 (Location not available until 2014)	Vault Attenuation Pond prior to discharge through Wally Lake outfall diffuser	Late operation	Ammonia, nitrate, nitrite Water volume	Prior to discharge and weekly during discharge Daily during period of discharge
ST-16	Portage Rock Storage Facility	Early operation	Ammonia, nitrate, nitrite	Bi-annually during open water
		Late operation	Ammonia	Monthly during open water
		Closure	Ammonia, nitrate, nitrite	Bi-annually during open water
ST-17 ^(a)	North Portage Pit Sump	Early operation	Ammonia Nitrate, nitrite	Monthly and bi-annually during open water Bi-annually during open water
			Water volume	Daily during period of discharge
	Portage Pit Lake	Late operation	Ammonia, nitrate, nitrite	Monthly during open water
		Closure	Ammonia, nitrate, nitrite	Bi-annually during open water
ST-18	Portage Attenuation Pond	Early operation	Ammonia Nitrate, nitrite	Monthly and bi-annually during open water Bi-annually during open water
			Ammonia	Monthly and bi-annually during open water
ST-19 ^(a)	Third Portage Pit Sump	Early operation	Nitrate, nitrite Water volume	Bi-annually during open water Daily during period of discharge
			Ammonia, nitrate, nitrite	Monthly during open water
	Third Portage Pit Lake	Late operation	Ammonia, nitrate, nitrite	Monthly and bi-annually during open water
ST-20	Goose Island Pit Sump	Early operation	Ammonia Nitrate, nitrite	Monthly and bi-annually during open water Bi-annually during open water

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	9

Station	Description	Phase	Parameters ^(c)	Frequency
			Water volume	Daily during period of discharge
	Goose Island Pit Lake	Late operation	Ammonia, nitrate, nitrite	Monthly during open water
		Closure	Ammonia, nitrate, nitrite	Bi-annually during open water
ST-21	Tailings Reclaim Pond	Early (South Cell) and late (North Cell) operation	Ammonia, nitrate, nitrite	Monthly during open water
ST-23 (Location not available until 2014)	Vault Pit Sump	Late operation	Ammonia	Monthly and bi-annually during open water
			Nitrate, nitrite	Bi-annually during open water
			Water volume	Daily during period of discharge
ST-24 ^(b) (Location not available until 2014)	Vault Rock Storage Facility	Late operation	Ammonia	Monthly and bi-annually during open water
			Nitrate, nitrite	Bi-annually during open water
		Closure	Ammonia, nitrate, nitrite	Monthly during open water
ST-25 (Location not available until 2014)	Vault Attenuation Pond	Late operation	Ammonia	Monthly and bi-annually during open water
			Nitrate, nitrite	Bi-annually during open water

(a) ST-17 and ST-19 become one sampling point at closure.


(b) Two monitoring points will be assigned to the Vault Storage Facility (ST-24) during closure.

(c) Parameters listed are only those required for the AMP. The complete suite of parameters analyzed for each station is provided in AEM (2009b) and NWB (2008).

In addition to the monitoring listed in Table 1, the following actions are undertaken as part of the AMP:

- If runoff or seepage is detected at the rock storage facility, water samples collected at the Portage Rock Storage Facility during late operation will also be analyzed for nitrate and nitrite to complete the suite of signature compounds found in explosive residuals.
- Tailings slurry volumes and density from the mill pumping facility to the TSF are recorded on a monthly basis.
- The records of water volumes pumped from the Portage Pit sumps include the destination: Portage Attenuation Pond or the future South Cell TSF (former Attenuation Pond).
- The records of water volumes pumped from the Portage Attenuation Pond will include the destination: Third Portage Lake or other future destination.

Sampling frequency at the pit sump will also be increased if high variability is identified in observed constituent concentrations as a result of the blasting schedule.


 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	10

5.0 REPORTING

Reporting of ammonia concentrations at the sampling stations listed in Table 1 is included as part of the requirement of the water license (NWB 2008). The reporting frequency is provided in AEM (2009b), and includes:


- Brief monthly reports of the compiled water quality monitoring results, sent to the Nunavut Water Board (NWB), the AANDC Water License Inspector and to the Kivalliq Inuit Association (KIA); and
- An annual report submitted to the NWB, KIA, Aboriginal Affairs and Northern Development Canada, Nunavut Impact Review Board, Government of Nunavut, and other interested parties. This report summarizes monitoring results for each sampling station, annual seep water chemistry results, annual groundwater monitoring results, receiving water monitoring results, spills and any accidental releases, measured flow volumes, effluent volumes and loadings, and results of QA/QC analytical data.

Mine operation personnel reviews on a monthly basis the data gathered from the sampling stations in Table 1 and from the monitoring action proposed under the AMP. If the data indicates that further studies and/or significant changes to the water management infrastructure are required to assess or control ammonia concentrations, AEM will notify the Nunavut Water Board as early as practical. Results of these further studies and/or changes to the AMP monitoring actions will be transmitted to the Nunavut Water Board for review.

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	11

6.0 REVIEW OF AMMONIA MANAGEMENT PLAN

Review of the results of the site water quality and AMP monitoring during the year may provide new information, and/or indications that changes to the AMP are necessary. When revisions are warranted, an updated AMP will be submitted to the Nunavut Water Board for review.

 SNC • LAVALIN	TECHNICAL NOTE Ammonia Management Plan	Prepared by: A.-L. Nguyen Reviewed by: S. Trottier		
		Rev.	Date	Page
	610756-0000-40ER-0004	00	February 20 th , 2013	12

7.0 REFERENCES

CCME (2010), Canadian Water Quality Guidelines for the Protection of Aquatic Life, Ammonia.

Golder (2009). Updated Water Management Plan. Agnico-Eagle Mines. July 2009

Golder (2011), Updated Water Management Plan, Agnico-Eagle Mines, July 2011

NWB (Nunavut Water Board License) (2008). Water License No: 2AM-MEA0815. Agnico-Eagle Mines Ltd. June 2008.

SLI (2012). Water Management Plan 2012. Agnico-Eagle Mines. Document No. 610756-0000-40ER-0001, Rev. 02. March 2013.

SLI (2012). Water Quality Forecasting for the Portage Area 2012-2025. Agnico-Eagle Mines. Document No. 610756-0000-40ER-0002, Rev. 01. March 2013




APPENDIX C1

ENVIRONMENT FIELD STATIONS – MINE SITE VIEW

REVIEWS

THE INFORMATION HERE ON IS THE PROPERTY OF AGNICO-EAGLE LTD. AND MUST BE RETURNED UPON REQUEST.
WITHOUT WRITTEN PERMISSION, ANY COPYING TRANSMITTAL TO OTHERS AND ANY USE EXCEPT THAT FOR WHICH IT IS LOANED ARE PROHIBITED.

© AGNICO-EAGLE LTD.

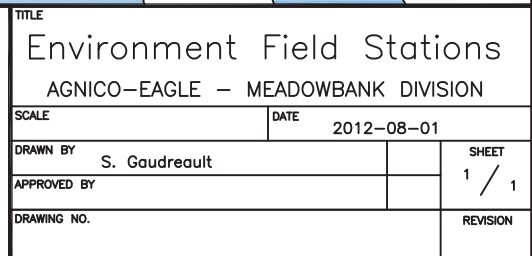



APPENDIX C2

SPILL CONTROL AND LOADING PROCEDURE PLAN

Dyno Spill Control and Loading Procedure Plan

- 1) All trucks are washed inside shop to contain any residue that may have contacted trucks. The water from the washing of the trucks and or the shop floors themselves is then picked up by the AEM e vacuum and disposed of in the onsite Stormwater Management Pond.
- 2) A.N. Prill is brought to the Emulsion Plant site in 20 ft Seacans and is stored in the Seacans on the A.N. Pad for the site till it is needed. It is then taken out of the Seacan /s and brought into the Plant for use. Sometimes enough product for the next batch is stored outside to speed up Batching time when it is necessary. A.N. Prill is not left outside if weather looks like it is going to be damp or raining to prevent the leaching of Prill through the Tote bags and on to the ground surface.
- 3) Any A.N. spills that occur are promptly cleaned up and disposed of in 1 of 2 ways:
 - i. Any contaminated prill is put into containment barrels or buckets inside Plant, depending on amount, and put into the next Ansol batch to be made.
 - ii. Any contaminated Prill is put in Barrels or Buckets (depending on amount) and then transferred from barrels to buckets for the Emulsion Truck Operators to take to the Blast Pattern and placed into the boreholes after they have been loaded (disposal via blast).

Any spills that are too difficult (some of our drummed Products) to take care of in this manner are placed in Metal Drums or HAZMAT bins etc. with absorbing materials, sealed and sent to AEM HAZMAT AREA (for shipment south).

- 4) Emulsion waste (with contaminants) is also either contained in drums or bins until it can be transferred into buckets and taken to Blast patterns and placed into boreholes for disposal (disposal via blasting).

Any non contaminated Emulsion is put back through the system and on to Trucks.


When Trucks need to be de-contaminated or process lines of trucks or plant need to be cleaned out, the excess water is strained through a Sack (this allows the water to go through, but contains the Emulsion) to minimize nitrites in our plant sump containment.

- 5) When an Emulsion Truck has completed loading on a blast pattern the remaining emulsion is flushed out of the loading hose by running water through the hose (water holding tank on trucks) until water discharges out the end of the hose into the borehole.
This does not completely remove all of the Emulsion out of the Hose; there is still a residue amount left in the hose. Thus, when the Truck operator starts up on the next blast pattern, the hose is put into the borehole and the Operator primes the hose and all the residue Emulsion is contained in borehole and disposed of when hole/s are blasted.



APPENDIX C3

DYNO NOBEL EMERGENCY RESPONSE PLAN – MAGAZINE, PLANT AND WORK SITE

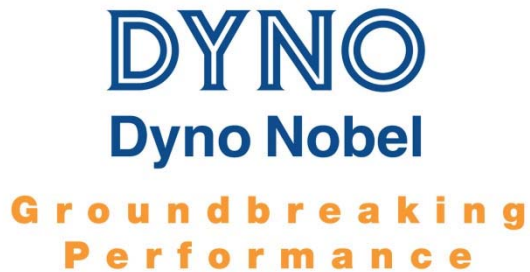

EMERGENCY RESPONSE PLAN
QAAQTUQ
Agnico Eagle Meadowbank (Baker Lake)
Nunavut

For Dyno Nobel Canada Inc.

Magazine, Plant and Work Sites

This Emergency Response Plan (ERP) addresses incidents and potential incidents involving the manufacturing, handling and storage of explosives and related products in Dyno Nobel Canada Inc.' magazines, plants and worksites. This ERP has been developed for Dyno Nobel Canada Inc. and all of its wholly-owned subsidiaries (DNX Drilling). Actions detailed within this plan are compulsory, under the approval and authorization of DNCI's Regional Operations Managers.

"This document, as presented on Dyno Nobel's database, is a controlled document and represents the version currently in effect. All printed copies are uncontrolled documents and may not be current".

Note: Information provided within this document may be privileged and is not intended for general distribution.

Original Date of Publication: 15 October 2003, as amended site specific, December 19, 2011

<u>Publication/ Amendment Date</u>	<u>Changes To Prior Edition</u>	<u>Pg.</u>
15 Oct 03	New document	All
26 Apr 04	Amendment # 1	
	Renumbering of Appendices 6 – 13	App. 7 – 14
	Miscellaneous Typos & Amendment Dates	All
17 March 08	Amendment #2	
	Updated Contact information	
	Addition of definitions	
	Included Calling and responding emergency procedures	
	Addition Duties of Key personnel	
	Addition of response to Natural disasters	
	Addition of visitor and contractors access control -	
	Replaced the Appendices and renumbering	
	Included a Emergency Report form	
	Addition of Nitric acid, Aluminum and Diethylene glycol and CFE	
	Addition of alternate methods of communication	
	Addition of Reportable Substance list	
	Miscellaneous Typos & Amendment Dates	All
August 18, 2010	Amendment #3	
	Updated Scope and ERP Outline	
	Added Sign-off sheet for Annual Fire Department Review	
	Added Appendix for Employee Training sign-off	
	Updated Reporting Incidents Flowchart	
	Updated procedure for Raw Material Truck Spills	
	Updated Bomb Threat Checklist	
September 29, 2011	Amendment #4	
	Updated contacts and phone numbers	
November 15, 2011	Amendment #5	
	Amended Appendix 8	
	Addition of Appendix 10	

Table of Contents

Section	Topic	Pg.
1.0	Scope	4
2.0	Related Documents	4
3.0	ERP Outline	4
4.0	Preparation and Planning	6
5.0	Training	7
6.0	Emergency Procedures and Lines of Authority	8
6.1	Duties Of Key Personnel	8
Table 6-1	Flow Chart	9
6.2	Fire & Explosives	13
Table 6-2	Fire Fighting Information	15
Table 6-3	Control Measures	16
Table 6-4	Evacuation Distances	17
6.3	Environmental Releases	18
Table 6-5	Environmental Release Procedures	20
6.4	Security	21
6.5	Bomb Threat	21
Table 6-6	Bomb Threat – Conversation Guidelines	21
6.6	Lines of Authority	22
7.0	Notification and Reporting	23
Table 7-1	Reportable Substances Quantity List	25
8.0	Decontamination	27
9.0	Work Site Closure / Shut Down	27
10.0	Response to Natural Disaster Preventive Measures	28
11.0	Work Site Start Up	29

Work Site Phone Numbers and Magazine / Plant Details

- Appendix 1 DNCI Emergency report form
- Appendix 2 DNCI Corporate Contacts
- Appendix 3 ERA Contact List
- Appendix 4 Management and Site Contact list
- Appendix 5 Site Specific Information
- Appendix 6 Bomb Threat Checklist

- Appendix 7 New/Transferred Employee or Annual Refresher Form
- Appendix 8 Annual Fire Department Review Form / Debrief Form
- Appendix 9 TDG Regulation Class Quantity Emission Limit

1.0 SCOPE

This document provides a Work Site Emergency Response Plan covering fire/explosion, spills, security breach, bomb threat, evacuation and prescribed actions that employees must take to ensure employee and public safety in the event of an emergency. The general reference to DNCI's "Work Sites" throughout this document includes magazines, plants and miscellaneous work locations.

The Emergency Response Plan appearing on Dyno Nobel Canada Inc.' database is a controlled document. Uncontrolled copies of this ERP are provided to customers and associates who own the land on which DNCI's worksite is located, plus applicable municipal and regulatory authorities. As well, uncontrolled copies are issued to all Company employees and are placed in all central offices and Company delivery vehicles.

2.0 RELATED DOCUMENTS

The following documents also relate to emergency situations that can arise and should be held at each Work Site:

- Federal, Provincial and Municipal regulations, standards and guidelines
- Corporate Policies plus MSA Standards & Procedures
- Standard Operating Procedures (SOP's)
- Dyno Nobel General and Specialized Work Rules
- Material Safety Data Sheets
- Prime Contractor's / Customer's ERP
- Transportation ERAP #2-1037
- Crisis Communication Plan

3.0 ERP OUTLINE

3.1 The following materials are covered by this ERP:

Fuel Oil
ATF Hydraulic Fluid
Ammonium Nitrate Prills and Solution
Sodium Nitrite
Sodium Thiocyanate
ANFO
Emulsion

Packaged Explosives
Detonators
Acetic acid
Diethylene glycol
Aluminum
Enviro CFE

3.2 The following situations are addressed in this ERP:

- Fire / Explosion
- Storage Tank Failure
- Spills from Product Delivery Trucks
- Spills from Raw Material Delivery Trucks
- Process Spills
- Shut down due to weather, floods, lightning, fires, explosions and other threats to the security and operation of DNCI's facilities, equipment and material.
- Bomb Threats
- Quantities of spills and reportable to Dyno Nobel and authorities

3.3 This ERP covers:

Preparation	Reporting
Training	Waste Disposal Permits
Lines of Authority	Containment
Notification	Inspection
Decontamination	Maintenance

3.4 The following definitions apply to this plan:

DNCI Corporate contact : A DNCI corporate employee who is assigned to receive Emergency Calls at all times from the answering service.

ER Advisor: Emergency Response Advisor (ERA), who will normally be the applicable General Manager, Area Manager, or Technical Advisor who will liaise with First Responders.

OSC: (DNCI) On Scene Coordinator, the Senior DNCI employee at an incident site who manages and controls DNCI resources in support of First Responders and incident recovery.

ERT: Emergency Response Team, DNCI personnel dispatched to an incident site to assist First Responders and conduct incident recovery under the direction of the OSC.

4.0 PREPARATION AND PLANNING

- 4.1 In order to provide competent emergency response at Dyno Nobel Canada Inc.' magazines, plants and worksites, first responders (local fire departments and mine rescue personnel) must be thoroughly briefed on an annual basis of the potential hazards involved in a Dyno Nobel Canada Inc. worksite fire. To this end, Work Site Supervisors must take fire department plus mine safety and security representatives on an annual magazine / plant tour to view:

Explosives Storage Areas	Evacuation (Meeting) Area
Bulk Emulsion Equipment	Communications Equipment
ANFO Blending Area	Facility Layout
Fire Fighting Equipment Sites	(Waste) Burn Facilities

A record of each explosives worksite tour and the names of the first responder representatives attending are to be documented and kept on file.

Annual Fire Department Review Form (Appendix 9)

- 4.2 All DNCI employees shall review this ERP on an annual basis and participate in ERP drills / exercises when scheduled.
- 4.3 All worksite accidents involving fire, explosion, reportable spills/emissions, breaches of security and bomb threats are to be reported to applicable authorities and senior management. As per incident reporting procedure
- 4.4 Spill procedures for each of the materials listed in section 3.1 are outlined in Table 6-3. All procedures specify: Method of Cleanup, Method of Disposal and Protective Clothing. Based on the procedures presented in Table 6-3, worksite supervisors must ensure that adequate clean-up equipment and materials are readily available and in good condition.

- 4.5 Worksite information for each of DNCI's facilities is contained in the attached appendices. The ERP is revised whenever significant changes are made.
- 4.6 Current Material Safety Data Sheets (MSDS) are to be kept at each Work Site for all hazardous materials that are stored and handled at the Work Site. Copies of current product MSDS' are also made available to customers and landowners. Obsolete MSDS' will be replaced as new ones are issued.
- 4.7 Each Work Site will hold and maintain in good repair, appropriate fire fighting and spill control equipment for potential emergencies. Fire extinguishers, hoses and other fire fighting equipment are to be visually inspected on a monthly basis to ensure Magazine, Plant, Work Site and delivery vehicle readiness.

5.0 TRAINING

- 5.1 All employees will complete training on the contents of this Plan during their "new hire" orientation and review the plan annually.
- 5.2 A trained person is considered to have reviewed all related documents (Section 2.0), to have been instructed on the use of related equipment and procedures, and to have discussed with their Supervisor or trainer, questions and issues of concern.
- 5.3 Training records, including certificates for training completed, are to be kept onsite in the Employee's Training Record.
- 5.4 The Magazine, Plant or Work Site Supervisor/Manager will certify their employees as having received training by signing the training form. In signing the training form, the Supervisor / Manager will have satisfied themselves that trained employees are able to:
 - Recognize fire and explosive hazards for the materials and processes to which they are exposed /involved with;
 - Competently use Fire Fighting / Fire Protection Equipment (Note: employees should receive refresher training in the use of fire extinguishers at least every three years)
 - Competently use applicable personal protective equipment (PPE) when handling hazardous substances;
 - Recognize and be familiar with substances which become hazardous wastes when spilled; and

- Follow SOP's and use established work practices to minimize the potential for fires, explosions, environmental releases and other accidents.
- Worksite Managers / Supervisors will ensure that all contractors receive a worksite orientation before commencing work or being left unaccompanied in the worksite. Following the orientation process, the contractors will be required to sign off on the Contractor Checklist acknowledging training in the applicable areas including the site emergency response plan.
- All Plant & Magazine sites will have in place, a continuous (24 hour) access control system to control the entrance, presence and exit of visitor and contractors and their equipment and materials
- Employees must be trained on Reportable Quantities to the Government in the unlikely event of a spill.
- All employees are aware of evacuation routes, muster point location, and all-clear notice procedure.
- New/Transferred employee or Annual Refresher sign-off form located in Appendix 8

6.0 EMERGENCY PROCEDURES AND LINES OF AUTHORITY



6.1 GENERAL


Reporting Incidents Flow Chart (continued on next page)

Table 6-1
Emergency Response Flow Chart

Reporting Incidents

Property Loss/Fly Rock/Environmental Spill/Injury

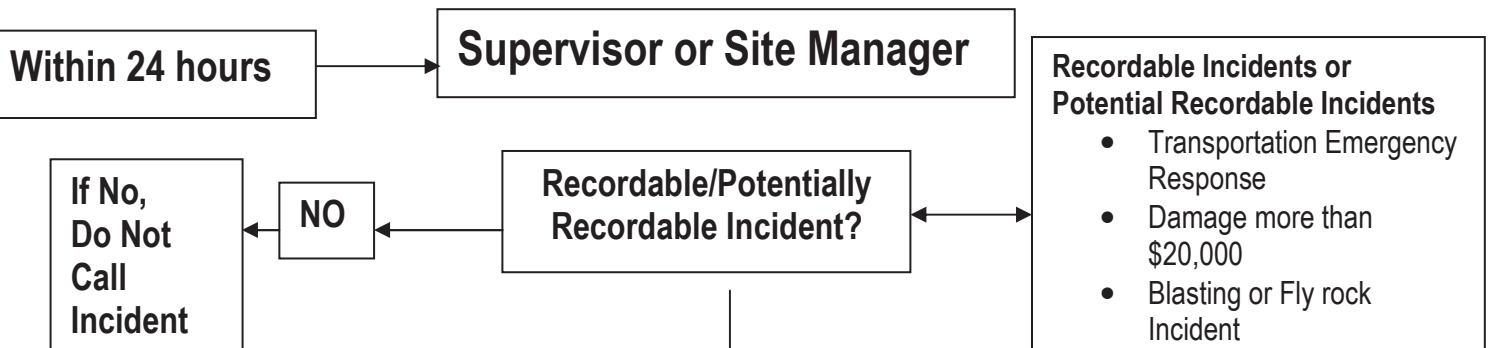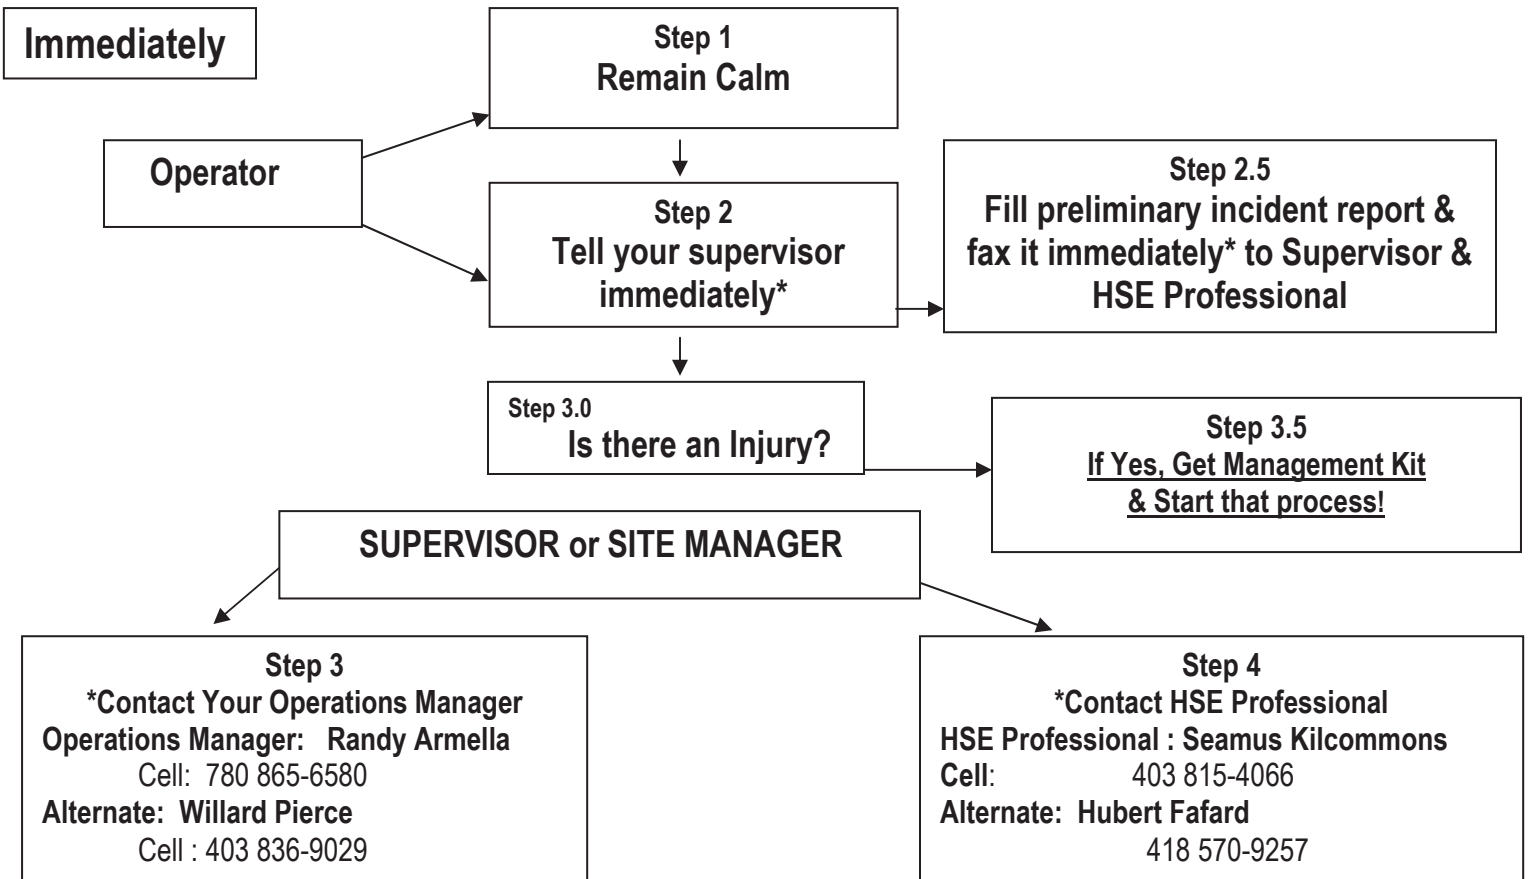

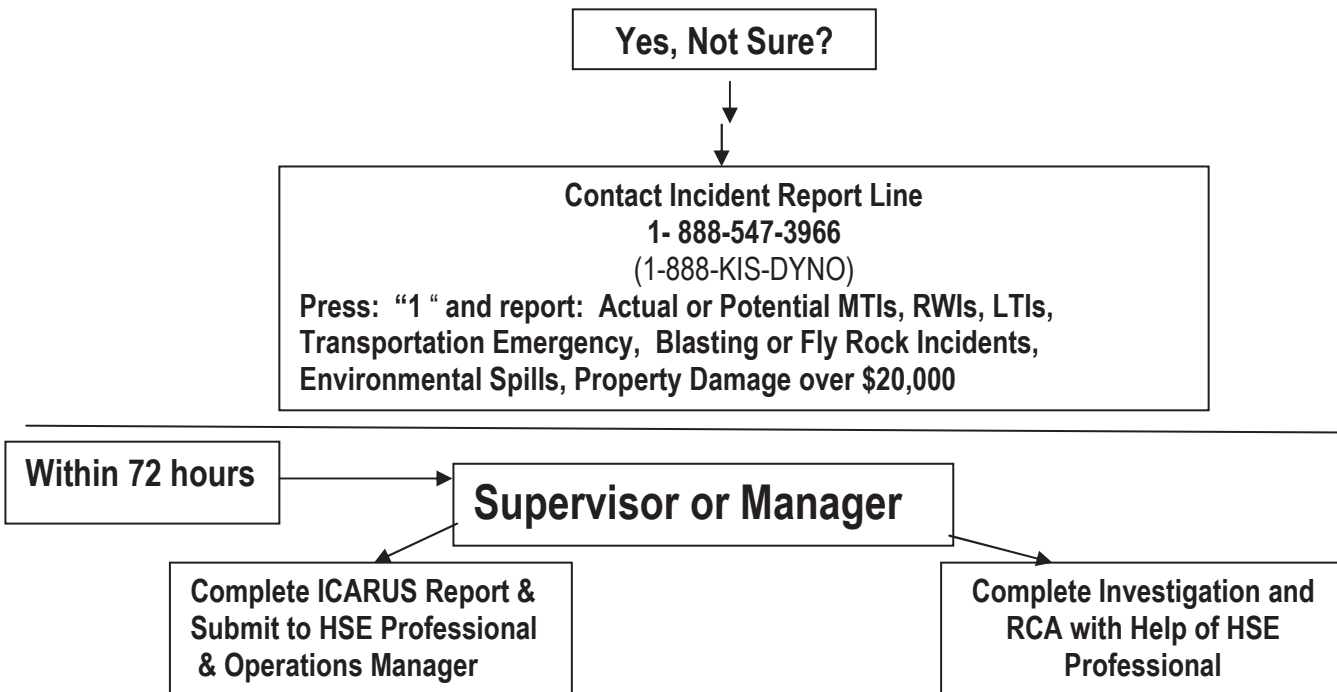

SITE SUPERVISOR/DELAGATE
EXPERIENCING EMERGENCY / POTENTIAL EMERGENCY

- **CALL FOR EMERGENCY ASSISTANCE**
In the event of an emergency, accidental release or imminent accidental release involving explosives, eliminate potential sources of detonation where possible (eg. turn off the ignition of a vehicle), call **911** (or the local police number) for immediate assistance, **call the site Supervisor/ Area Manager** and initiate the site's Emergency Response Plan. If normal phone systems are down other methods of communication can include two way radios, satellite phones, pager, e mail and vehicle satellite tracking systems.
- **WARN PUBLIC WITHIN EVACUATION DISTANCES IF RISK OF DETONATION**
Should there be explosive detonations, or the risk of detonations due to the presence of fire or other detonating factors, advise the First Responders (or anyone within the immediate vicinity if First Responders are not at the scene) of the risk and applicable safety distances per Table 6-4, page 17 (liaise with Emergency Response Advisor (ERA) if time permits). Help organize perimeter guards to prevent people from entering the evacuation zone.
Note: See ERP, page 17 Table 6-4 for Evacuation Procedures.

- **ASSIST LOCAL AUTHORITIES**

Assist First Responders and Local Authorities in eliminating the emergency situation, and liaise with DNCI's On-Call Employee / ERA until relieved by the Company's Emergency Response Team (ERT).

TO RESPOND TO AN EMERGENCY CALL

DNCI Corporate contact instructions:

Upon receiving a call for emergency response assistance, keep a log of all subsequent communications and actions, and do the following:

1. Immediately obtain the name and callback number of the caller, in case the telephone line is lost.
2. Obtain information as fully and accurately as possible following the emergency report form (see appendix 1).
3. Call an ER Advisor for the applicable Region (see appendix 2) and report the emergency situation. In turn, the ER Advisor will phone the emergency scene caller, establish ongoing contact, assess the emergency, determine what Company resources and/or contracted emergency response services are required and organize an Emergency Response Team – ERT to proceed to the emergency scene if required.
4. Assist the Emergency Response Advisor (ERA).
5. Liaise with Company Executive / Senior Managers.

Emergency Response Advisor (ERA) instructions:

1. Call the Branch/Plant Supervisor nearest the emergency scene plus provincial & federal authorities (see applicable appendix to Annex D) to advise them of the situation and the need for an emergency response.
2. Designate, assemble and dispatch an Emergency Response Team (ERT), made up of Groups 1 & 2 personnel (see ERAP pg. 16 and Annex D) under the leadership of an On Scene Coordinator (OSC), if required.
3. Authorize the dispatching of additional resources, communications, transportation and contracted services as necessary.
4. Contact and instruct the designated Emergency Response Team (ERT) to proceed to the emergency scene with the required vehicles and equipment.

5. Liaise with the Person in Charge of the Emergency) and/or Local Authorities to obtain a situation update.
6. Advise Local Authorities as appropriate, regarding the properties, hazards and handling procedures for the explosives involved in the emergency. In particular, advise the Local Authorities of appropriate evacuation distances per Table 6-4 pg. 17.
7. Continue to consult with the Local Authorities as appropriate, plus the Company's On-Scene Coordinator (OSC), to stabilize and eliminate the emergency.
8. Refer to **Regional Manager** Tom Medak or Cory Redwood .(see appendix2)) for any media requests in accordance to the Crisis Communication Plan (CCP). Media contacts shall be through Regional Manager designated for the area.
9. Contact the explosives supplier and / or transporter (if other than DNCI) to advise them of the emergency and to request their assistance if/as required.

ON-SCENE CO-ORDINATOR (OSC)

- The On-Scene Coordinator (OSC) is the Company's representative and local authority in charge of all company actions and resources at the emergency scene. Once the OSC arrives at the emergency scene, the ERA will transfer communication with First Responders/Local Authorities to the OSC. In turn, the OSC will liaise with the ER Advisor as required. Throughout the Company's emergency response, the OSC will ensure that First Responders and Company personnel (employees and contractors) observe all safety and regulatory standards and procedures.
- The OSC may revise / adjust the composition of the Emergency Response Team (ERT) and supporting resources as required. The OSC may, in consultation with the ER Advisor, contract commercial services to assist in addressing and resolving the emergency situation.
- The OSC will oversee the Company's local involvement with emergency services, government (municipal & provincial) and public interests until the emergency is fully resolved. Post-emergency activities (clean-up, restoration, etc.) under the direction of the Environment Manager may be delegated to an appropriate Branch, Plant or Area Manager. **EMERGENCY RESPONSE TEAM (ERT)**
- Selected emergency response personnel will take their direction to assemble and proceed to the emergency scene from the ERA or their representative. Team members will immediately report to the On-Scene-Coordinator.
- The primary role of the ERT is to provide a competent and trained / certified workforce plus specialized equipment and material to assist First Responders / Local Authorities in the stabilizing and elimination of an 'explosives emergency', and to retrieve / recover, repackage and remove to safe and secure storage, non-detonated explosives.

- While at the emergency scene, ERT members will take their direction from the Company's OSC and remain available until released by the OSC.

NOTE:

ONLY INDIVIDUALS WHO HAVE RECEIVED TRAINING AS REQUIRED UNDER THE TRANSPORTATION OF DANGEROUS GOODS (CLEAR LANGUAGE) REGULATIONS, OR WHO ARE WORKING UNDER THE DIRECT AND CONTINUOUS SUPERVISION OF AN EMPLOYEE WHO HAS BEEN TRAINED FOR CLASS 1 DANGEROUS GOODS UNDER TDG, MAY PARTICIPATE IN SITE CLEAN-UP ACTIVITIES SUCH AS PICKING UP, REPACKAGING AND TRANSPORTING EXPLOSIVE MATERIAL.

6.1.1 In any emergency the Work Site Supervisor/Manager or their delegate must take certain actions, including the following:

- Call local fire/emergency authorities (at mine sites, also call Mine Fire, Safety and Security if different and give relevant information).
- Account for all employees and visitors. Arrange for Rescue of anyone who may be trapped, without endangering oneself or others.
- Notify Dyno Nobel Canada Inc. ERA's so that necessary arrangements can be made for technical / administrative support, including accident reporting and investigation plus continued/alternate production. The following information should be provided and refer to appendix 1:

What Occurred	Time of Occurrence
Action Taken	People Contacted
Status of Situation	Anticipated Follow-up

6.2 FIRE & EXPLOSIVES

6.2.1. There are three categories of fire that may involve explosives:

I. Fires Directly Involving Class 1 Explosives and Blasting Agents

- **DO NOT FIGHT THE FIRE.** Instruct all fire fighters on the scene not to fight fire with explosives.

- Shut off power at main breakers if possible. At mine sites, call Mine Security or Fire/Rescue. At all other DNCI locations call local Fire/Rescue personnel.
- Evacuate all personnel from the Work Site to the safe meeting place as outlined in the Work Site Appendix.
- Set up a communications base at the meeting place and guard against anyone entering the area.

II. Fires Involving Components For Manufacture of Blasting Agents

Bulk blasting agents may be in the form of emulsion or ANFO. ANFO is a mixture of prilled ammonium nitrate and fuel oil.

Under conditions of large mass, intense heat, confined dust / vapor buildup, and the right mixture combination of the basic ingredients, emulsion and ANFO will explode. The probability of explosion with ammonium nitrate (AN) alone is very small, but increases when under intense heat and confinement. Table 6-1 includes recommended fire fighting procedures for each of these substances.

III. Fires Involving Dyno Nobel Canada Inc. Trucks

In cases where the Dyno Nobel Canada Inc. delivery trucks are in a building that is on fire, if there is no explosives and safe to do so, may be moved provided access to the truck and exit from the building is not barred by flames or smoke, with available fire extinguishers with caution only if the fire is small and not in the storage compartment.

Fires on re-pump or other bulk explosive delivery vehicles shall not be fought if the fire involves the explosives compartment. Fire fighting measures should be taken immediately to prevent any fire such as a tire, electrical or cab fire from reaching the explosives compartment.

Fires on other transport vehicles may be fought with caution. Fires that cannot be controlled sufficiently to avoid involvement of the vehicle's fuel compartment shall be left and personnel evacuated to a safe distance.

- 6.2.2.** When a fire is small and does not involve any explosive agents, it may be fought with plant extinguishing equipment. If the fire is widespread and intense, all

personnel, including visitors and contractors should be evacuated to the meeting area outside the main gate.

Table 6 - 2
FIRE FIGHTING INFORMATION

MATERIAL	RECOMMENDED FIRE-FIGHTING METHODS	SPECIAL CONSIDERATION
Ammonium Nitrate Prill – Odorless white to light tan crystalline solid	Use flooding amounts of water in early stages of fire. Keep upwind. AN is an oxidizing agent which supports combustion and is an explosive hazard if heated under confinement that allows high-pressure buildup. Ensure good ventilation and remove combustible materials if it can be safely done. Evacuate to designated area if fire cannot be controlled.	Toxic oxides of nitrogen are given off during combustion. Fire fighters require self-contained positive pressure breathing apparatus. Avoid contaminating with organic materials. Many powdered metals such as Al, Sb, Si, Cd, Cr, Co, Cu, Fe, Pb, Mg, Mn, Ni, Sn, Zn and brass react violently and explosively with fused AN below 200°C Sensitivity to detonation increases when heated.
Ammonium Nitrate Solution- Colorless/Odourless Liquid – white paste like solid when cooled	Use flooding amounts of water in early stages of fire. Cool containing vessels with with flooding quantities of water until after fire is out	Material will not burn, but thermal decomposition may result in flammable/toxic gases being formed. These products are nitrogen oxides and ammonia. (NO,NO ₂ NH ₃). Product may form explosive mixtures when contaminated and comes in contact with organic materials. Explosive when exposed to heat or flame under confinement. Avoid temperatures over 210°C (410°F) A self contained breathing apparatus should be used to avoid inhalation of toxic fumes
Acetic Acid – Colourless liquid with a pungent odour	Use dry chemicals, CO ₂ , Alcohol foam or water spray	Isolate and restrict area access, stay upwind. Water run-off and vapour cloud may be corrosive.
Sodium Thiocyanate – White solid - odourless	Use extinguishing media most appropriate for the surrounding fire	Wear self contained breathing apparatus – MSHA/NIOSH approved or equivalent, and full protective gear. During a fire, irritating or highly toxic gases may be generated by thermal decomposition or combustion.
Sodium Nitrite – Oxidizing agent - white to light yellow crystals- faint odour	Flammability class – not regulated. Flood with water only – Isolate materials not involved in the fire and cool containers with flooding quantities of water until well after the fire is out.	Self contained apparatus should be worn in a fire involving Sodium Nitrite. Thermal decomposition will cause reddish brown nitrogen oxides to be released.
Fuel Oil (No. 2 diesel) Dyed or pale yellow liquid with petroleum odor; and/or ATF Fluid	Use water spray to cool fire-exposed surfaces and to protect personnel. Shut off fuel from fire. Use foam, dry chemical or water spray to extinguish fire. Avoid spraying water directly into storage container due to danger of boil-over.	Avoid strong oxidizing agents.

Explosive emulsions, ANFO, packaged explosives and firing devices.	Fire involving explosive materials must never be fought. Evacuate the incident scene. Do not confine (ventilate to prevent / reduce pressure build-up if safe to do so).	Explosion hazard.
Enviro CFE	Dry chemical, foam, water spray (fog). Use water spray to cool exposed surfaces and containers	OIL FLOATS ON WATER. Do not use direct or heavy water stream to fight fire. Use organic vapour respirator or self-contained breathing apparatus to fight fire.

**Table 6 - 3
CONTROL MEASURES FOR FIRE**

MATERIAL	RECOMMENDED FIRE-FIGHTING METHODS	SPECIAL CONSIDERATION
Acetic acid	Small fire: type ABC dry chemical or CO ₂ fire extinguisher. Large fire: water fog or foam.	May react violently with oxidizers and nitric acid. May react with aluminum powder and give off highly flammable hydrogen gas.
Aluminum	Small fire: type D fire extinguisher, dry sand. Never use water.	May react with oxidizers (nitrate and perchlorate) and acids. Avoid contact with water. Highly flammable hydrogen gas may be released.
Diethylene glycol	Small fire: type ABC dry chemical or CO ₂ fire extinguisher. Large fire: water fog.	Keep away from oxidizers (nitrates and perchlorate). Explosion hazard if heated under confinement.

EVACUATION PROCEDURES

Advise the first emergency responders at the scene (police or fire) of the need to evacuate using the guidance in the Emergency Response Plan. Employees at the scene should assist local emergency services to the best of their ability to accomplish this. For incidents within a worksite such as a mine, quarry or construction operation, in most cases access is radio controlled. The quickest way of alerting people, therefore, is by site radio. Clearly state your location, situation and call for assistance in evacuating the area.

DO NOT FIGHT EXPLOSIVES FIRES. EVACUATE THE AREA AND LET THE FIRE BURN ITSELF OUT.

THE MINIMUM EVACUATION DISTANCE IS AS OUTLINED IN TABLE 6-4 (Pg. 17) FOR ALL DIRECTIONS (which is based on a higher traffic / risk / population density within the area, without benefit of protective features such as berms and hills. (**Transport Canada requires 1,600 meters for situations that involve high-risk surroundings**) upon determining actual quantity of explosives refer to Table 6-4 as per ERD quantity of distances.

Table 6 - 4
EVACUATION DISTANCES
Based On Amount of Explosives Present

Explosive <u>Quantity</u>		Metric <u>Distance</u>		English <u>Distance</u>
250 kg		70 Meters		230 Feet
500 kg		100 Meters		320 Feet
1,000 kg		150 Meters		500 Feet
2,000 kg		240 Meters		800 Feet
5,000 kg		400 Meters		1,300 Feet
7,000 kg		450 Meters		1,450 Feet
10,000 kg		480 Meters		1,550 Feet
20,000 kg		700 Meters		2,300 Feet
40,000 kg		800 Meters		2,640 Feet
60,000 kg		870 Meters		2,860 Feet
80,000 kg		960 Meters		3,150 Feet
100,000 kg		1040 Meters		3,420 Feet
120,000 kg		1100 Meters		3,610 Feet
>120,000 kg		1600 Meters		5,250 Feet

6.3 ENVIRONMENTAL RELEASES

6.3.1 Procedure For Fuel Oil Storage Tank Failure

- Assess the magnitude of the leak.
- If the leak is slow and the source can be determined, take the appropriate action to prevent further leakage.
- Transfer fuel from storage tank into drums if necessary.
- Collect spilled material, including contaminated soil, with absorbent pads or inert solid absorbent and store in drums labeled for disposal.
- If the leak is large and further leakage cannot be prevented, allow the dyke to fill. Transfer to drums, label for reuse or disposal, and store.
- Inspect empty tank to identify failure/cause of leak and repair tank.

6.3.2 Procedure For Raw Material Truck Spills

- Identify the material involved, assess the magnitude of the spill or leak and assist the driver to take appropriate action to stop the leak, taking care to prevent run off and/or entry into any water course or drainage system near the spill site.
- For AN prill, shovel spilled material into drums, label for reuse or disposal, and store. Use a non-sparking shovel to transfer spilled material into lined drums.
- For spilled fuel, contain by dyking with earth. Collect spilled fuel with absorbent pads or solid inert absorbent, transfer into drums, label and store for disposal.
- Remove contaminated soil for disposal in conformance with Environment Canada standards.

6.3.3 Procedure For Process Spills

- Identify the material involved and assess the magnitude of the spill or leak, taking care to prevent run off and/or entry into any watercourse or drainage system near the spill site.
- For AN prill, shovel spilled material into drums, label for reuse or disposal, and store.
- For spilled fuel, contain by dyking with earth. Collect with absorbent pads or solid inert absorbent, transfer into drums, label, and store for disposal.
- In the case of leaking bags of ANFO, sweep or shovel the spilled material into a clean drum or other suitable container, label for reuse or disposal, and store.
- Remove contaminated soil for disposal in conformance with Environment Canada standards.

- Have any process equipment (pumps, process lines, parts, gauges, etc.) involved in a leak or spill inspected and repaired or replaced. Re-inspect and test if necessary after repair is affected.

6.3.4 **Procedure For Emulsion Tank Failure**

- Assess the magnitude of the leak.
- If the leak is slow and the source can be determined, take the appropriate action to prevent further leakage.
- Transfer remaining emulsion from leaking storage tank into another storage tank, a tanker trailer if available, or into drums as necessary.
- Collect spilled material using double diaphragm pump(s) and store in labeled drums for reuse or disposal at the mine.
- If the leak is large and further leakage cannot be prevented, allow the room to fill. Transfer to drums, label for reuse or disposal, and store.
- Inspect empty tank to identify failure/cause of leak and repair or replace the tank

6.3.5 **Procedure For Fire**

- In the event of a raw material or product fire, take care to protect all persons from exposure to smoke and gaseous emissions from the fire.
- Potential toxic gaseous emissions from fires involving explosive materials include:

Oxides of Nitrogen
Carbon Monoxide
Cyanide Gas

- All fires must be reported to local authorities and Mine Site Security as soon as possible.
- Self contained breathing apparatus is required for fighting a fire in the plant.
- Follow procedures outlined above for any spills and leaks resulting from fire when it is safe to do so

Table 6 - 5
ENVIRONMENTAL RELEASE PROCEDURES

MATERIAL	SPILL AND LEAK PROCEDURES	WASTE DISPOSAL
Ammonium Nitrate Prill (odorless white to light tan crystalline solid)	Remove source of heat and ignition. Sweep or shovel spill into a clean, non-combustible container. Wash remaining trace residues with water. Wear rubber gloves and safety glasses to minimize contact with skin and eyes.	Re-use if possible or give it to a farmer as a fertilizer. If not possible, dispose of as-is in approved. Remove as much as possible the spilled material as a solid.
Ammonium Nitrate Solution- Colorless/Odourless Liquid – white paste like solid when cooled	Small spill - Dike and contain spilled material. Ensure spilled material does not enter sewers, wells or water courses. Allow to solidify. Use appropriate tools to place in container for disposal. Larger spill - Dike and contain spilled material. Ensure spilled material does not enter sewers, wells or water courses. Notify downstream water users. Allow to solidify. Use appropriate tools to place in container for disposal.	Call for assistance for disposal. Ensure disposal complies with regulatory requirements and regulations.
Fuel Oil (dyed or pale yellow liquid with petroleum odor)	Eliminate any source of ignition. Prevent spills from entering watercourses or drainage systems. Contain with sand or earth. Recover with pump or inert absorbent material into clean container. Wear safety glasses and rubber gloves to prevent contact with the eyes and skin.	Dispose of recovered material in approved landfill or other waste disposal facility.
ANFO (Ammonium Nitrate Fuel Oil)	This material is an explosive. Remove all sources of heat and ignition. Transfer into clean plastic container with a plastic shovel. Label drums. Wear rubber gloves.	Recycle product, if possible. If not practical, explode it inside a borehole or burn it in an authorized burning ground.
Emulsion	This product is a blasting agent. Remove all sources of heat and ignition. Prevent spills from entering watercourses or drainage systems. If large amount of emulsion is involved, contain spill with earth or sand found locally. Recover spilled material with a diaphragm pump. Use of a diaphragm pump also requires an air compressor. Limitation of the pump suction is approximately 2.5 meters, pump discharge is approximately 8 meters. Use a screening device on pump suction hose. Out of area spills will require taking two pumps and extra hose. Transfer the product into a tanker trailer or clean 200 liter drums. If small amount of emulsion is involved, transfer material into a clean plastic container with a plastic shovel. Label tanker trailer or drums. Wear rubber gloves and rubber boots.	Recycle product, if possible. If not practical, explode it inside a borehole or if large amount is involved, demulsify it with liquid detergent.

Enviro CFE	Eliminate any source of ignition. Prevent spills from entering watercourses or drainage systems. Contain with sand or earth. Recover with pump or inert absorbent material into clean container. Wear safety glasses and rubber gloves to prevent contact with the eyes and skin.	Dispose of recovered material in approved landfill or other waste disposal facility.
Sodium Thiocyanate – White solid - odourless	Ensure adequate ventilation whe handling Sodium Thiocyanate. Keep containers closed when not in use. Wear appropriate PPE – eye protection, gloves and appropriate clothing to prevent skin exposure.	Vacuum or sweep up material and place into a suitable disposal container. Avoid run off into storm sewers and ditches which lead to waterways. Not regulated as a hazardous material. Chemical waste generators must consult appropriate hazardous waste regulations to ensure complete and accurate classification.
Sodium Nitrite – Oxydizing agent - white to light yellow crystals- faint odour	In the event of a spill or leak, contact the vendor (403-263-8660) for advice. Wear respirator, protective clothing and gloves. Vacuuming is the recommended method to clean up spills. Do not sweep or use compressed air for clean up. Recover spilled material on non-combustible material, such as vermiculite. Use non-sparking tools and place in covered containers for disposal. Any recovered material mau be used for it's intended purpose , depending on contamination.	Dispose of the waste material at an approved hazardous waste treatment/disposal facility.
Acetic Acid – Colourless liquid with a pungent odour	Wear appropriate PPE – evacuate downind areas as required to prevent exposure and to allow fumes and vapours to dissipate. Prevent entry into sewers or streams. Dike if needed. Eliminate all sources of ignition. Neutralize the residue with sodium carbonate or crushed limestone. Absorb win an inert dry material and place in an appropriate container for disposal. Flush area with water to remove trace residue.	Waste disposal must be done in accordance with provincial and federal regulations. Empty containers must be recycled or disposed of through an approved waste management facility.

6.4 SECURITY

- 6.4.1. In the event of a breach of security at a Dyno Nobel Canada Inc. Work Site, a call is to be made to the RCMP / local Police Department at the discretion of the Supervisor/Manager, or their delegate. In the case of a breach of security, Dyno Nobel Canada Inc.' HSE, Regulatory Affairs and Executive / Senior Management shall also be informed immediately and provided with the same information as outlined in Section 6.1
- 6.4.2. Any person(s) apprehended during the course of a serious security breach shall be detained until the Police arrive (note: employees are not to put themselves at undue risk by attempting to apprehend or restrain a potentially violent person).

6.5 BOMB THREAT

- 6.5.1. The safety of employees and the public is of primary concern. A person receiving a bomb threat over the telephone should attempt to remain calm and keep the caller talking by asking the questions listed in Table 6-6 (ERP pg. 20). Recording (writing) as much information about the caller and their comments is also very important for future reference. If possible, alert a co-worker to the situation while talking to the caller.
- 6.5.2. The police / mine security should be advised of the bomb threat as soon as possible. Unless there is good reason to the contrary, all personnel should evacuate the Work Site and await the arrival of the police / first responders at the designated meeting area. Suspicious objects should be reported but not tampered with and other people should be prevented from entering the Work Site until the local authority has authorized a return to the Work Site. Employees should be prepared to assist local authorities in their search / inspection of the Work Site as necessary.

Table 6 - 6
CONVERSATION GUIDELINES IN THE EVENT OF RECEIVING
A BOMB THREAT
See Appendix 7

6.6 LINES OF AUTHORITY

- 6.6.1 Based upon the information available at the time of the incident, the Work Site Supervisor/Manager, in consultation with others (such as DNCI Senior Management, Mine/local authorities and/or Dyno Nobel advisors), will evaluate the incident and proceed with appropriate steps to implement this ERP. A decision on when to return to the scene of a serious incident will be made in like fashion, subject to approval by public authorities overseeing the incident.
- 6.6.2 The Work Site Supervisor/Manager will have overall responsibility for the implementation of this ERP and the supervision of all Company activities. Public authorities and the site owner have ultimate authority regarding the resumption of normal production activities.

7.0 NOTIFICATION AND REPORTING

- 7.1 Any incident that activates this ERP shall be documented on the DYNO Incident (Cintellate) Report. The Corporate Emergency Response Advisor must also be notified and in turn will advise the:

HSE Manager
Area Manager

Vice President Operations

It is the responsibility of the HSE Manager or his delegate to report the incident to DYNO's HSE Management Team. A major incident involving a fire with emissions and/or a hazardous material spill shall be reported to a provincial Environment Officer under the direction of the Environmental Manager. Major incidents shall also be reported to the Chief Inspector, Explosives Branch, Natural Resources Canada; a Provincial/Territorial Safety Officer; and as applicable, an Emergency Measures Official.

Any incident which involves a spill at a Mine Site shall be immediately reported to the Mine Site Environmental Representative, and followed up with a copy of the incident report when complete.

7.2 Spills and Releases – Reportable and Significant Classifications

1) Determine if the spill/release is reportable

All environmental incidents are to be input into Cintellate. Reportable spills/releases are not only input into Cintellate, but the investigation and corrective action sections of Cintellate must be completed. To assist in determining if a spill/release is reportable, a listing of common materials with assigned reportable quantities is referenced (see Appendix 5, Reportable Substance List). The reportable quantities utilize the most stringent "reportable quantity" in Canada. Even if the spill/released material is recovered, the media impacted by the spill/release may be reportable to authorities (e.g., a portion of a spill reaching a source of drinking water or wetland). In addition, a spill/release is reportable if the amount equals or exceeds the Dyno Nobel Default Threshold.

2) Determine if the spill/release is significant

- Significant spills/releases are disclosed in the company's annual report. Significant spills/releases trigger time-critical internal actions as required by the company's procedures (crisis communication, internal investigation, etc)

The following table is provided to assist in making these determinations:

Reporting of Environmental Spills

Is the spill reportable?

- Yes if above a Reportable Quantity
- Yes if oil sheen is visible or sludge/emulsion is deposited beneath water surface
- Yes if water quality standards are exceeded
- Yes if from a UST exceeding 25 gallons or result in a sheen

Is the spill significant?

- Yes if authorities implement a national contingency plan
- Yes if "sensitive" environmental features have been impacted
- Yes if neighbors are evacuated
- Yes if authorities and/or neighbors file complaints and/or demand response activities
- Yes if financial impact is >US\$100K
- Yes if media coverage is adverse.

7.3 Internal investigation reports will include:

- Name, work address, and phone number of the investigating (reporting) individual
- Identification and quantity of the released substance
- Time, duration, and location of the release
- Nature and quantity of injuries, property damage, production loss, administrative penalty and/or legal liability
- Precautions taken during the incident
- Relevant environmental conditions
- Corrective actions taken at the time of the incident
- Recommended corrective actions to prevent future occurrence

7.4 Senior Management shall be immediately informed by telephone of any major incident that requires Government notification as per Dyno Nobel's reporting procedures.

7.5 Major incidents involving explosive material shall also be reported to the Chief Inspector, Explosives Branch, and Natural Resources Canada by the applicable Regulatory Affairs Coordinator.

Table 7 - 1
REPORTABLE SUBSTANCE QUANTITY LIST

Material Released	Reportable to Authorities		Dyno Nobel Default Threshold (Proposed)
	If Recovered	If Unrecoverable/ Abandoned / Disposed	
AN Solution	Not Reportable if it can be used as a product	45 Kg (100 lbs) as released oxidizer (not media specific)	225 Kg (500 lbs)
	44 Kg (100 lbs) for ammonia if released into water	45 Kg (100 lbs) for ammonia if released into water	
	Report if released to Drinking Water (DW std at 10mg/L-N)	Report if released to Drinking Water (DW std at 10mg/L-N)	
	Report if released to aquatic ecosystem (NH3 toxic to fish)	Report if released to aquatic ecosystem (NH3 toxic to fish)	
AN Prill	Not Reportable if it can be used as a product	45 Kg (100 lbs) as released oxidizer (not media specific)	225 Kg (500 lbs)
	45 Kg (100 lbs) for ammonia if released into water	45 Kg (100 lbs) for ammonia if released into water	
	Report if released to Drinking Water (DW std at 10mg/L-N)	Report if released to Drinking Water (DW std at 10mg/L-N)	
	Report if released to aquatic ecosystem (NH3 toxic to fish)	Report if released to aquatic ecosystem (NH3 toxic to fish)	
SN Prill	Not Reportable if it can be used as a product	45 Kg (100 lbs) as released oxidizer (not media specific)	225 Kg (500 lbs)
	Report if released to Drinking Water (DW std at 10mg/L-N)	Report if released to Drinking Water (DW std at 10mg/L-N)	
Acetic Acid	453 Kg (1,000 lbs)	454 Kg (1,000 lbs)	225 Kg (500 lbs)
	Report if released to Drinking Water (DW std at 10mg/L-N)	Report if released to Drinking Water (DW std at 10mg/L-N)	
Sodium Nitrite	45 Kg (100 lbs)	45 Kg (100 lbs)	225 Kg (500 lbs)
	Report if released to Drinking Water (DW std at 1mg/L-N)	Report if released to Drinking Water (DW std at 1mg/L-N)	
Fuel Oil	Reportable if sheen on surface of pond, stream, etc. or sludge within such	Reportable if sheen on surface of pond, stream, etc. or sludge within such	225 Kg (500 lbs); 261 L (69 gallons)
	State Regulations - Varies from Any Amount to specific Trigger Amounts	State Regulations - Varies from All Spills to specific Trigger Amounts	
	95 L (25 gallons) from UST	96 L (25 gallons) from UST	
Mineral Oil	Reportable if sheen on surface of pond, stream, etc. or sludge within such	Reportable if sheen on surface of pond, stream, etc. or sludge within such	225 Kg (500 lbs); 261 L (69 gallons)

Emergency Response Plan for Dyno Nobel Canada Inc.' Magazine, Plant & Work Sites

	State Regulations - Varies from Any Amount to specific Trigger Amounts	State Regulations - Varies from All Spills to specific Trigger Amounts	
	95 L (25 gallons) from UST	96 L (25 gallons) from UST	
Emulsifier Agents	Reportable if sheen on surface of pond, stream, etc. or sludge within such State Regulations - Varies from Any Amount to specific Trigger Amounts	Reportable if sheen on surface of pond, stream, etc. or sludge within such State Regulations - Varies from All Spills to specific Trigger Amounts	225 Kg (500 lbs); 261 L (69 gallons)
Granular Aluminum	Not Reportable	Not Reportable	225 Kg (500 lbs)
ANFO	Not Reportable if it can be used as a product 45 Kg (100 lbs) for ammonia if released into water Report if released to Drinking Water (DW std at 10mg/L-N) Report if released to aquatic ecosystem (NH3 toxic to fish) Reportable if sheen on surface of pond, stream, etc.	45 Kg (100 lbs) as released oxidizer (not media specific) 45 Kg (100 lbs) for ammonia if released into water Report if released to Drinking Water (DW std at 10mg/L-N) Report if released to aquatic ecosystem (NH3 toxic to fish) Reportable if sheen on surface of pond, stream, etc.	225 Kg (500 lbs)
Emulsion	Not Reportable if it can be used as a product 44 Kg (100 lbs) for ammonia if released into water Report if released to Drinking Water (DW std at 10mg/L-N) Report if released to aquatic ecosystem (NH3 toxic to fish) Reportable if sheen on surface of pond, stream, etc. or sludge within such	45 Kg (100 lbs) as released oxidizer (not media specific) 45 Kg (100 lbs) for ammonia if released into water Report if released to Drinking Water (DW std at 10mg/L-N) Report if released to aquatic ecosystem (NH3 toxic to fish) Reportable if sheen on surface of pond, stream, etc. or sludge within such	225 Kg (500 lbs)
Ethylene Glycol	2250 Kg (5000 lbs)	2250 Kg (5000 lbs)	225 Kg (500 lbs)
Sodium Thiocyanate	45 Kg (100 lbs) Report if released to Drinking Water (DW std at 1mg/L-N)	45 Kg (100 lbs) Report if released to Drinking Water (DW std at 1mg/L-N)	225 Kg (500 lbs)

8.0 DECONTAMINATION

- 8.1 DNCI's Standard Operating Procedures and safety rules establish work practices that minimize employees' direct and indirect contact with hazardous substances.
- 8.2 Equipment, rubber boots, gloves and clothes that have been contaminated can be washed with soap and water. Wash water should be collected and disposed of in an approved manner with other contaminated material.

9.0 WORKSITE CLOSURE / SHUT DOWN

9.1 Plant Shutdown (use appropriate lock-out/tag-out procedures)

- In the event that a plant is shut down due to weather, flood, or other adverse situation, the Plant Manager / Supervisor or his delegate will ensure that all non-essential power is shut off. The Plant Manager / Supervisor will secure all valves and flow devices so as to prevent accidental opening.
- The Plant Manager / Supervisor shall determine if any raw material or raw material storage will be contaminated or at risk of fire/explosion, and take steps to move the material or isolate it from the contamination / hazard source.
- If the power and/or gas will create a dangerous situation the Plant Manager / Supervisor will cut the outside supply of power, thereby isolating all plant equipment.
- The Plant Manager / Supervisor will advise local Mine authorities of the plant shutdown and preventative actions taken.
- All sensitive documents must be secured.

9.2 Magazine Closure (use appropriate lock-out/tag-out procedures)

- In the event that a magazine is closed due to weather, flood, or other adverse situation, the Supervisor/Manager or his delegate will ensure that all non-essential power is shut off. Also, the Supervisor/Manager will ensure that all magazines and compound gates are locked before leaving the site.
- The Supervisor/Manager shall determine if any products or raw materials will be contaminated and take steps to move the material or isolate it from the contamination source.
- If power and/or gas will create a dangerous situation the Supervisor/Manager will cut the outside supply of power, thereby isolating all magazine equipment.

10. **RESPONSE TO NATURAL DISASTER**

Hurricanes, tornadoes, floods, slides, forest fires, and earthquakes, have the ability to damage or destroy everything in their path. Yet much of the damage or destruction associated with such phenomena is the result of some secondary event, e.g. fallen power lines, ruptured tanks valves, pipes etc. If reasonable warning of an approaching disaster is received, efforts can be made to minimize damage by taking specific preventative measures. These measures are outlined in the following procedures.

1. Consult the Site Supervisor for guidance and proceed according to his direction. **SEE SITE SPECIFIC POTENTIAL HAZARDS APPENDIX 10**
2. If so directed, notify key personnel regarding the action being taken.
3. Collect important files, records and papers for safekeeping.
4. Open main electrical breaker to cut off all power to the site. (The main breaker is marked for easy identification).
5. Secure all buildings and equipment and lock the site gate.
6. Evacuate the site taking mobile equipment to safety.
7. Post Guards on site access routes to monitor the activities of unauthorized personnel.
8. A report of the incident must be submitted to the Area Manager within 24 hours.

10.1 **PREVENTIVE MEASURES**

10.2 **Waste Disposal Permits**

If nitrate waste is generated, a disposal permit must be obtained and kept up to date if the product will be disposed of off-site, or in mine tailings. Permits to dispose of other collected waste in the event of spills or leaks (such as described in Section 6.3) must also be obtained in consultation with mine / provincial environmental representatives

10.3 **Liquid Containment**

All fuel / oil storage tanks must be dyked according to the provisions of Federal and/or Provincial regulations (eg. National Fire Code, Environmental Protection Act), or have a double-walled tank.

A plan must be in place and materials on hand to create a dyke in the event of a large fuel or solution leak or spill or other emergency spill situation.

10.4 **Inspection**

All site emergency storage areas and equipment must be inspected monthly by qualified personnel, monthly for physical condition and serviceability,

and the results recorded according to quality and safety standard operating procedures.

All recommendations/orders made by NRC Explosives Branch inspectors, Fire Marshals and insurance inspectors must be responded to and acted upon accordingly. Copies of their reports are to be forwarded to DNCI's HSE representative for the region.

10.5 Maintenance

All preventive and breakdown maintenance must be carried out and recorded in accordance with standard operating procedures.

**11.0 WORK SITE START UP
(Restoration of Business)**

- 11.1 Before startup, the condition prompting the shutdown / closure must be over / corrected (i.e. flood, fire, explosion or blizzard).
- 11.2 All decontamination procedures must be followed and the site cleared and cleaned of any environmental waste hazards.
- 11.3 All repairs to plant equipment involving safety shutdowns and essential operating machinery must be completed.
- 11.4 All electrical circuits, plumbing and piping must be tested.
- 11.5 The Work Site Supervisor / Manager will ensure that all lockout and tag-out procedures have been followed and signed off.
- 11.6 The Work Site Supervisor / Manager will start up the facility by turning on individual switches to the components that have been shutdown.
- 11.7 Operational checks will be done to ensure that all equipment is functioning at safe working pressures and voltage.
- 11.8 The Work Site Supervisor / Manager will give the verbal "all clear" before workers will be allowed to return to work.
- 11.9 The Work Site Supervisor / Manager or one of their delegates will cancel / remove all roadblocks, terminate evacuation activities, and notify employees to return to normal activities.

APPENDIX 1

Basic Investigation Report (Factual Report not prepared Under Legal Professional Privilege)		
Incident Title		
Incident No.		
Incident Date		
Site		
Department / Location		
Report Author		
Report Date		
Investigation Manager		
Investigation Team Members		
Report Distribution		
Who was involved? name, job, title		
When did it happen? date & exact time		
Where did it happen? The exact location		
What was the person doing at the time? What product or equipment was involved		
What went wrong? Not your opinion, only factual information. Eg: an operator fell off a ladder, the hose broke; spill / quantity		
What happened? Describe the sequence and timing of events		
Immediate Control Actions What first aid treatment was given and or actions taken (valve turned off, electricity isolated) immediately after the incident to make the situation safe		
Interim Control Action The interim corrective actions to prevent re-occurrence		
5-Why Analysis - Consolidate the information above into a flow chart Double click on chart to enter visio and update as required		
Contributing factors What factors combined to make the situation unsafe – in descending order of importance		
Root Cause What were the root causes identified in the 5Why analysis – in descending order of importance		
Corrective Action	Who	Due Date
Comments		

APPENDIX 2

DNCI Corporate contact

Name	Position	Cell number
Benoit Choquette	Environmental Manager - Canada	(514) 246-6285
Seamus Kilcommons	H&S Manager Western Canada	(403) 815-4066
Tim Marles	H&S Advisor Artic	(403) 723-7540
Willard Pierce	Regional Manager West/ Central Canada	(403) 836-9029
Hubert Fafard	H&S Manager Eastern Canada	(418) 570-9257
Greg Brown	Sales Manager Western	(403) 512-5127
Ralph Olson	Operations Manager of Western Canada	(250) 713-8720
Randy Armella	Bulk Operations Manager	(780) 865-6580
Rick Chopp	H&S Manager – Central Canada	(705) 498-2855
Pierre St Georges	Regulatory Affairs Coordinator	(613) 677-1051
Cory Redwood	General Manager Western Canada	(867) 444-8533

APPENDIX 3

DNCI Emergency Response Advisors (ERA) per area

Name	Position	Cell number	Area (West, Central or East)
Tom Medak	Mgr, Bulk operations	(403) 818-4434	West / Arctic
Dennis Wall & Doug Robertson	Meadowbank Operations Supervisors	(867) 793-4610 opt 2 ext 6804 Cell (867) 222-3930	Arctic
Seamus Kilcommons	H&S Manager Western Canda	(403) 815-4066	West
Tim Marles	H&S Advisor Arctic	(403) 723-7540 office	Artic
Tyrone McClean	Operations manager, Manitoba and Saskatchewan	(204) 687-0046	Central
Corey Rachuk	Plant Supervisor - Flin Flon	(204) 687-0028	Central
Joss Forget	Operations Manager Northern Ontario	(705) 471- 8745	East
David Roy	Manager Plant operations	(418) 570-5604	East
Francois Lambert	Operations Manager	(514) 212-3490	East
Daniel Roy	Dyno Consult , Ste-Sophie	(514) 213-5889	East

APPENDIX 4
SITE: QAAQTUQ / Meadowbank Operations

MANAGEMENT AND WORK SITE CONTACT LIST

NAME	TITLE	BUSINESS PHONE	2 WAY RADIO	CELL PHONE
Dennis Wall	Site Supervisor	(867)793-4610 opt#2 ext 6804		(867) 222-3930
Doug Robertson	Site Supervisor	((867)793-4610 opt#2 ext 6804		(867) 222-3930
Tom Medak	Bulk Manager	(403) 236-9160		(403) 818-4434
Tim Marles	H&S Advisor Arctic	403 723-7540		TBA
Seamus Kilcommons	H&S Manager	(403) 236-9160		(403) 815-4066
Benoit Choquette	Environmental Manager	(450) 818-7176		(514) 249-6285
Pierre St George	Regulatory Affairs Coordinator	(613) 632-5844		(613) 677-1051

Agnico-Eagle Mines Ltd. – Meadowbank WORK SITE CONTACT LIST

NAME	TITLE	BUSINESS PHONE	2 WAY RADIO	CELL PHONE
Meadowbank Mine		(867)793-4610		
Julie Belanger	Agnico-Eagle	(867)793-4610 ext 6721		

EXTERNAL CONTACT NUMBERS

ORGANIZATION/CONTACT	LOCATION	PHONE NUMBER
NT Oil & Chemical Spills	Iqaluit, NU	(867) 979-8130
Environment Canada, NT	Yellowknife, NT	(867) 669-4700
NRC / Explosives Branch	Ottawa	(613) 995-5555
RCMP	Baker Lake, NU	(867) 793-1111 or (867)-793-0123
RCMP 'G' Division	Yellowknife, NT	(867)669-5100

APPENDIX 5

Area Office Address:

Agnico-Eagle Mines Ltd. - Meadowbank
PO BOX 540
Baker Lake, Nunavut
X0C 0A0

Type of Facility:

Bulk Explosives Site

Customer/Client Information:

Customer: Agnico-Eagle
Contact:
Title:

Evacuation and Emergency Meeting Place Upon Evacuation:

As identified on site orientation forms (Designated Muster Points)

Emergency Shutdown switch location:

“ONLY A CERTIFIED PERSONELLE ARE TO ACTIVATE THIS SWITCH”

Magazine and Plant Site Address:**NRC License:**

Agnico-Eagle Meadowbank Mine

Site Plan and Evacuation Route:

Posted in site offices – site specific orientations required

Site Rescue Plans:

Site Supervisor or designate to conduct review of attendance sheet. If employees, visitors or contractors are unaccounted for, Site Supervisor will advise mine LPO of unaccounted persons and last known location. Site Supervisor shall attend last known location with mine rescue team and jointly determine potential hazards of re-entering area to locate unaccounted for persons. Site Supervisor and Rescue team entering the evacuated area must don all required PPE due to unknown potential dangers that may have come about. Proper fire retardant suits, SCBA and/or other PPE as determine by the site to protect rescuers from becoming overcome by physical, chemical or other hazards. If determined safe to enter site and/ or buildings, a counter clockwise sweep of the area is to be conducted.

Medical Emergencies: In the unlikely event of a medical emergency, the site shall ensure that it is compliant to OH&S Code. As per legislation requirements, the site shall have adequate first aiders and equipment to attend to individuals as required.

All incidents, first aid/ medical treatment/property damage/near miss or other, shall be in compliance with HSE MS Standard 9.2, which meets or exceeds legislative requirements.

Site First Aiders:	LOCATION	PHONE NUMBER
TBA		
Security (Mine Emergency Services –fire, EMS)		

Emergency Equipment On Hand:

Fire Extinguishers, Spill Kits, First Aid Kits, non-sparking shovels as outlined in site plan.

Delivery Vehicles:

<u>Unit #</u>	<u>Vehicle</u>	<u>(EVC/ETP) TC Permit #</u>	<u>Carrying Capacity (80% of Max.)</u>
---------------	----------------	----------------------------------	--

APPENDIX 6 BOMB THREAT CHECKLIST

Exact time of call:			
Exact words of caller:			
QUESTIONS TO ASK			
1- When is bomb going to explode?			
2- Where is the bomb?			
3- What does it look like?			
4- What kind of bomb is it?			
5-What will cause it to explode?			
6- Did you place the bomb?			
7- Why?			
8- Where are you calling from?			
9- What is your address?			
10- What is your name?			
CALLER'S VOICE (circle)			
1- Calm	Slow	Crying	Slurred
2- Stutter	Deep	Loud	Broken
3- Giggling	Accent	Angry	Rapid
4- Stressed	Nasal	Lisp	Excited
5- Disguised	Sincere	Squeaky	Normal
If voice is familiar, whom did it sound like?			
Were there any background noises?			
Remarks:			
Person receiving call:		Telephone number call received at:	
Date:		Report call immediately to:	

APPENDIX 7

Dyno Nobel Inc.

JOB-SPECIFIC ORIENTATION CHECKLIST

(Modify as needed to meet site-specific needs)

Employee Name: Job Title:

Location: Hire Date:

CHECK COMPLETED ITEMS. FOR ALL ITEMS THAT ARE NOT APPLICABLE, ENTER "NA" ON THE LINE RETURN COMPLETED AND SIGNED CHECKLIST TO APPROPRIATE HR REPRESENTATIVE

1. JOB SPECIFIC ORIENTATION TO DNA WORK SITE(S)

- | | |
|---|---|
| a. <input type="checkbox"/> DN Safety & Quality Policy | m. <input type="checkbox"/> Drug and Alcohol Policy |
| b. <input type="checkbox"/> General Safety Rules | n. <input type="checkbox"/> Site Emergency and Evacuation Plans |
| c. <input type="checkbox"/> Site Specific Safety Rules and Instructions | o. <input type="checkbox"/> Fire Extinguishers |
| d. <input type="checkbox"/> Products and Services | p. <input type="checkbox"/> DN Crisis Communication Plan |
| e. <input type="checkbox"/> Tour of Site | q. <input type="checkbox"/> Parking and Traffic Plan |
| f. <input type="checkbox"/> Rest Rooms, Lockers, Eating Areas | r. <input type="checkbox"/> Security Issues |
| g. <input type="checkbox"/> Dress and Uniform Standards | s. <input type="checkbox"/> Electrical Hazards |
| h. <input type="checkbox"/> Personal Protective Equipment | t. <input type="checkbox"/> Review Job Description |
| i. <input type="checkbox"/> First Aid Procedures | u. <input type="checkbox"/> Take 5 Program |
| j. <input type="checkbox"/> How to Report Near-Misses and Accidents | v. <input type="checkbox"/> Site Specific SOPs |
| k. <input type="checkbox"/> Workers' Compensation and Return to Work | |
| l. <input type="checkbox"/> Smoking Policy and Designated Areas | |

2. OCCUPATIONAL HEALTH AND SAFETY ACT - REGULATION (OHSA)

- | | |
|--|--|
| a. <input type="checkbox"/> Mobile Equipment (Forklifts/Bobcats) | e. <input type="checkbox"/> DNA Hearing Conservation |
| b. <input type="checkbox"/> Review Site MSDS | f. <input type="checkbox"/> Bloodborne Pathogens |
| c. <input type="checkbox"/> Confined Spaces | g. <input type="checkbox"/> Worker's Rights |
| d. <input type="checkbox"/> Lockout/Tagout | |

3. ENVIRONMENT CANADA

- | | |
|---|---|
| a. <input type="checkbox"/> Spill/Release Reporting | d. <input type="checkbox"/> Used Oil Management |
| b. <input type="checkbox"/> Proper disposal of Waste | e. <input type="checkbox"/> Drum/Container Management |
| c. <input type="checkbox"/> Waste Minimization/Pollution Prevention | |

4. TRANSPORTATION CANADA (TDG)

- | | |
|--|---|
| a. <input type="checkbox"/> Road Test | c. <input type="checkbox"/> TDG Hours of Service Policy |
| b. <input type="checkbox"/> TDG Transportation | d. <input type="checkbox"/> Pre and Post Inspections |

5. NATURAL RESOURCES CANADA, EXPLOSIVES SAFETY AND SECURITY BRANCH

- | | |
|--|--|
| a. <input type="checkbox"/> Site Security Plans / Key Policy | b. <input type="checkbox"/> Magazine Rules |
| c. <input type="checkbox"/> Inventory Accuracy | d. <input type="checkbox"/> Guidelines for bulk explosive facilities |

6. QUESTIONS AND SUMMARY

—

—

— Ask employee if there are any questions or areas of employment not clearly understood. Advise employee what's next.

Comments

:

Signature Date Trainer/Supervisor Signature _____ Date _____ Employee

APPENDIX 8

ANNUAL FIRE DEPARTMENT REVIEW FORM

Information to be released to Emergency Services

From: Local Emergency Services

Subject: Emergency Response Plan for _____.

The following is a copy of the Emergency Response Plan that has been prepared by Dyno Nobel Inc. Has been received from _____ operations. The ERP has been discussed and being kept on file for future reference. If questions arise, we have been given the contact information for the _____ operations staff.

Signed: _____

Position: _____

Date: _____

EMERGENCY RESPONSE REPORT/DEBRIEF TEMPLATE (found in NEXUS Std 9.1)

Site:

Date:

Drill or

Actual Event (circle)

Emergency Call placed with:

Mine Emergency ☐

911 ☐

Supervisor/Manager Advised: ☐

Incident Details:

Sequence of Events

Time	Activity	By

Gaps Identified:

	Details of Gaps Identified	*Action Required
1.		
2.		
3.		
4.		
5.		
6.		
7.		
8.		

A report should be raised in SHAERS/ICARUS listing all gaps identified and action required.

Fax completed form to Health & Safety Advisor for your site

APPENDIX 9
Transportation of Dangerous Goods Regulation
Class Quantity Emission Limit

1	Any quantity that could pose a danger to public safety or 50 kg
2	Any quantity that could pose a danger to public safety or any sustained release of 10 minutes or more
3	200 L
4	25 kg
5.1	50 kg or 50 L
5.2	1 kg or 1 L
6.1	5 kg or 5 L
6.2	Any quantity that could pose a danger to public safety or 1 kg or 1 L
7	Any quantity that could pose a danger to public safety. An emission level greater than the level established in section 20 of the <i>Packaging and Transport of Nuclear Substances Regulations</i>
8	5 kg or 5 L
9	25 kg or 25 L

Table identified in Section 8.1(1) of Part 8 of the Transportation of Dangerous Goods Regulation Class Quantity Emission Limit

APPENDIX 10

Emergency Risk Assessment

Site Emergency Response Plan should be based upon a risk assessment of all types of probable emergencies and regulatory impact (as found in NEXUS Std 9.1)

Location Date Analysis Completed Completed by:

Emergency Type	Scenario(s)	Safeguards	Historical Frequency	Future Risk Potential	Loss Severity Rate	Probable Emergency 8+ to be in plan	Regulatory Notifications	Actions / Remarks
Bomb Threat								
Chemical Spill/Release								
Security								
Explosion								
Fire								
Loss/Theft of Explosives								
Equipment								
Process Loss/Interruption								
Catastrophic Injury/Illness								
Trespassing/Vandalism								
Extreme Temperatures								
Earthquake								
Hurricane								
Tornado								
Severe Flooding								
OFF SITE								
Blast Site Incident								
Fire (Forest/Brush)								
Neighboring Facility Incident								
Transportation Vehicle Accident								
Transportation Fire/Explosion Incident								
Transportation Chemical Spill								
Transportation Vehicle Breakdown								

Emergency Assessment Score Information - Use to evaluate Emergency Type level of risk

Historical Frequency	Score	Future Risk Potential	Score	Loss Severity Rate	Score	Probability Total A & B (8+) to be in plan
Several Time per Year	5	Several Time per Year	5	Catastrophic	5	
One Time per Year	4	One Time per Year	4	Major/Critical	4	12 or higher
Once Every 3-5 Years	3	Once Every 3-5 Years	3	Serious	3	8-11
Less than Once Every 10 Yrs	2	Less than Once Every 10 Yrs	2	Negligible- No Loss	2	Less and 8
Very Unlikely to Happen Ever	1	Very Unlikely to Happen Ever	1	No Loss Occurrence	1	



APPENDIX C4

MSDS FOR BULK EMULATION AND PRESPLIT

- 1. MSDS – Dyno Gold Lite Bulk Emulsion**
- 2. MSDS – Detagel Presplit**

Material Safety Data Sheet

Dyno Nobel Inc.

2650 Decker Lake Boulevard, Suite 300

Salt Lake City, Utah 84119

Phone: 801-364-4800 Fax: 801-321-6703

E-Mail: dnna.hse@am.dynonobel.com

FOR 24 HOUR EMERGENCY, CALL **CHEMTREC (USA) 800-424-9300**
CANUTEC (CANADA) 613-996-6666**MSDS # 1052****Date** 10/20/05

Supersedes

MSDS # 1052 03/21/05

Added Dyno® RG3

SECTION I - PRODUCT IDENTIFICATION

Trade Name(s): DYNOL GOLD® C, DYNOL GOLD® C EXTRA
DYNOL GOLD® C LITE, DYNOL GOLD® C LITE SUPER
DYNOL GOLD® CS LITE
DYNOL GOLD®, DYNOL GOLD® LITE
DYNOL GOLD® B, DYNOL GOLD® B LITE
HD
1116, 1126P, 1136P, 1146P
IREMEX 362, IREMEX 562, IREMEX 762, IREMEX 764
RJ5
RG1-A
RUG-1 (Canada Only)
DX 5007; DX 5010
DX 5013; DX 5013G; DX 5013 PB
TITAN® XL1000
TITAN® 1000, TITAN® 1000 G, TITAN® PB 1000
DYNOL® RG3

Product Class: Bulk Emulsion**Product Appearance & Odor:** Translucent to opaque, viscous liquid. May be silvery in color. May have fuel odor.

DOT Hazard Shipping Description: As Transported:
Oxidizing Liquid, n.o.s. (Ammonium Nitrate) 5.1 UN3139 II
After Blending with Density Control Agent On-site:
Explosive, Blasting, Type E 1.5D UN0332 II

NFPA Hazard Classification: Not Applicable (See Section IV - Special Fire Fighting Procedures)

SECTION II - HAZARDOUS INGREDIENTS

Ingredients:	CAS#	% (Range)	ACGIH TLV-TWA
Ammonium Nitrate	6484-52-2	30-80	No Value Established
Sodium Nitrate ¹	7631-99-4	0-15	No Value Established
Calcium Nitrate	10124-37-5	0-35	No Value Established
Fuel Oil	68476-34-6	0-10	100 ppm
Mineral Oil	64742-35-4	0-7	5 mg/m ³
Aluminum *	7429-90-5	0-5	10 mg/m ³

Material Safety Data Sheet

¹ Our source of Sodium Nitrate (Chilean) may contain perchlorate ion, which occurs naturally. Although Dyno Nobel does not analyze for the presence of perchlorate anion, based on published studies, the products listed above may contain between 0 and 300 ppm perchlorate.

* The hazardous ingredients marked with an asterisk are not found in the majority of listed products.

Ingredients, other than those mentioned above, as used in this product are not hazardous as defined under current Department of Labor regulations, or are present in de minimus concentrations (less than 0.1% for carcinogens, less than 1.0% for other hazardous materials).

SECTION III - PHYSICAL DATA

Boiling Point: Not Applicable

Vapor Density: (Air = 1) Not Applicable

Percent Volatile by Volume: <30

Vapor Pressure: Not Applicable

Density: 0.8 - 1.5 g/cc

Solubility in Water: Nitrate salts are completely soluble, but emulsion dissolution is very slow.

Evaporation Rate (Butyl Acetate = 1): <1

SECTION IV - FIRE AND EXPLOSION HAZARD DATA

Flash Point: Not Applicable

Flammable Limits: Not Applicable

Extinguishing Media: (See Special Fire Fighting Procedures Section)

Special Fire Fighting Procedures: Do not attempt to fight fires involving explosive materials or emulsion explosive precursors. Evacuate all personnel to a predetermined safe location, no less than 2,500 feet in all directions.

Unusual Fire and Explosion Hazards: May explode or detonate under fire conditions. Burning material may produce toxic vapors.

SECTION V - HEALTH HAZARD DATA

Effects of Overexposure

Eyes: Can cause irritation, redness and tearing.

Skin: Prolonged contact may cause irritation.

Ingestion: Large amounts may be harmful if swallowed.

Inhalation: May cause dizziness, nausea or intestinal upset.

Systemic or Other Effects: *Perchlorate:* Perchlorate can potentially inhibit iodide uptake by the thyroid and result in a decrease in thyroid hormone. The National Academy of Sciences (NAS) has reviewed the toxicity of perchlorate and has concluded that even the most sensitive populations could ingest up to 0.7 microgram perchlorate per kilogram of body weight per day without adversely affecting health. The USEPA must establish a maximum contaminant level (MCL) for perchlorate in drinking water by 2007, and this study by NAS may result in a recommendation of about 20 ppb for the MCL.

Emergency and First Aid Procedures

Eyes: Irrigate with running water for at least fifteen minutes. If irritation persists, seek medical attention.

Skin: Remove contaminated clothing. Wash with soap and water.

Ingestion: Seek medical attention.

Inhalation: Remove to fresh air. If irritation persists, seek medical attention.

Special Considerations: None.

Material Safety Data Sheet

SECTION VI - REACTIVITY DATA

Stability: Stable under normal conditions. May explode when subjected to fire, supersonic shock or high-energy projectile impact, especially when confined or in large quantities.

Conditions to Avoid: Keep away from heat, flame, ignition sources and strong shock.

Materials to Avoid (Incompatibility): Corrosives (strong acids and strong bases or alkalis).

Hazardous Decomposition Products: Nitrogen Oxides (NO_x), Carbon Monoxide (CO)

Hazardous Polymerization: Will not occur.

SECTION VII - SPILL OR LEAK PROCEDURES

Steps to be taken in Case Material is Released or Spilled: Protect from all ignition sources. In case of fire evacuate area not less than 2,500 feet in all directions. Notify authorities in accordance with emergency response procedures. Only personnel trained in emergency response should respond. If no fire danger is present, and product is undamaged and/or uncontaminated, repackage product in original packaging or other clean DOT approved container. Ensure that a complete account of product has been made and is verified. Follow applicable Federal, State and local spill reporting requirements.

Waste Disposal Method: Disposal must comply with Federal, State and local regulations. If product becomes a waste, it is potentially regulated as a hazardous waste as defined under the Resource Conservation and Recovery Act (RCRA) 40 CFR, part 261. Review disposal requirements with a person knowledgeable with applicable environmental law (RCRA) before disposing of any explosive material.

SECTION VIII - SPECIAL PROTECTION INFORMATION

Ventilation: Not required for normal handling.

Respiratory Protection: None normally required.

Protective Clothing: Gloves and work clothing that reduce skin contact are suggested.

Eye Protection: Safety glasses are recommended.

Other Precautions Required: None.

SECTION IX - SPECIAL PRECAUTIONS

Precautions to be taken in handling and storage: Store in cool, dry, well-ventilated location. Store in compliance with Federal, State and local regulations. Keep away from heat, flame, ignition sources and strong shock.

Precautions to be taken during use: Avoid breathing the fumes or gases from detonation of explosives. Use accepted safe industry practices when using explosive materials. Unintended detonation of explosives or explosive devices can cause serious injury or death.

Other Precautions: It is recommended that users of explosives material be familiar with the Institute of Makers of Explosives Safety Library publications.

SECTION X - SPECIAL INFORMATION

The reporting requirements of Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR 372 may become applicable if the physical state of this product is changed to an aqueous solution. If an aqueous solution of this product is manufactured, processed, or otherwise used, the nitrate compounds category and ammonia listings of the previously referenced regulation should be reviewed.

Material Safety Data Sheet

Disclaimer

Dyno Nobel Inc. and its subsidiaries disclaim any warranties with respect to this product, the safety or suitability thereof, the information contained herein, or the results to be obtained, whether express or implied, INCLUDING WITHOUT LIMITATION, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND/OR OTHER WARRANTY. The information contained herein is provided for reference purposes only and is intended only for persons having relevant technical skills. Because conditions and manner of use are outside of our control, the user is responsible for determining the conditions of safe use of the product. Buyers and users assume all risk, responsibility and liability whatsoever from any and all injuries (including death), losses, or damages to persons or property arising from the use of this product or information. Under no circumstances shall either Dyno Nobel Inc. or any of its subsidiaries be liable for special, consequential or incidental damages or for anticipated loss of profits.

Detagel Presplit

Material Safety Data Sheet

5700 N. Portland, Suite 301 / Oklahoma City, OK 73112 / Phone: (405) 947-0765 / Fax: (405) 947-0768

SECTION 1 - PRODUCT INFORMATION		SECTION 2 - HEALTH ALERT
TRADE NAME:	Presplit	DANGER - If misused or disposed of improperly, material could explode and cause death or serious injury. DO NOT HANDLE WHEN IN DOUBT!! **See section VIII - Personal Protection** CHEM-TEL, INC. (800) 255-3924.
SYNONYM:	NA	
CHEMICAL FAMILY:	Watergel Slurry High Explosive	
FORMULA:	Mixture	
CAS NUMBER:	None	
UN/NA NUMBER:	UN0241	
DOT HAZARD CLASS:	Explosive, Blasting, Type E, Class 1.1 D	

SECTION 3 - HEALTH HAZARD INFORMATION

EYE: May cause moderate irritation.

SKIN: May cause moderate irritation characterized by redness and/or rash.

INHALATION: Inhalation of decomposed products may irritate the respiratory tract. Prolonged exposure to these fumes may result in respiratory difficulties (shortness of breath, etc.) and possibly more severe toxic effects.

INGESTION: Swallowing large quantities may cause toxicity characterized by dizziness, bluish skin coloration, methemoglobinemia, unconsciousness, abdominal spasms, nausea, and pain.

SECTION 4 - EMERGENCY AND FIRST AID PROCEDURES

EYE CONTACT: Flush with large amounts of water. Seek medical aid.

SKIN CONTACT: Remove contaminated clothing. Wash skin thoroughly with soap and water.

INHALATION: Remove from exposure. If breathing stops or is difficult, administer artificial respiration or oxygen. Seek medical aid.

INGESTION: Give 8-16 oz. of milk or water. Induce vomiting. Seek medical aid.

SECTION 5 - RECOMMENDED OCCUPATIONAL EXPOSURE LIMIT/ HAZARDOUS INGREDIENTS

EXPOSURE LIMIT (PRODUCT): None required for product. *React to form Hexaminedinitrate

HAZARDOUS INGREDIENTS:	PERCENT	EXPOSURE LIMIT	PPM	MG/M3
Ammonium Nitrate	<65%	NONE		
Sodium Nitrate	<20%	NONE		
Sodium Perchlorate	<7%	NONE		
Nitric Acid*	<5%	ACGIH - TLV	2	5
Hexamine*	<15%	NONE		
Aluminum	<7%	ACGIH - TLV		
Pentaerythritol Tetranitrate	<2%	NONE		

NOTE: All ingredients are present in a gelled slurry matrix and individual hazard may not be present in this formulation.

SECTION 6 - REACTIVITY DATA

CONDITIONS CONTRIBUTING TO INSTABILITY: Heat (confinement); Stacking (burning).

INCOMPATIBILITY: Can react violently or explode, with reducing agents and organic materials. Avoid amines, strong alkalis & acids. **HAZARDOUS REACTION / DECOMPOSITION PRODUCTS:** At high temperatures, especially >374 F, may emit severe toxic fumes of nitrogen oxides.

CONDITIONS CONTRIBUTING TO HAZARDOUS POLYMERIZATION: Not applicable.

SECTION 7 - FIRE AND EXPLOSION HAZARD INFORMATION

FLASH POINT & METHOD: NA **AUTO IGNITION TEMPERATURE:** Explodes **FLAMMABLE LIMITS (% BY VOLUME/AIR):**

LOWER: NA **UPPER:** NA **EXTINGUISHING MEDIA:** Water **FIRE-FIGHTING PROCEDURES:** When explosive is burning,

EVACUATE AREA. Avoid breathing vapor. Don't disturb fire, as dusty cloud containing aluminum may form explosive mixture with air.

FIRE & EXPLOSION HAZARDS: Dangerous when exposed to heat or flame. Can support combustion of other materials involved in a fire and is capable of undergoing detonation if heated to high temperatures, especially under confinement including being piled on itself in a burning fire. When heated to decomposition, highly toxic fumes may be emitted. Do not return to area of explosion until smoke and fumes have dissipated. Dry alkali or amine salts are explosive.

Detagel Presplit

Material Safety Data Sheet

SECTION 7 - FIRE AND EXPLOSION HAZARD INFORMATION (con't.)

Internally, product contains detonating cord, consisting of flexible cord with an explosive core of PETN (pentaerythritol tetranitrate) within a textile casing covered by a seamless polyethylene jacket. This portion, if removed from the cartridge, may explode when subjected to fire or shock. PETN crystals, if separated or spilled, are substantially more sensitive to initiation by impact and friction than other components of the product, and care should be taken to avoid shock, friction, and excessive heat.

SECTION 8 - PERSONAL PROTECTION INFORMATION

EYE PROTECTION: Safety goggles approved for the handling of explosives materials.

SKIN PROTECTION: Neoprene, natural rubber, polyethylene or polyvinyl chloride gloves. Use barrier creams, hand protection and protective clothing. **RESPIRATORY PROTECTION:** Not normally required. Mechanical filter or supplied air type respirator as required for concentrations exceeding the occupational exposure limit.

VENTILATION: Maintain adequate ventilation. Use local exhaust if needed.

SECTION 9 - PERSONAL HANDLING INSTRUCTIONS

HANDLING: Explosives should not be abandoned at any location for any reason. Do not handle during electrical storms.

STORAGE: Store in a cool, dry, well-ventilated area remote from operations. Storage area should be of non-combustible construction and in accordance with appropriate BATF regulations. Organic materials, flammable substances and finely divided metals should be stored separately. Flames, smoking and unauthorized personnel are prohibited where this product is used or stored. Protect against physical damage, static electricity and lightning.

WARNING: Use of this product by persons lacking adequate training, experience and supervision may result in death or serious injury. Obey all Federal, State, and local laws / regulations applicable to transportation, storage, handling, and use of explosives.

DISTANCE: Always stay from area of explosion or disposal sites. Stay behind suitable barriers.

SECTION 10 - SPILL & LEAK PROCEDURES

PROCEDURES IF MATERIAL IS RELEASED OR SPILLED (IN ADDITION, SEE SECTION 8): Isolate area. Eliminate ALL sources of ignition. Avoid skin contact. Scrape up. Remove soiled clothing.

WASTE DISPOSAL - USE APPROPRIATE METHOD(S): Disposal of unexploded or deteriorated explosives material can be hazardous. Expert assistance is positively recommended in destroying explosives. Accidents can be prevented by thorough planning and handling in accordance with approved methods. Consult your supervisor, or the nearest SEC Regional Office for assistance. If improperly disposed of, material could explode and cause death or serious injury.

In all cases, follow facility emergency response procedures. Contact Facility Environmental Manager for assistance. Report any discharge of oil or hazardous substance that may enter surface waters to the National Response Center (800) 424 - 8802.

Observe all applicable local, state, and federal environmental spill and water quality regulations.

SECTION 11 - PHYSICAL DATA

BOILING POINT: NA **BULK DENSITY:** 1.25 g/cc **MELTING POINT:** NA **%VOLATILE BY VOLUME:** NA
VAPOR PRESSURE: NA **EVAPORATION RATE (ETHER=1):** NA **SOLUBILITY IN WATER:** Negligible with short term exposure
APPEARANCE/ODOR: Odorless .gray/white gel packaged in polyethylene cartridges **DECOMPOSITION POINT:** 200 C

SECTION 12 - COMMENTS

This product is classified as a Class 1.1D High Explosive and must be stored in a high explosive magazine. Storage should be in a well constructed, well ventilated, dry structure located to conform with local, state, and federal regulations. The area surrounding an explosive magazine must be kept clear of combustible materials for a distance of 50 feet. Magazine floors and containers must be properly cleaned. Normal operating conditions are assumed unless otherwise stated. If any given information is not clear or does not apply to your situation, STOP, store the material suitably, and seek correct help from your supervisors, Institute of Makers of Explosives or Slurry Explosive Corporation.

Disposal sites must be clear of people at the time of disposal.

NOTICE: The data and recommendations presented herein are based upon data which are considered to be accurate. However, SEC makes no guarantee or warranty, either expressed or implied, of the accuracy or completeness of these data and recommendations. For more detailed information on the hazards of this product, contact the Regulatory Compliance Department at the address below:

Slurry Explosive Corporation
P. O. Box 348
Columbus, Kansas 66725
(620) 597-2552

Revised 6-2001