

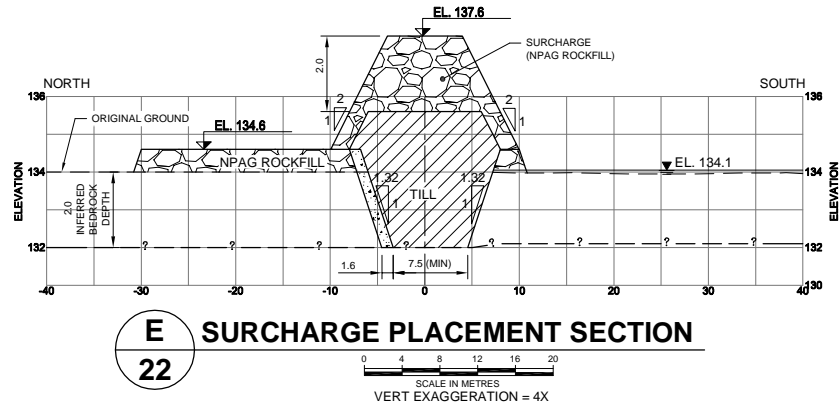
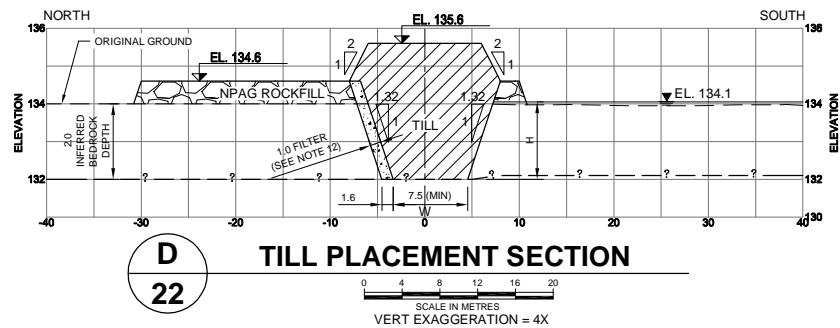
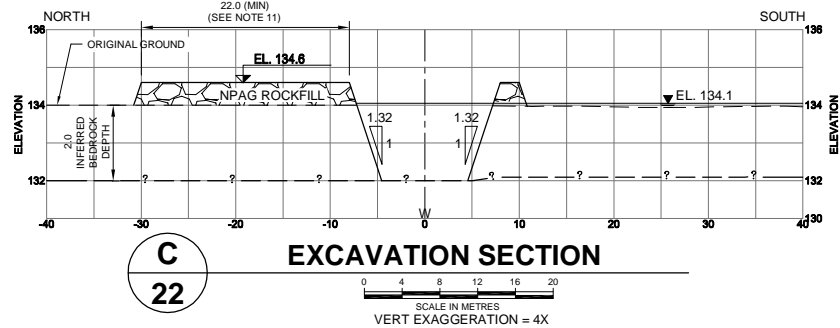
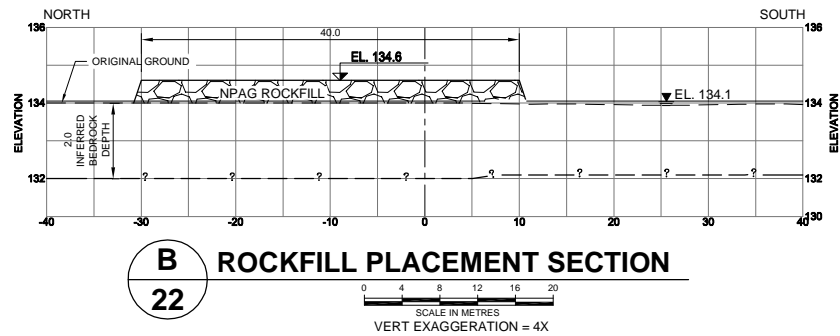


REVISION DATE: 08/08/01 03:04PM By: Etbella CADD FILE: N:\Bur-Graphics\Projects\2007\1413\07-1413-0074-0074\Drafting\2500c\Task-1000\0714130074-2000.A.23.dwg

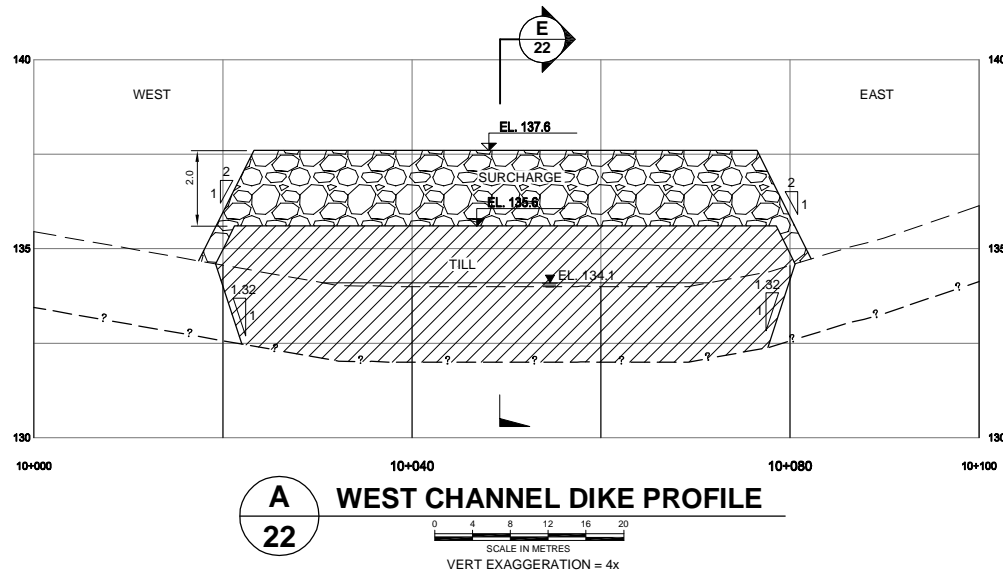

LEGEND:



NOTES:

- 1) ALL DIMENSIONS ARE IN METRES UNLESS OTHERWISE NOTED.
- 2) ALL ELEVATIONS ARE IN METRES ABOVE SEA LEVEL (MASL), UNLESS OTHERWISE NOTED.
- 3) CONTOUR INFORMATION ON LAND SUPPLIED BY AGNICO-EAGLE MINES LIMITED (AEM), MEADOWBANK DIVISION.
- 4) LAKEBED SURFACE BASED ON BATHYMETRIC AND SEISMIC SURVEYS BY GOLDER ASSOCIATES LTD., 2006. DETAILED BATHYMETRY (0.5M CONTOUR INTERVAL) BASED ON 2008 SURVEY.
- 5) WIDTH OF EXCAVATION AND TILL PLACEMENT TO BE CONFIRMED BASED ON FIELD CONDITIONS.
- 6) RATIO OF H/W IS LESS THAN 1/3, WHERE H IS HYDRAULIC HEAD AS DEPTH FROM LAKE LEVEL TO BASE OF EXCAVATION, AND W IS WIDTH OF TILL CORE AT BASE OF EXCAVATION.
- 7) TILL TO BE COMPACTED WITH 4 PASSES OF A 10 TONNE SHEEPSFOOT ROLLER. MAXIMUM LIFT THICKNESS OF TILL IS 0.5m.
- 8) TILL TO HAVE MINIMUM FINES CONTENT (PASSING #200 SIEVE) OF 30% BY MASS AND BOULDERS REMOVED.
- 9) BEDROCK SURFACE SHALL BE CLEARED OF LOOSE MATERIAL, SMOOTHED OF OVERHANGS, IRREGULARITIES TO PROVIDE A REGULAR SURFACE.
- 10) ROCKFILL TYPE TO BE NON-ACID GENERATING.
- 11) WIDTH OF ROCKFILL DOWNSTREAM OF EXCAVATION MAY BE VARIED TO ALLOW ACCESS.
- 12) FILTER REQUIREMENT TO BE DETERMINED BY ENGINEER AS BASED ON CONDITIONS IN FIELD.

PROJECT		AGNICO-EAGLE MINES LIMITED MEADOWBANK GOLD PROJECT NUNAVUT	
AEM		TITLE	
		WEST CHANNEL DIKE PROFILE AND SECTION	
	PROJECT No.	07-1413-0074/2500	FILE No.
	DESIGN	BW	16JUN08
	CADD	EA	16JUN08
	CHECK	-	-
	REVIEW	-	-
SCALE		AS SHOWN	REV. 0
2100-22		2100-23	

2100-22	WEST CHANNEL DIKE PLAN
DRAWING NO.	REFERENCES

01AUG08	BW	ISSUED FOR CONSTRUCTION	EA	-	-
16JUN08	BW	ISSUED FOR REVIEW	EA	-	-
REV	DATE	DES	REVISION DESCRIPTION	CADD	CHK

STAMP
-------