


GENERAL NOTES:

1. ALL COORDINATES ARE REFERENCED TO
CH11 AND CH2.
2. SITE PLANS AND TOPOGRAPHIC INFORMATION
ARE BASED ON AIR PHOTOS AND SURVEYS.
CURRENT CONDITIONS MAY NOT BE EXACTLY
AS SHOWN.
3. BORROW AREA INFORMATION AND TEST PIT
LOCATIONS ARE PROVIDED BY EEA ENGINEERING
CONSULTANTS LTD.
4. INFORMATION REGARDING DELINEATION AND
ANALYTICAL TESTING OF CONTAMINATED
SOLIDS HAS BEEN PROVIDED BY
BENTLEY CANADA INC.
5. ALL NON-HAZARDOUS DEBRIS TO BE PLACED
IN NON-HAZARDOUS WASTE LANDFILL.
6. BURIED DEBRIS AREAS TO BE CAPPED AND
GRADED.



PRELIMINARY
NOT FOR CONSTRUCTION

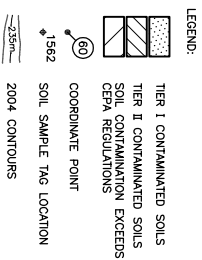

uma
An AECOM Company

REVISIONS	A	B	C
	ISSUED FOR CLIENT REVIEW	ISSUED FOR DESIGN SUBMISSION	ISSUED FOR TENDER
	DATE	DATE	DATE

A detail number
B source drawing no.
C detail set drawing no.


CAM-F Intermediate DEW Line Site
SARCPA LAKE
Site Restoration

CONTAMINATED AREAS
SECTION AND DETAILS
SHEET 2

designed by			control person		
T. JACQUIN					
drawn by			descriptive project		
D. JERREN					
approved by			approved project		
R. SCHMIDTKE					
PROJECT / Project Manager			Administration de Projets / PMS		
J. BUCHHEIM					
initial			sheet		
AS SCHUM					
project no.			project no.		
413334			C-10		
FFEBRUARY 2005			OF 12		

COORDINATE POINTS											
1	7 606 165.7	405 463.4	10	7 606 154.6	405 492.4	19	7 606 147.9	405 461.5	28	7 606 052.4	405 438.1
2	7 606 154.0	405 476.0	11	7 606 155.1	405 454.8	20	7 606 283.8	405 277.7	29	7 606 046.5	405 422.8
3	7 606 157.4	405 486.6	12	7 606 161.8	405 461.8	21	7 606 289.4	405 286.4	30	7 606 053.4	405 438.1
4	7 606 140.4	405 488.2	13	7 606 154.8	405 488.8	22	7 606 278.0	405 307.1	31	7 606 056.6	405 443.5
5	7 606 134.2	405 489.9	14	7 606 147.2	405 481.8	23	7 606 265.9	405 298.3	32	7 606 059.9	405 446.1
6	7 606 128.0	405 485.8	15	7 606 129.5	405 491.2	24	7 606 269.0	405 278.3	33	7 606 055.8	405 444.0
7	7 606 122.6	405 490.2	16	7 606 124.2	405 485.9	25	7 606 066.1	405 415.7	34	7 606 054.7	405 441.5
8	7 606 124.6	405 488.0	17	7 606 127.9	405 477.1	26	7 606 068.6	405 421.9	35	7 606 026.2	405 553.7
9	7 606 125.7	405 466.8	18	7 606 135.5	405 469.5	27	7 606 064.4	405 433.2	36	7 606 030.8	405 563.9


CONTAMINATED SOLID AREAS			
STAIN NO.	APPROXIMATE AREA (m2)	ESTIMATED VOLUME (m3)	DEPTH OF EXCAVATION (m)
DCC TIER II			
MODULE STATION	570	285	0.5
WEST BARREL CACHE	470	470	1.0
VEHICLE DEBRIS PILE - 1	310	93	0.3
VEHICLE DEBRIS PILE - 2	50	15	0.3
DUMP 'B'	130	39	0.3
CC SHOP	220	66	0.3

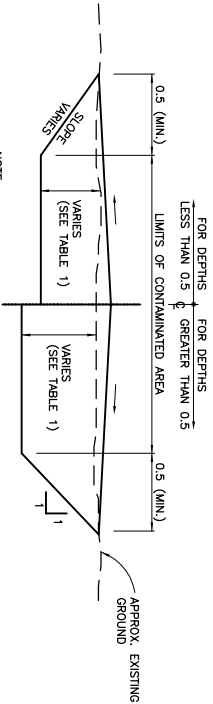

- NOTE:
1. MATERIAL TO BE REMOVED. TIER I SOLS TO BE
EXCAVATED AND REMOVED TO AN OFF-SITE
DISPOSAL FACILITY.
 2. TYPE 3 GRANULAR MATERIAL TO BE PLACED IN
EXCAVATION, COMPACTED AND MOUND TO
TYPICAL ABOVE GROUND SURFACE TO PROMOTE
DRAINAGE, UNLESS NOTED OTHERWISE.

TYPICAL SECTION

N.T.S.

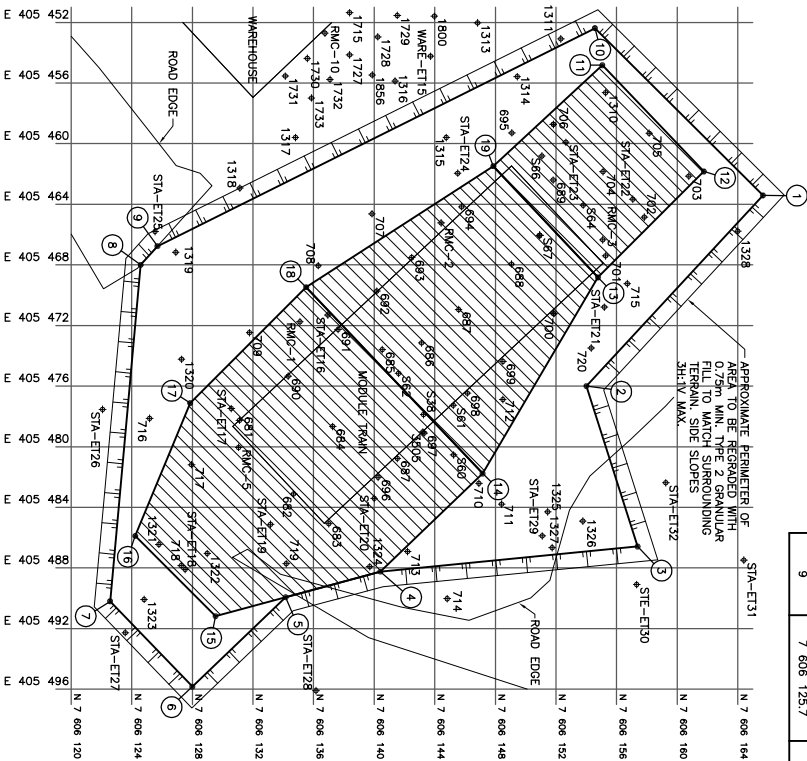

MODULE STATION (DMG. CO3)

0 4 8 12
4 2 1:200

