

Proposed Water Monitoring at Boston Mining Area

Station	Description	Phase
BMS-1a and BMS-1b	Contact water pond #1 and #2	construction, operations, care and maintenance
BMS-2	Surge pond at intake to water treatment plant	construction, operations, care and maintenance, closure
BMS-3	Discharge from water treatment plant	construction, operations, care and maintenance, closure
BMS-4	Reclaim line from TMA contact water pond	construction, operations, care and maintenance, closure
BMS-5	Non-contact water pond	construction, operations, care and maintenance
BMS-6	Freshwater intake at Aimaokatalok Lake	construction, operations, care and maintenance, closure
BMS-7	Landfill sump	construction, operations, care and maintenance, closure
BMS-8	Treated sewage discharge	construction, operations, care and maintenance, closure
BMS-9	Landfarm sump	construction, operations, care and maintenance, closure
BMS-10	Site runoff from sediment controls during construction	construction
BMS-11	Discharge from the Boston fuel storage and containment sumps	Construction, operations, care and maintenance, closure

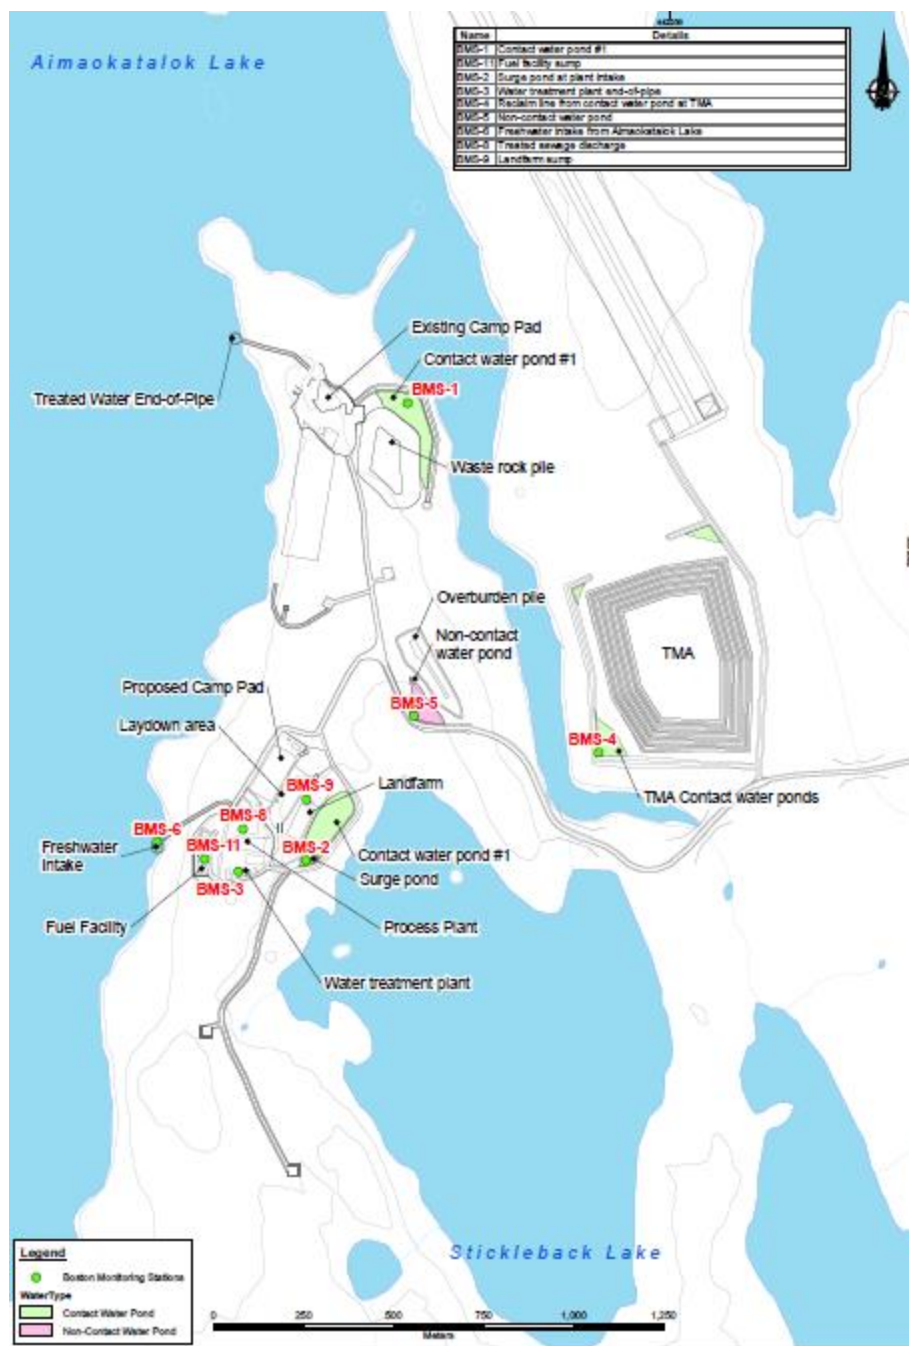


Figure 1: Proposed Boston Monitoring Locations