




8 7 6 5 4 300nm

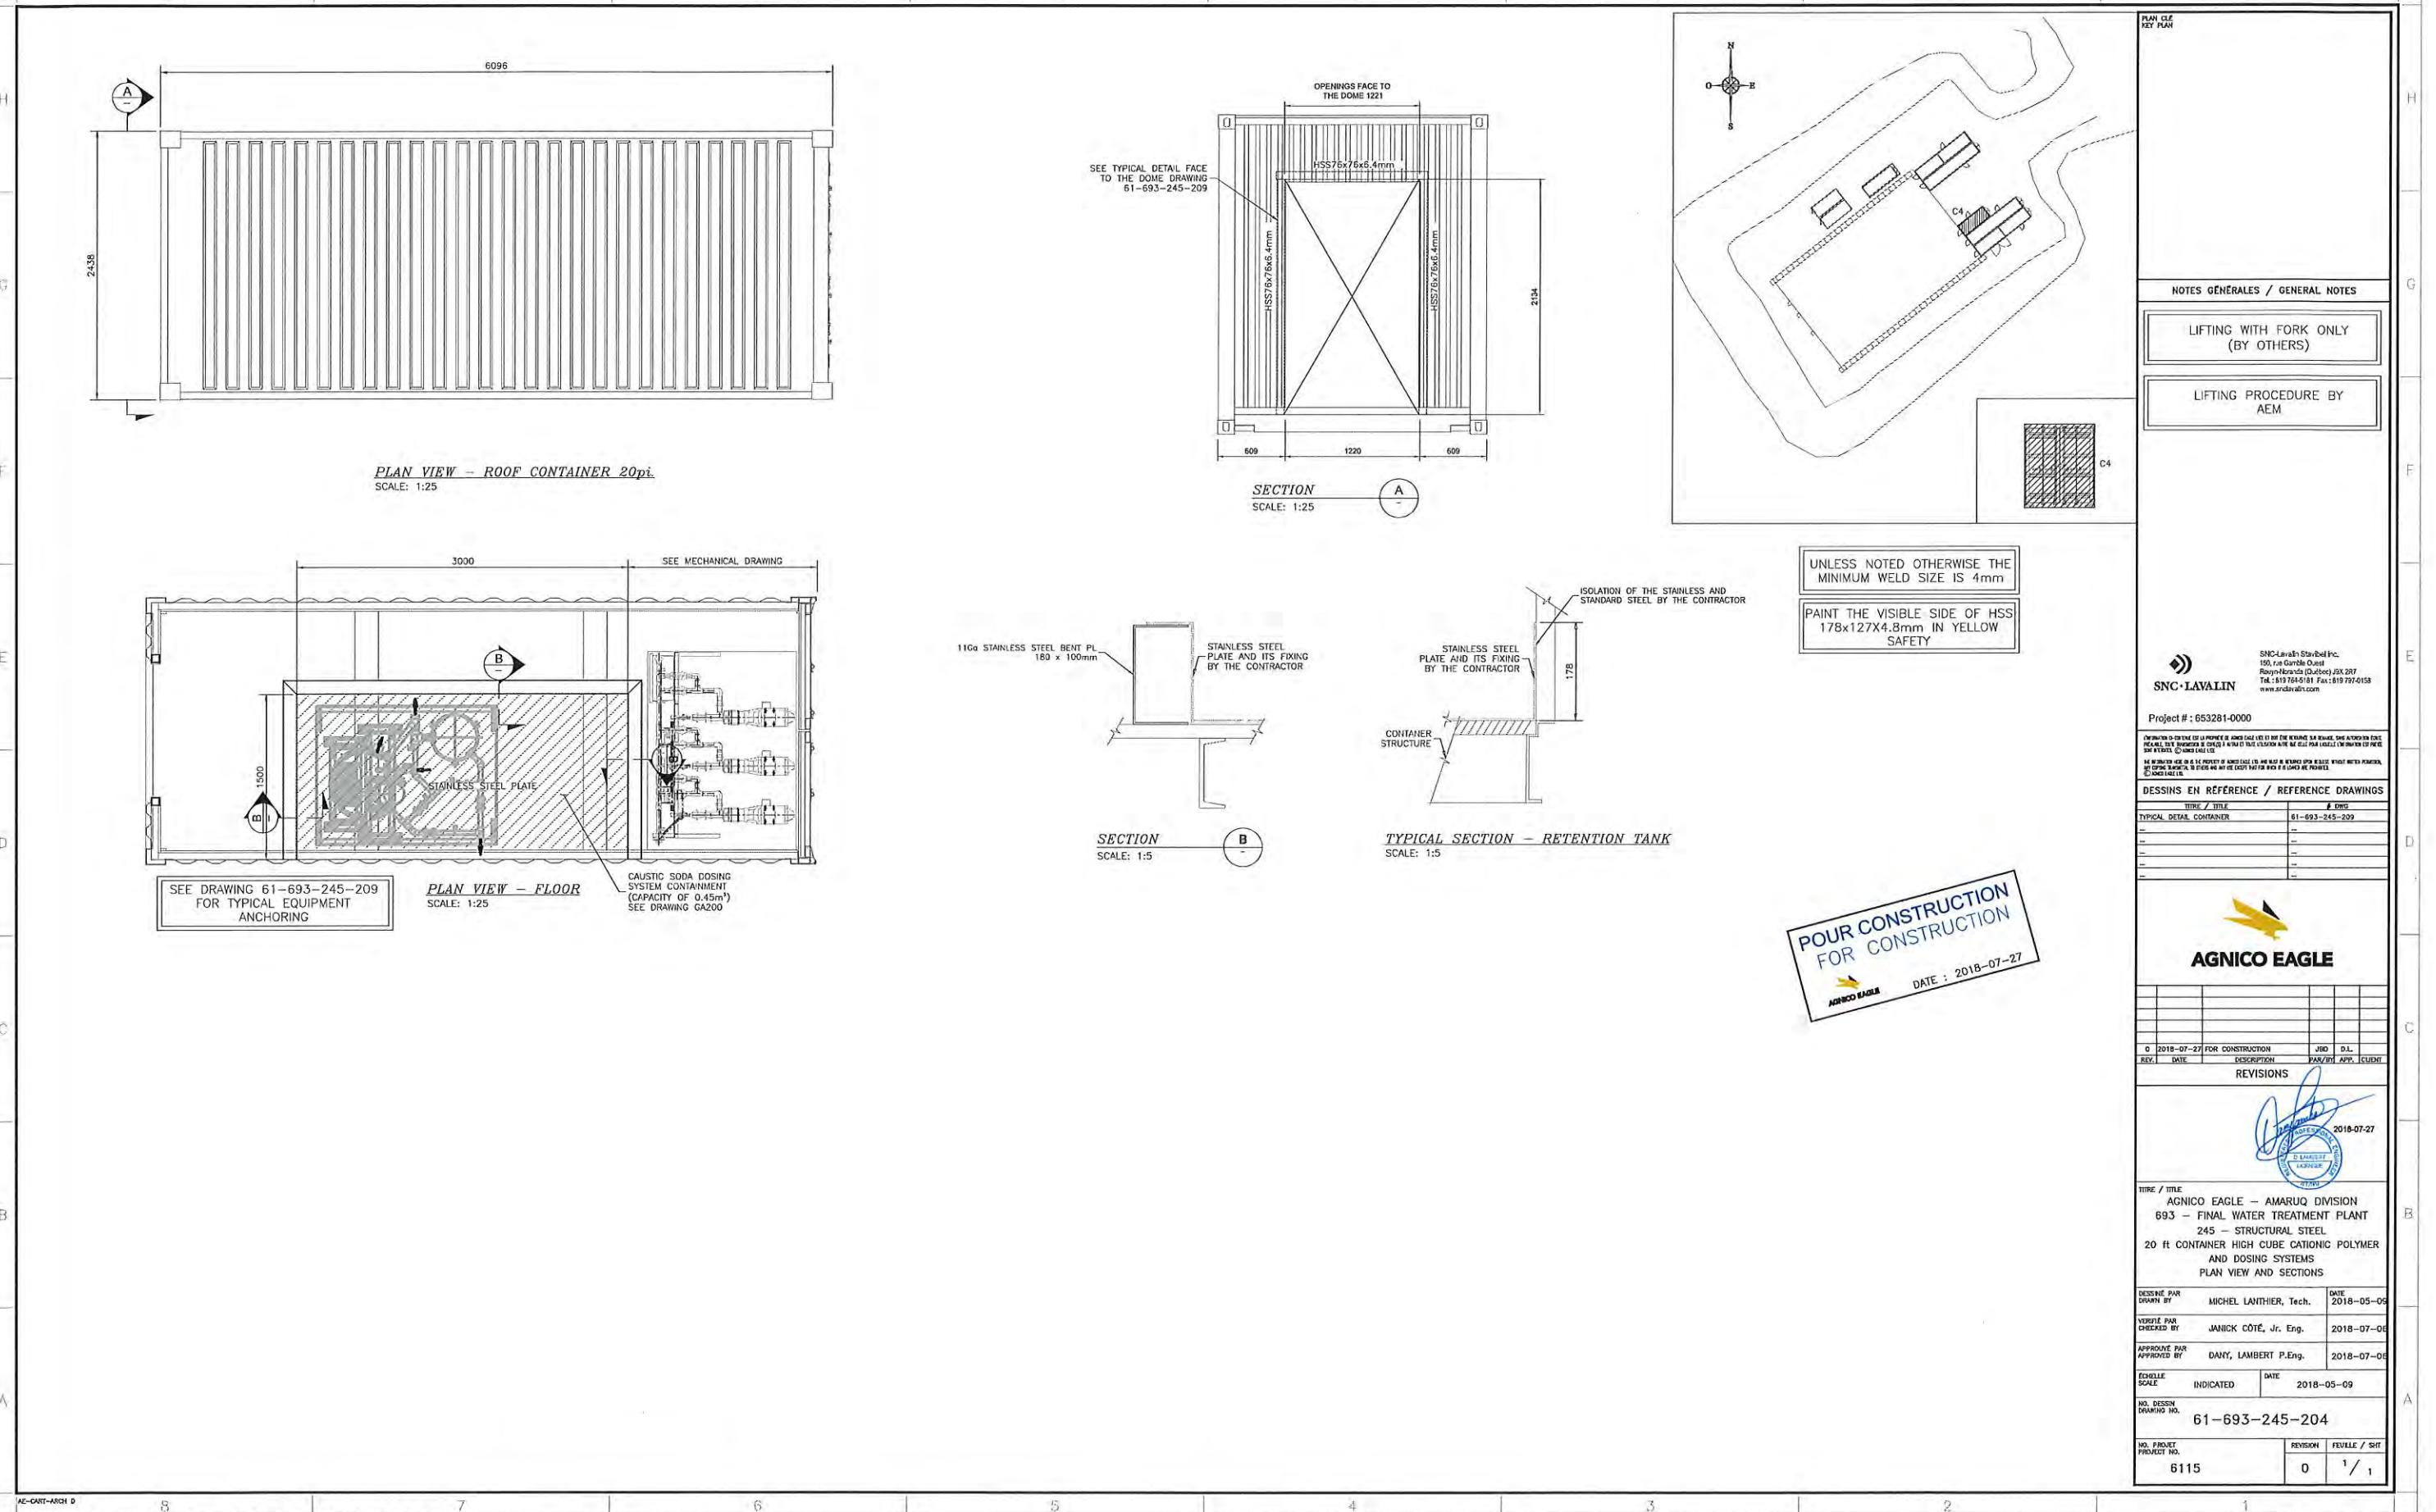

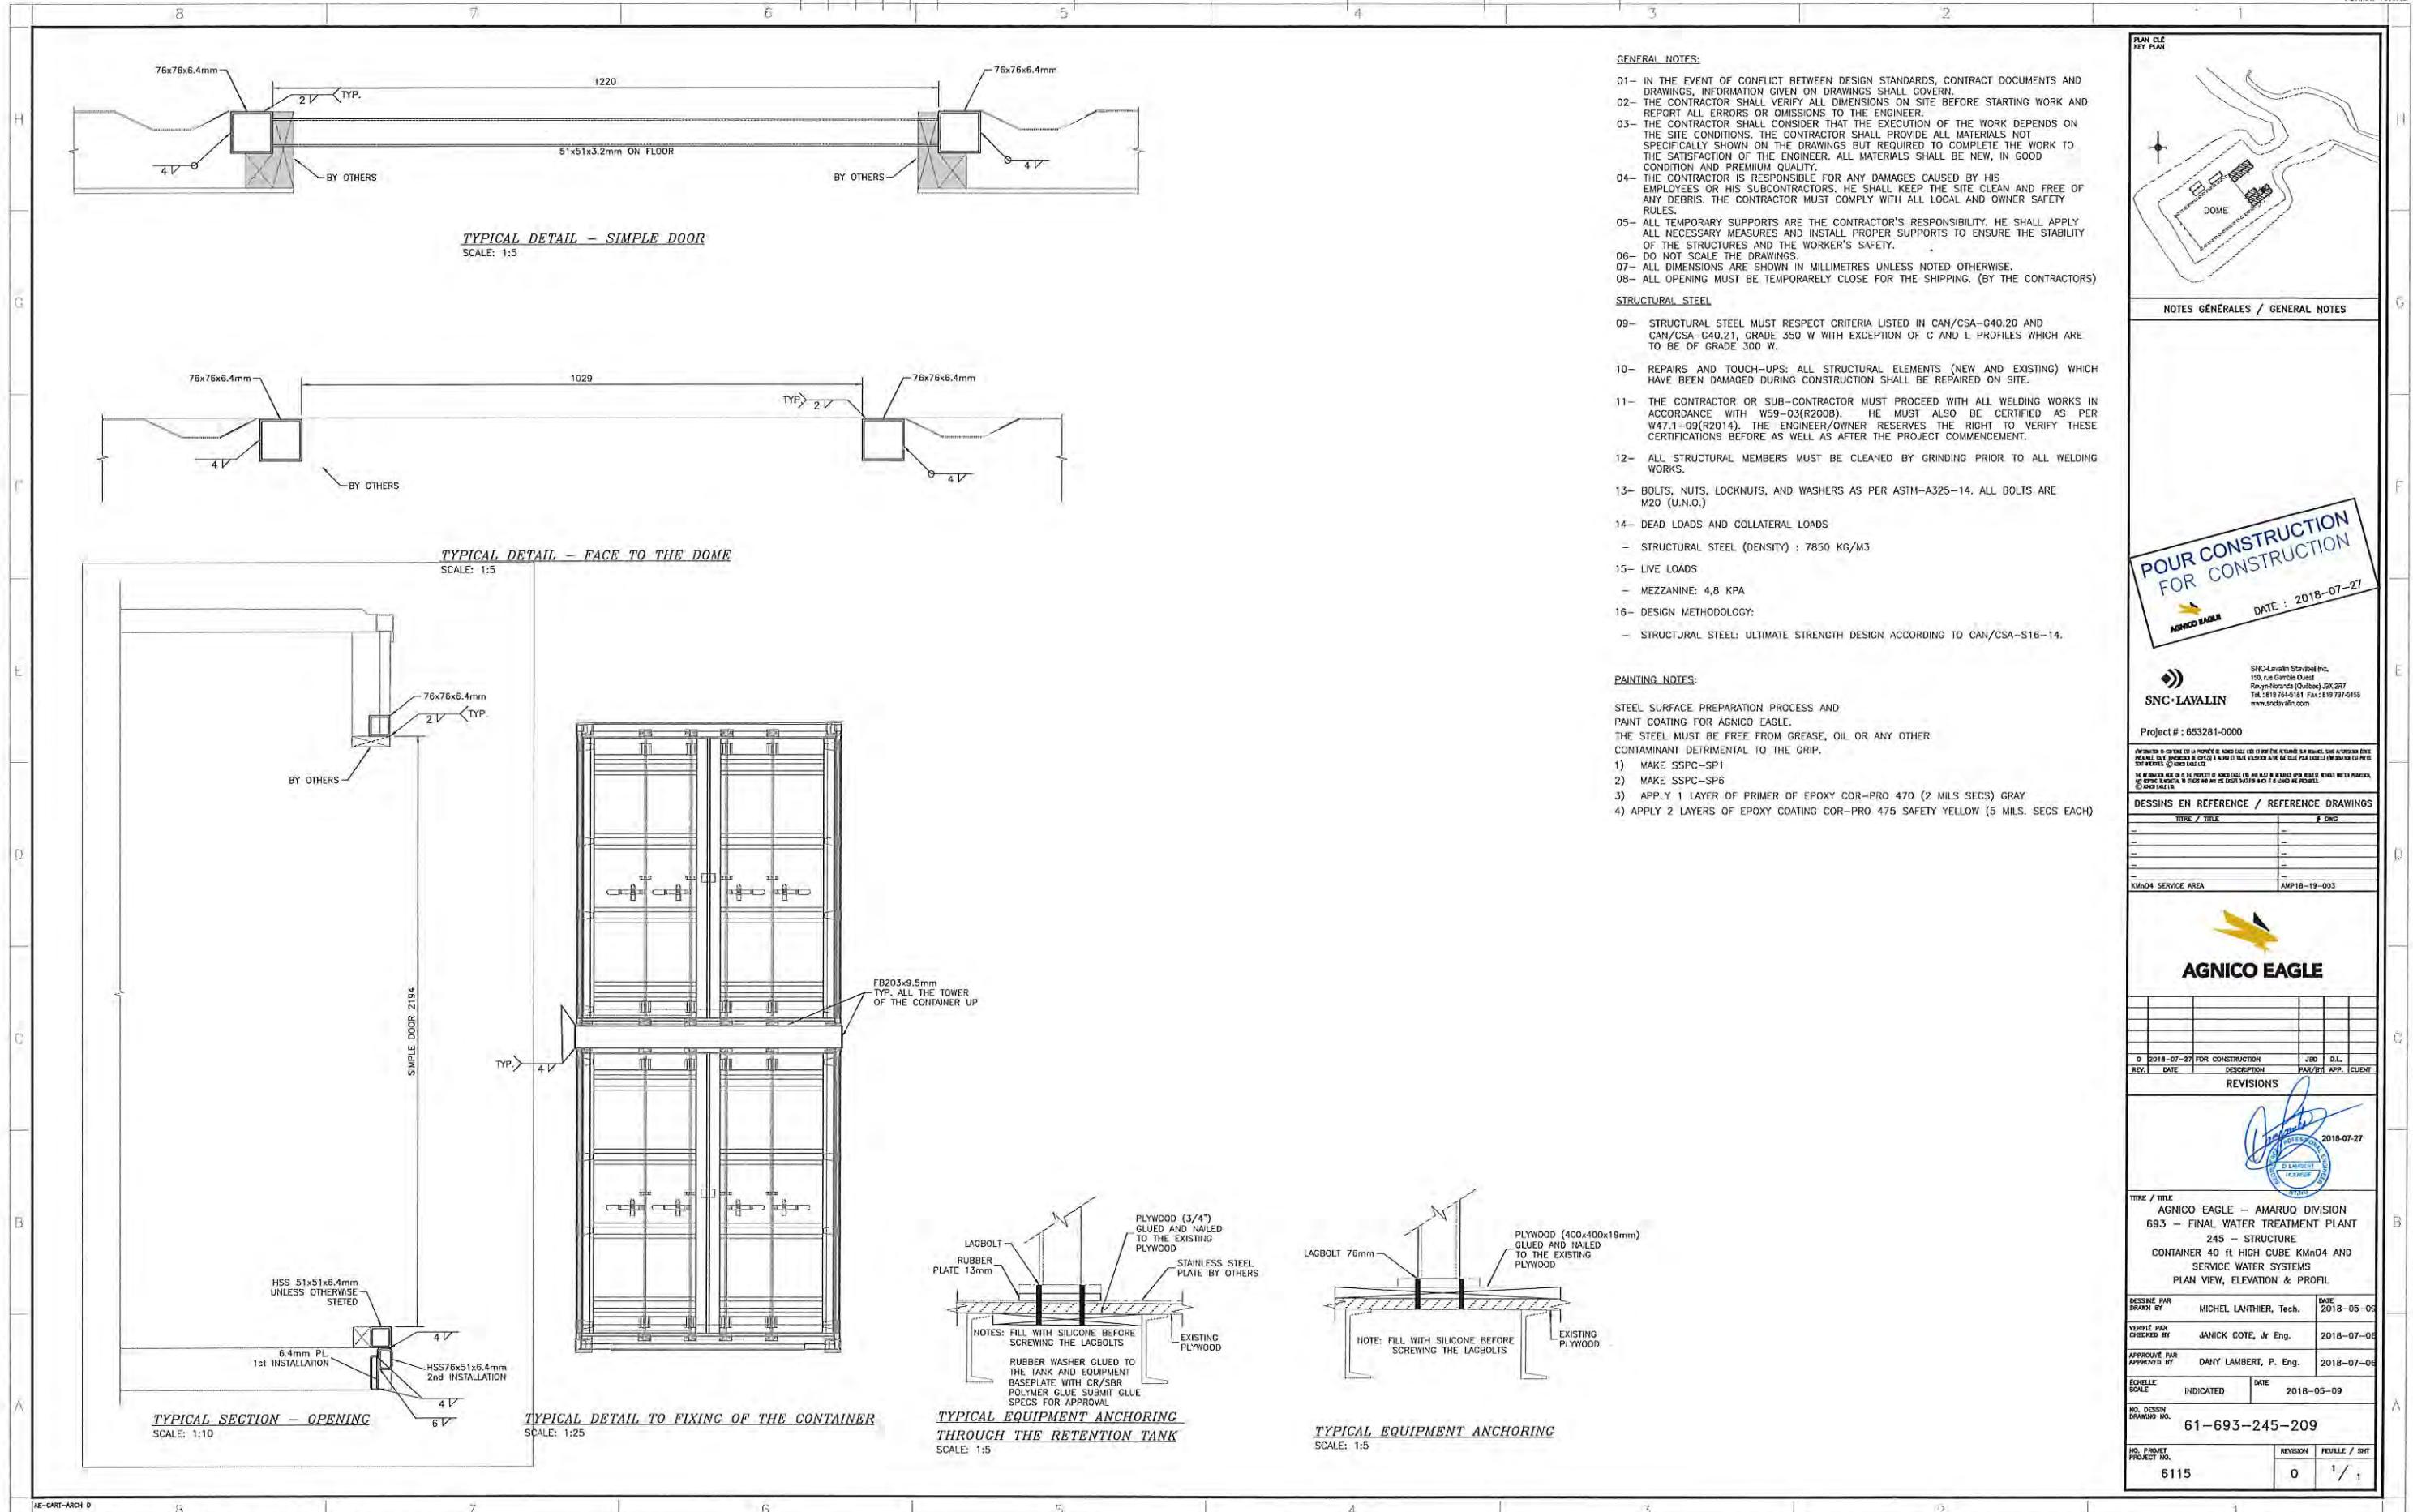



Appendix B


P&ID AsWTP

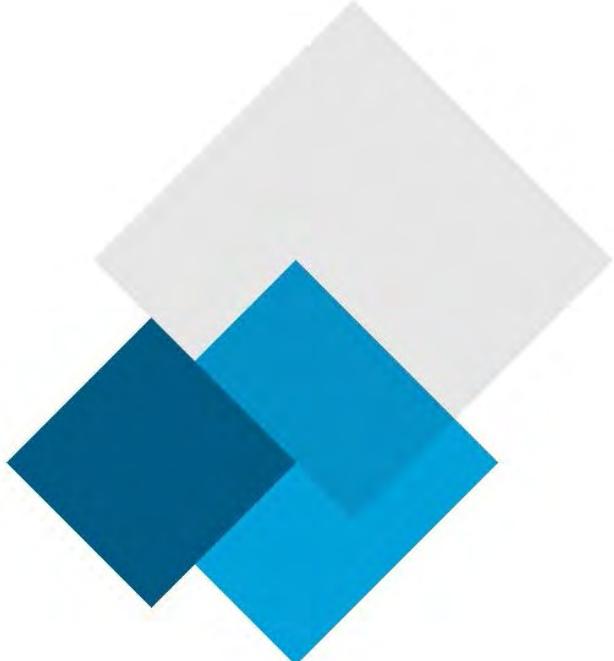



1	2	3	4	5	6	7	8
ABBREVIATIONS							
A TO C – AIR TO CLOSE A TO O – AIR TO OPEN AVG – AVERAGE B/EL – BOTTOM ELEVATION CL – CENTER LINE CFM – CUBIC FEET PER MINUTE CW – CITY WATER (POTABLE) DIA – DIAMETER DWG – DRAWING EL – ELEVATION SID – FAIL CLOSED F.O. – FAIL OPEN FRL – FILTER,REGULATOR\LUBRICATOR GAL – GALLONS GPD – GALLONS PER DAY GPH – GALLONS PER HOUR GPM – GALLONS PER MINUTE HB – HOSE BIB HG – INCHES OF MERCURY HI – HIGH HOA – HAND/OFF/AUTO HP – HORSEPOWER IA – INSTRUMENT AIR ID – INSIDE DIAMETER INV – INVERT LO – LOW MH – MANHOLE MW – MANWAY	N.C. – NORMALLY CLOSED N.O. – NORMALLY OPEN OAL – OVERALL LENGTH O.D. – OUTSIDE DIAMETER OF – OVERFLOW PA – PLANT AIR PSIG – POUNDS PER SQUARE INCH – GAUGE PW – PLANT WATER RED – REDUCER RPM – REVOLUTIONS PER MINUTE SCFM – STANDARD CUBIC FEET PER MINUTE SCH – SCHEDULE SG – SPECIFIC GRAVITY SP – SETPOINT SSH – STRAIGHT SIDE HEIGHT STD – STANDARD SW – SEAL WATER SWD – SIDE WATER DEPTH TDH – TOTAL DYNAMIC HEAD(FT OF FLUID) T/EL – TOP ELEVATION TYP – TYPICAL VAC – VACUUM VSD – VARIABLE SPEED DRIVE WC – WATER COLUMN WD – WATER DEPTH WL – WATER LEVEL WV – WORKING VOLUME (DOES NOT INCLUDE FREEBOARD OR HEEL)	VALVE SYMBOLS	PIPING ACCESSORIES	ISA INSTRUMENT IDENTIFICATION TABLE			
F	E	D	C	B	A		
PIPING AND TUBING MATERIALS	ACTUATORS	INSTRUMENTATION AND RELATED ITEMS	VALVE & ACCESSORY TAG	EQUIPMENT TAG NUMBERS	INSTRUMENT TAG NUMBERS	LINE NUMBER IDENTIFICATION	INSTRUMENT SYMBOLS
ABS – ACRYLONITRILE BUTADIENE STYRENE TRUSS PIPE ALM – ALUMINUM PIPE OR TUBING ARP – ALUMINUM REINFORCED PLASTIC PIPE BL – BLACK IRON PIPE BPT – BRAIDED PLASTIC TUBING-PVC CI – CAST IRON PIPE CISP – CAST IRON SOIL PIPE CMCP – CORRUGATED METAL CULVERT PIPE CMH – CHEMICAL HOSE CMP – CORRUGATED METAL PIPE COP – COPPER PIPE PVC – CHLORINATED POLYVINYL CHLORIDE PIPE CS – CARBON STEEL PIPE DI – DUCTILE CAST IRON PIPE ERP – EPOXY RESIN PIPE FRP – FIBERGLASS REINFORCED PLASTIC PIPE GS – GALVANIZED STEEL PIPE HOSE – FLEXIBLE HOSE HSI – HIGH SILICON IRON PIPE KLS – PVDF LINED STEEL PIPE (KYNAR® LINED TYPICAL) KYN – PVDF (KYNAR® TYPICAL)	MI – CARBON STEEL PIPE W/MALLEABLE IRON FITTINGS NEO – NEOPRENE HOSE NI – NICKEL ALLOY PIPE NLS – NEOPRENE LINED STEEL PIPE PEP – POLYETHYLENE PIPE PETB – POLYETHYLENE TUBING PLS – POLYPROPYLENE LINED STEEL PIPE POP – POLYPROPYLENE PIPE PRP – PHENOLIC RESIN PIPE PVC – POLYVINYL CHLORIDE PIPE HOSE PVDF – POLYVINYLDENE FLUORIDE PIPE RBR – RUBBER HOSE RCCP – REINFORCED CONCRETE CULVERT PIPE RCP – REINFORCED CONCRETE PIPE SAR – SARAN TUBING SLH – SLUDGE HOSE SLS – SARAN LINED STEEL PIPE SS – STAINLESS STEEL PIPE OR TUBING TEF – TEFLOON TUBING TI – TITANIUM ALLOY PIPE TLS – TEFLOON LINED STEEL PIPE TYB – TYGON® TUBING-BRAIDED TYG – TYGON® TUBING-UNBRAIDED	– CYLINDER – DIAPHRAGM-SPRING – ELECTRO HYDRAULIC – ELECTRO PNEUMATIC	– CAPILLARY TUBING – ELECTRICAL – HYDRAULIC – PNEUMATIC – DATA LINK	25-XXYY-ZZZZ-0 OPEN CLOSE – SPECTACLE BLIND – SPECTACLE BLIND – PIGTAIL SIPHON – STATIC MIXER – INJECTION QUILL – STOP LOG – FLUME – MAGNETIC FLOW METER – SONIC FLOW METER – TURBINE FLOW METER – VENTURI – WEIR – VORTEX SENSOR – ROTAMETER – DRAIN – PLUG	XXXXX AGITATORS, AERATORS BXXXX AIR HANDLING-BLOWERS, COMPRESSORS, DRYERS RXXXX CLARIFIERS, THICKENERS, SEPARATORS FXXXX FILTERS-VACUUM, PRESSURE, CENTRIFUGES PXXXX PUMPS TXXXX TANKS EXXXX HEAT EXCHANGER IXXXX SOFTENERS, DEMINERALIZERS ROXXXX REVERSE OSMOSIS UNITS SGXXXX STEAM GENERATORS VXXXX VALVE EJXXX EXPANSION JOINT HXXXX HOSE FXXXX FILTER SXXXX STRAINER SBXXXX SPECTACLE BLIND STXXXX STEAM TRAP	TIC 103 – INSTRUMENTATION IDENTIFICATION OR TAG NUMBER 103 – LOOP NUMBER TIC – FUNCTIONAL IDENTIFICATION NOTE: HYPHENS ARE OPTIONAL AS SEPARATORS	
A							
FLOWS AND LINES							
NEW MAIN FLOW EXISTING MAIN FLOW FUTURE MAIN FLOW NEW SECONDARY FLOW EXISTING SECONDARY FLOW FUTURE SECONDARY FLOW CHEMICALS BY OTHERS CS → SS MATERIAL SPECIFICATION CHANGE * SUPPLIED BY VEOLIA							

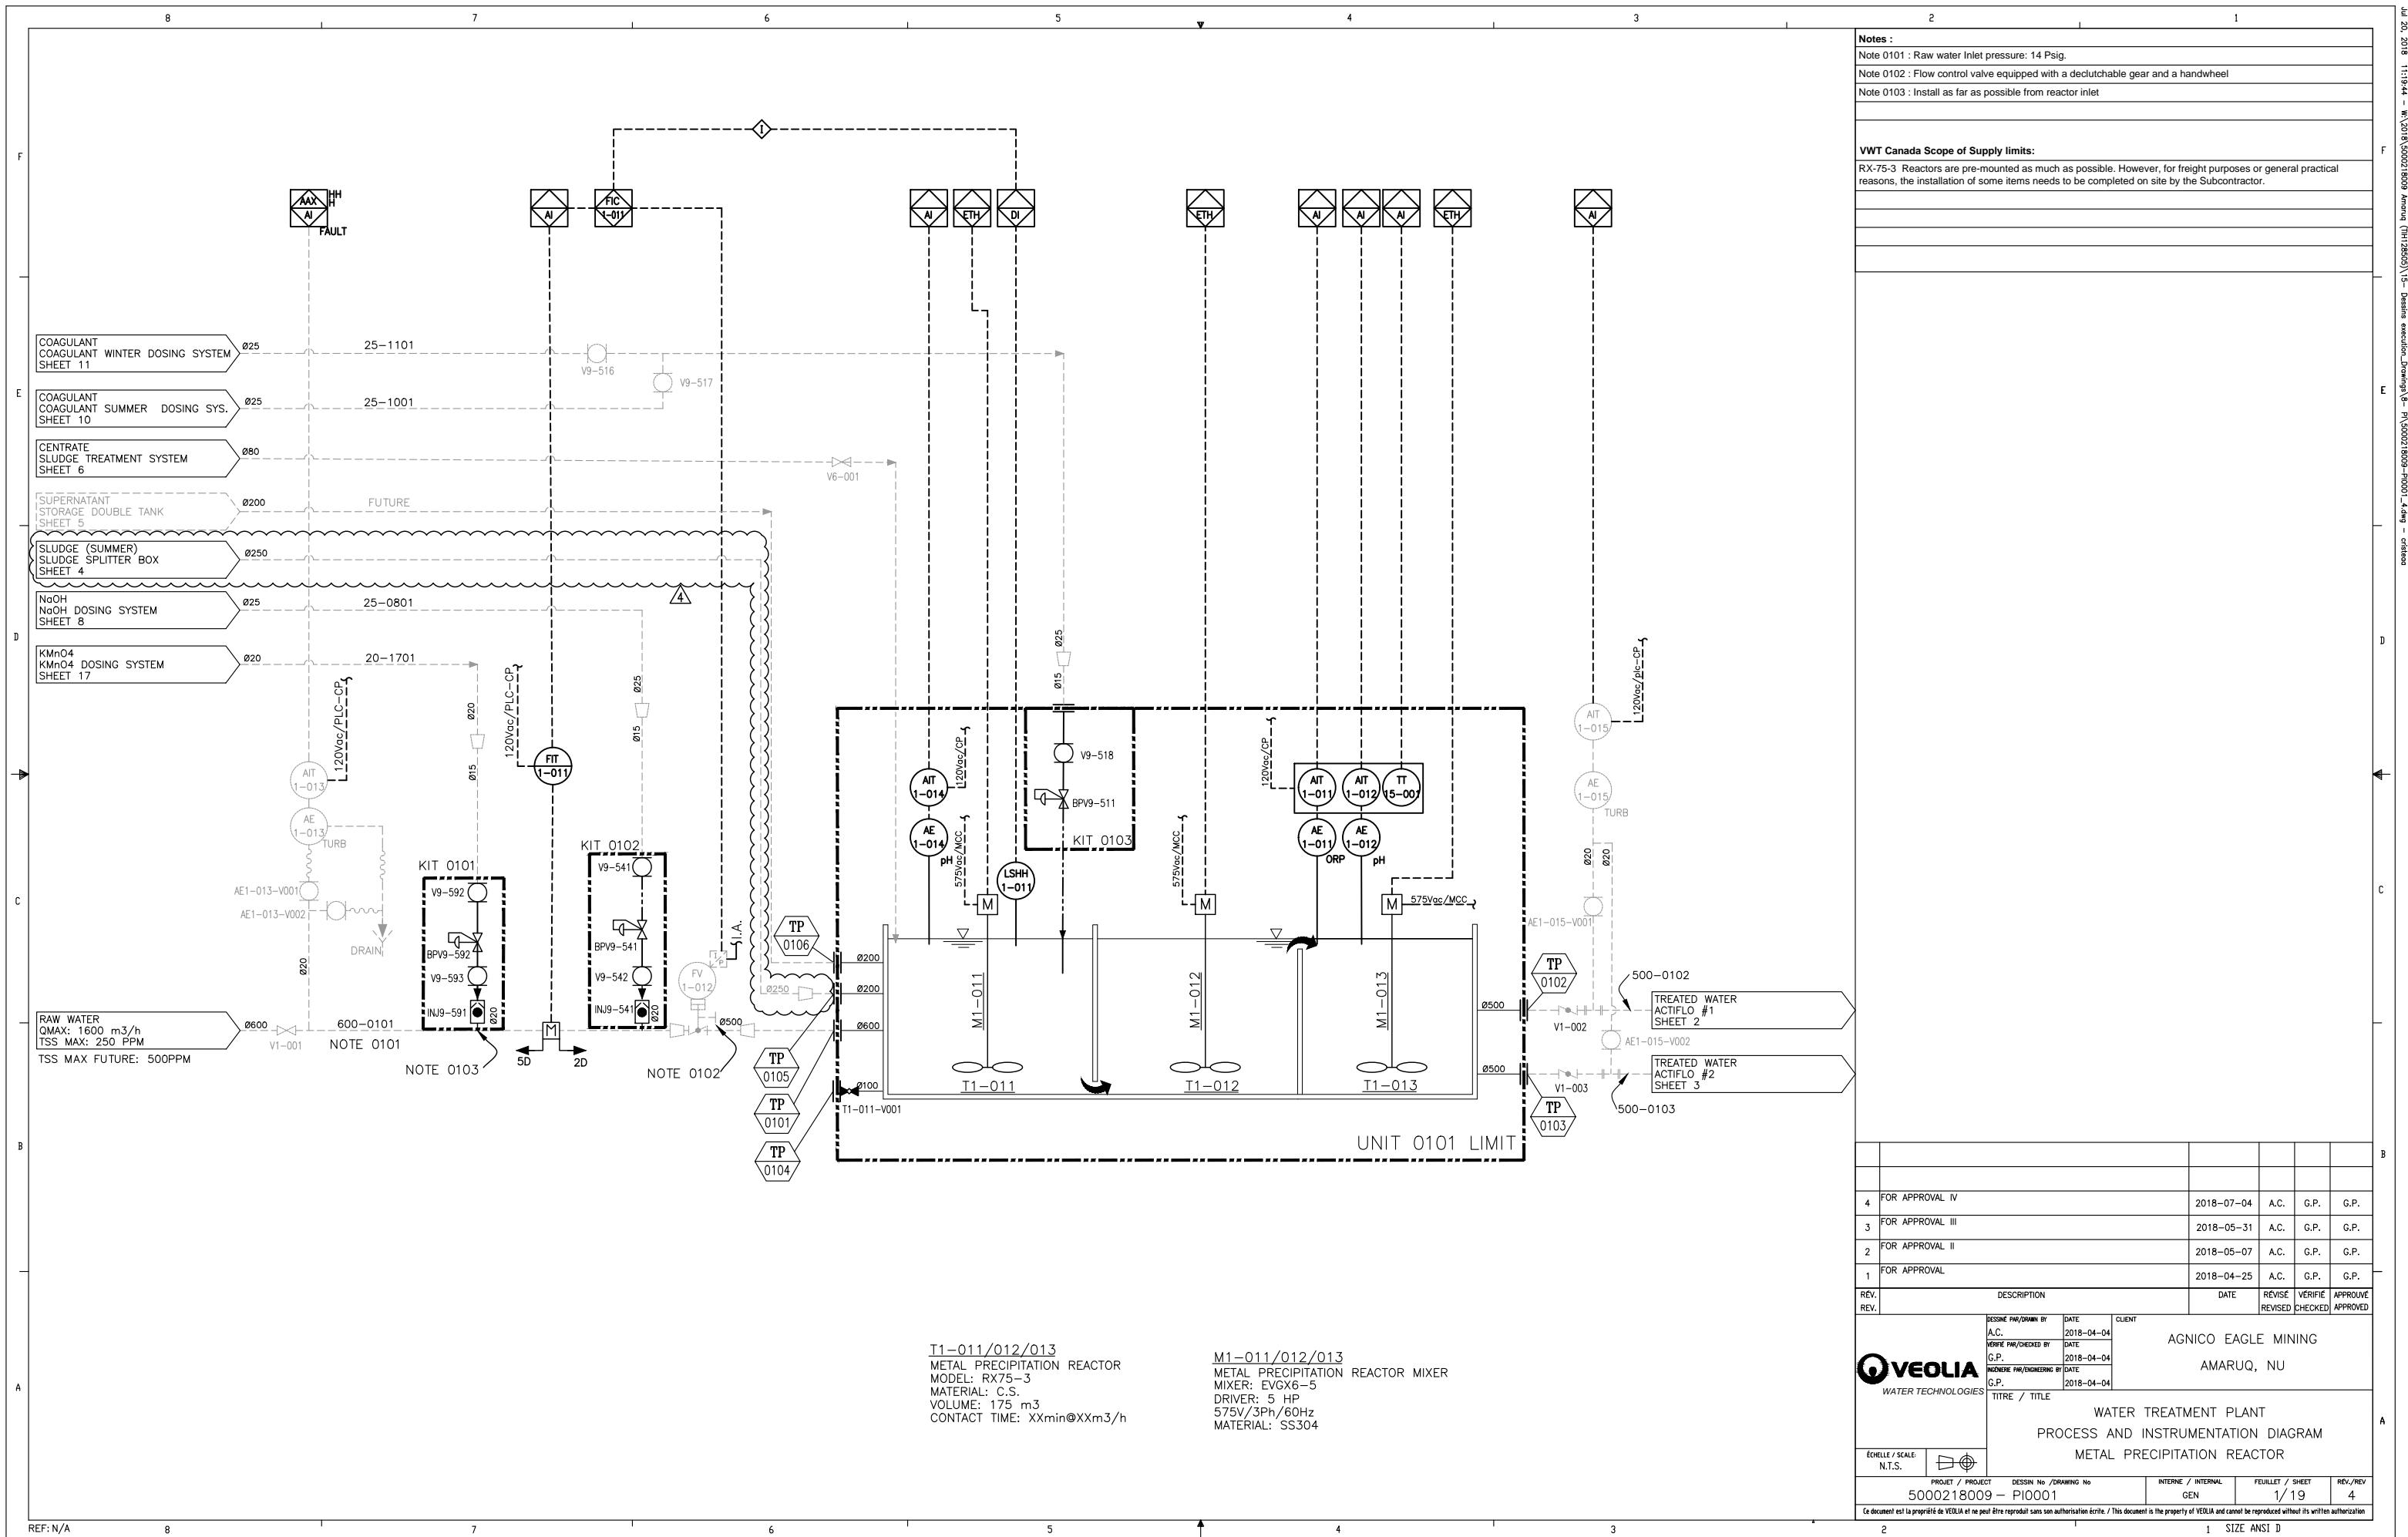


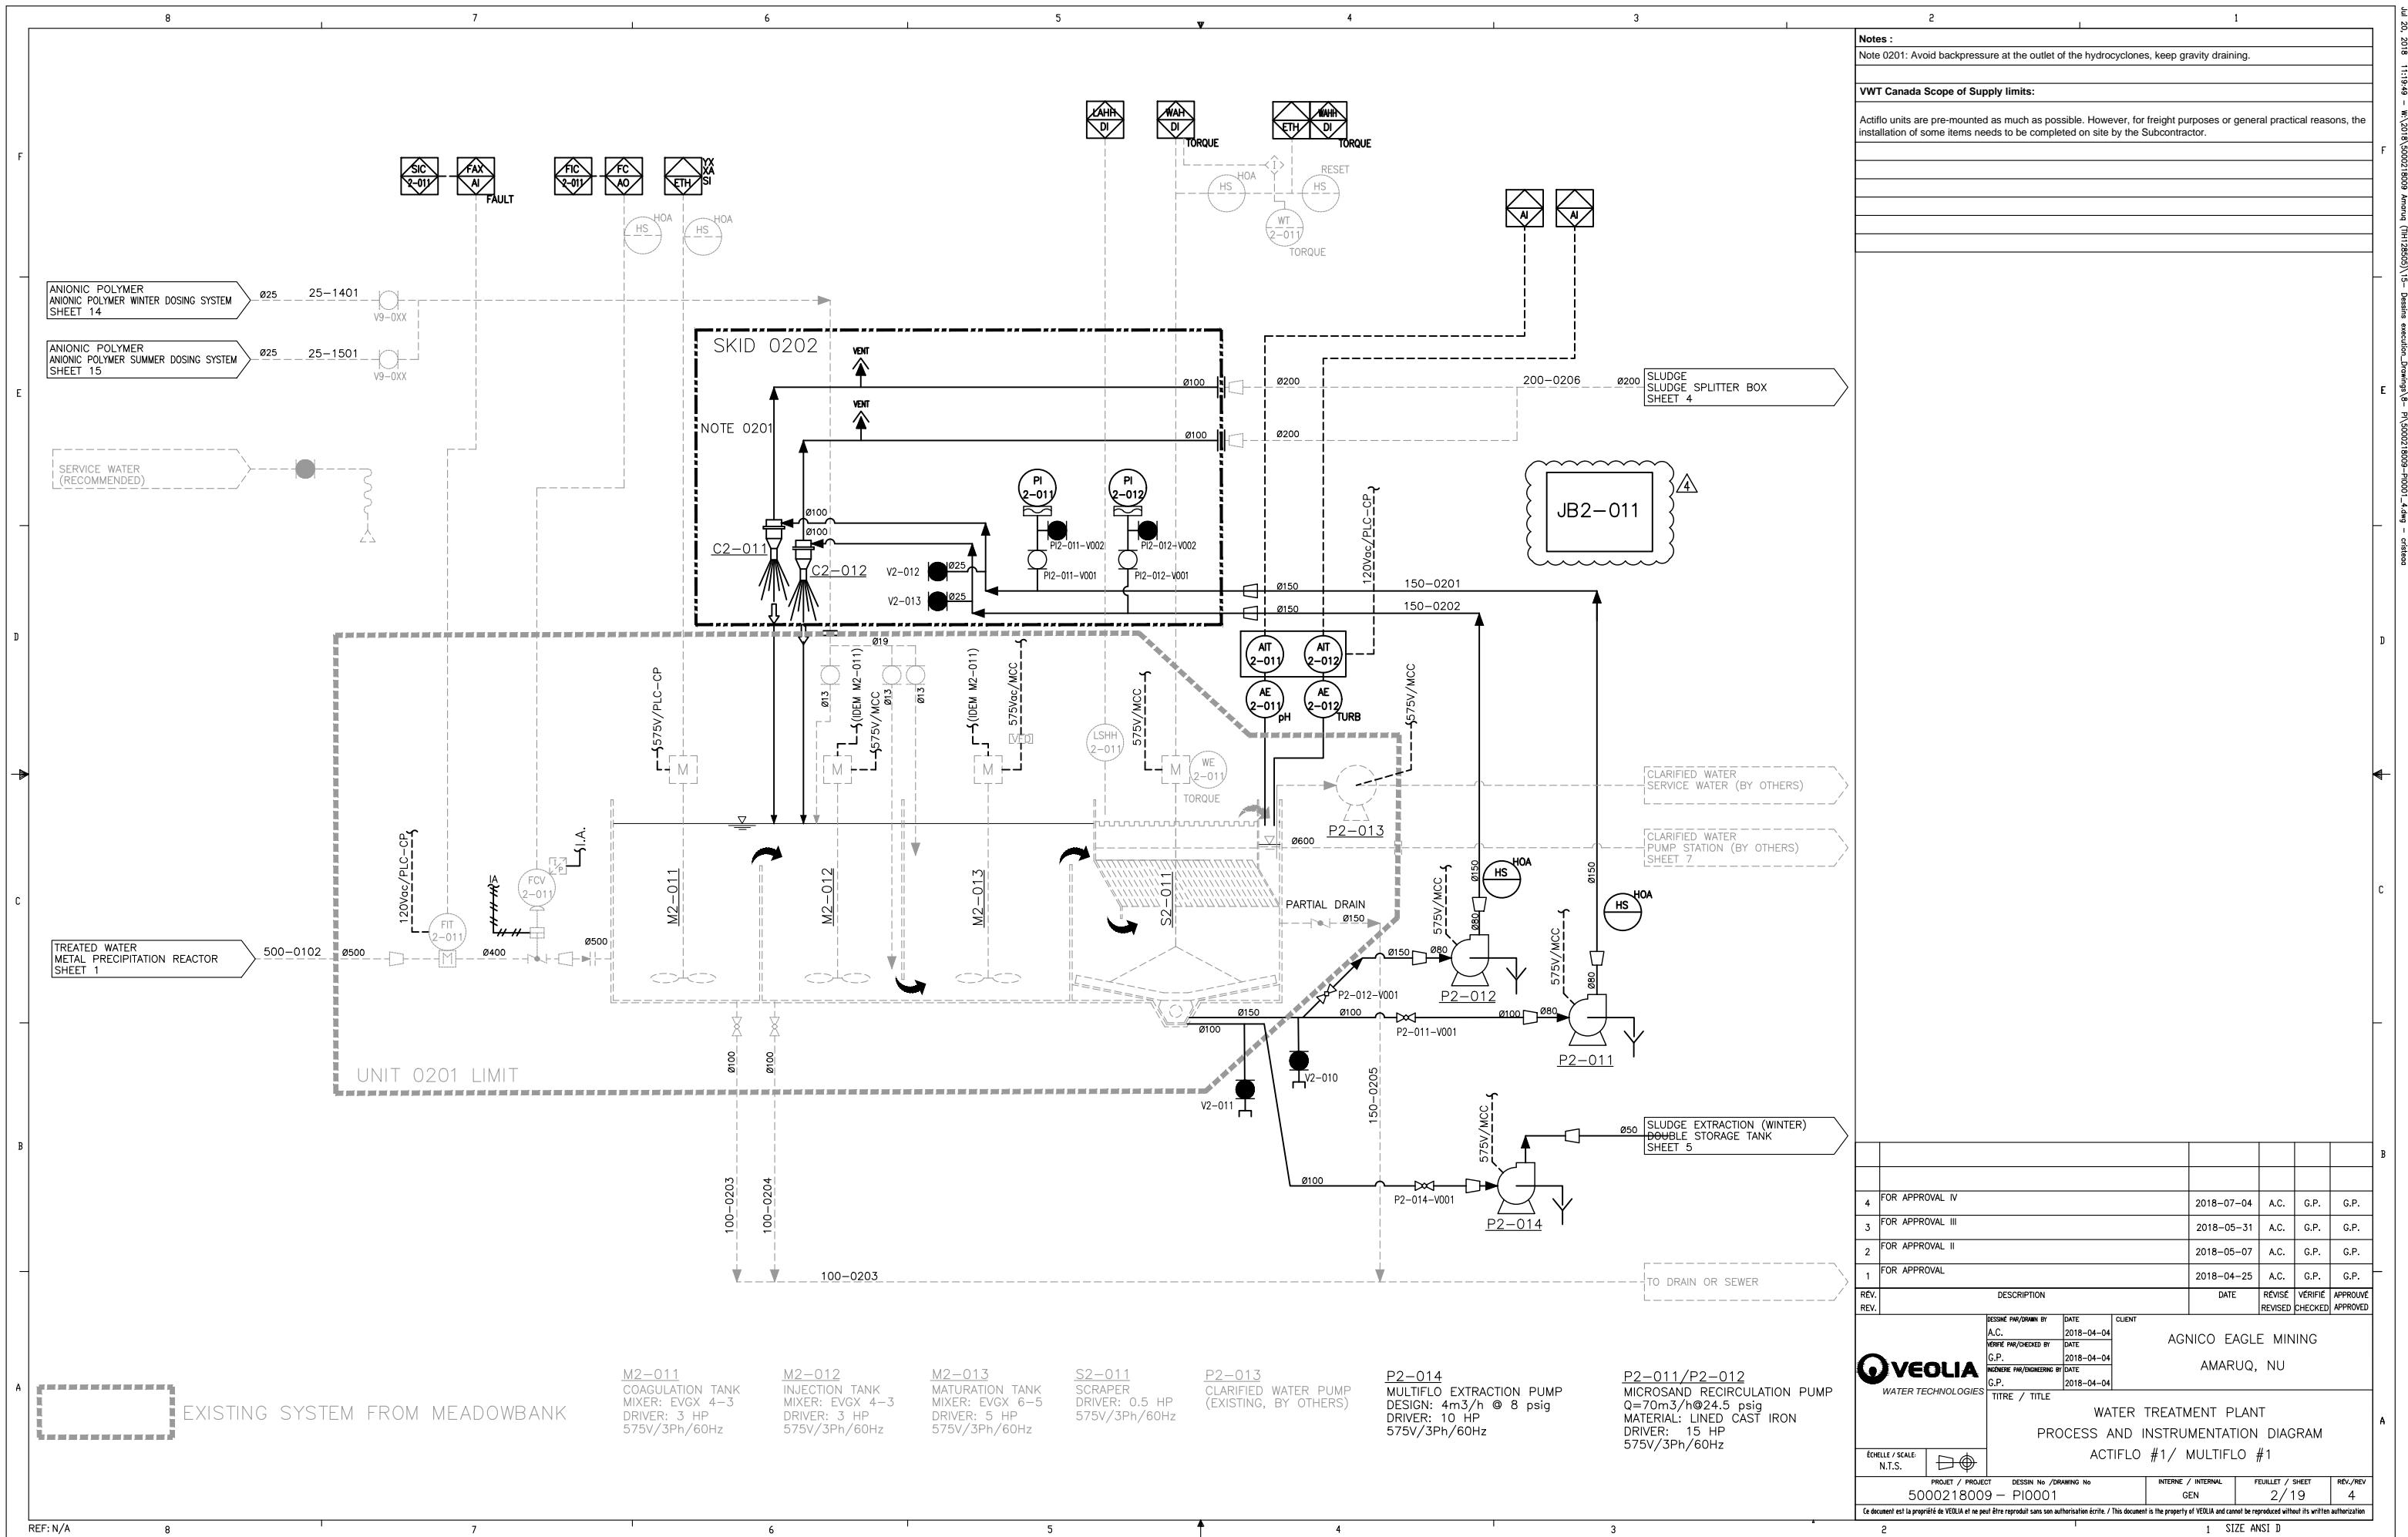


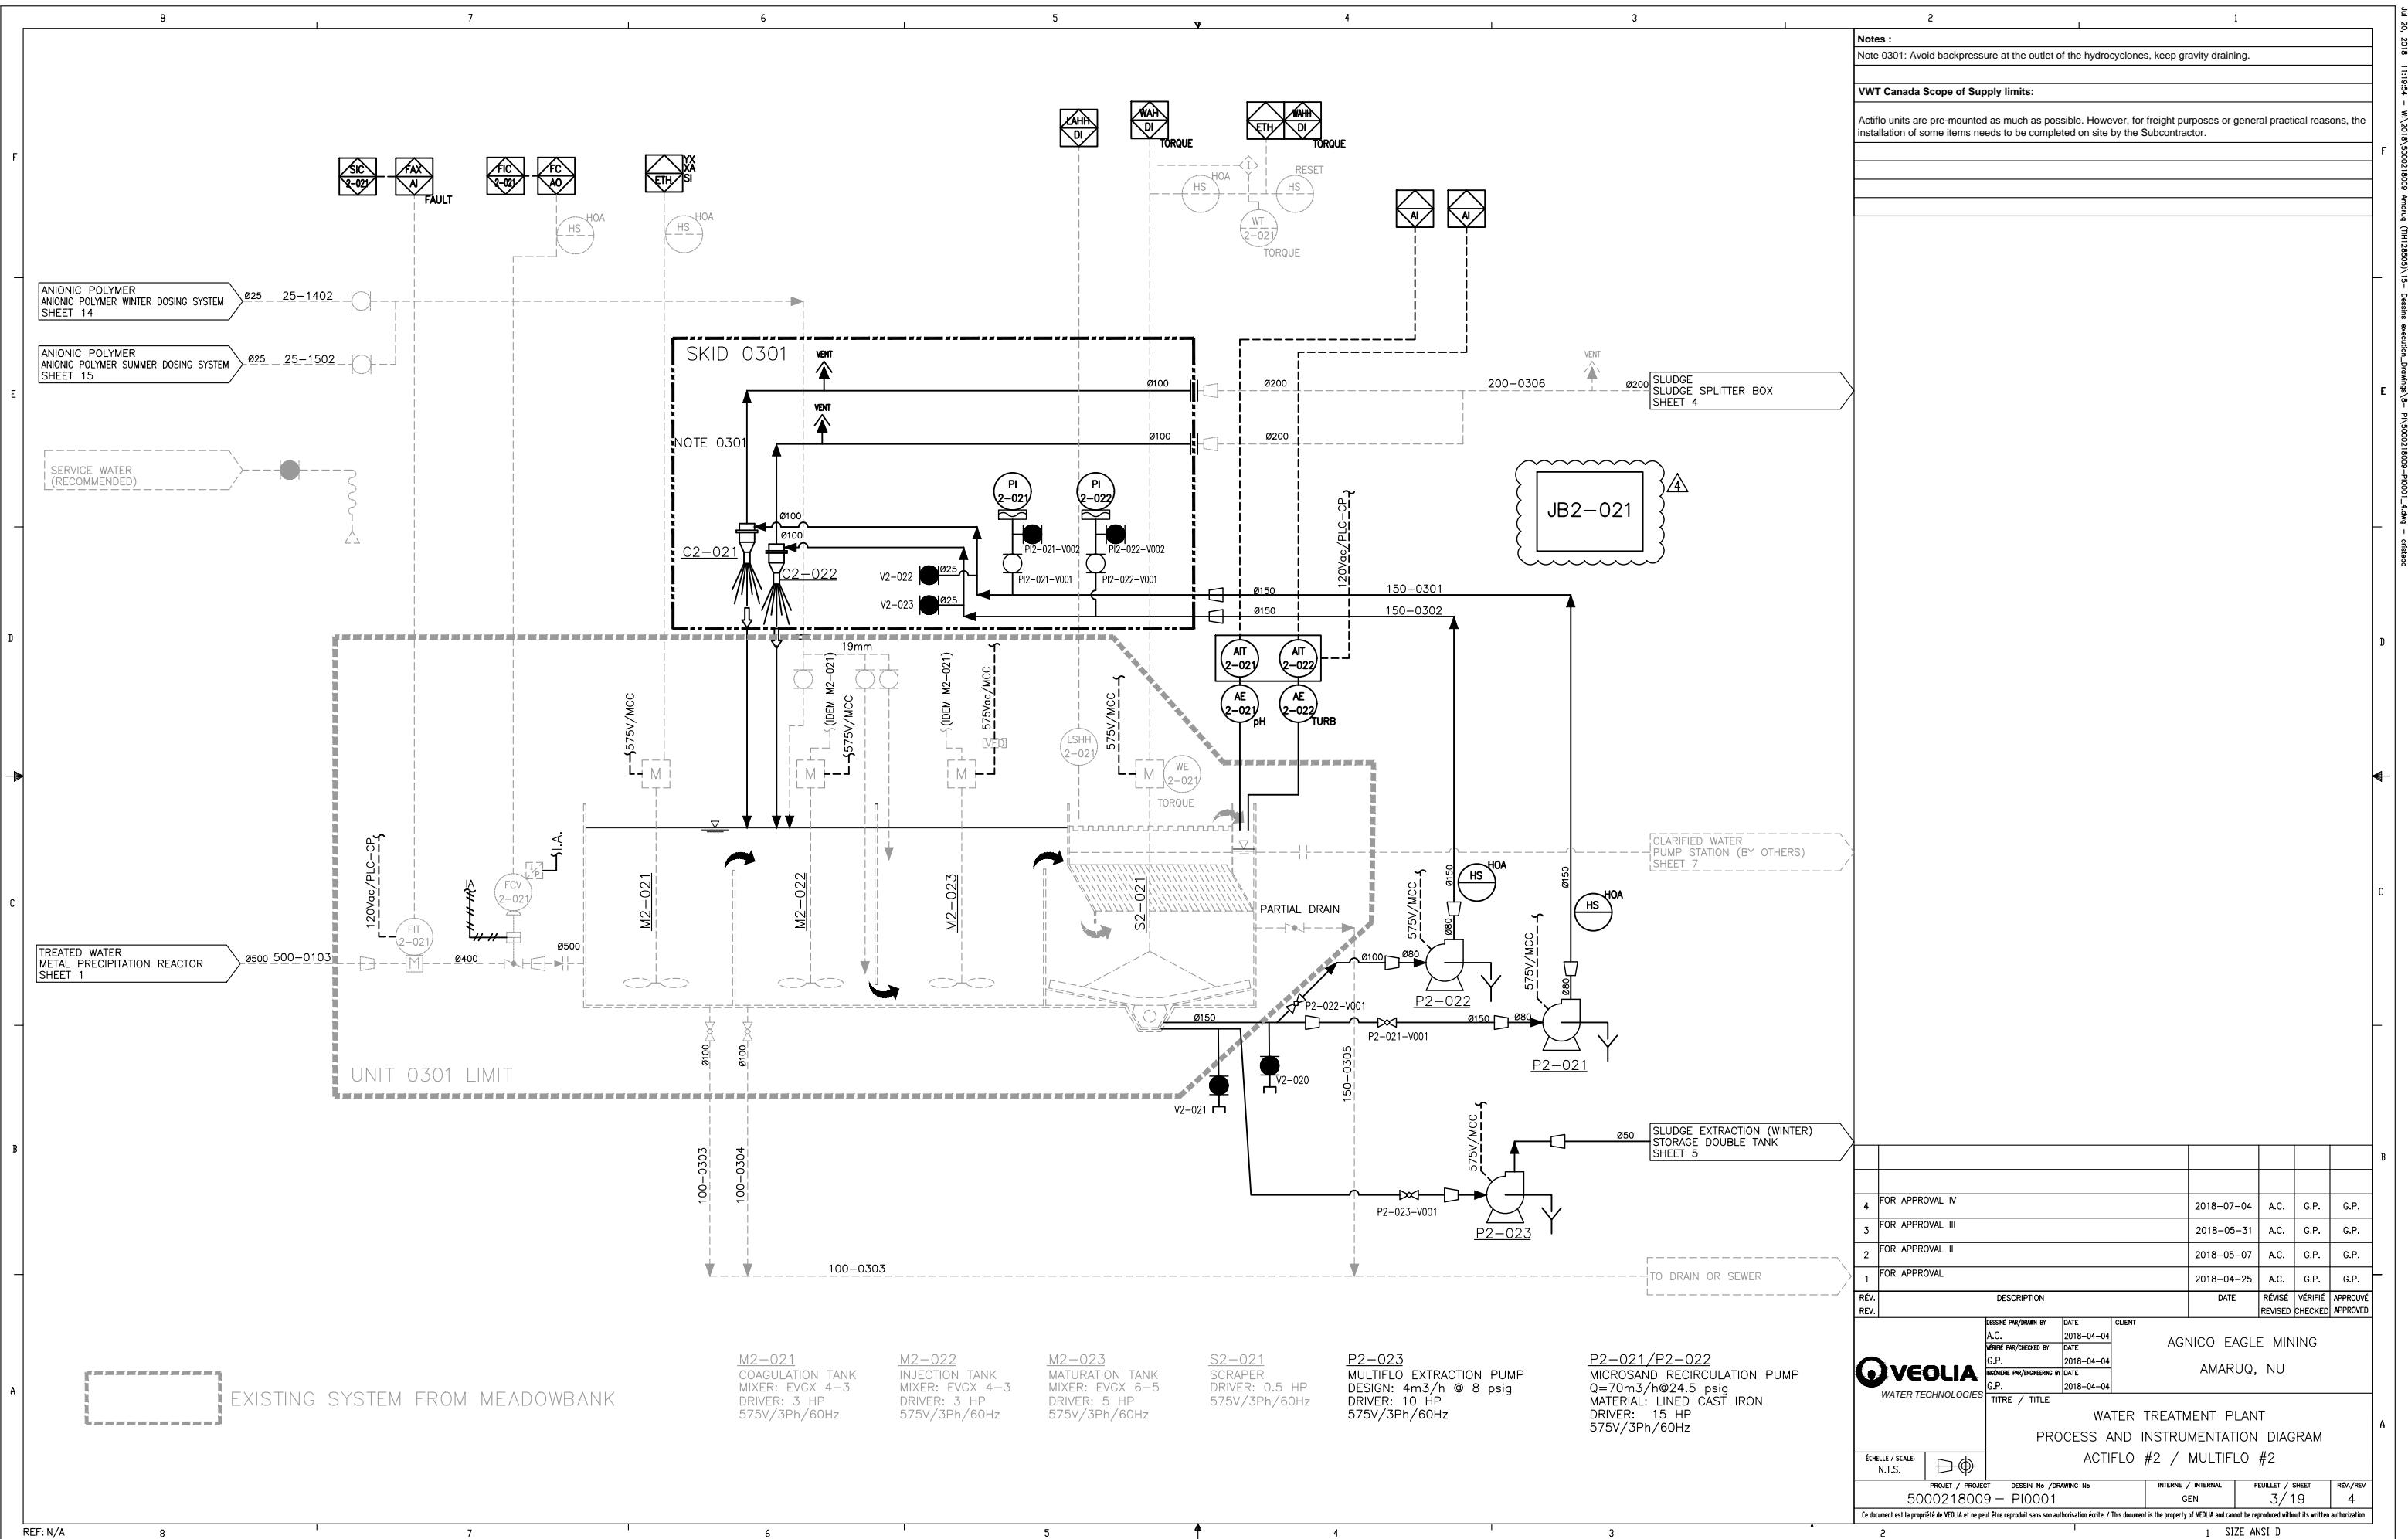


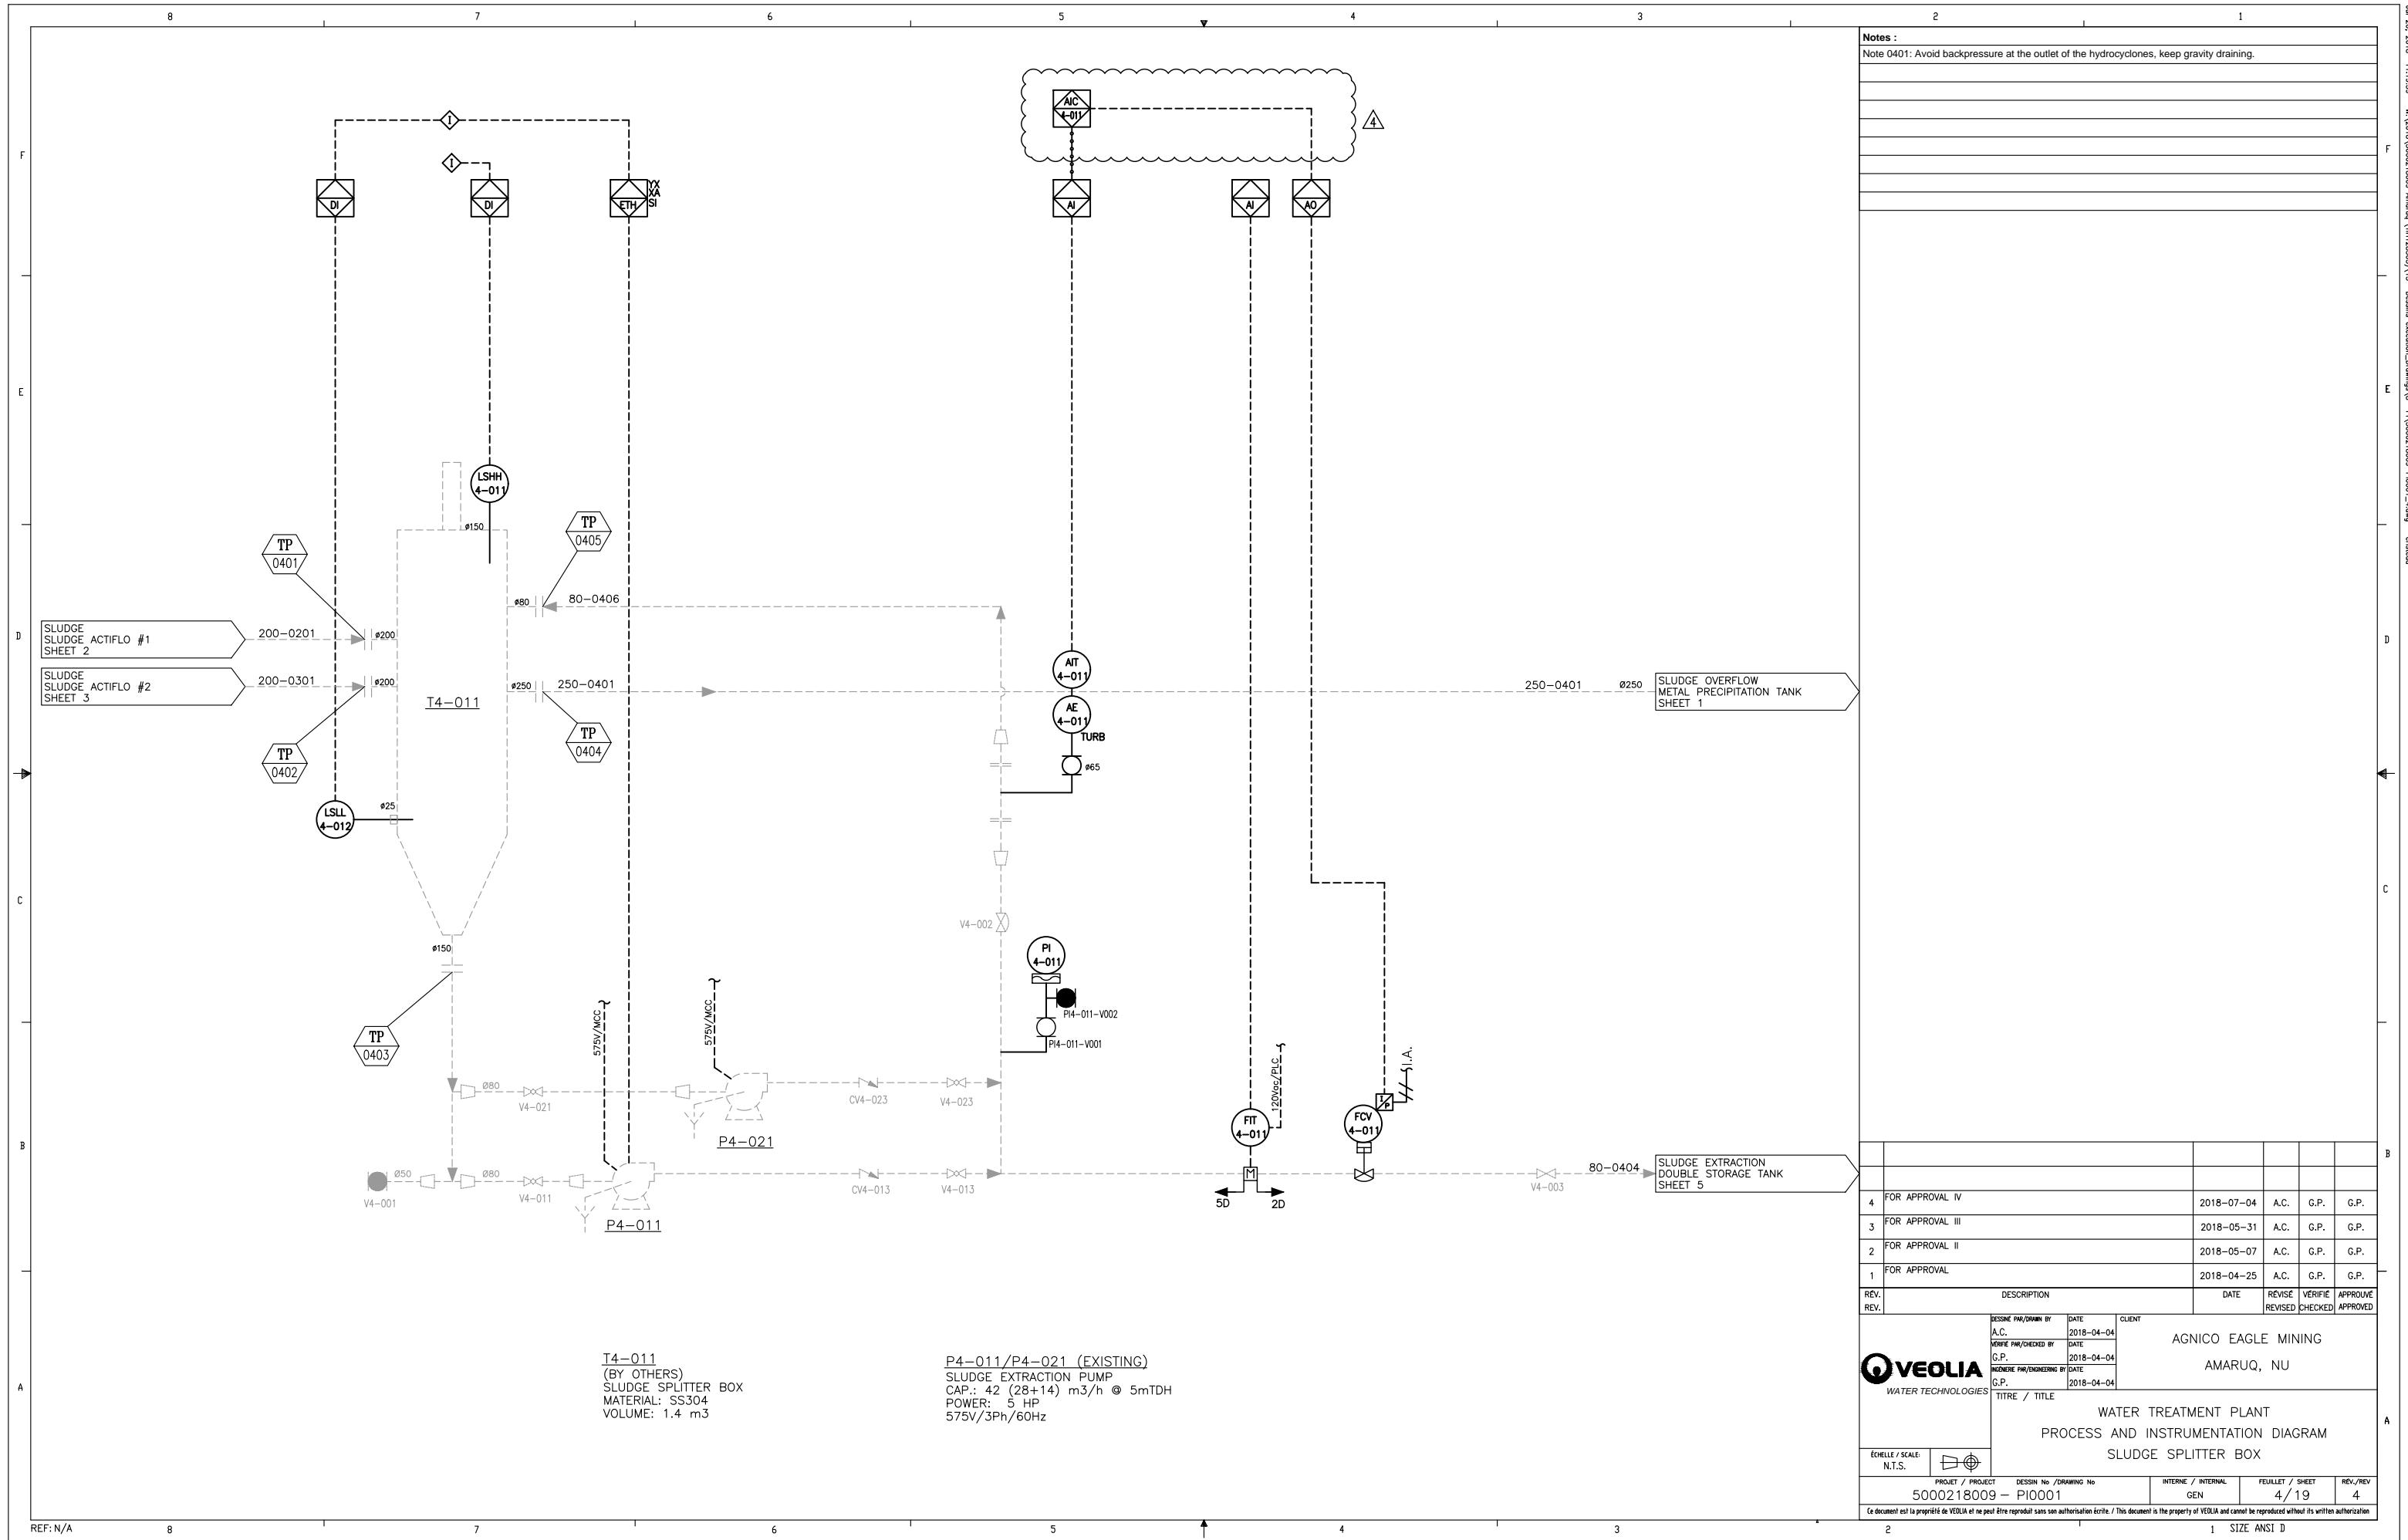


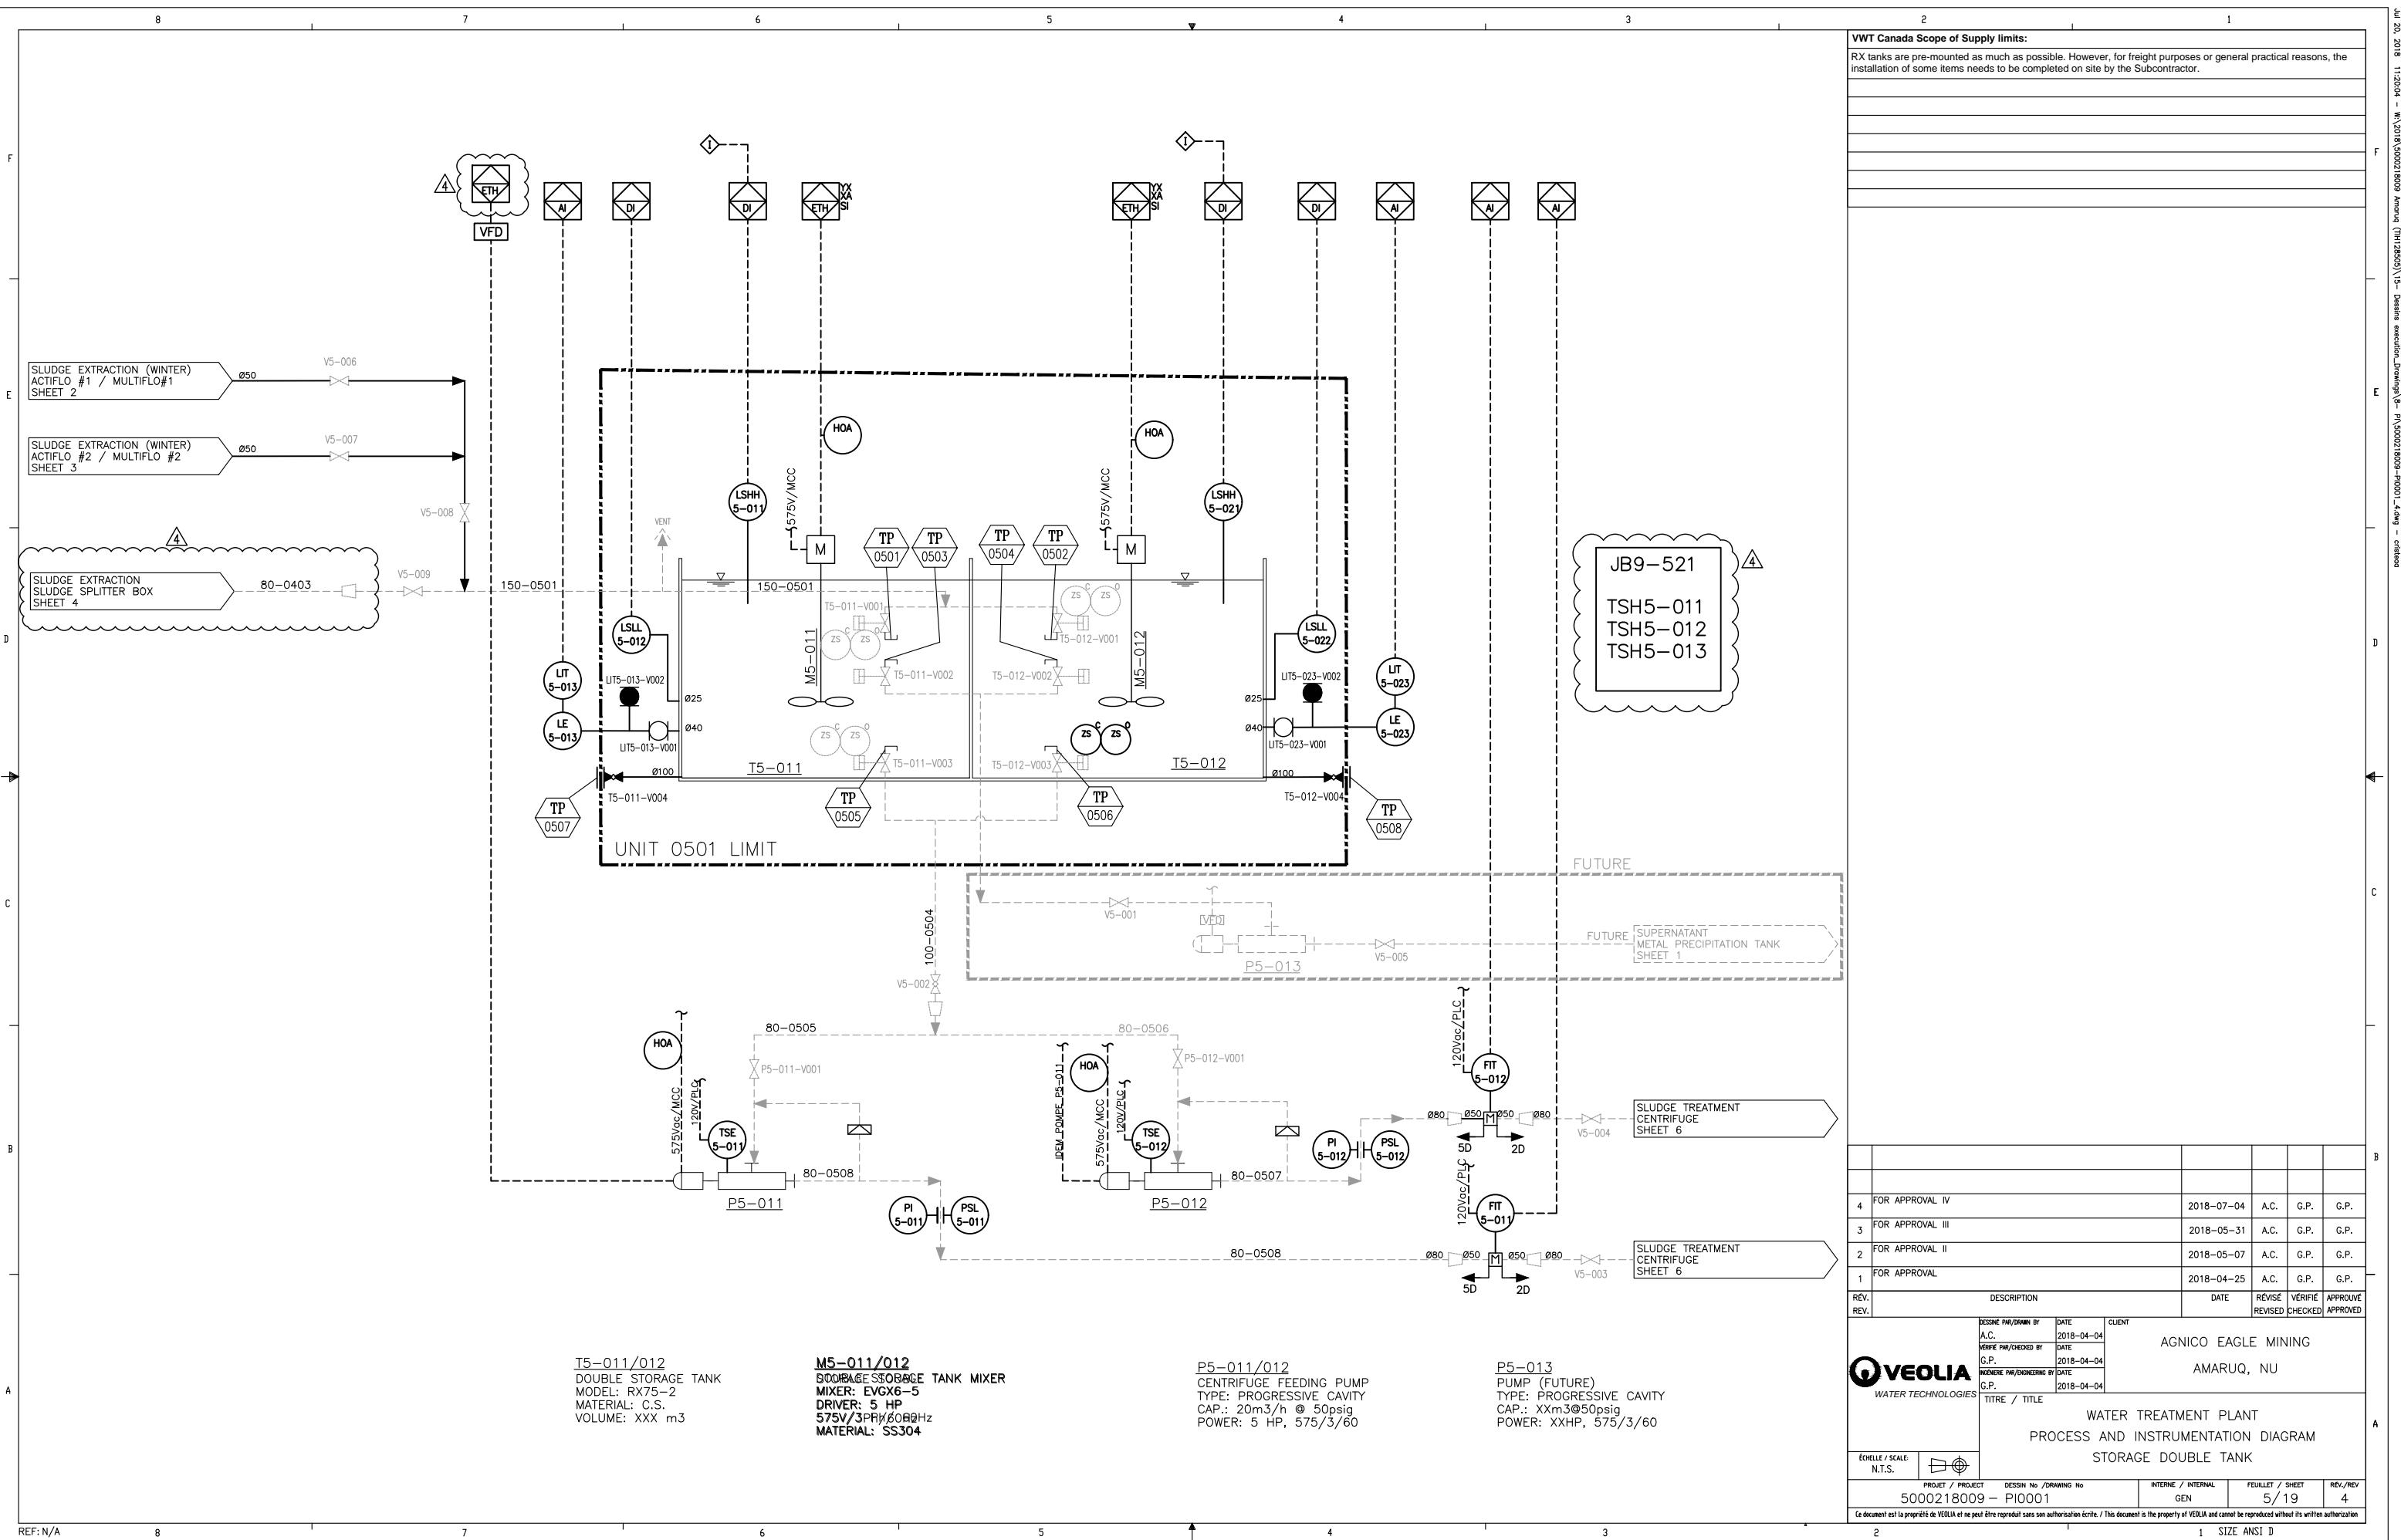


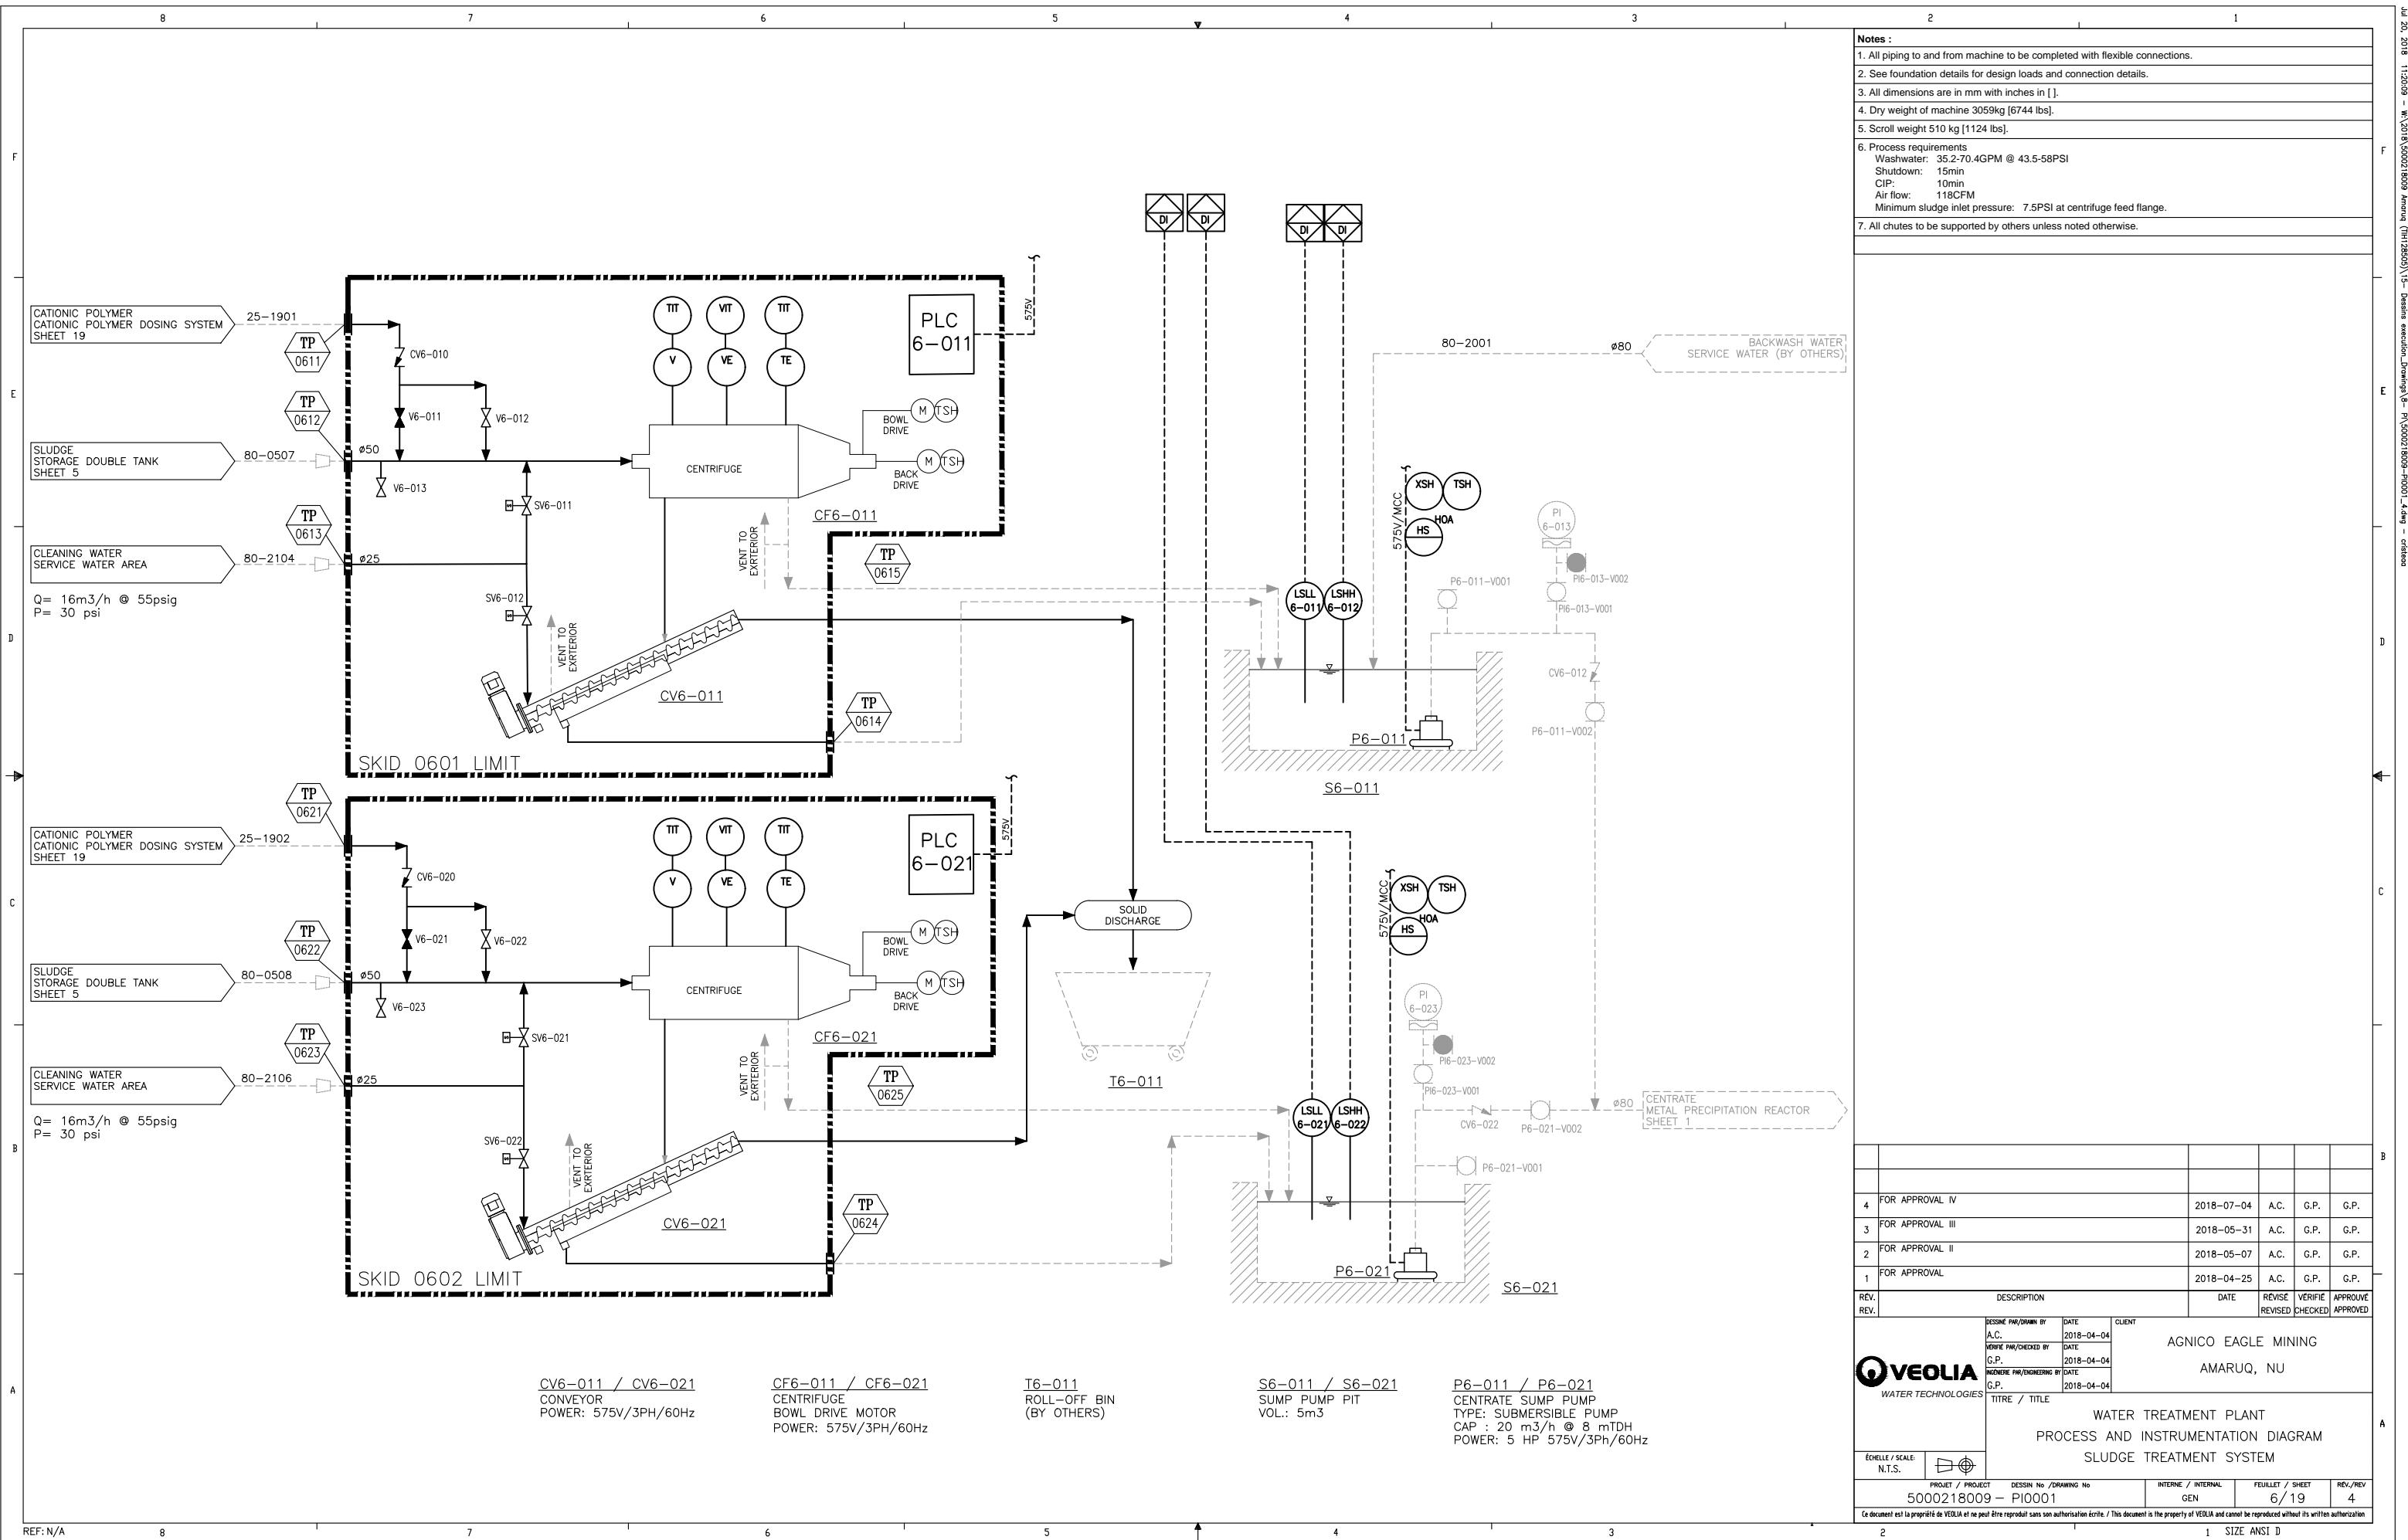


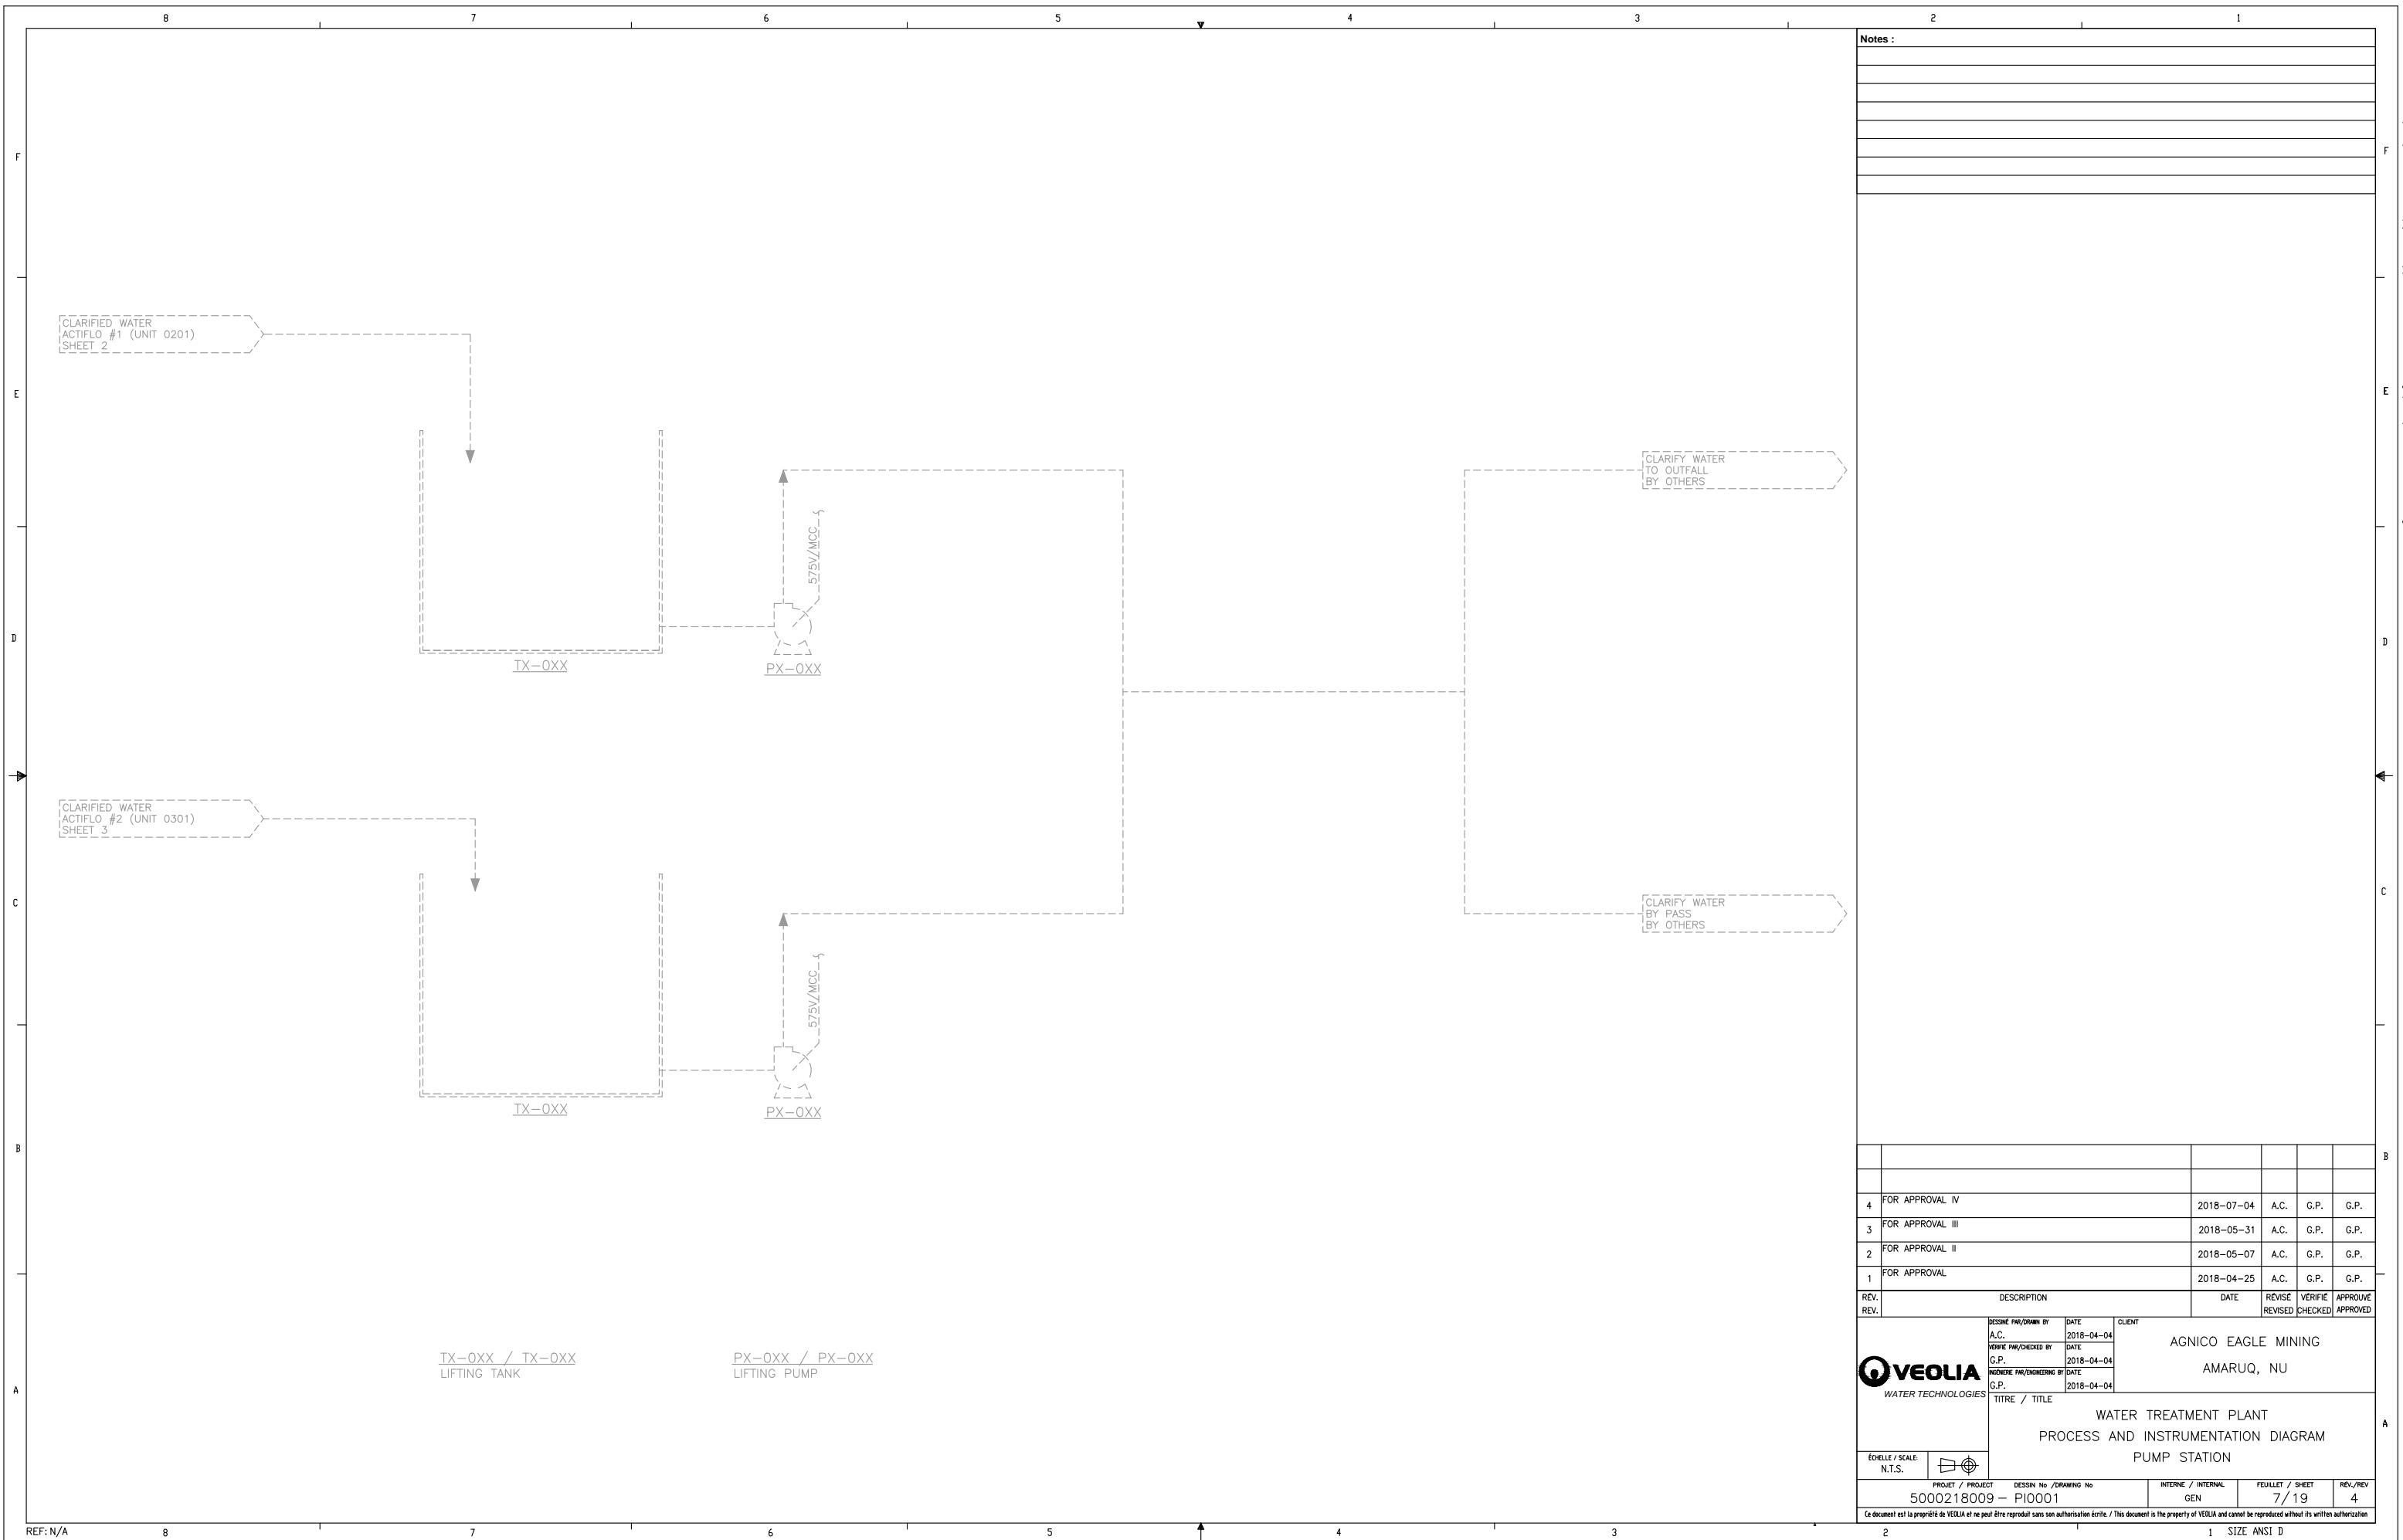


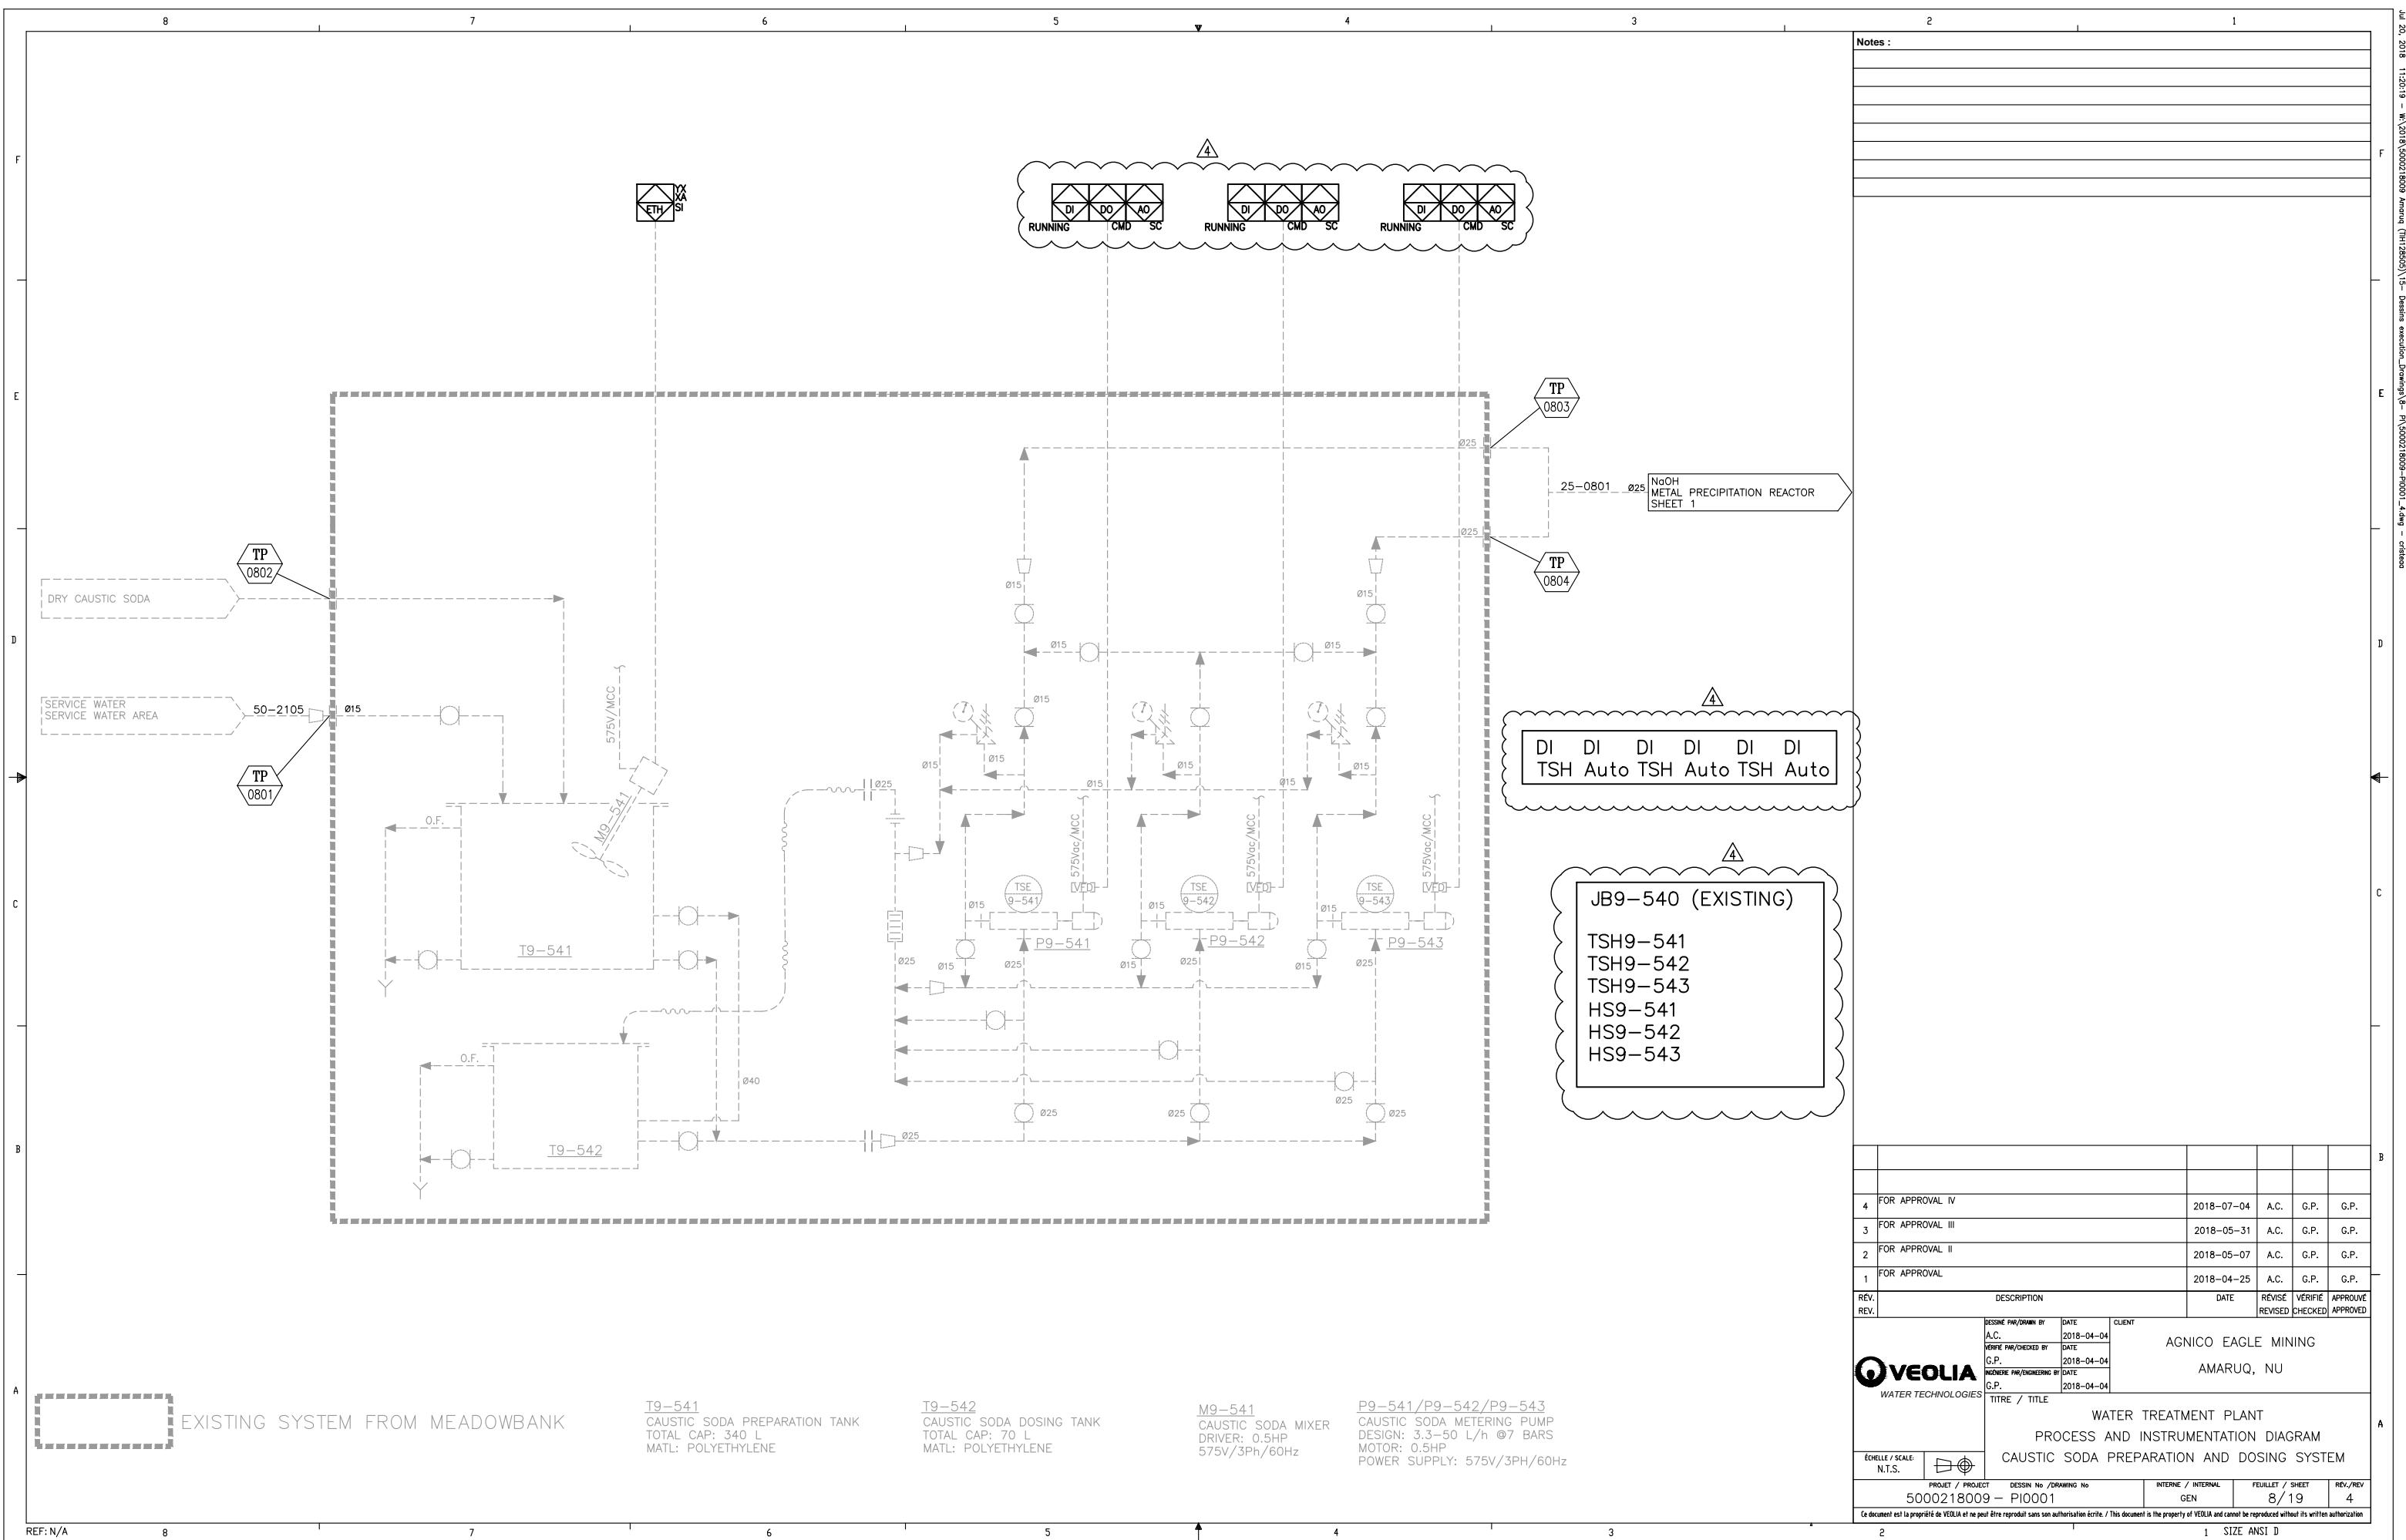


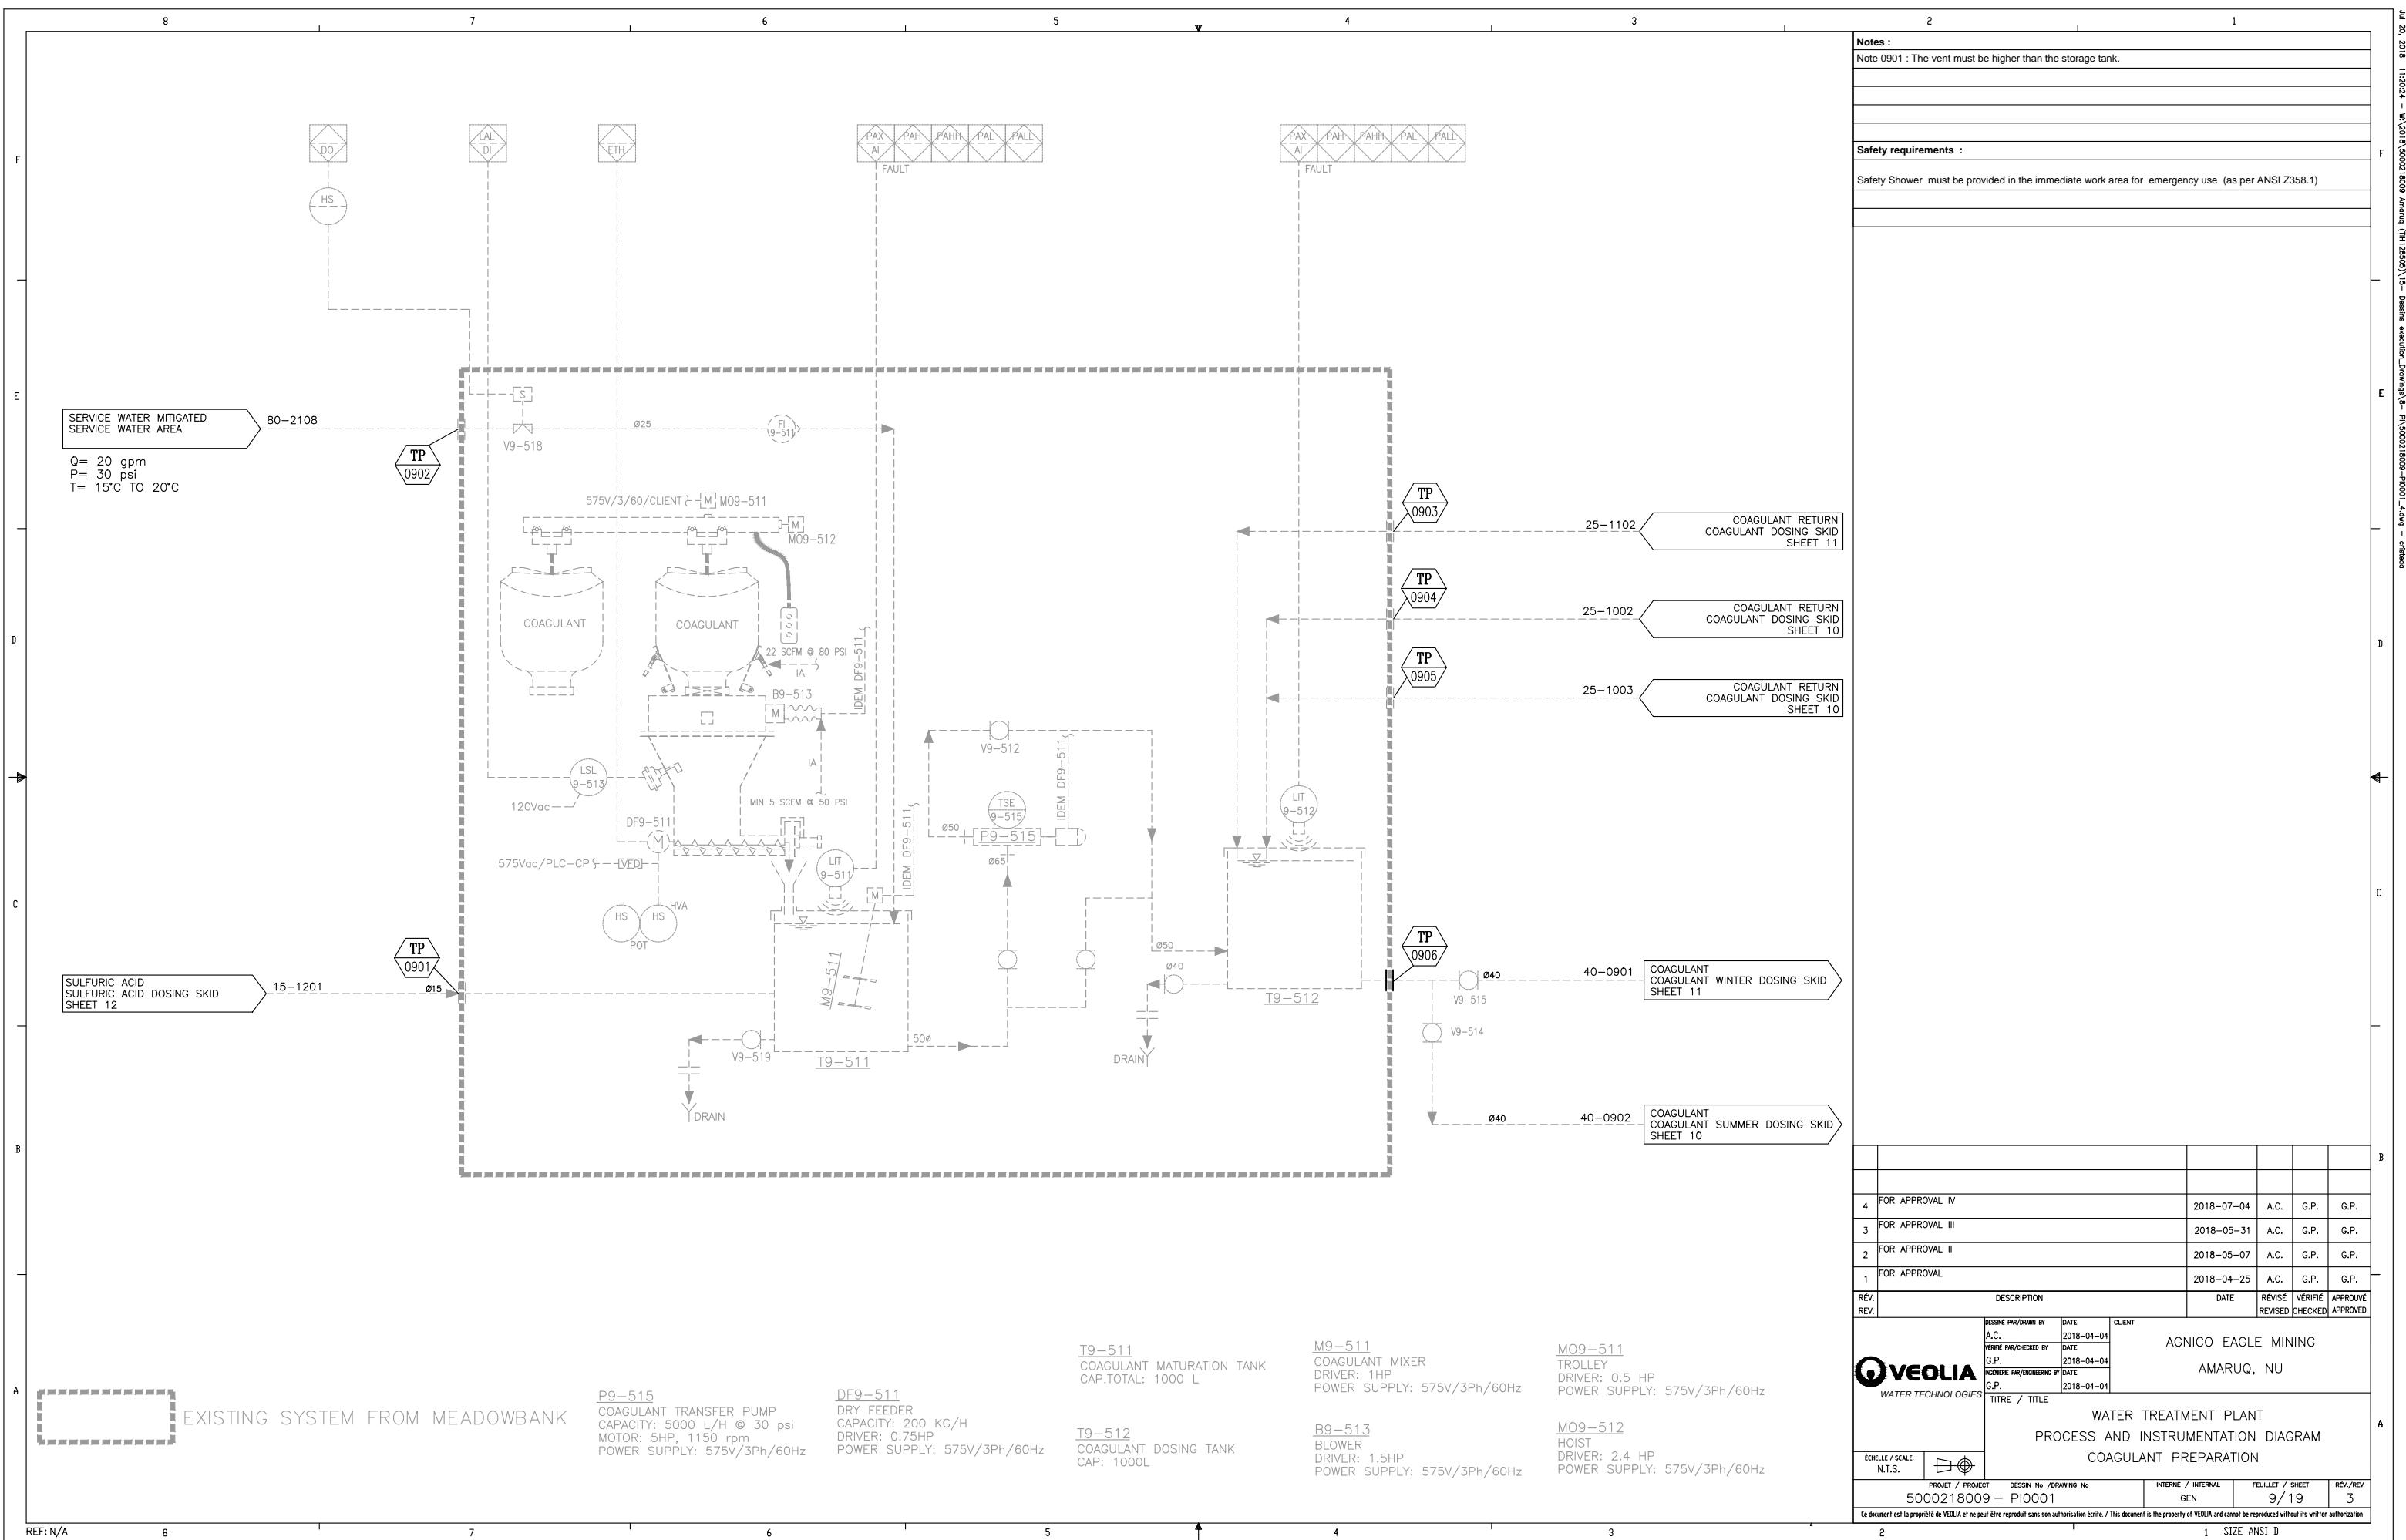


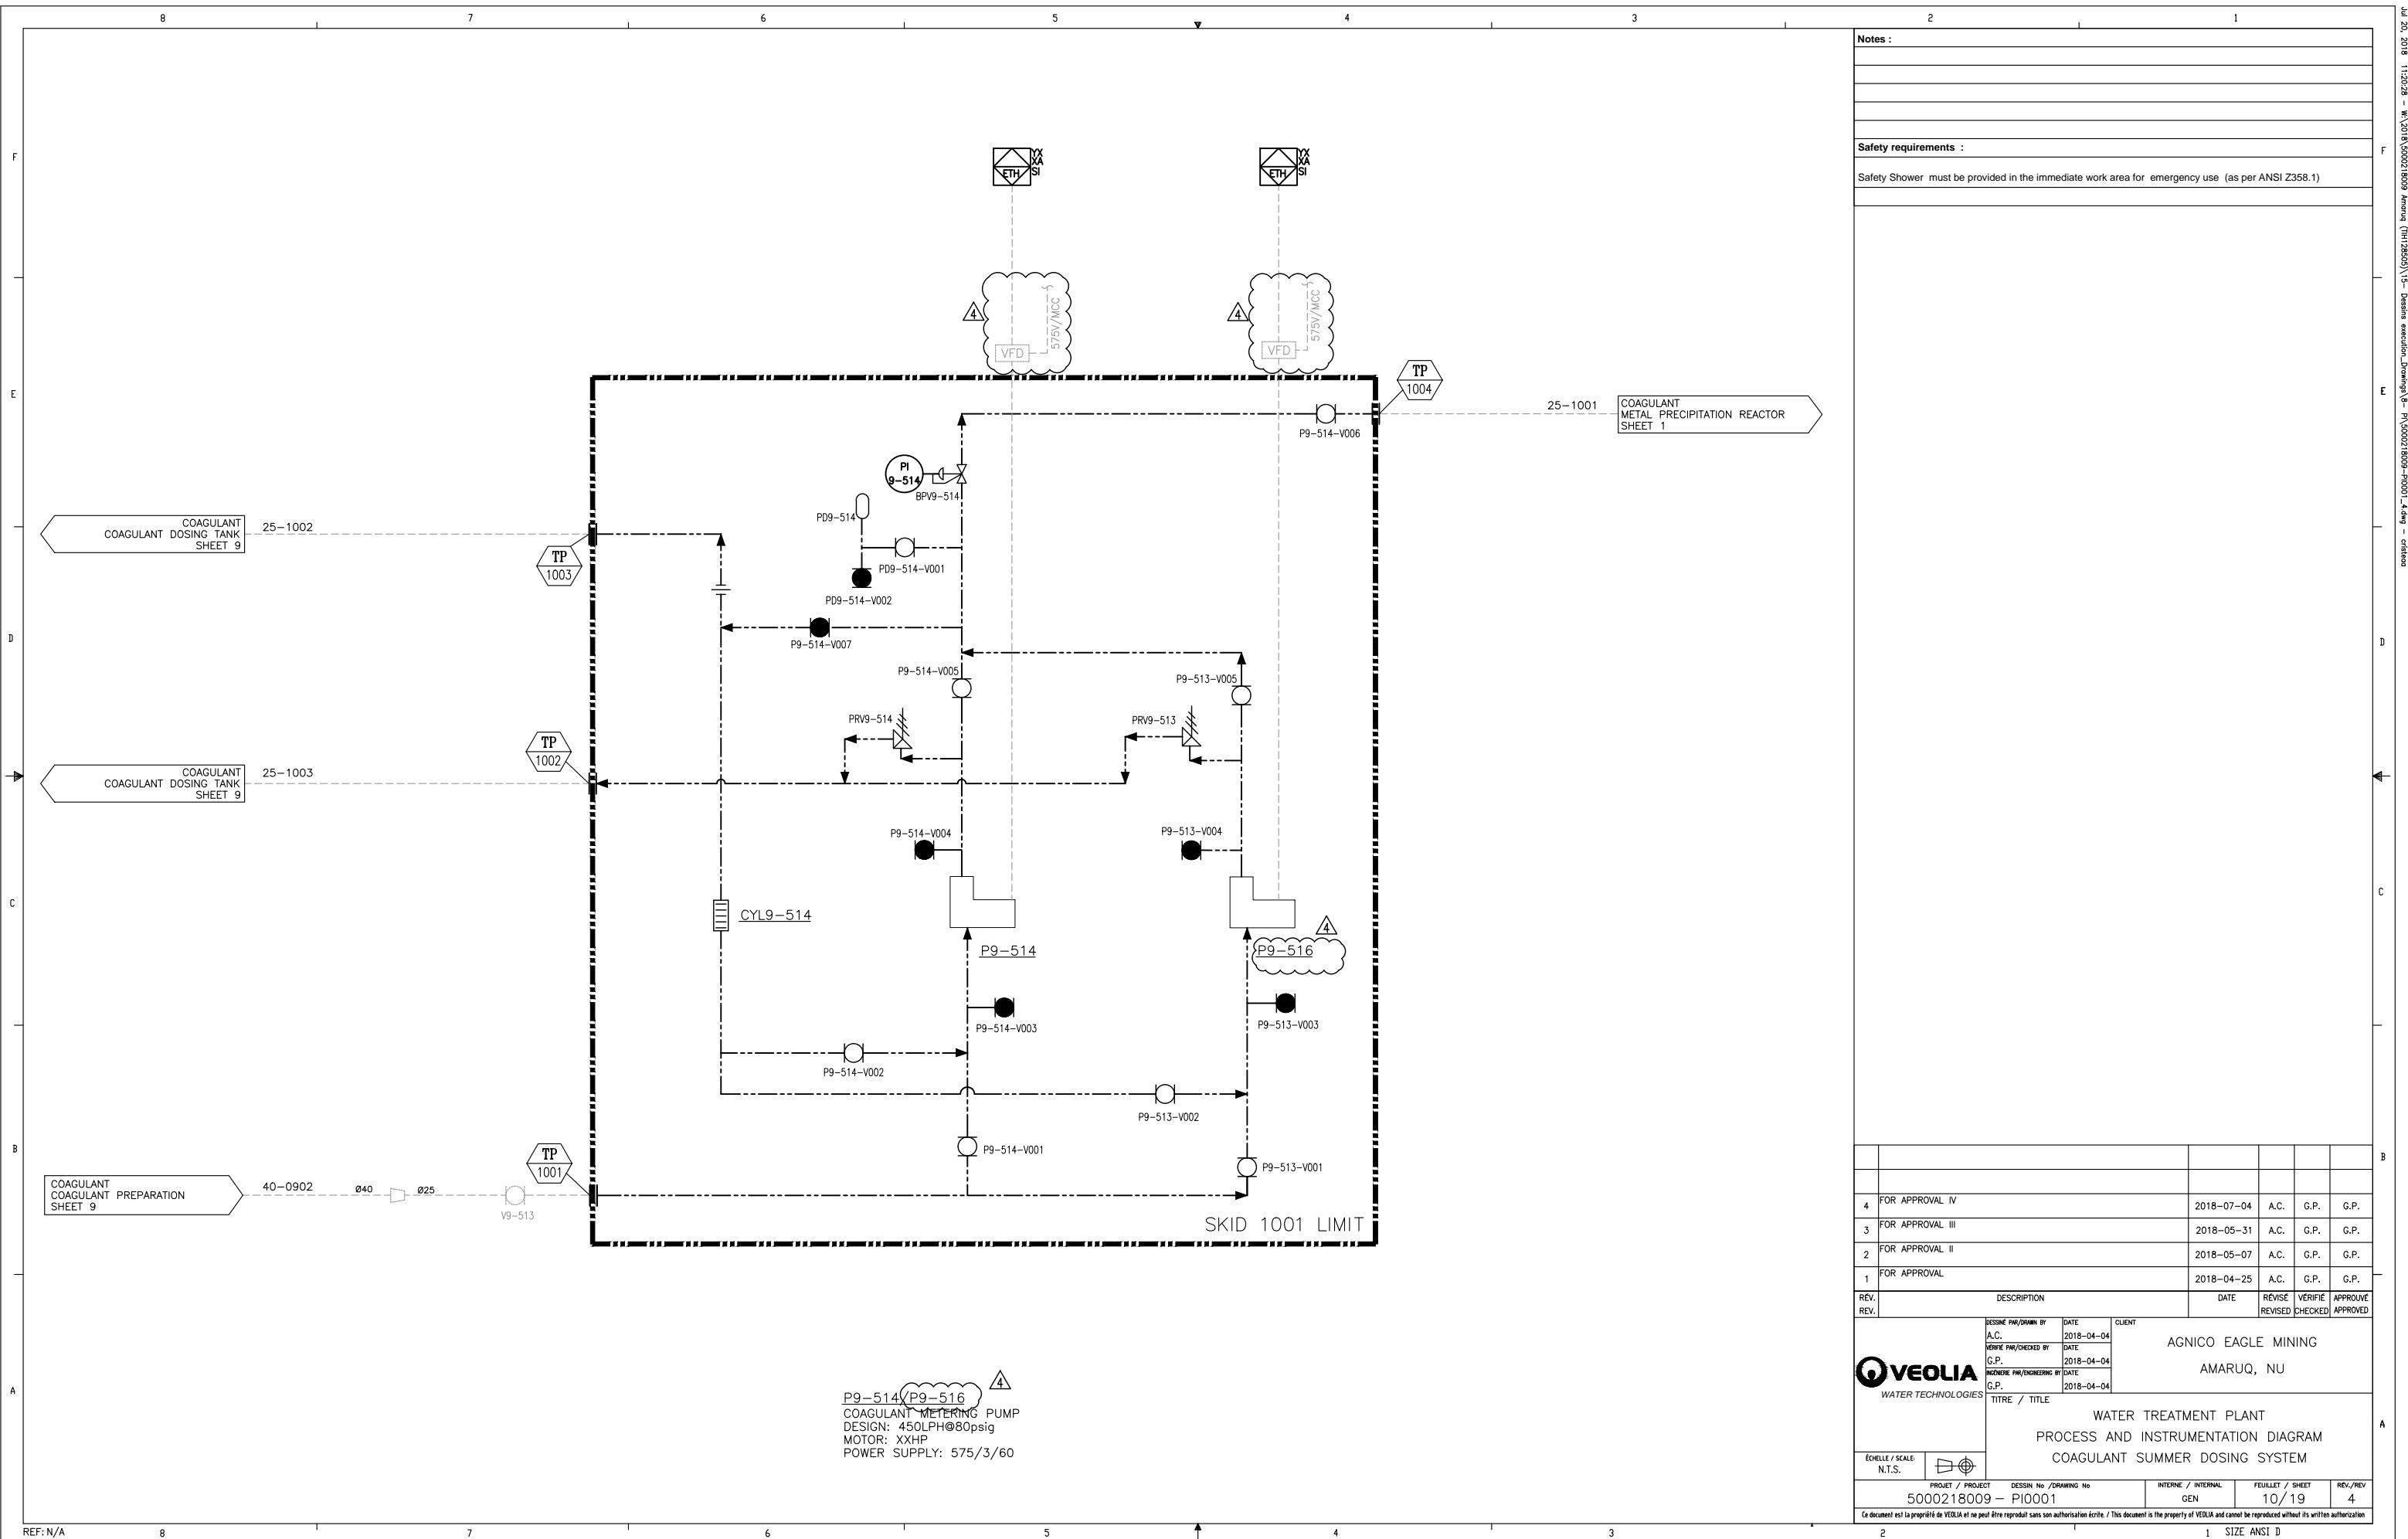


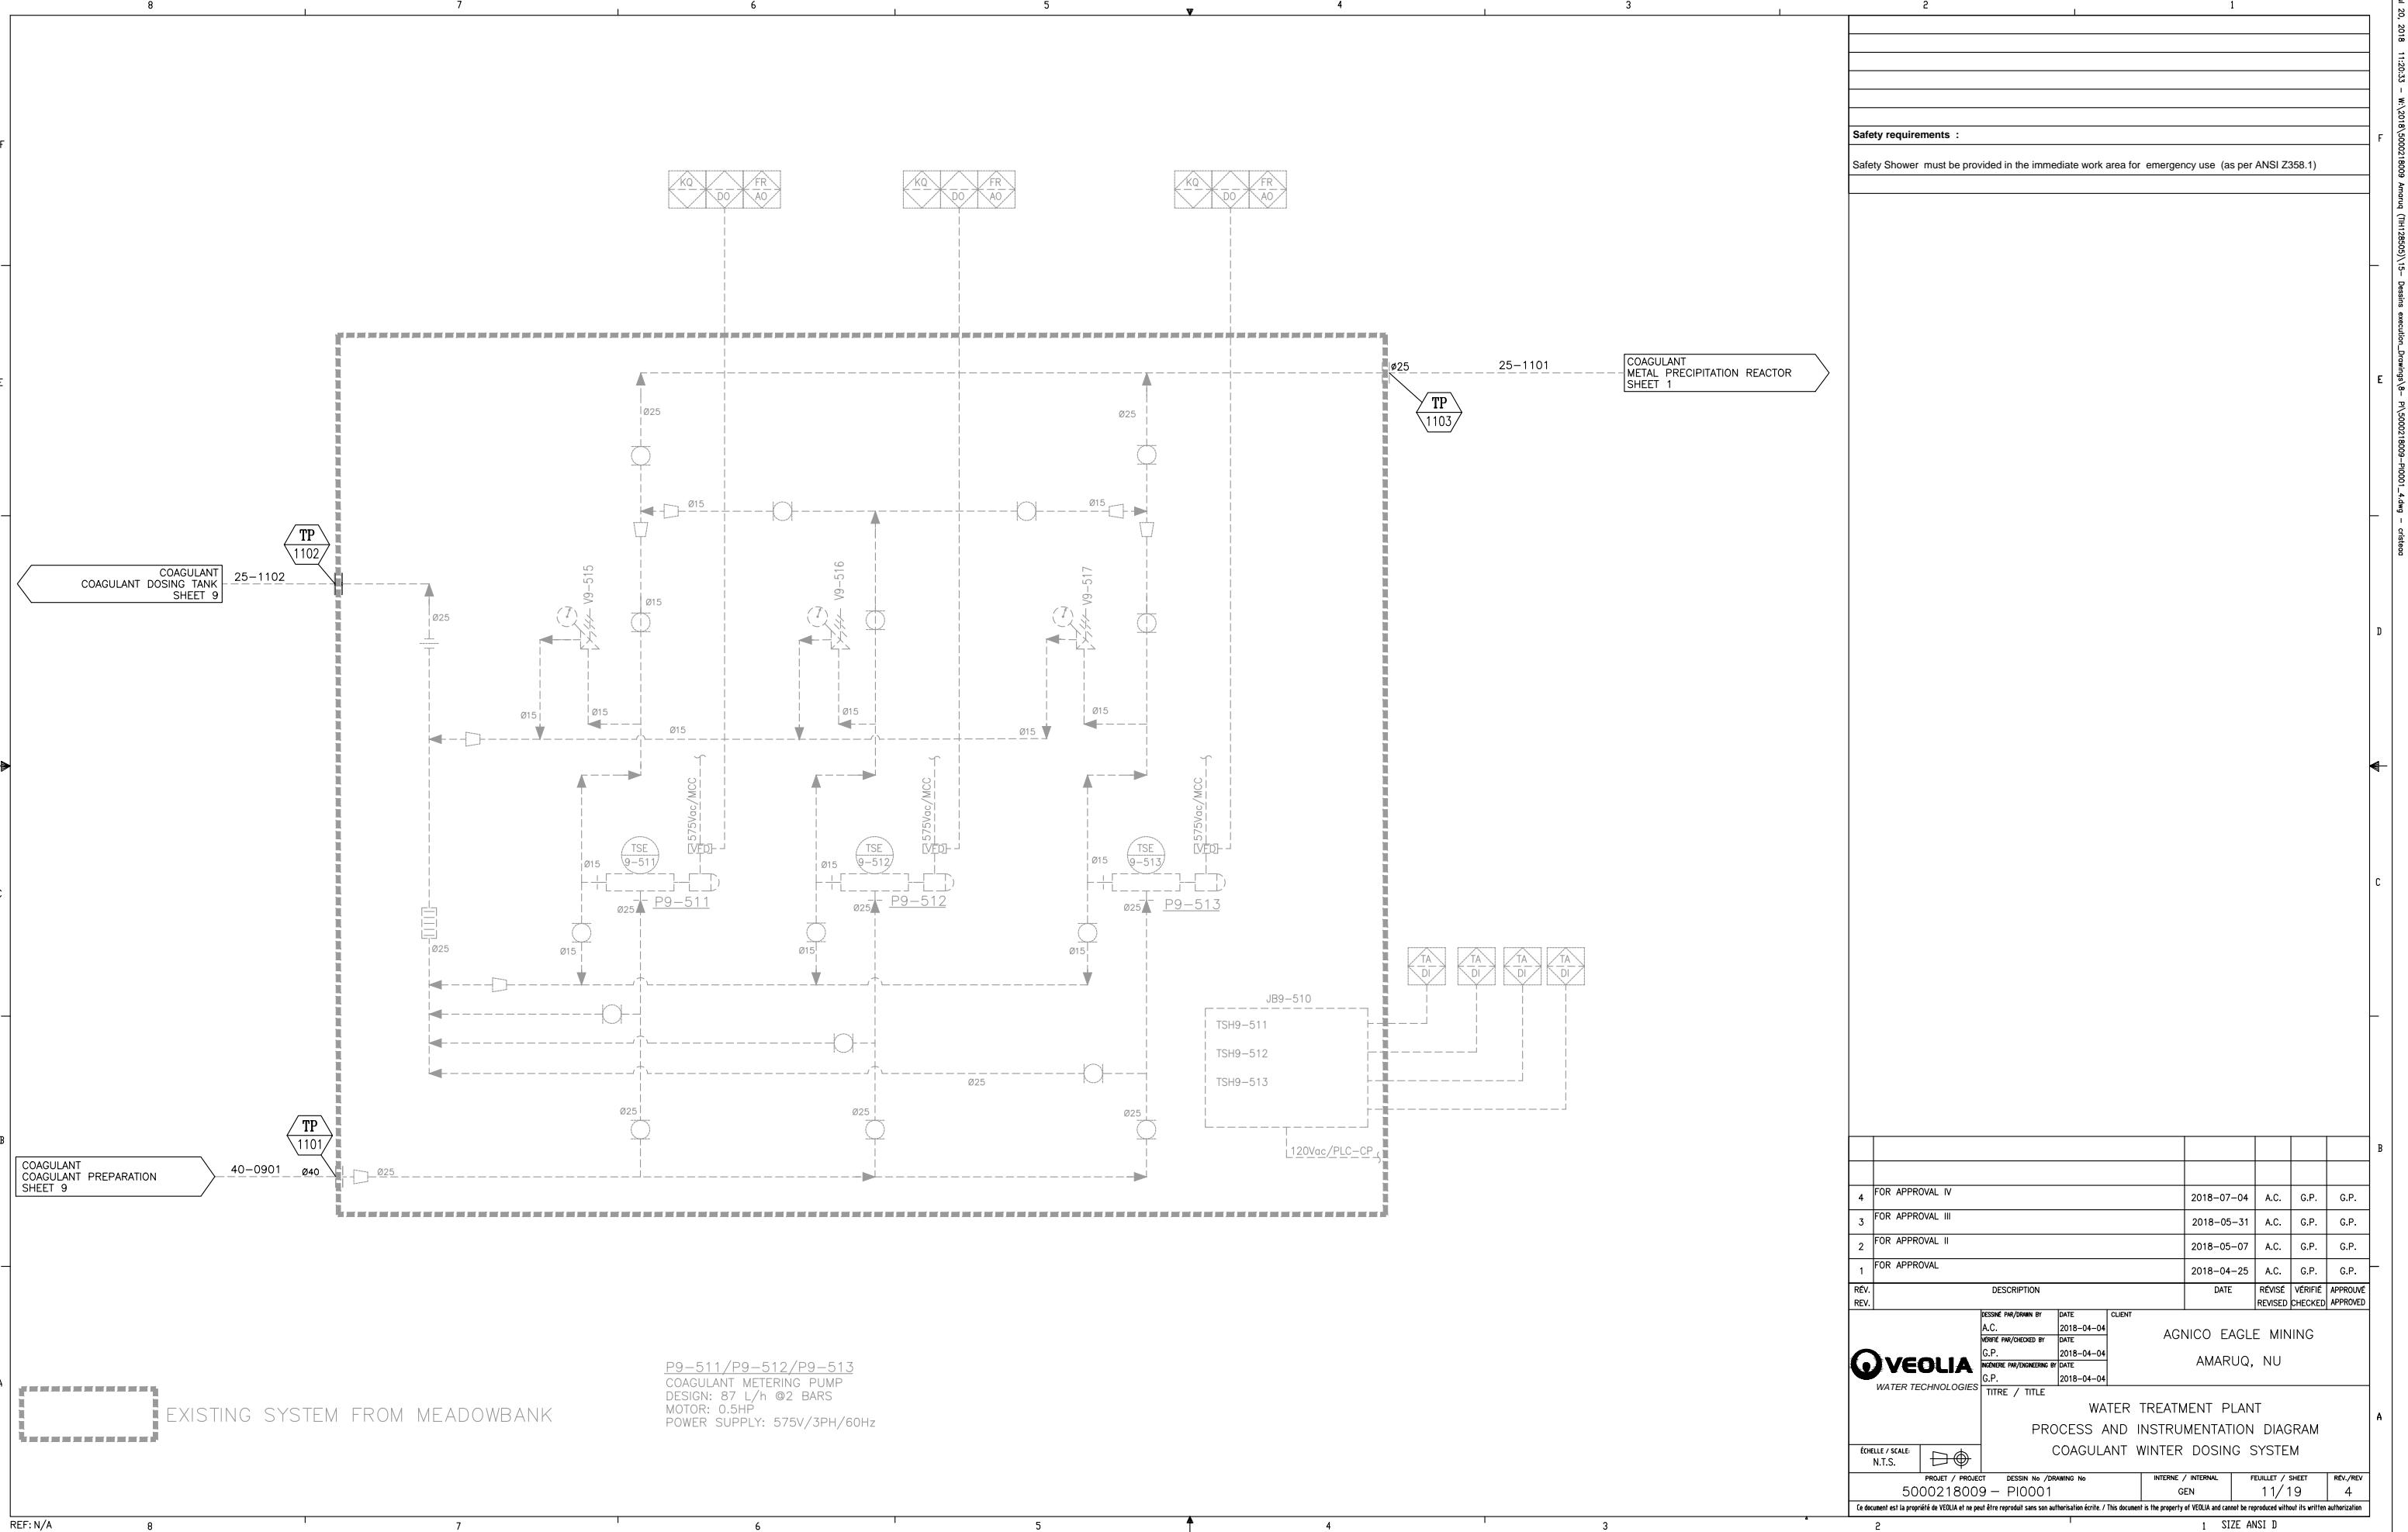


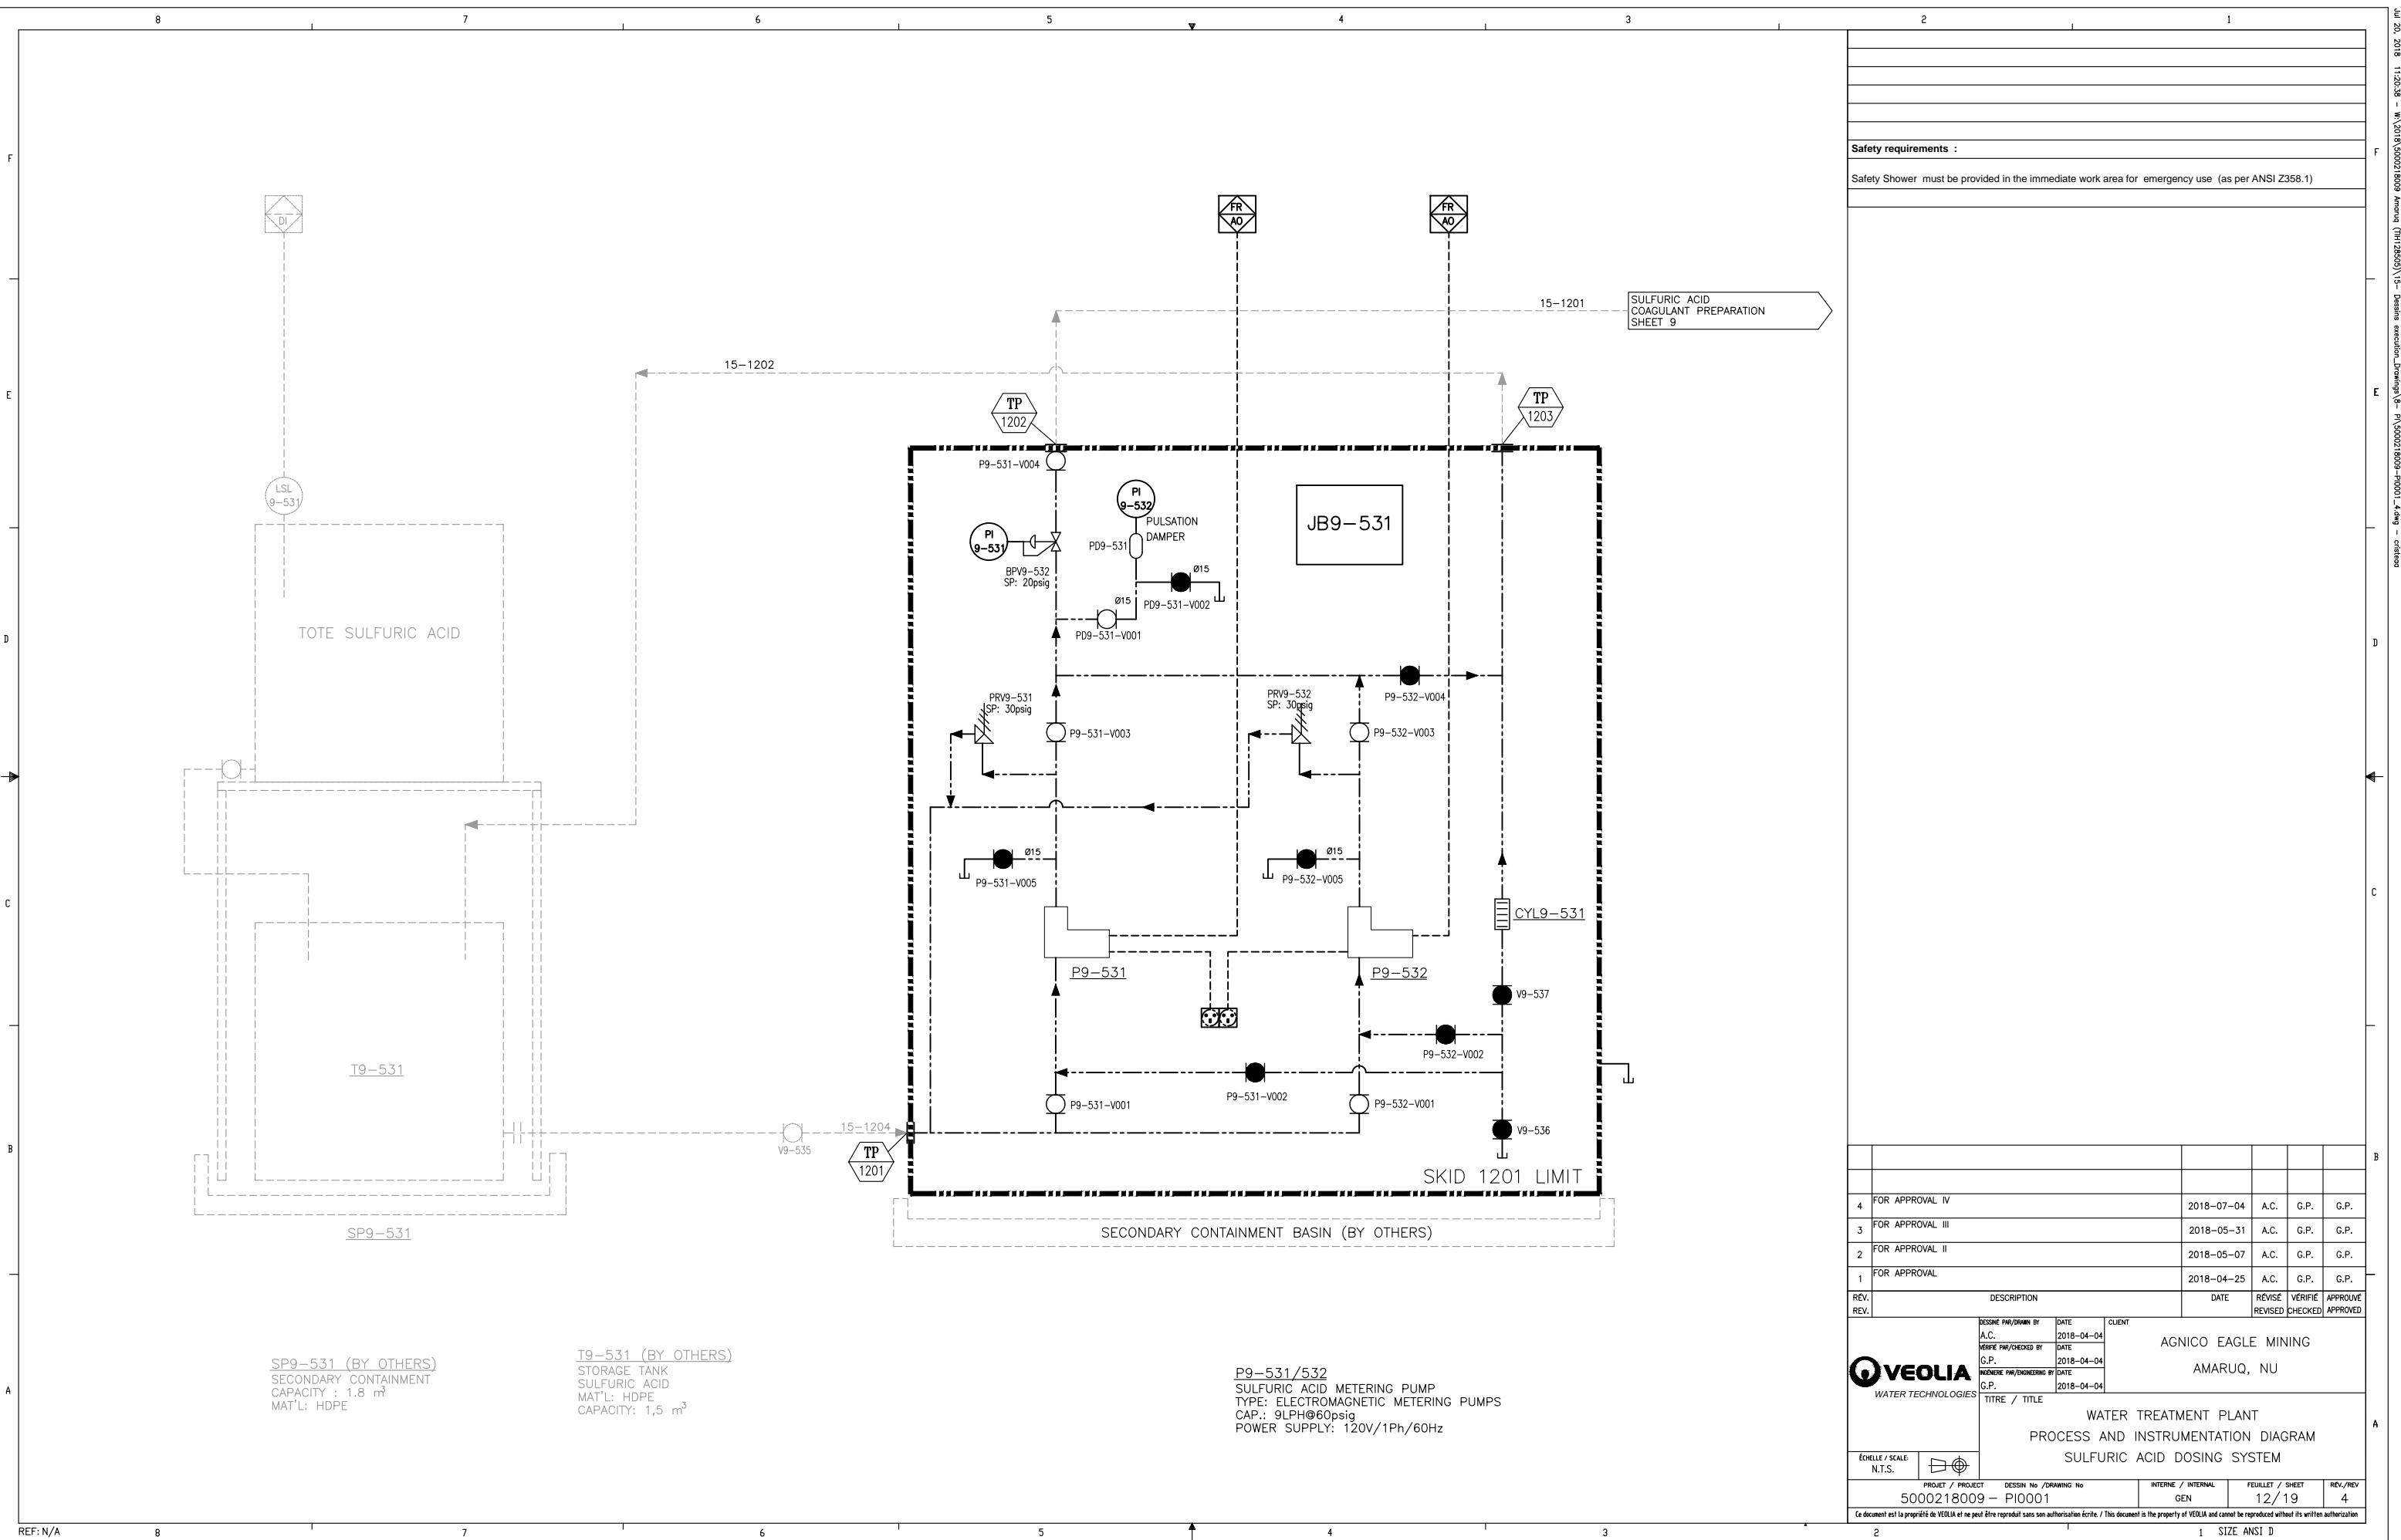


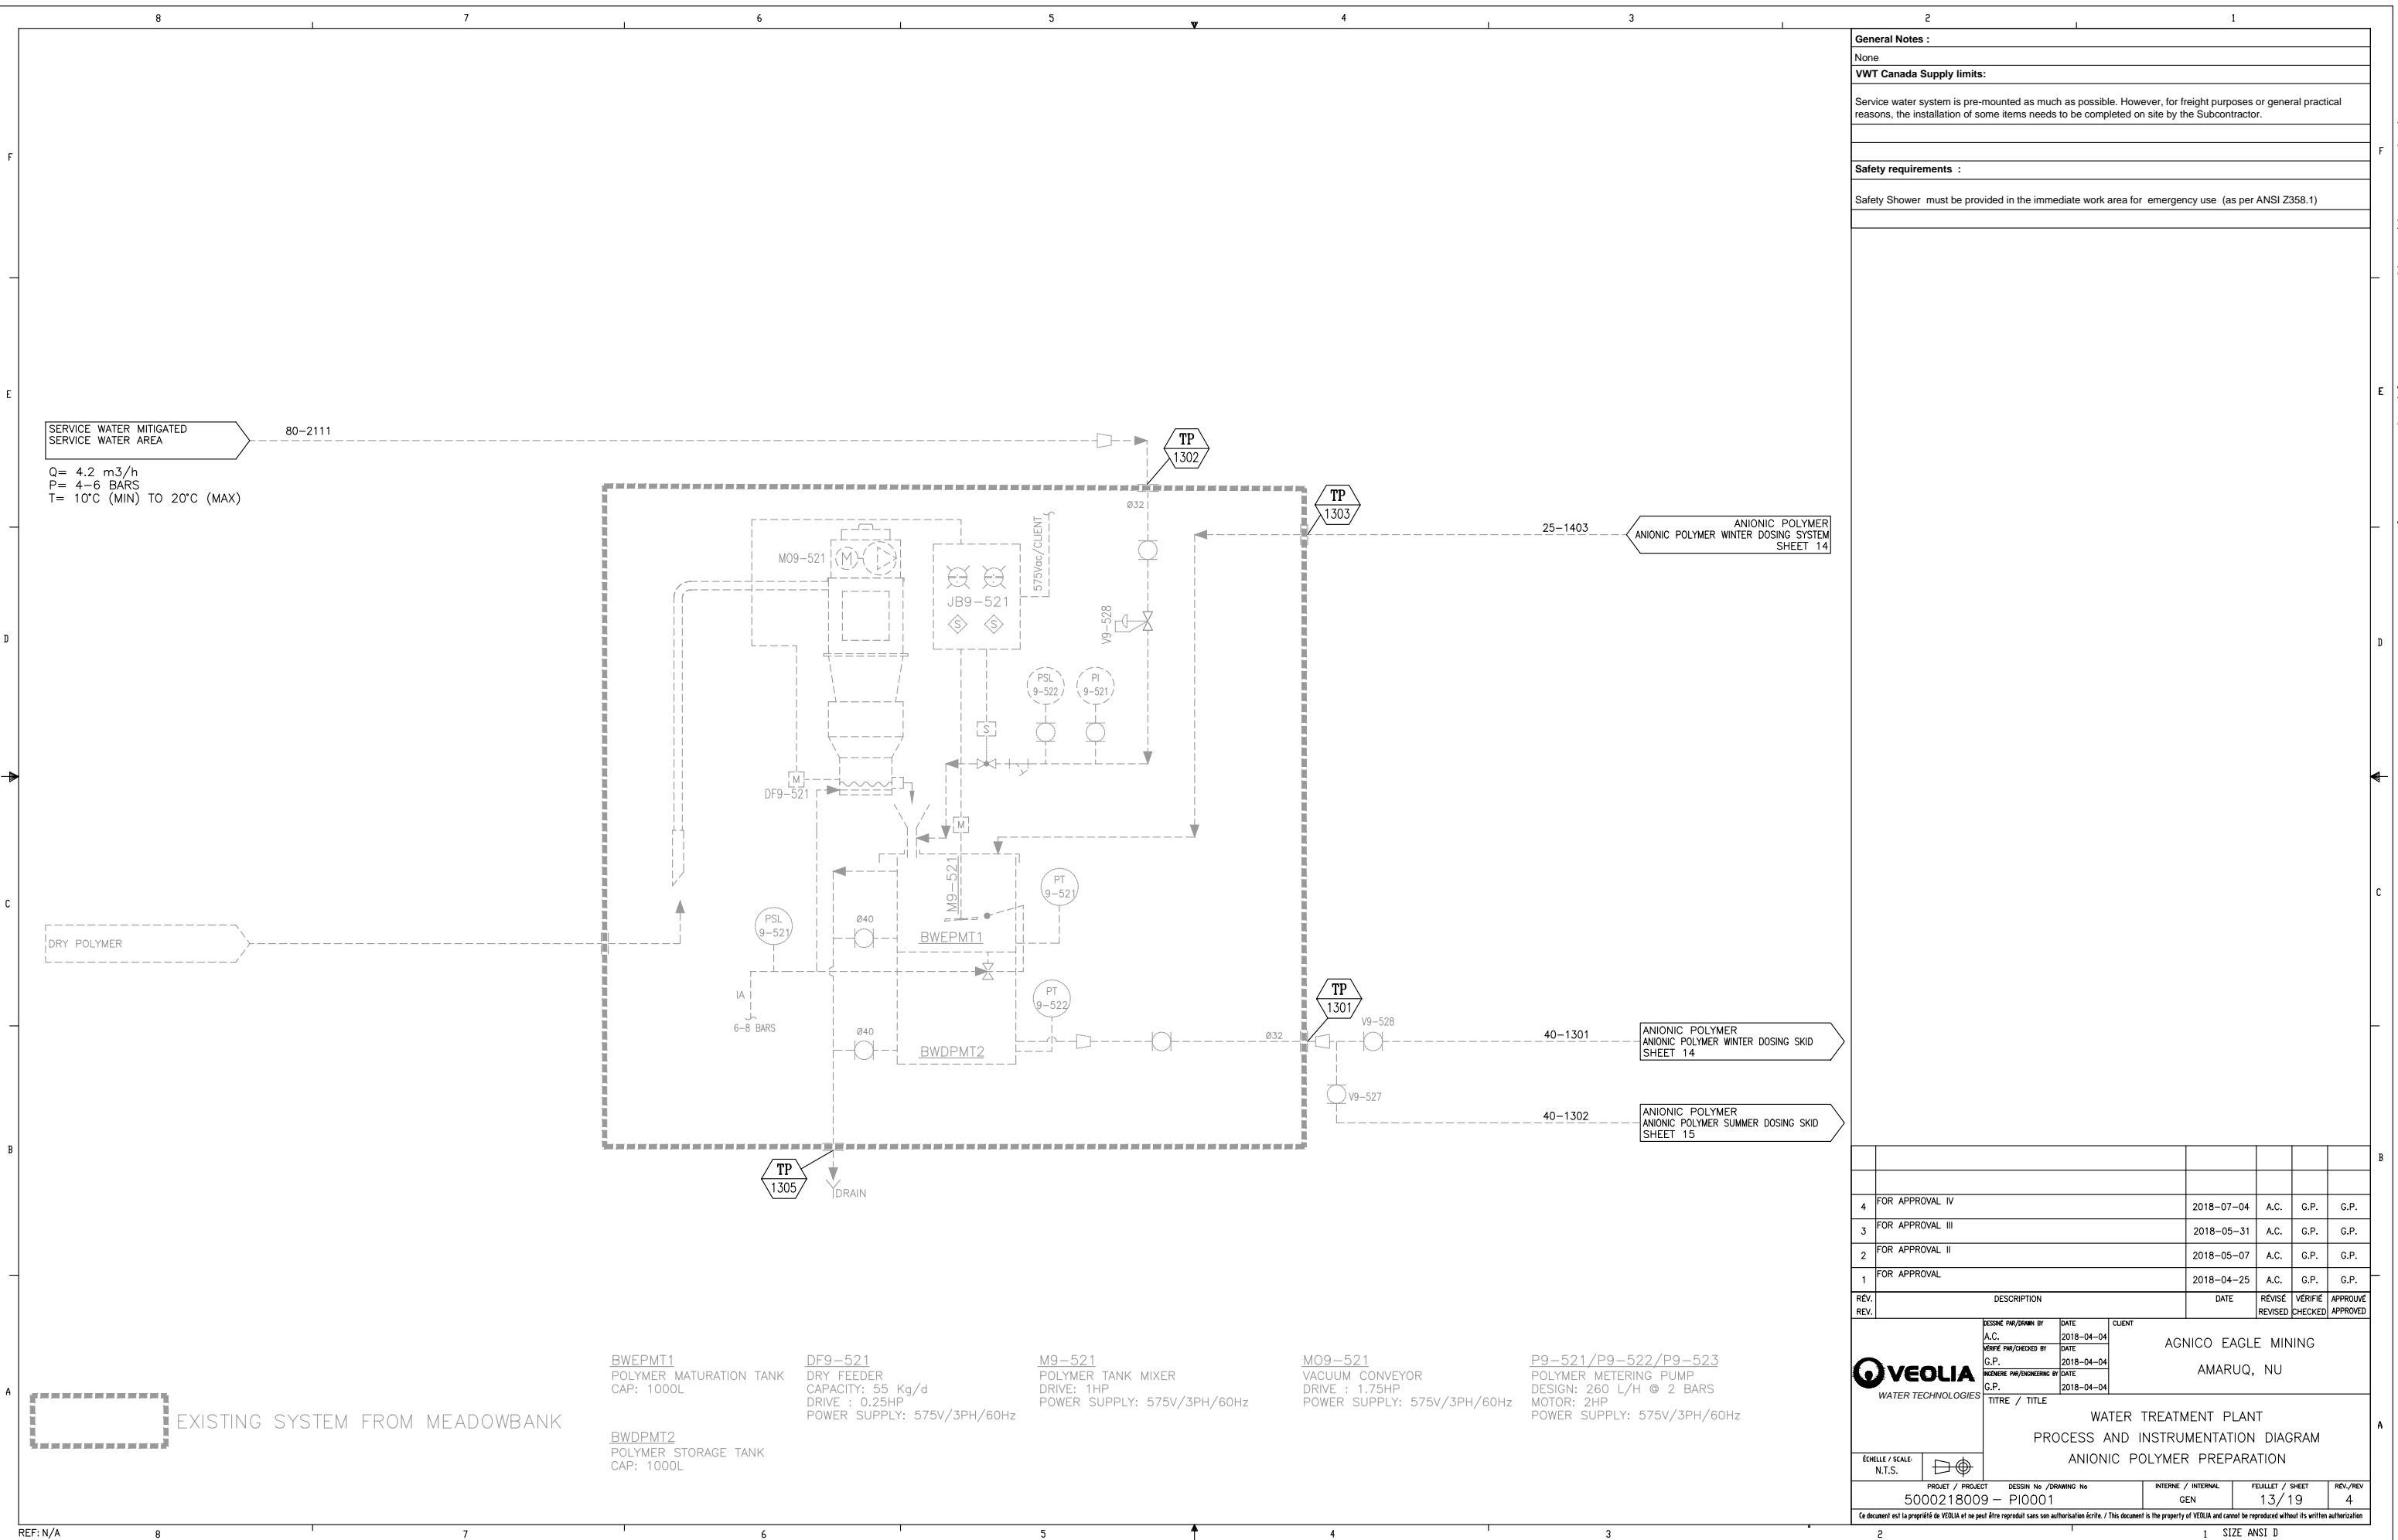

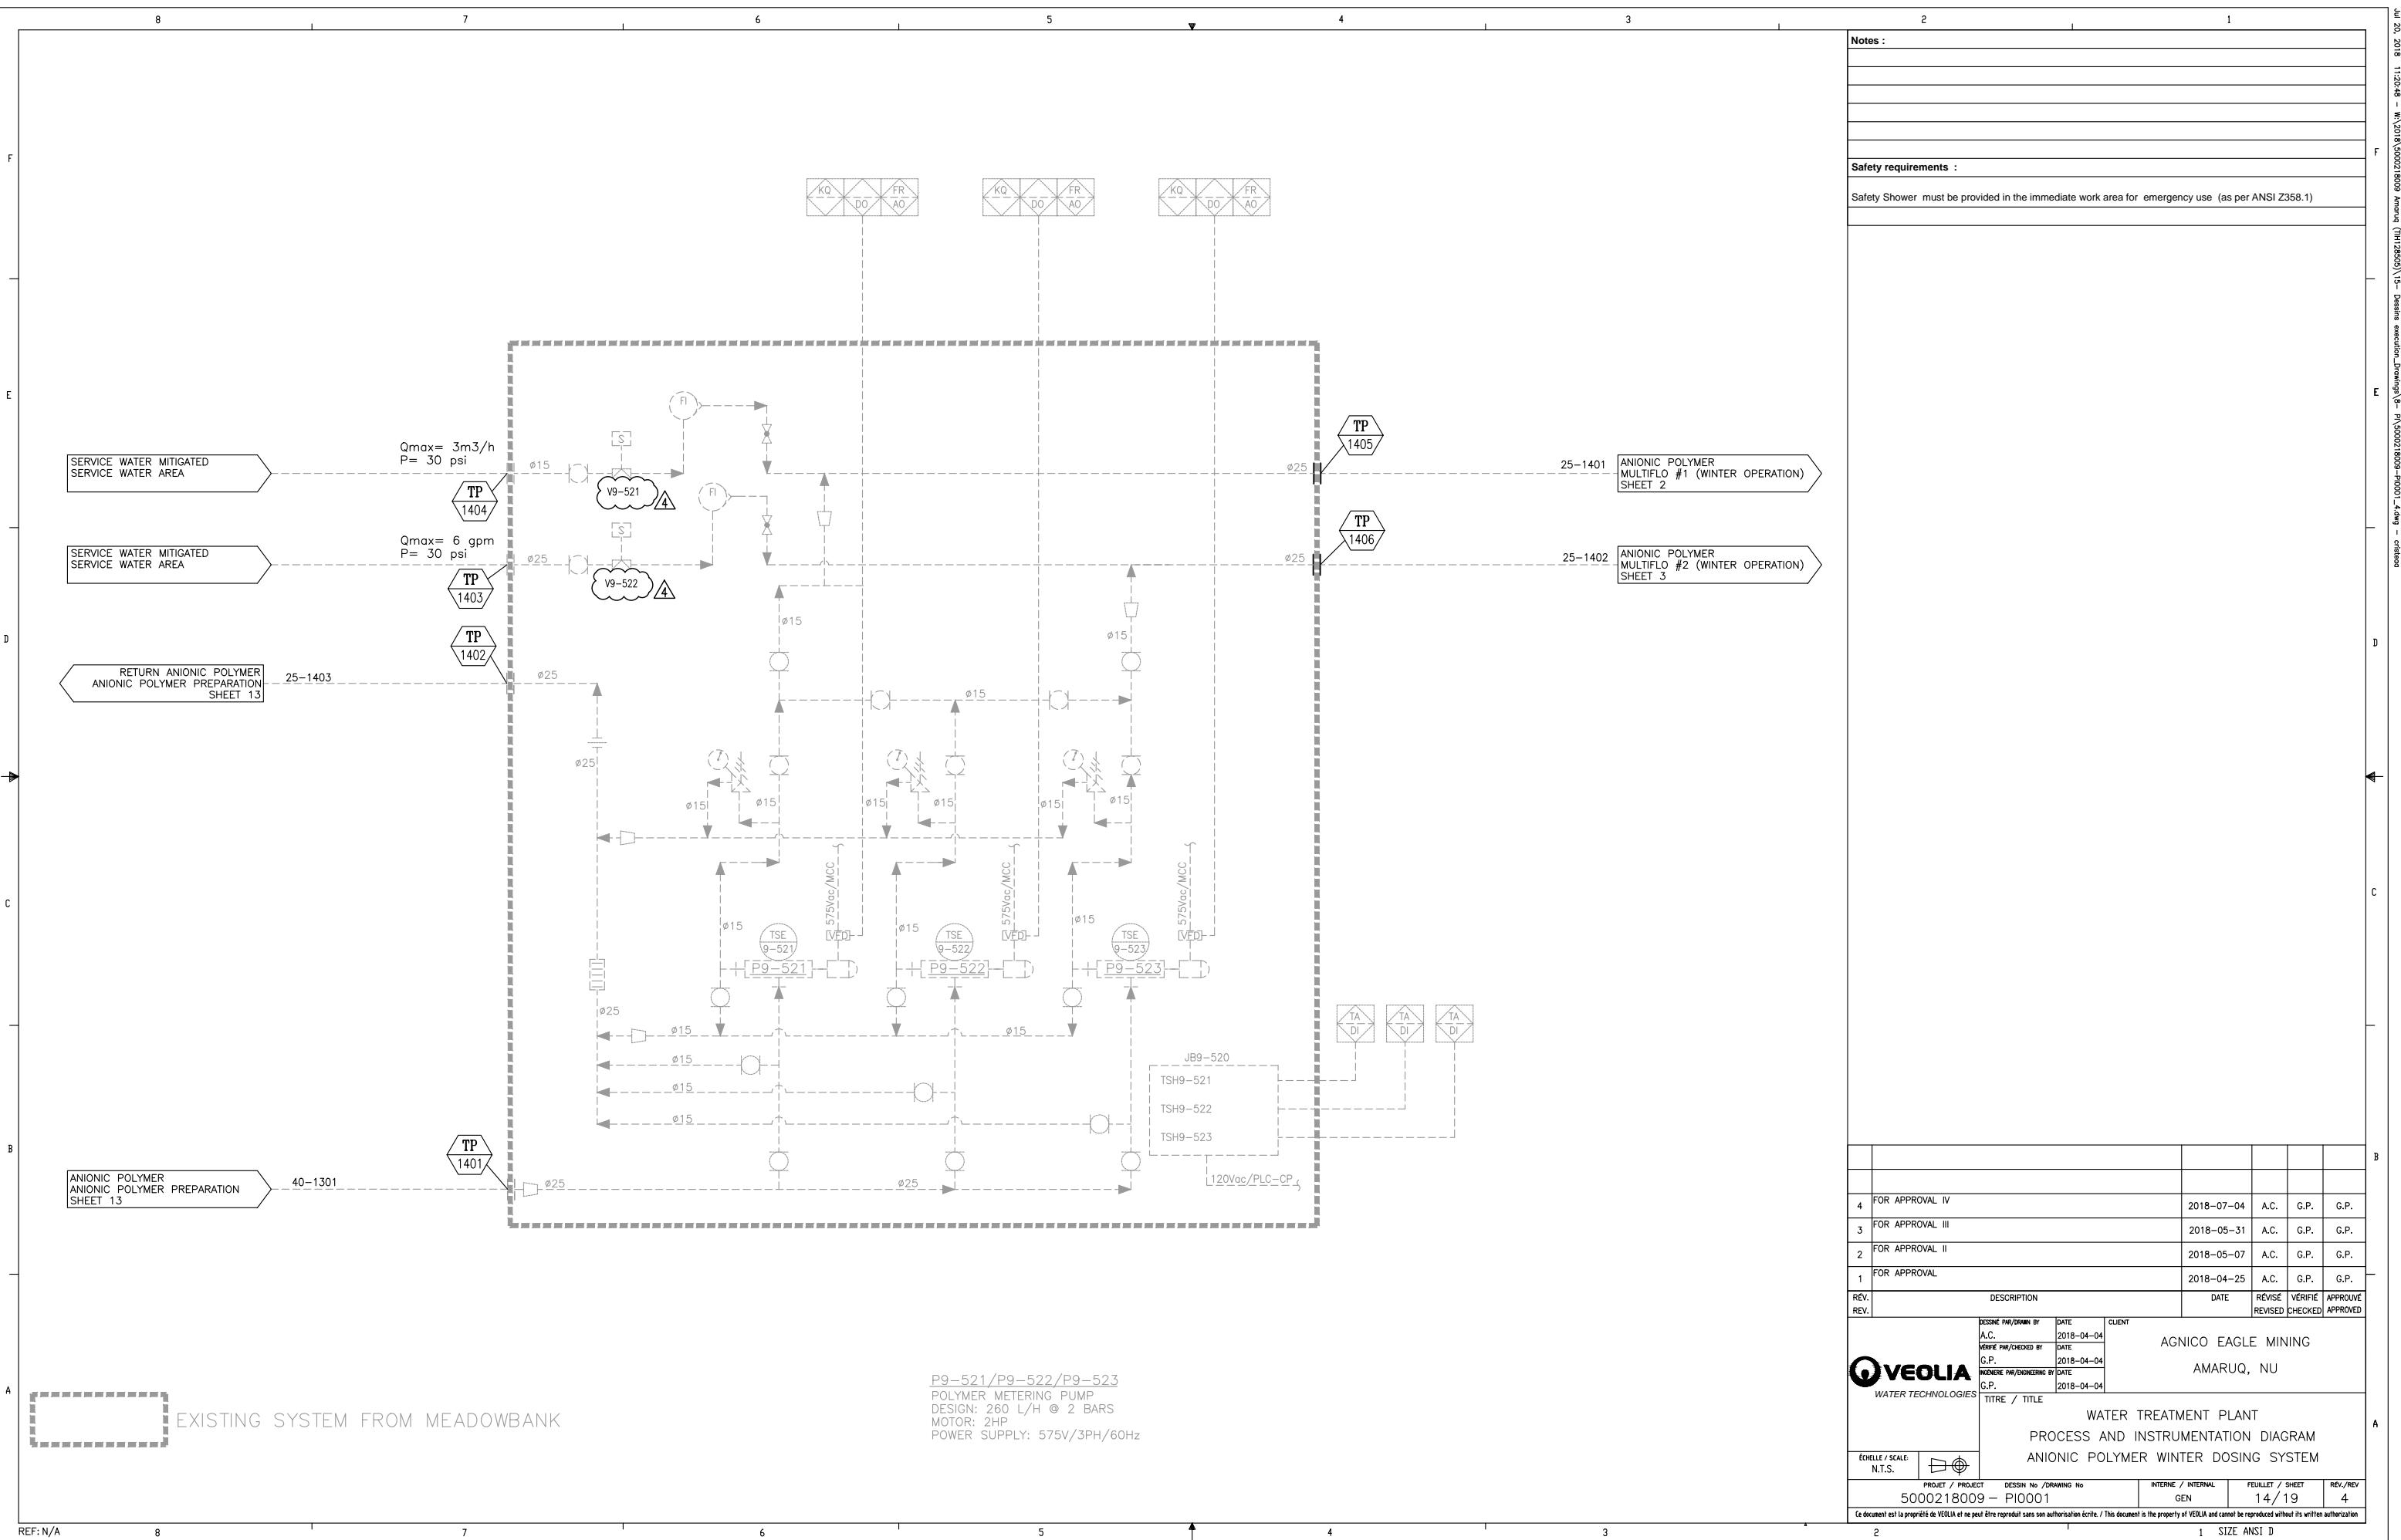


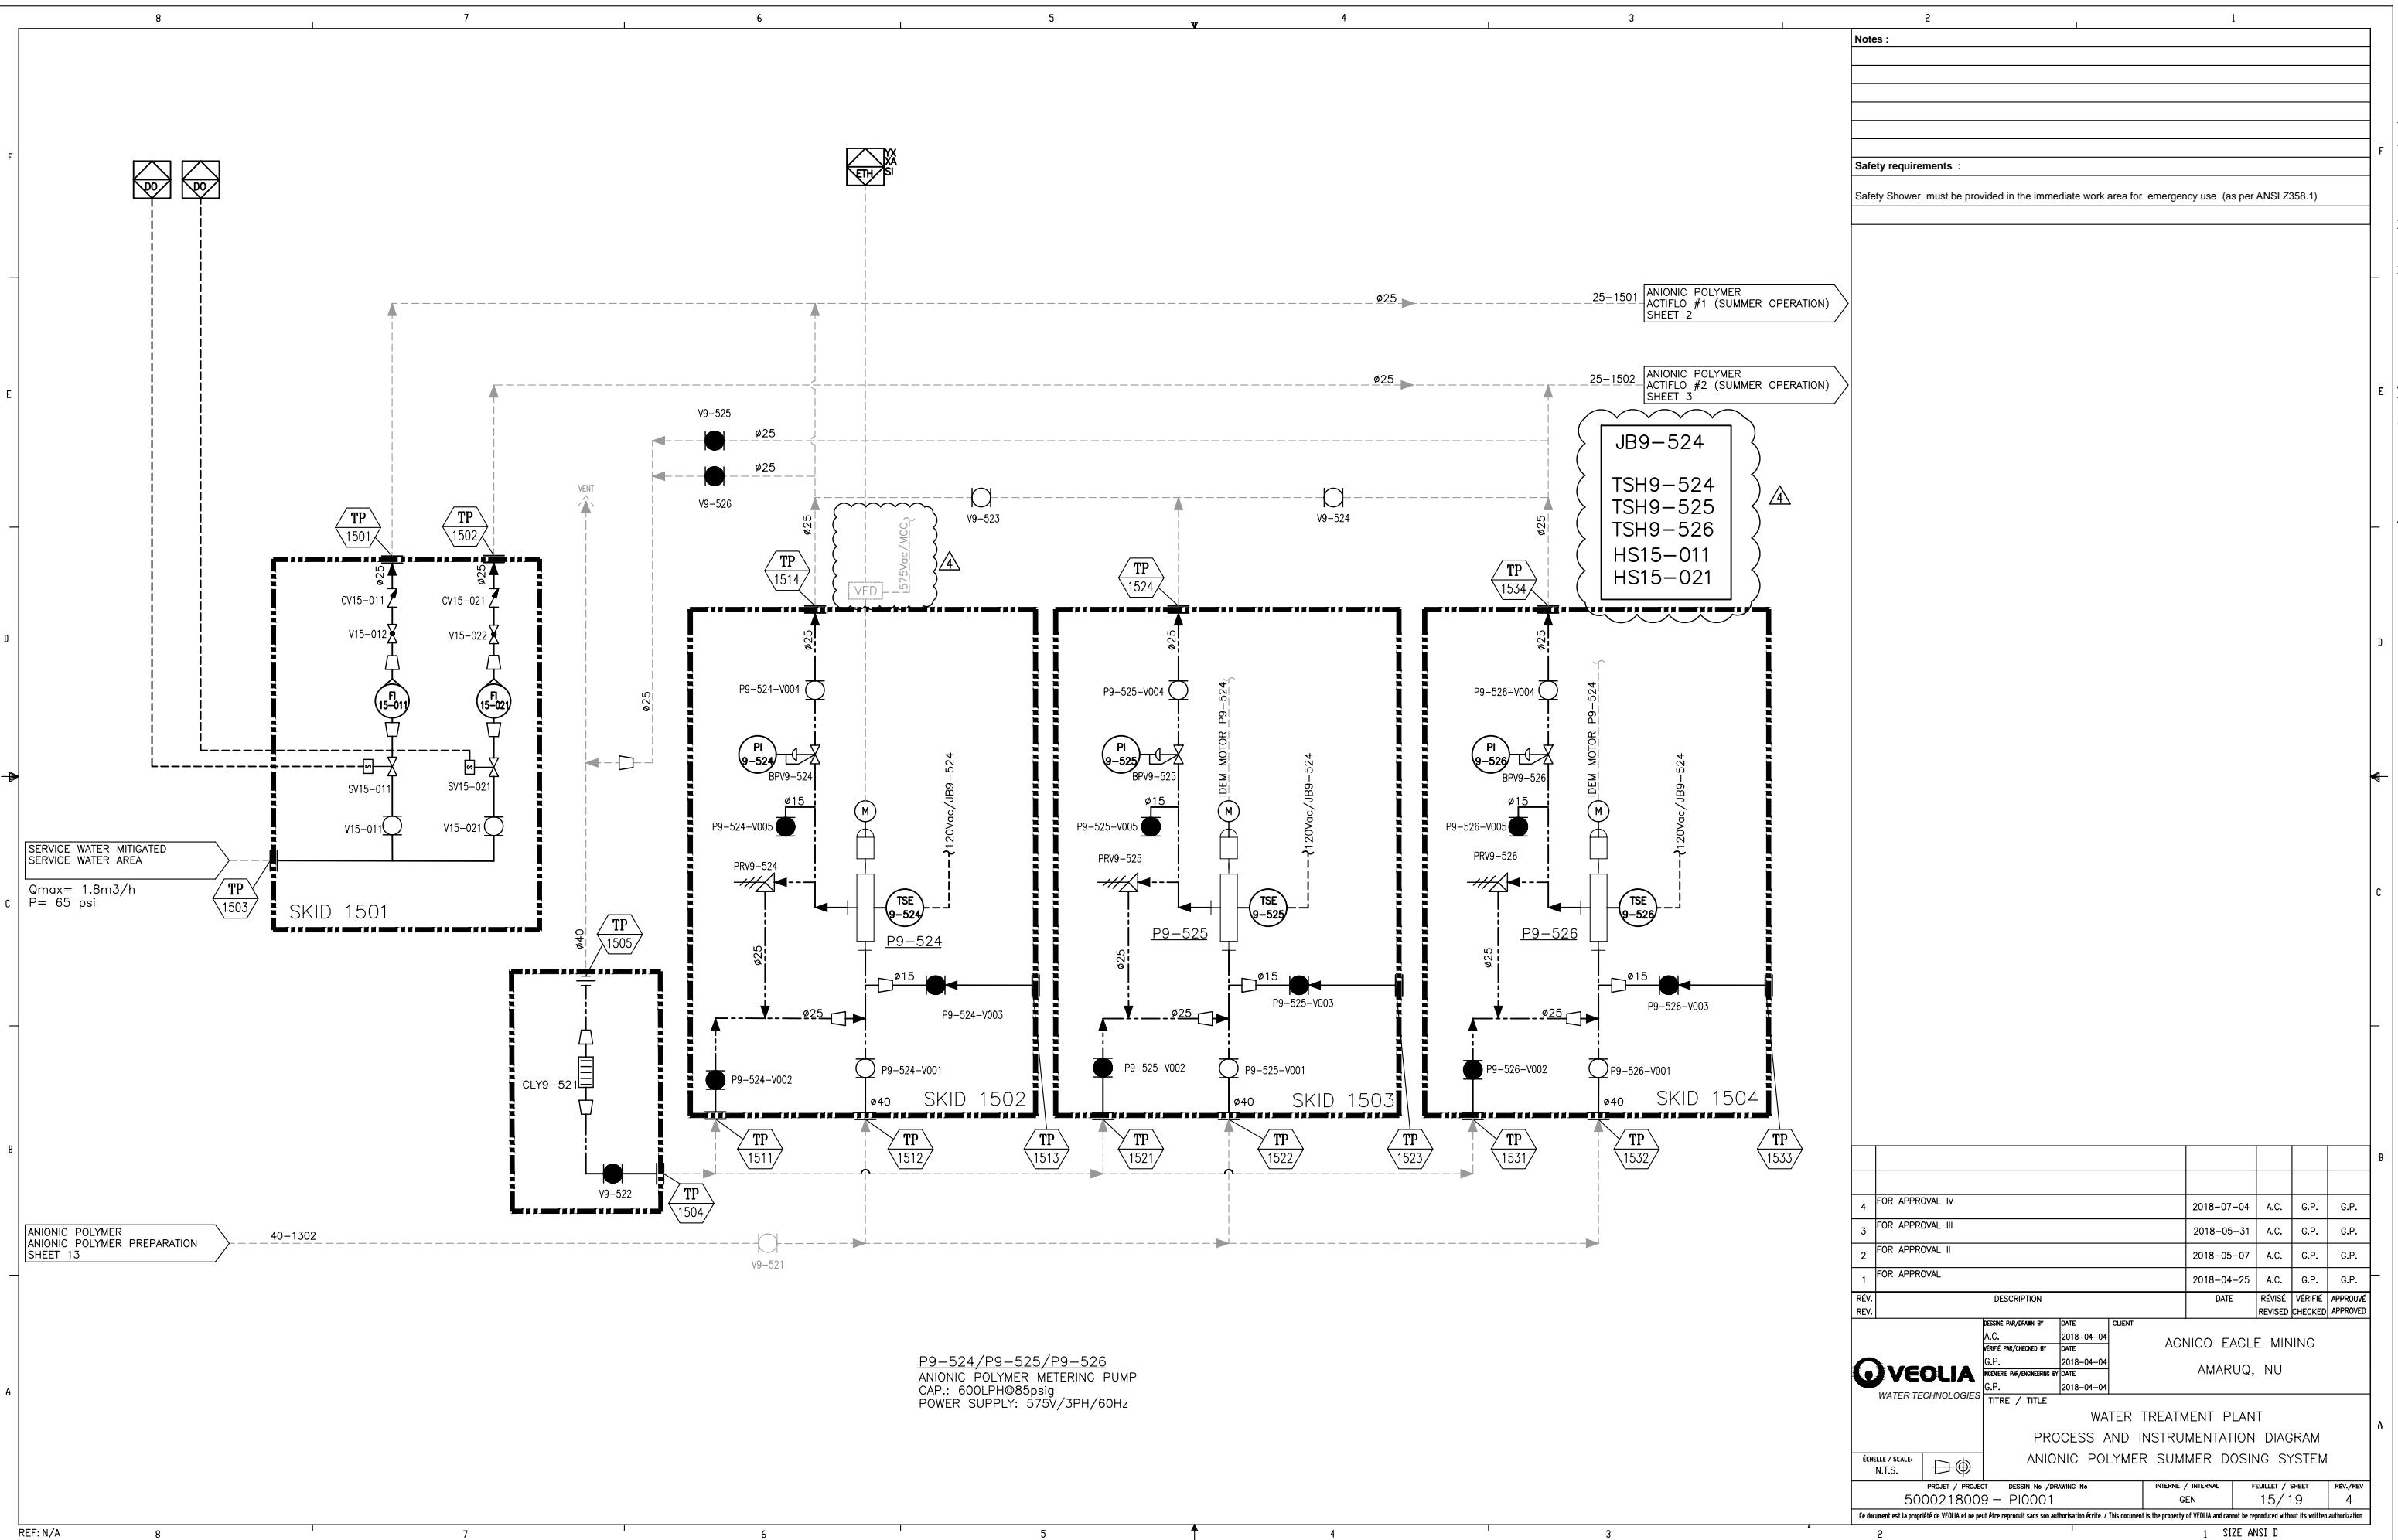


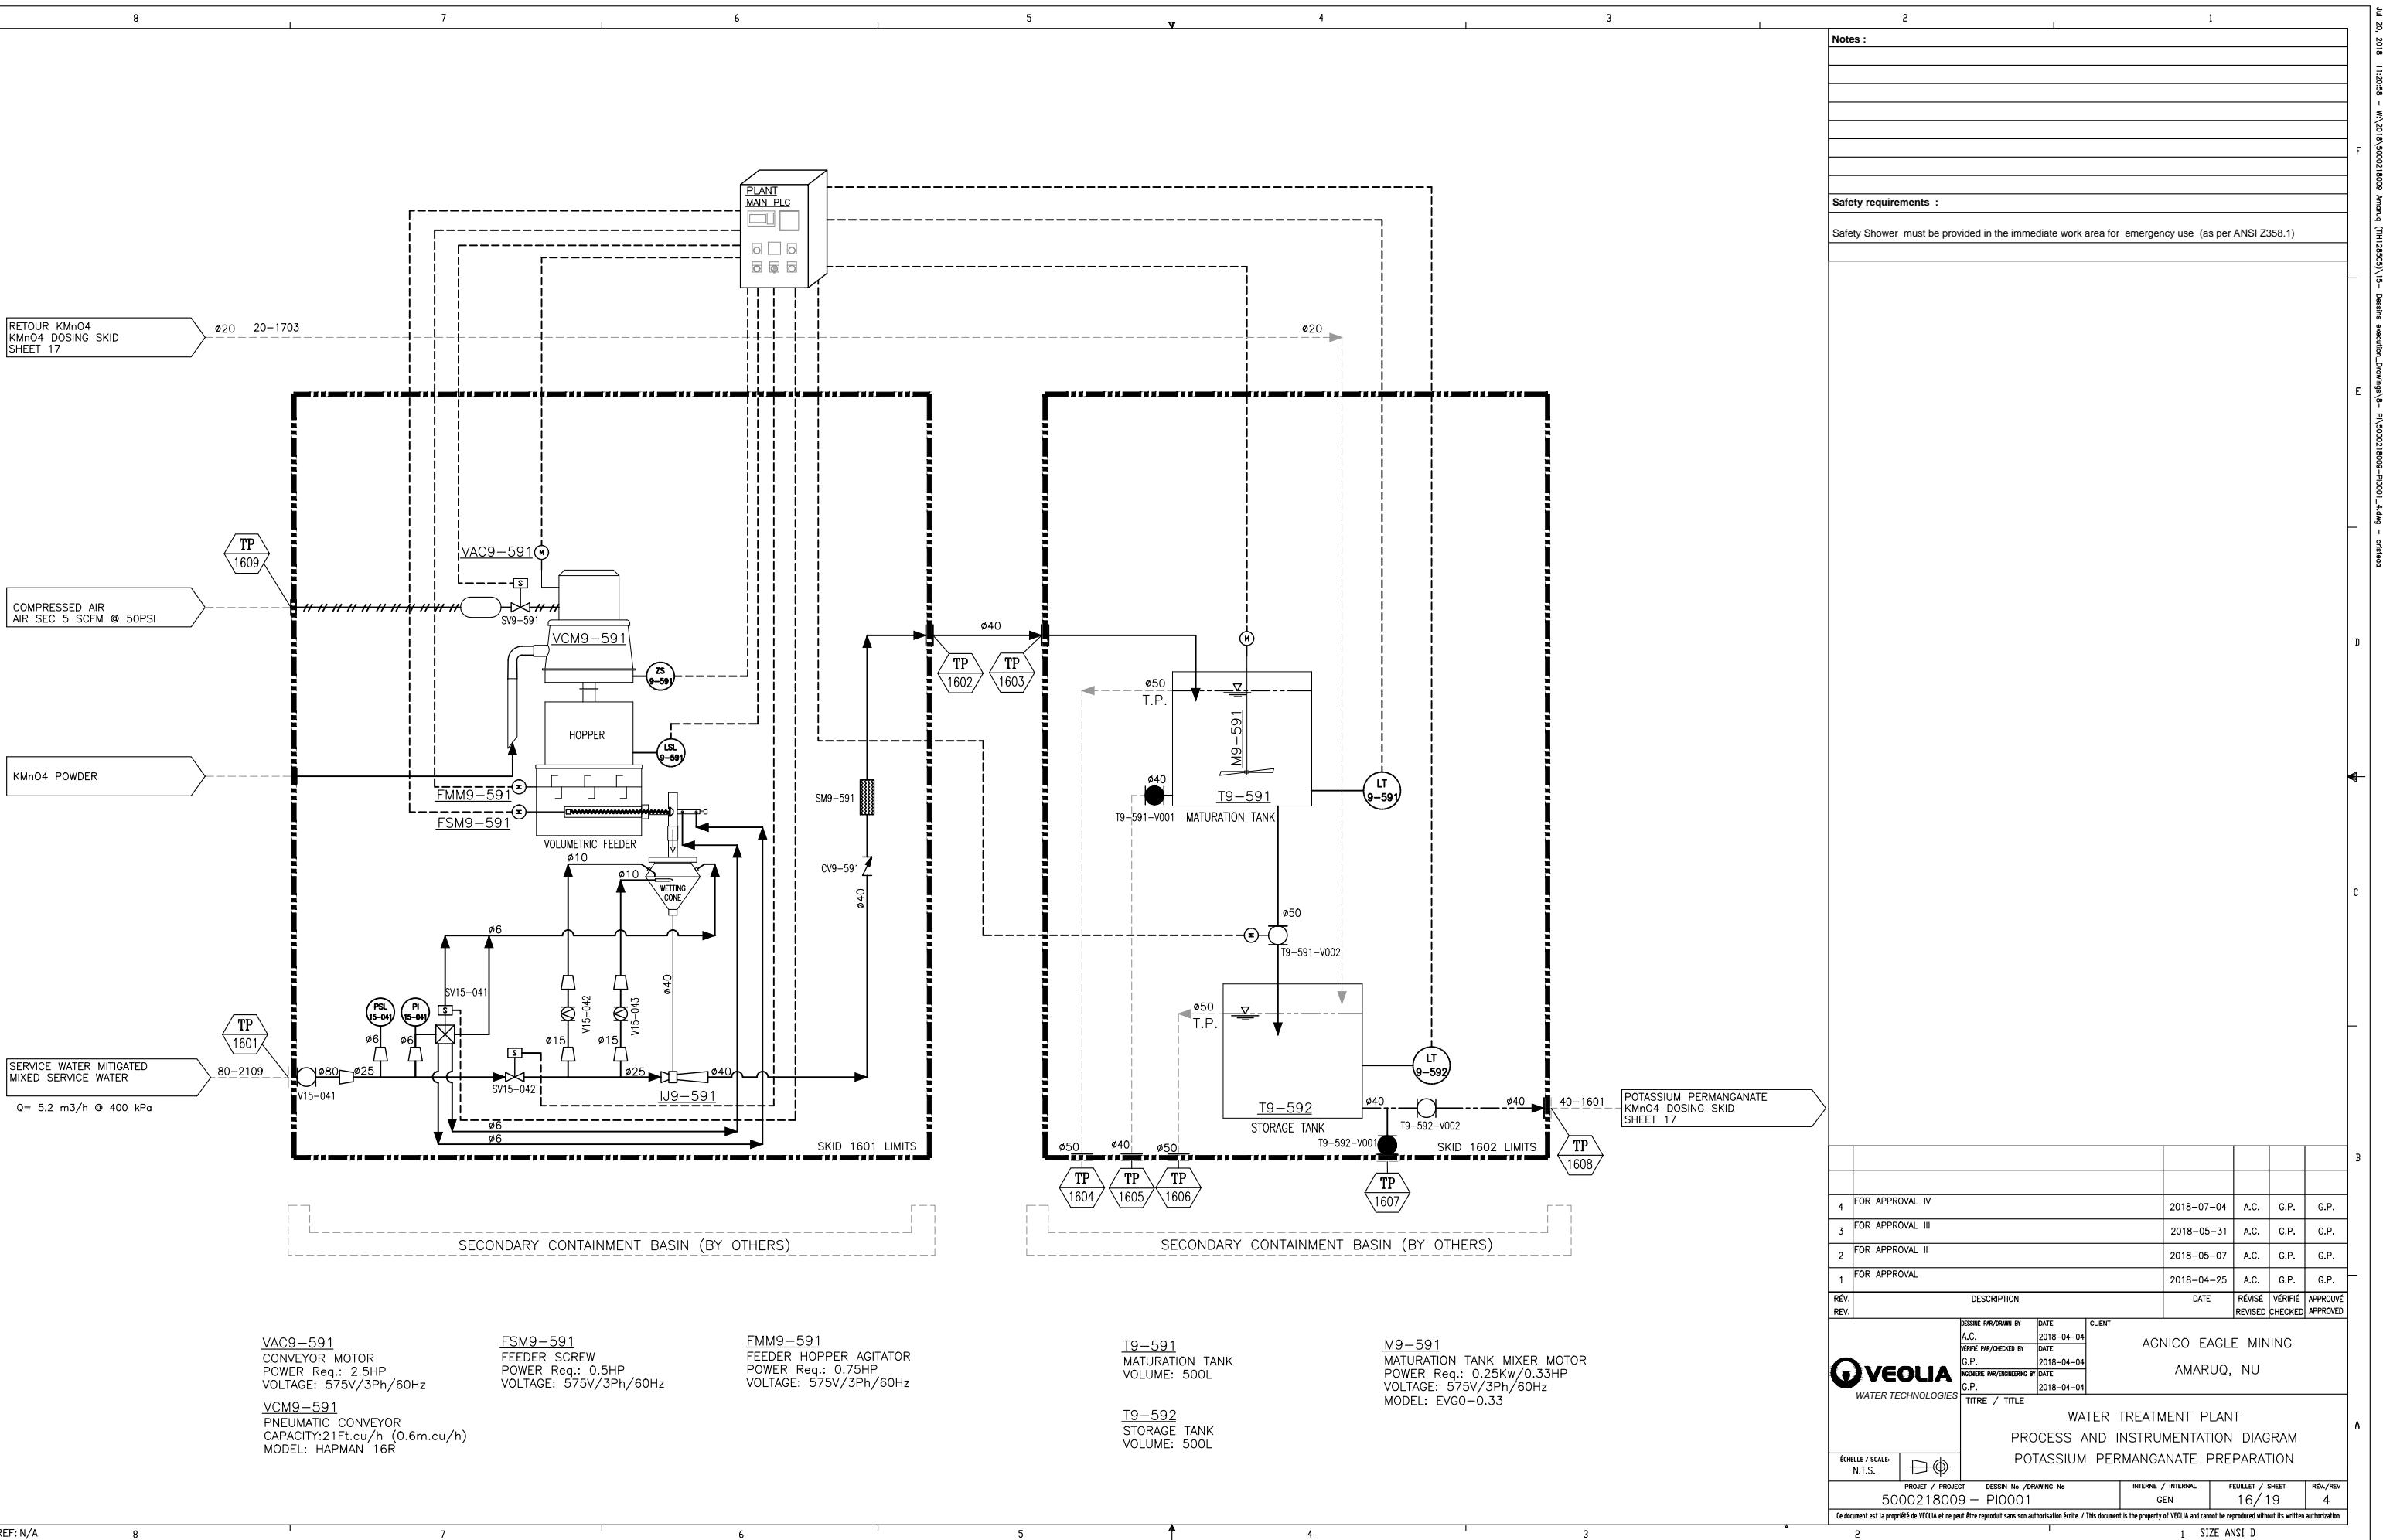


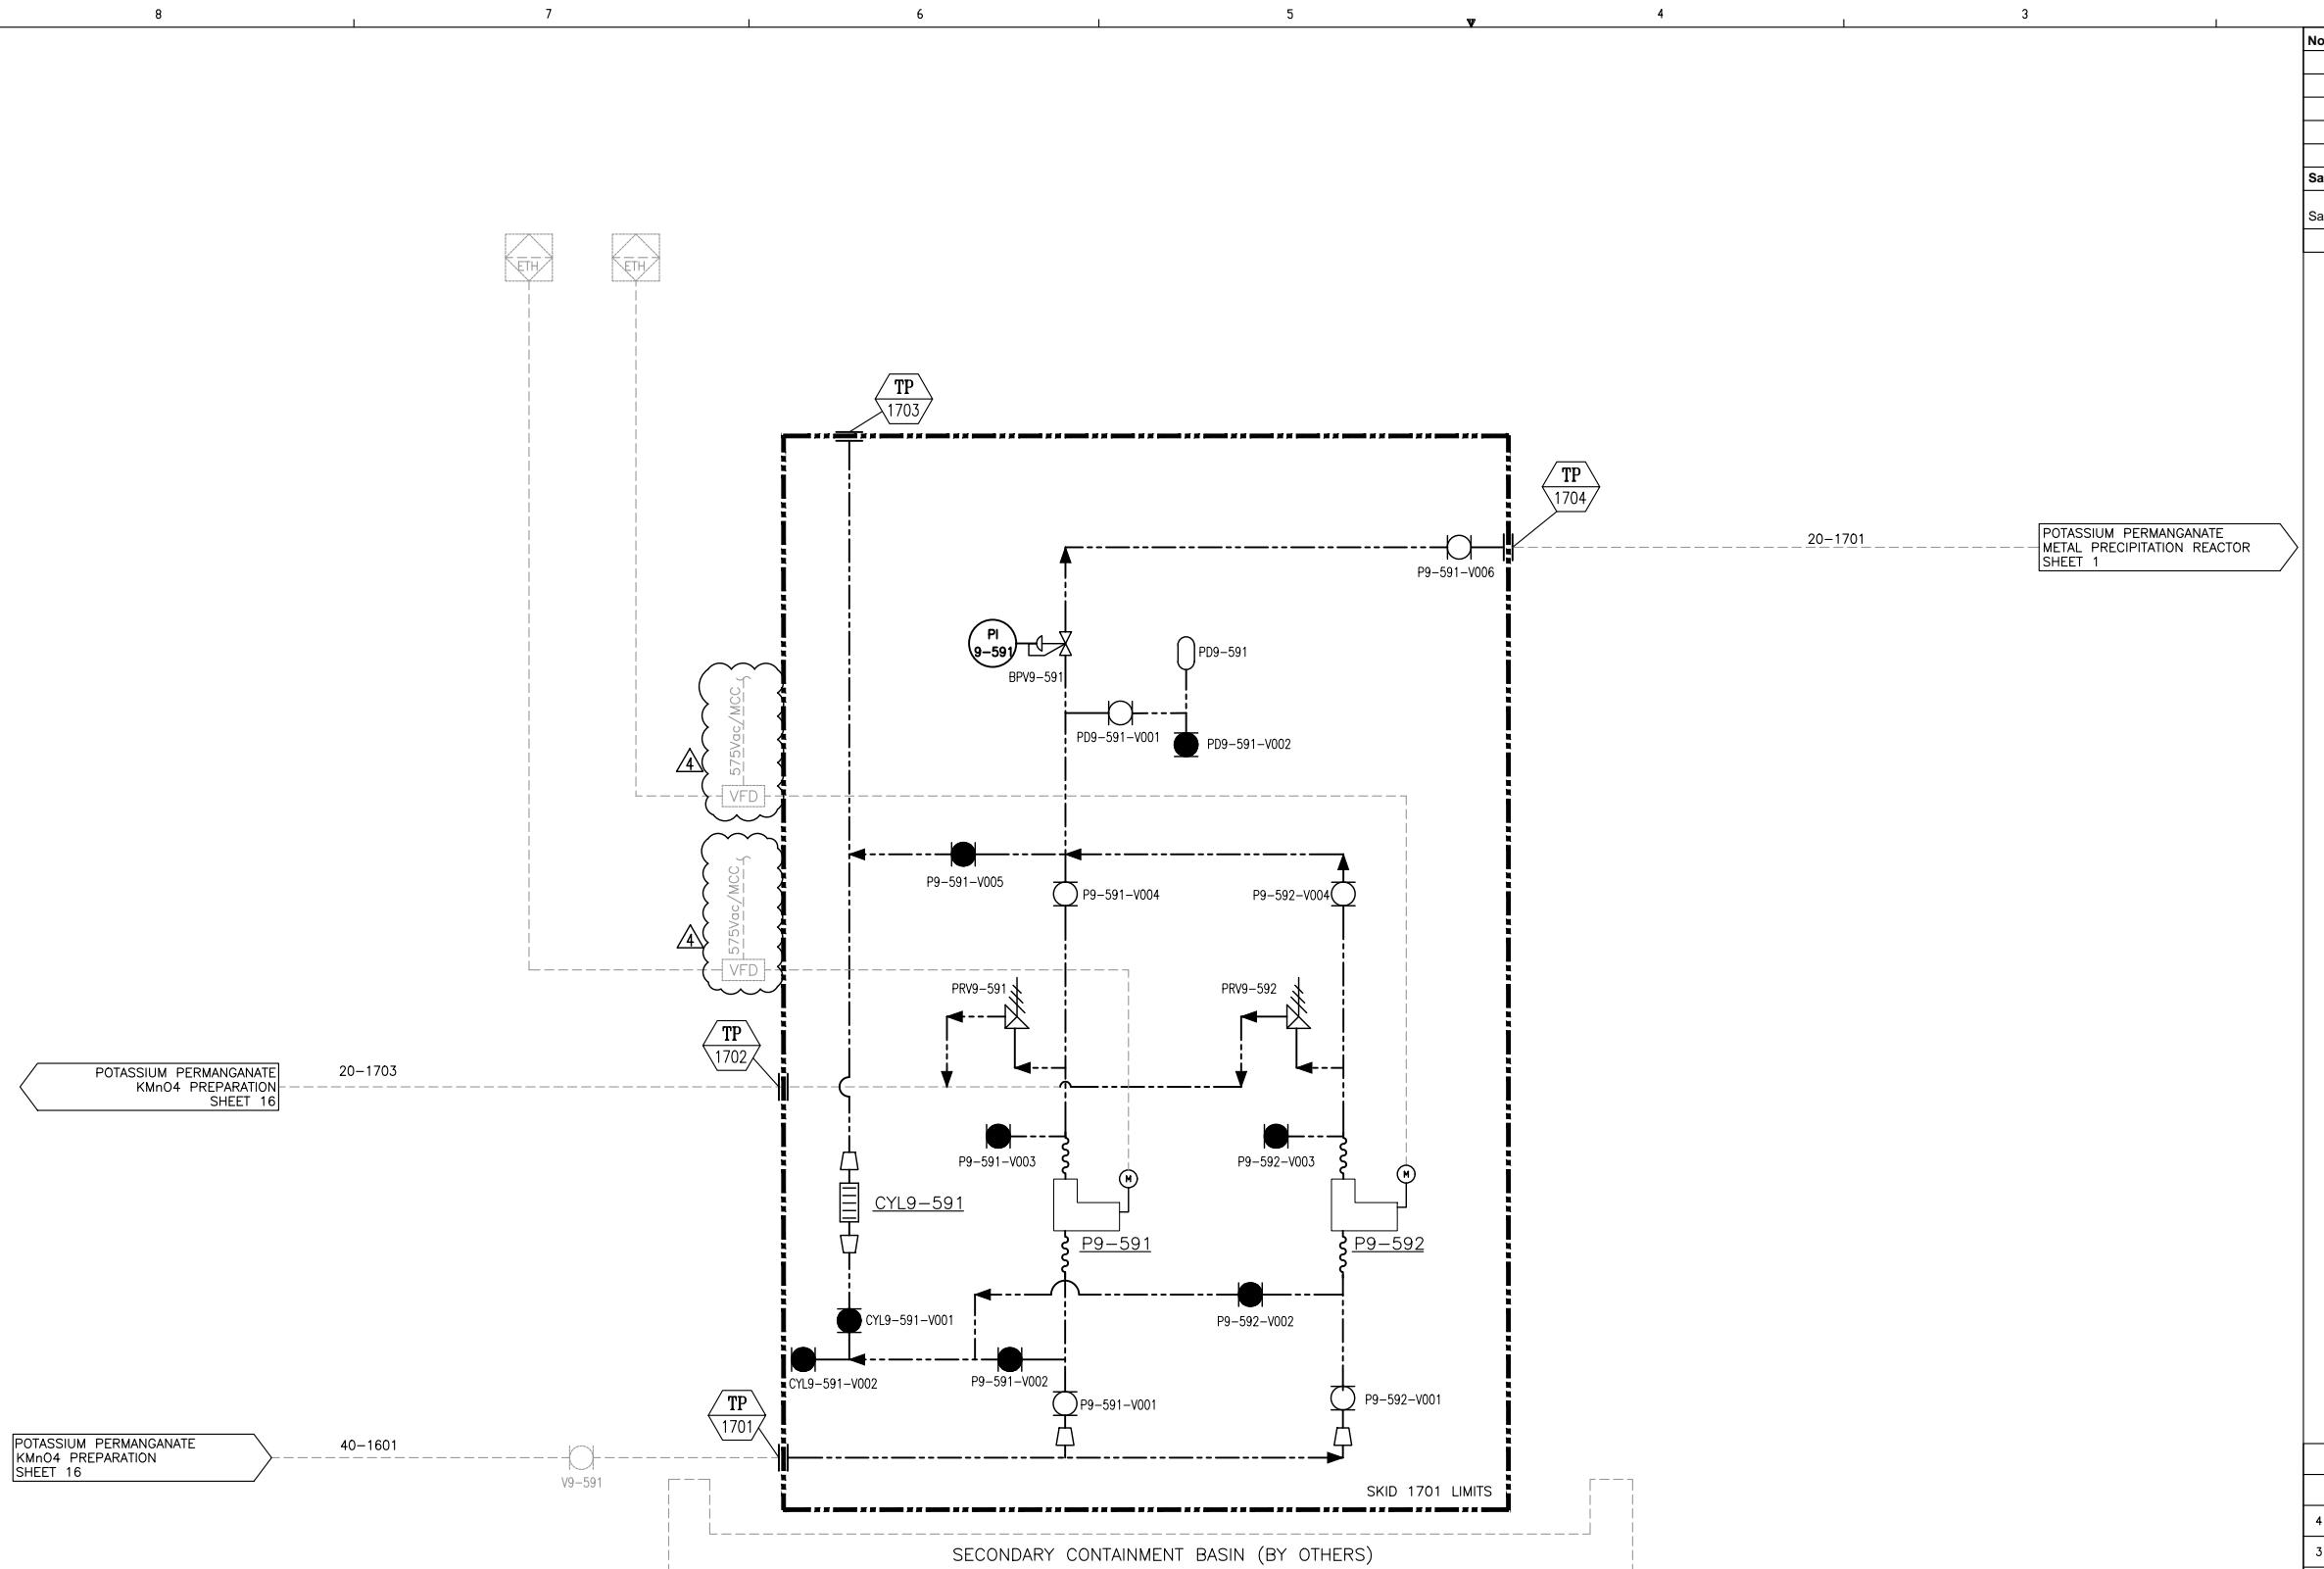


P9-591/P9-592
KMnO4 METERING PUMP
CAP.: 320LPH@80psig
POWER: XX HP, 575/3/60

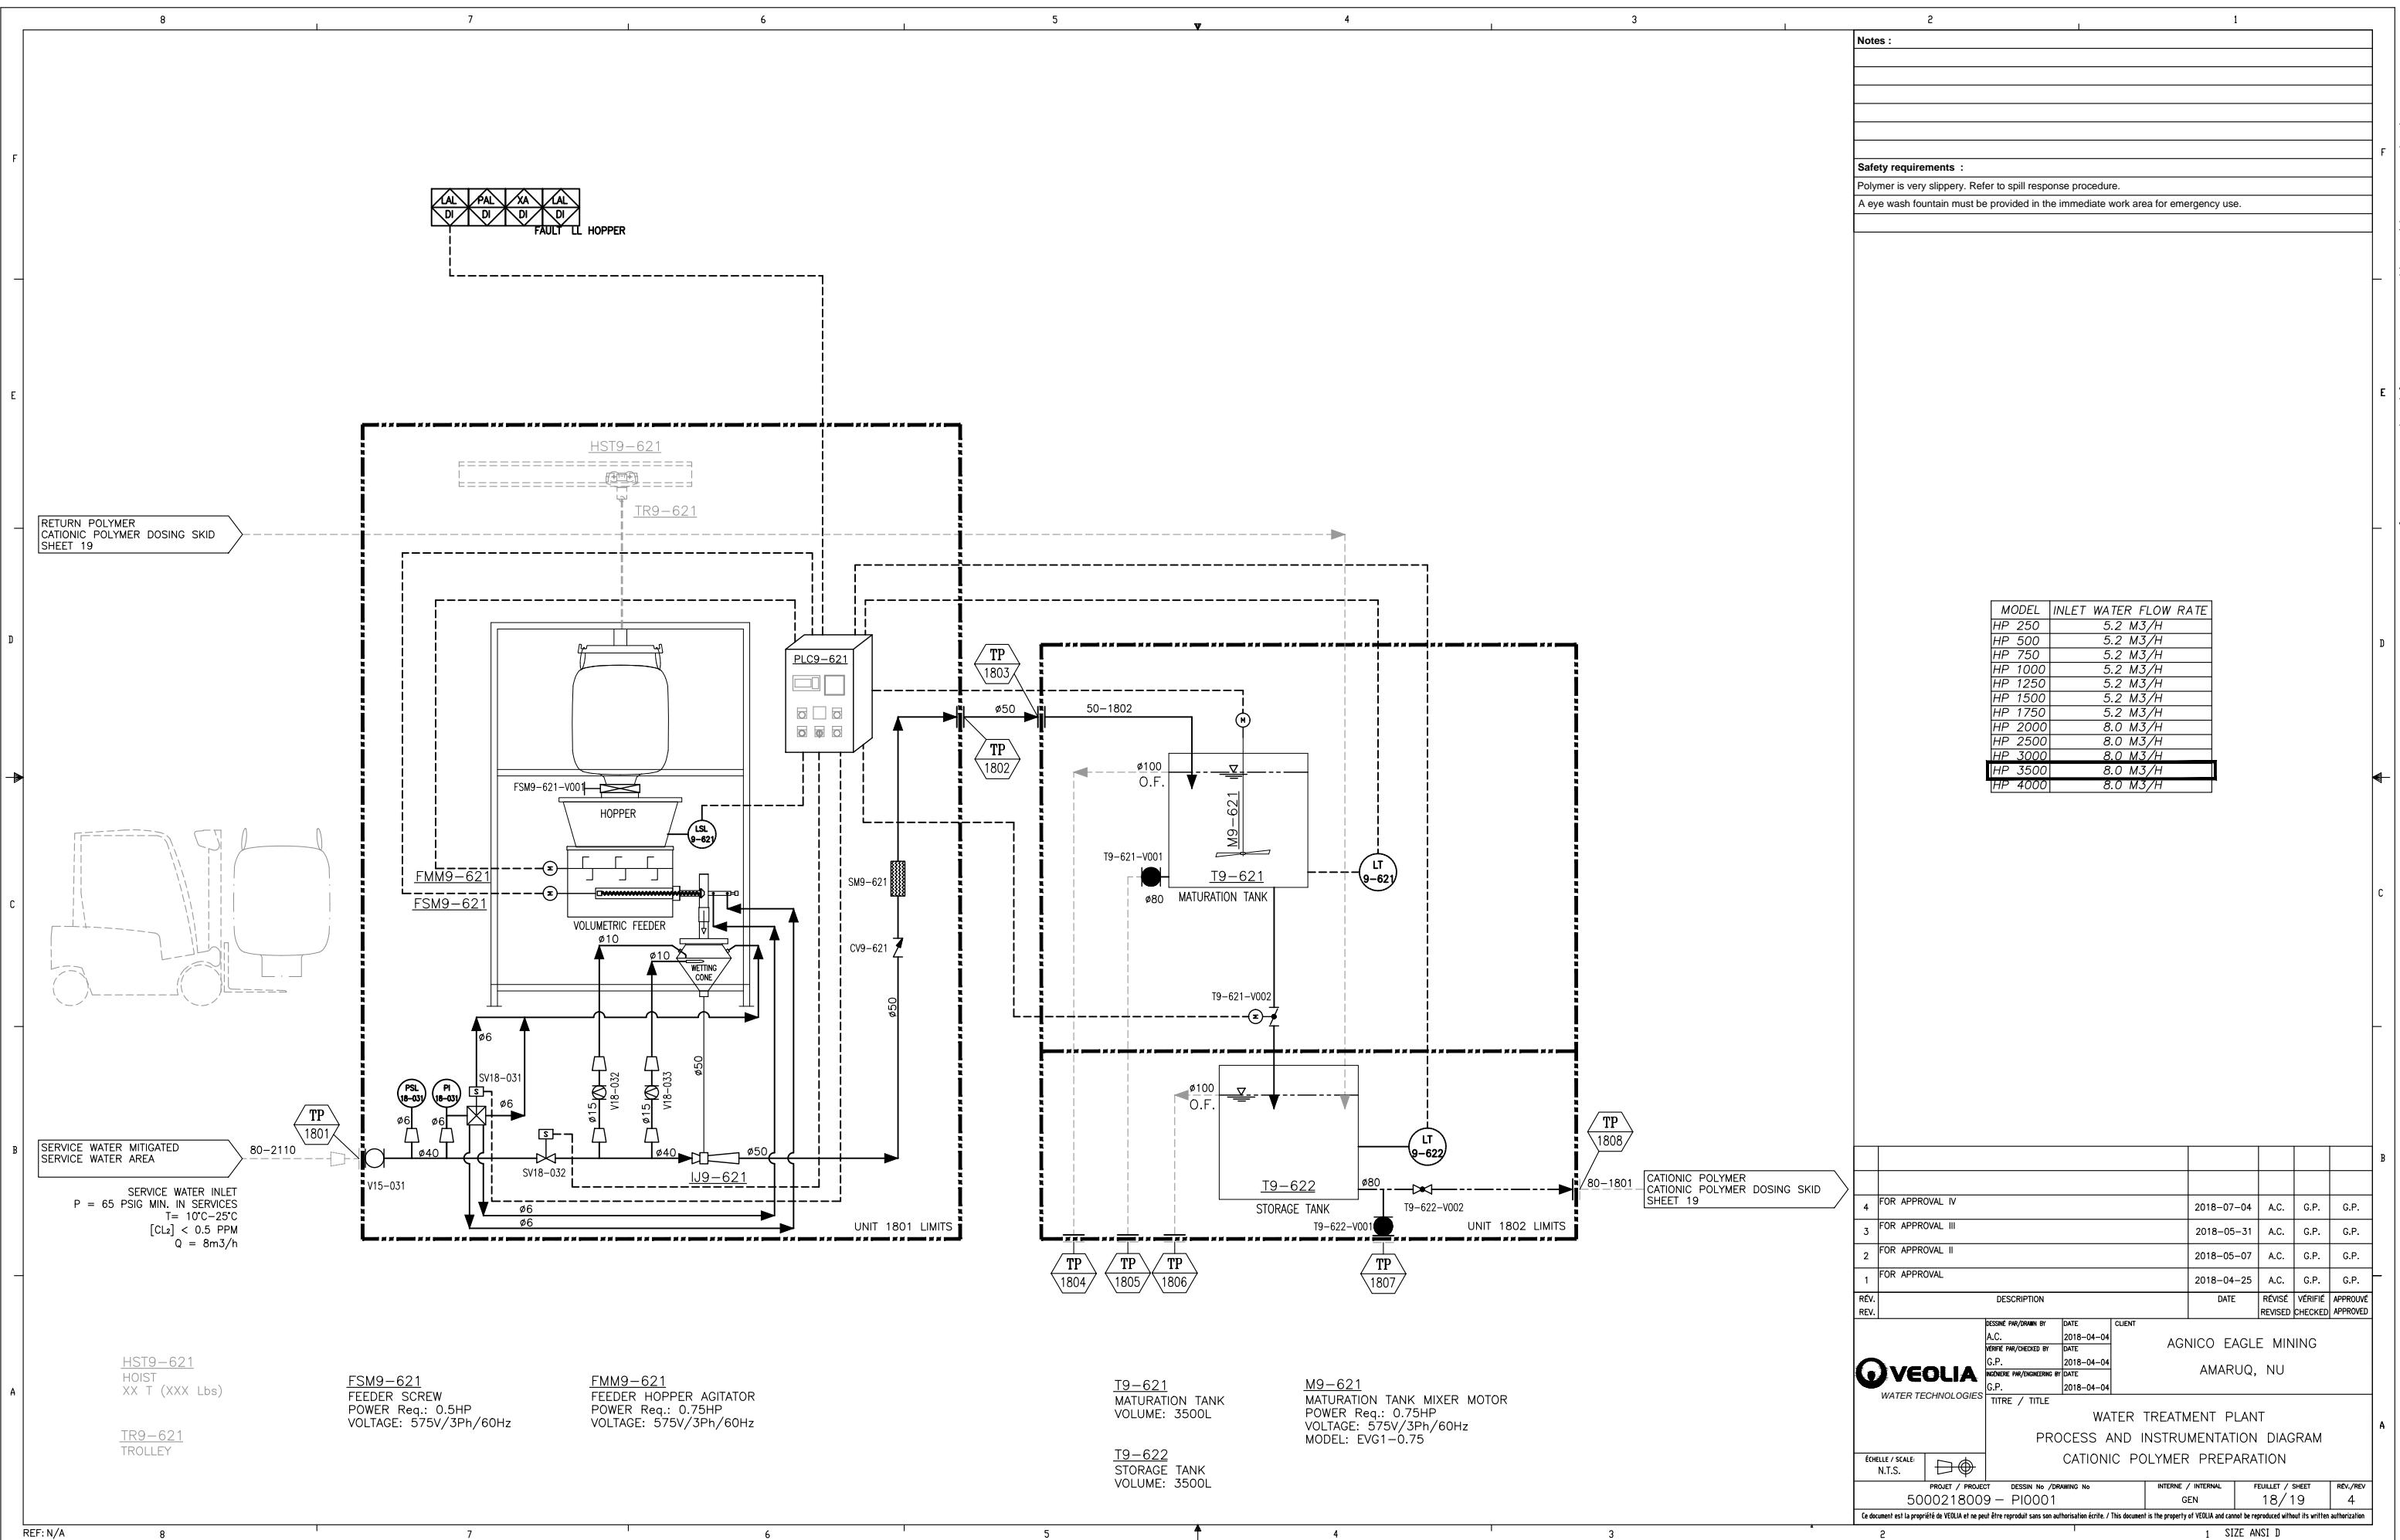

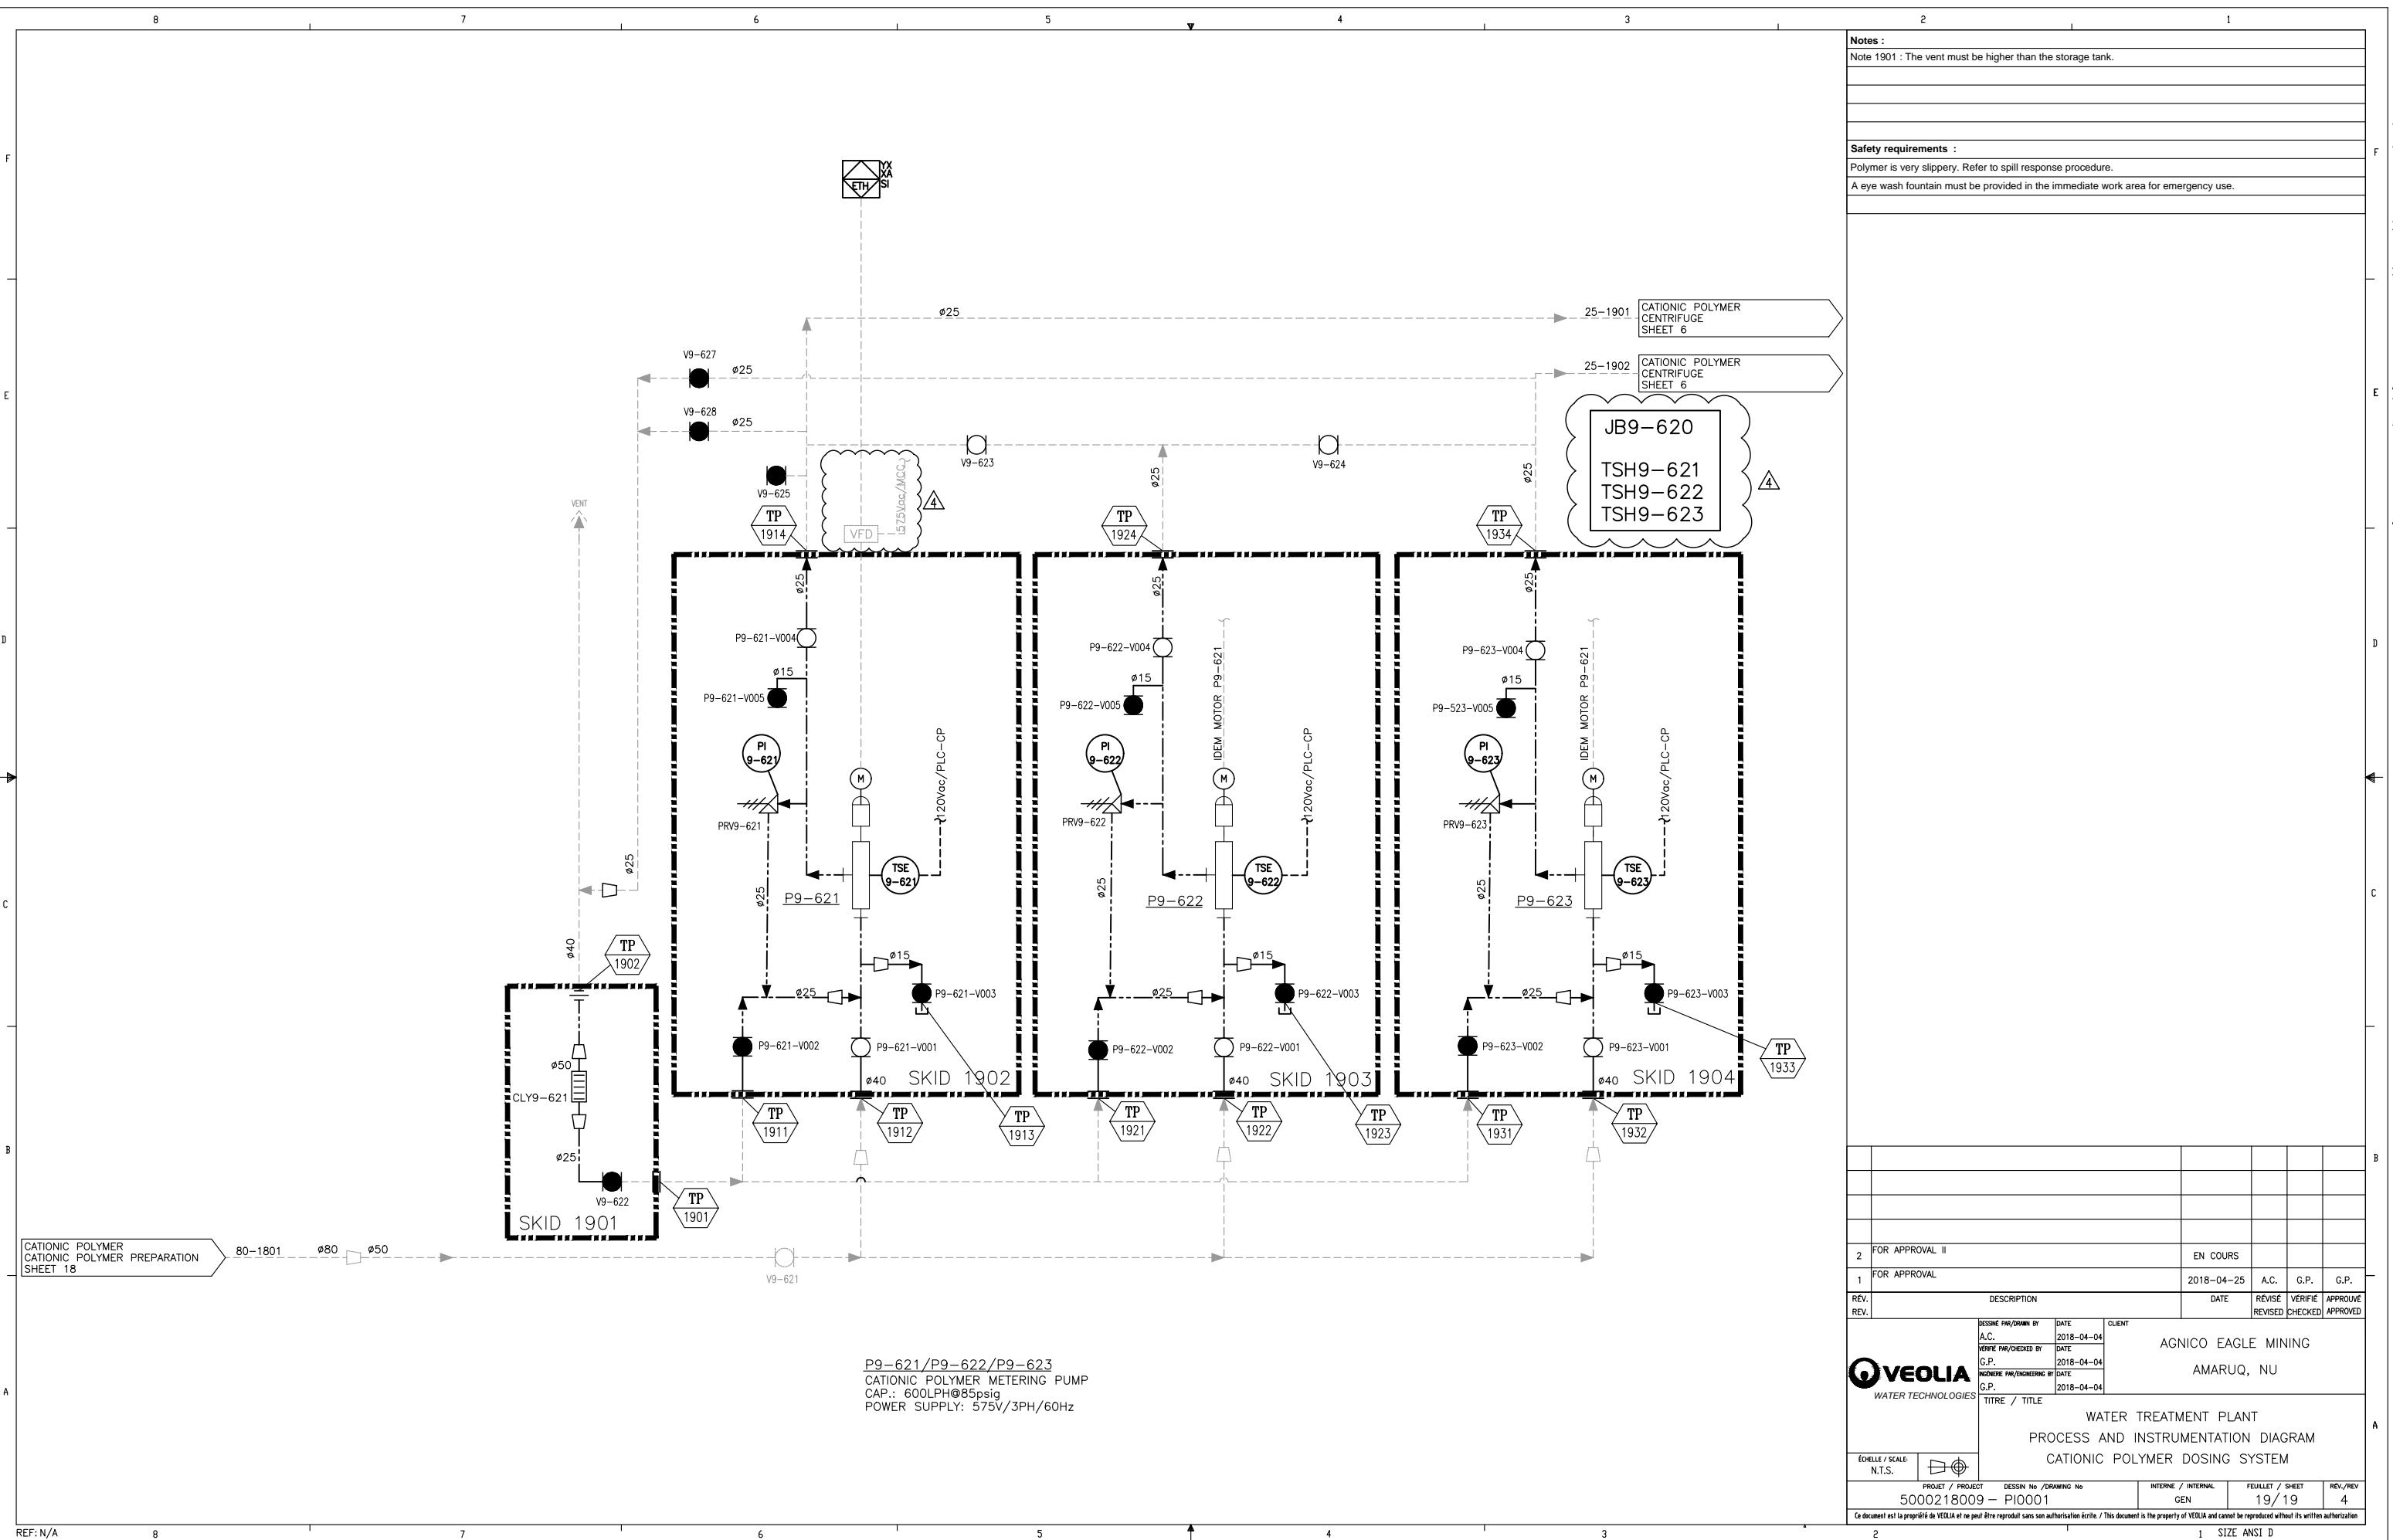


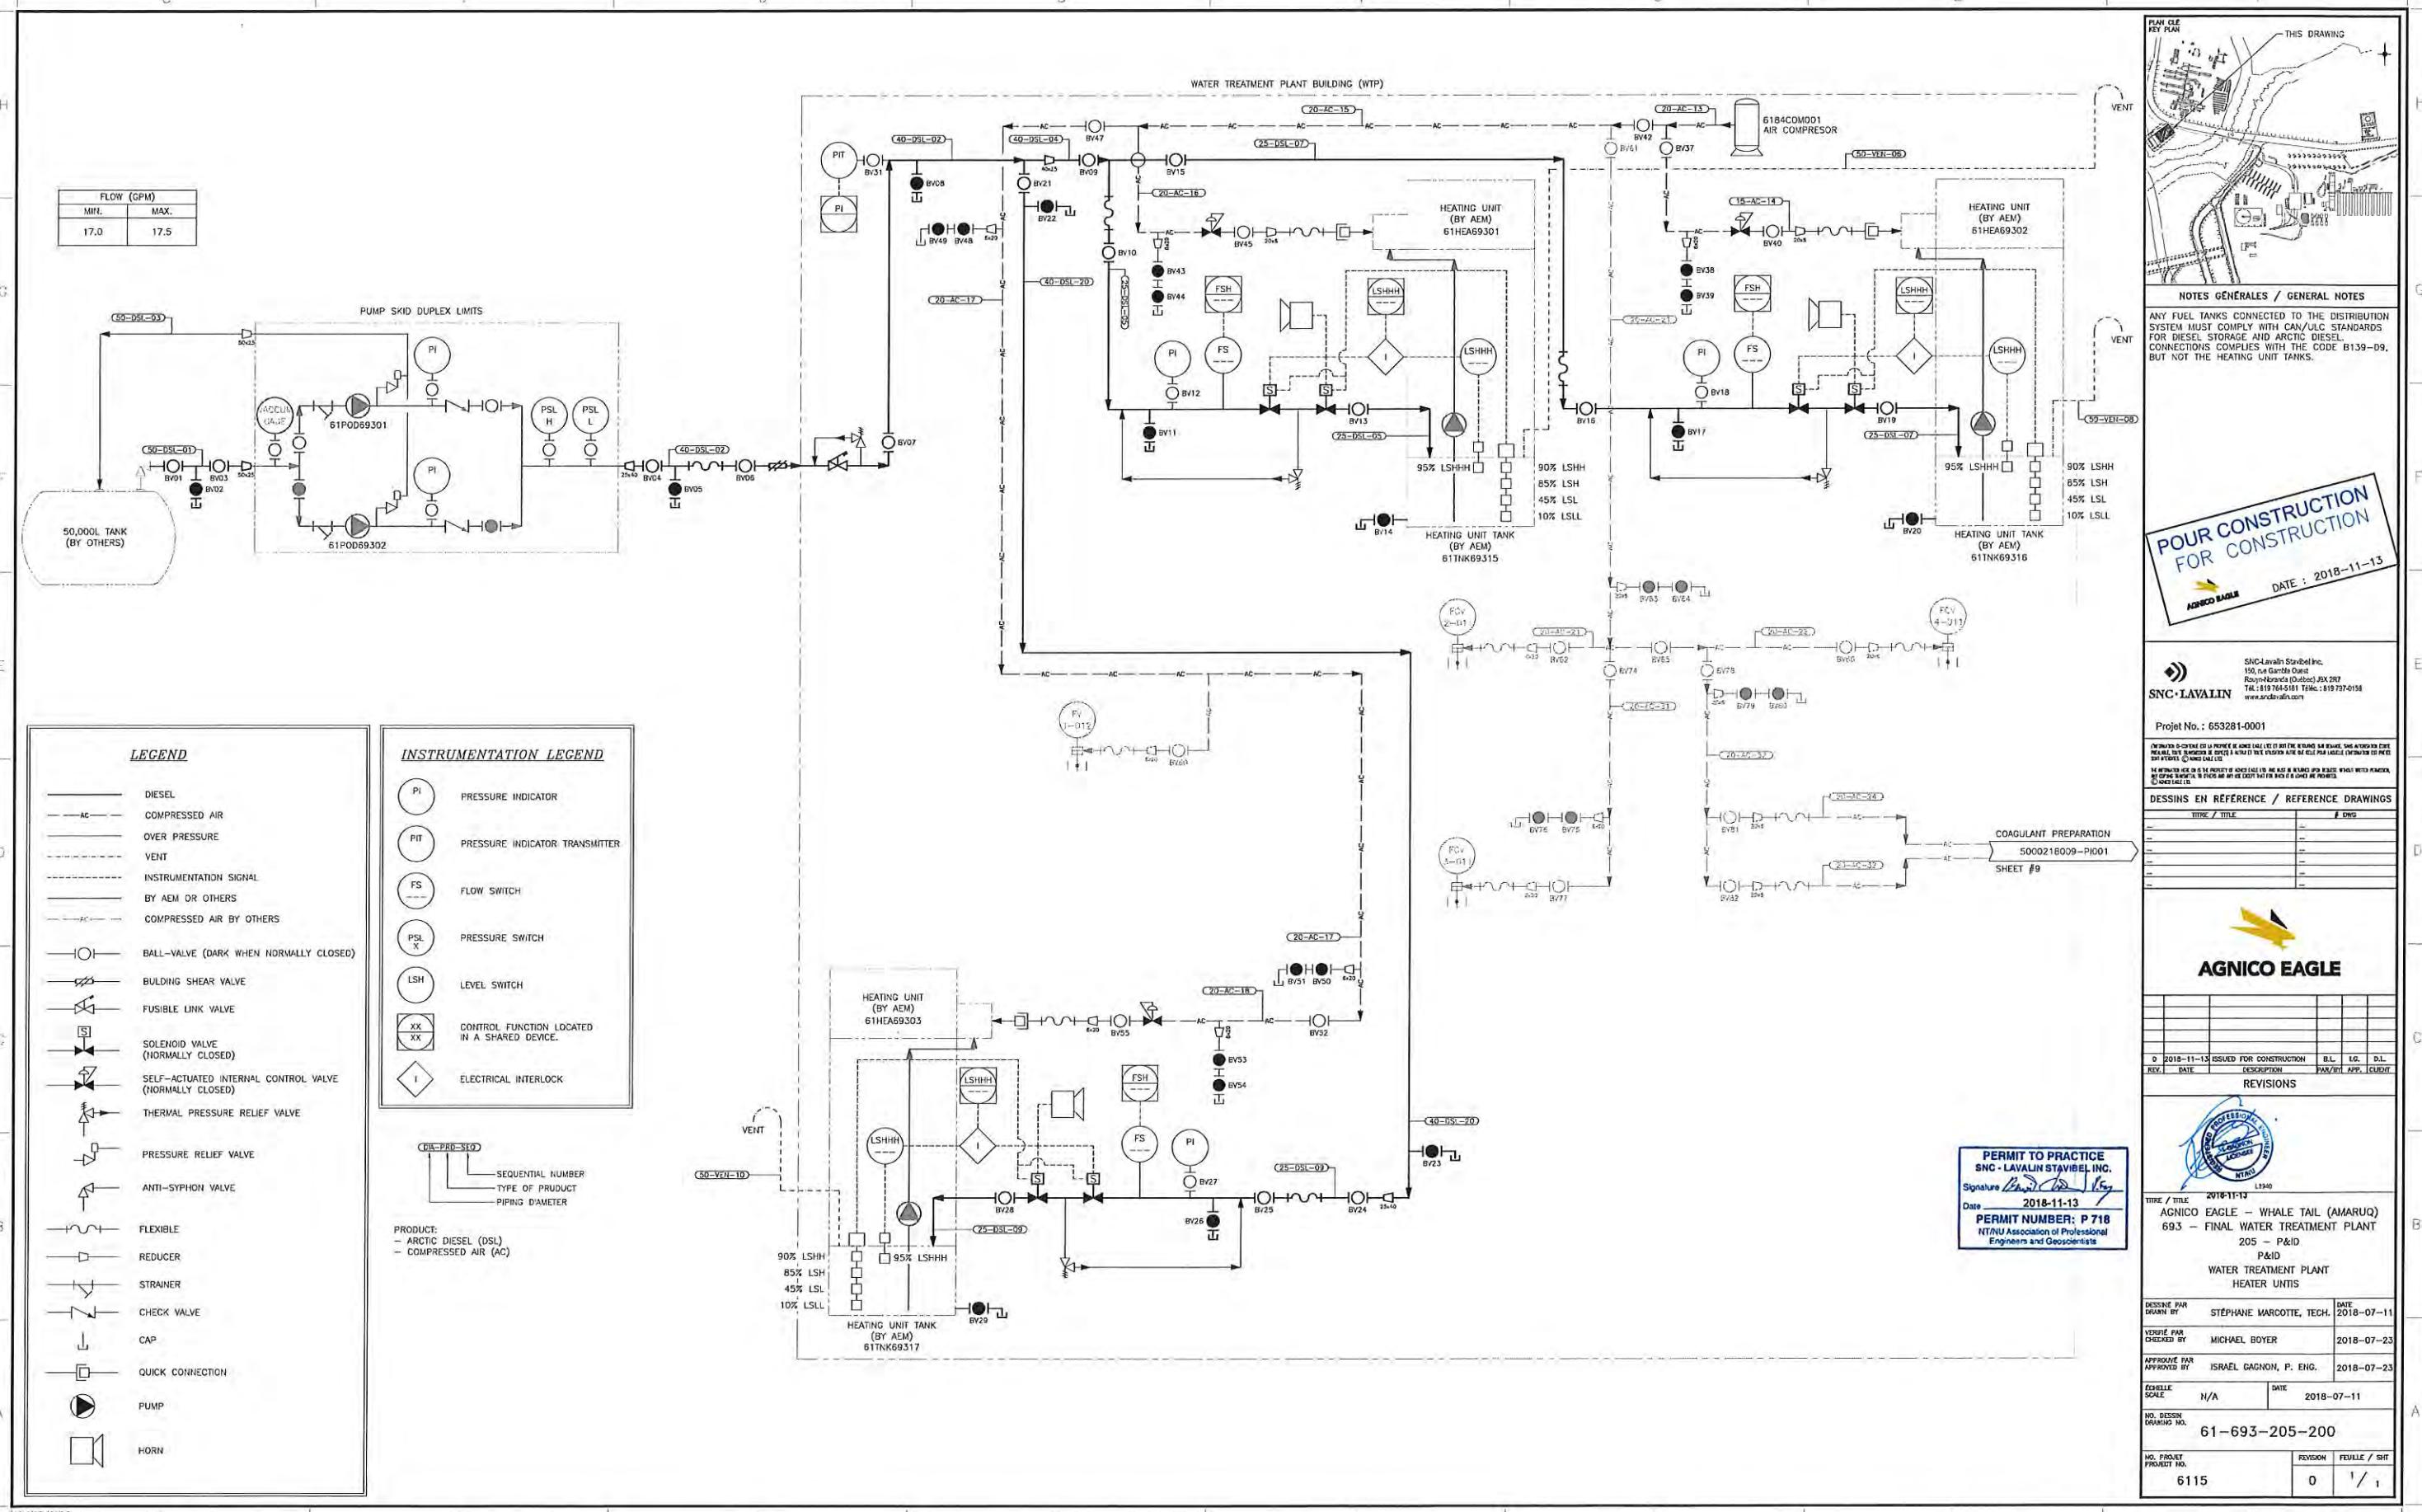

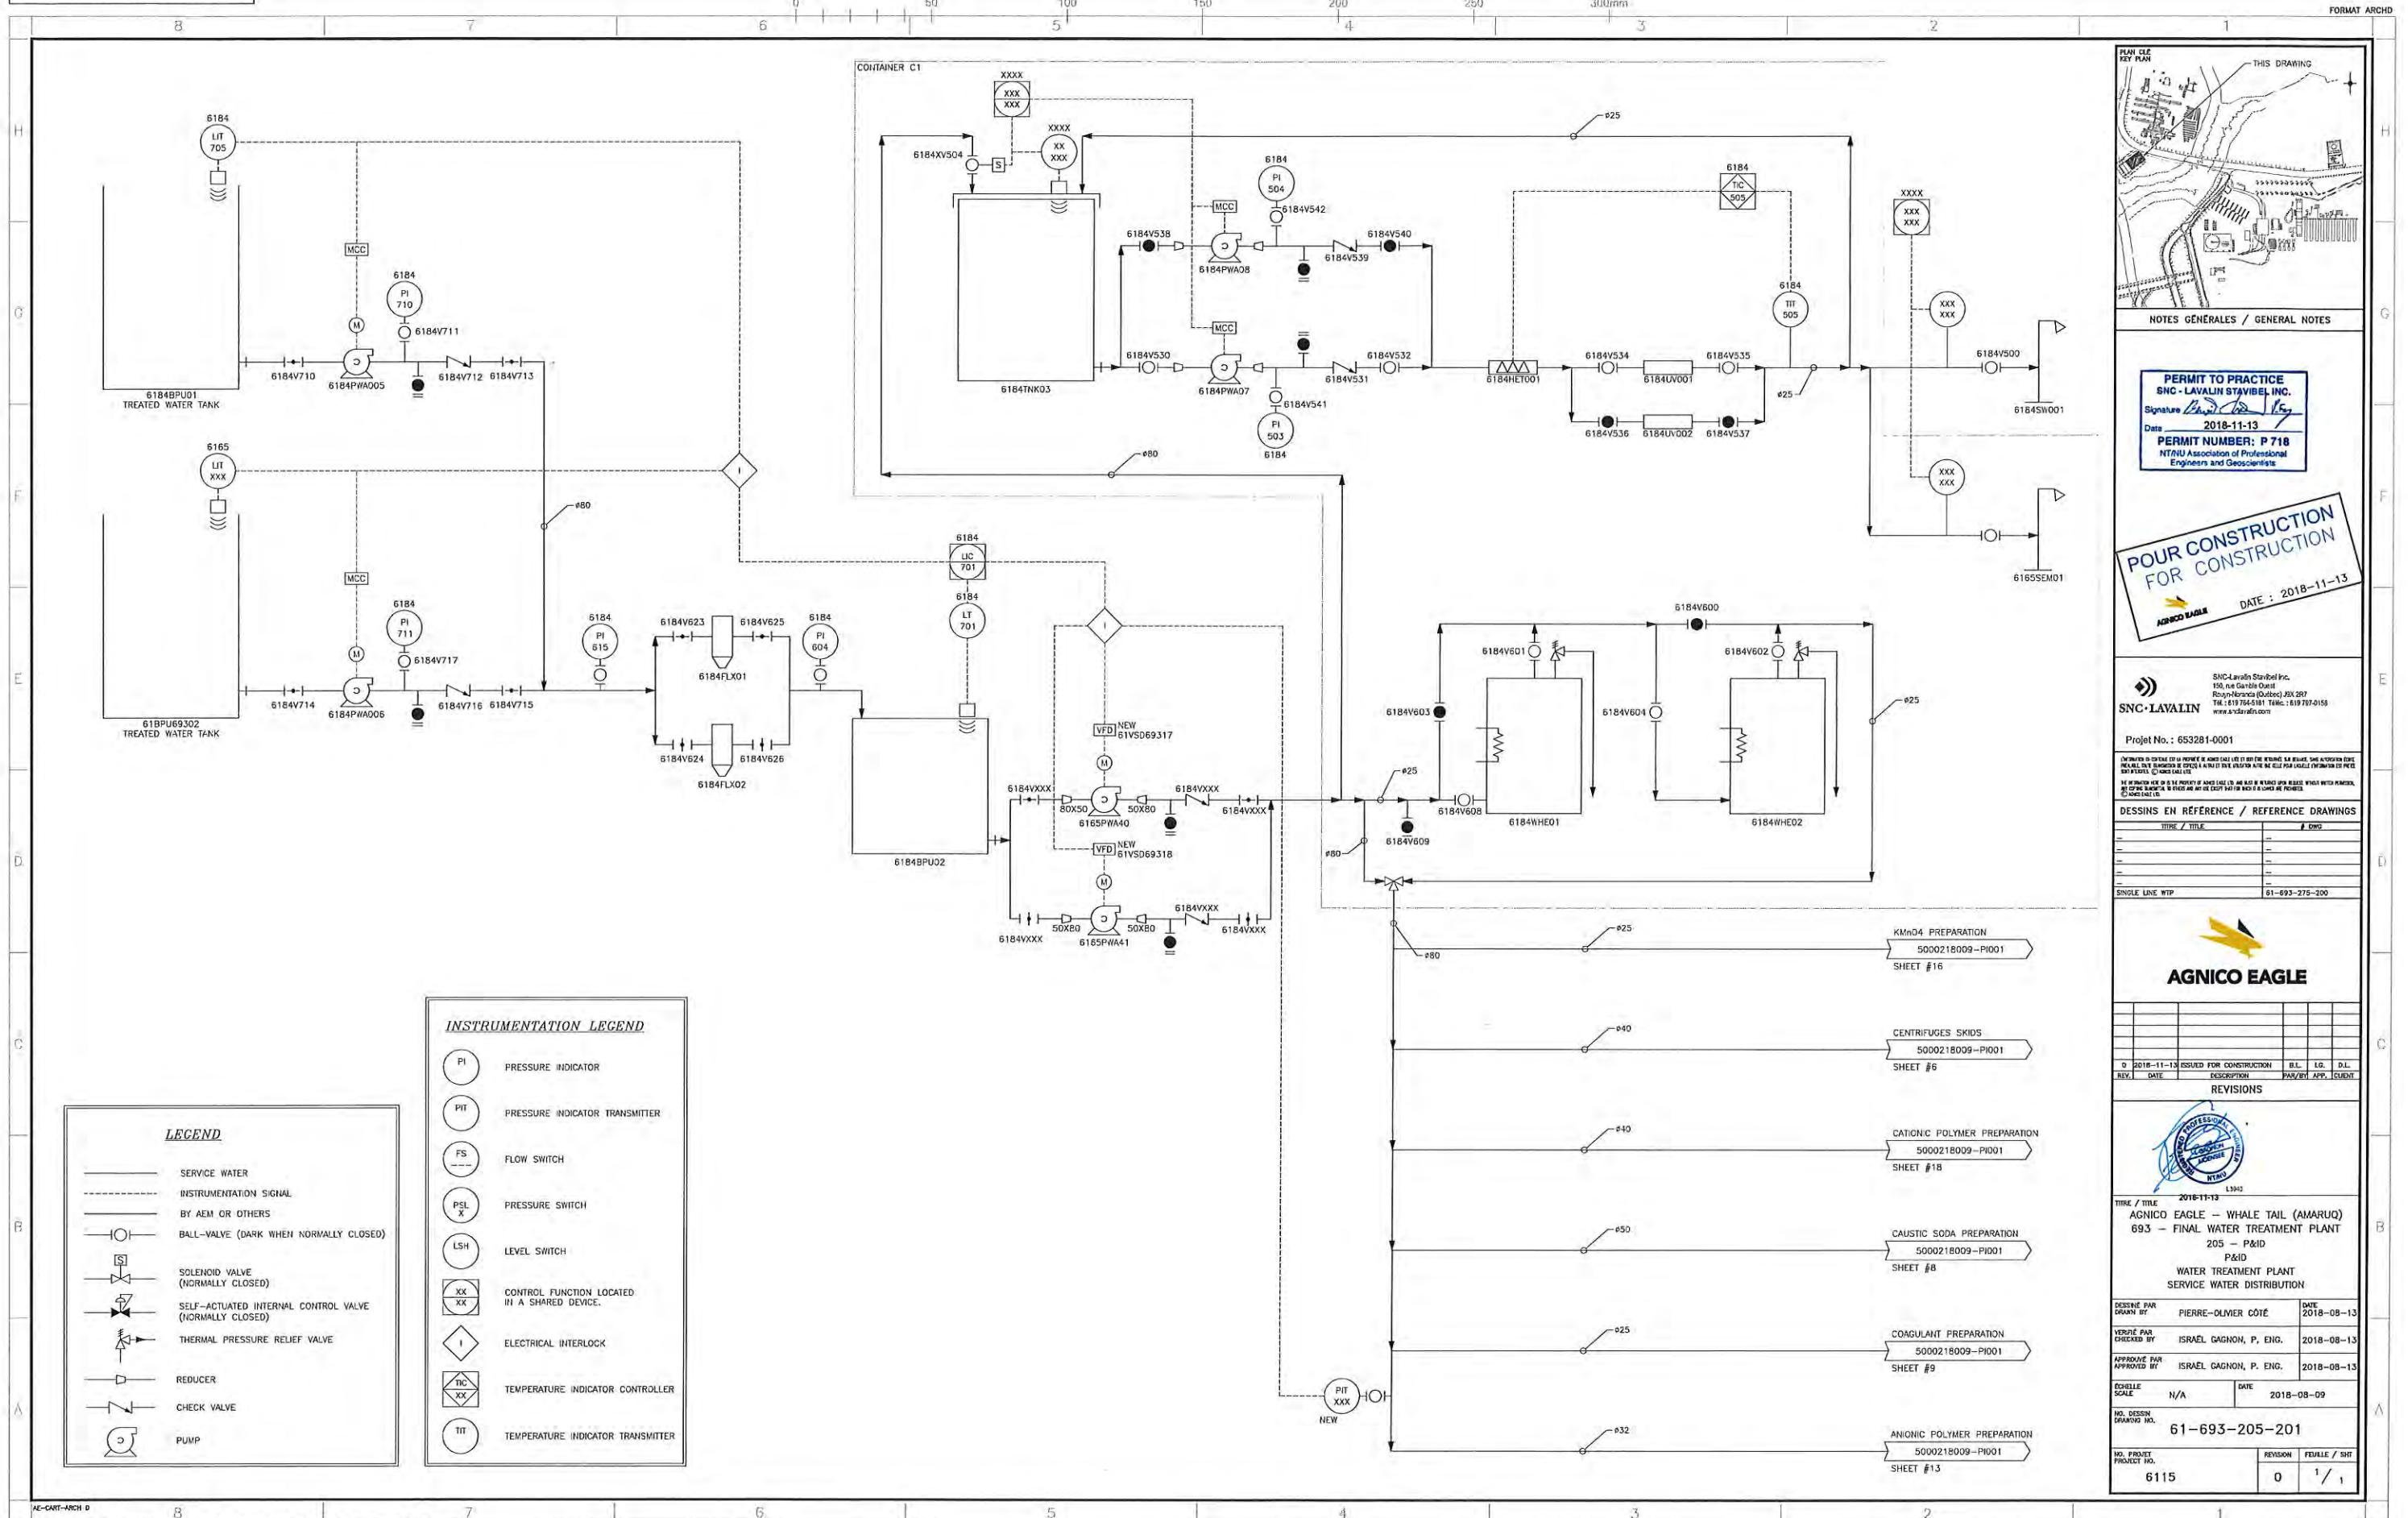

0 50 100 150 200 250 300 mm

8 7 6 5 4 3 2 1

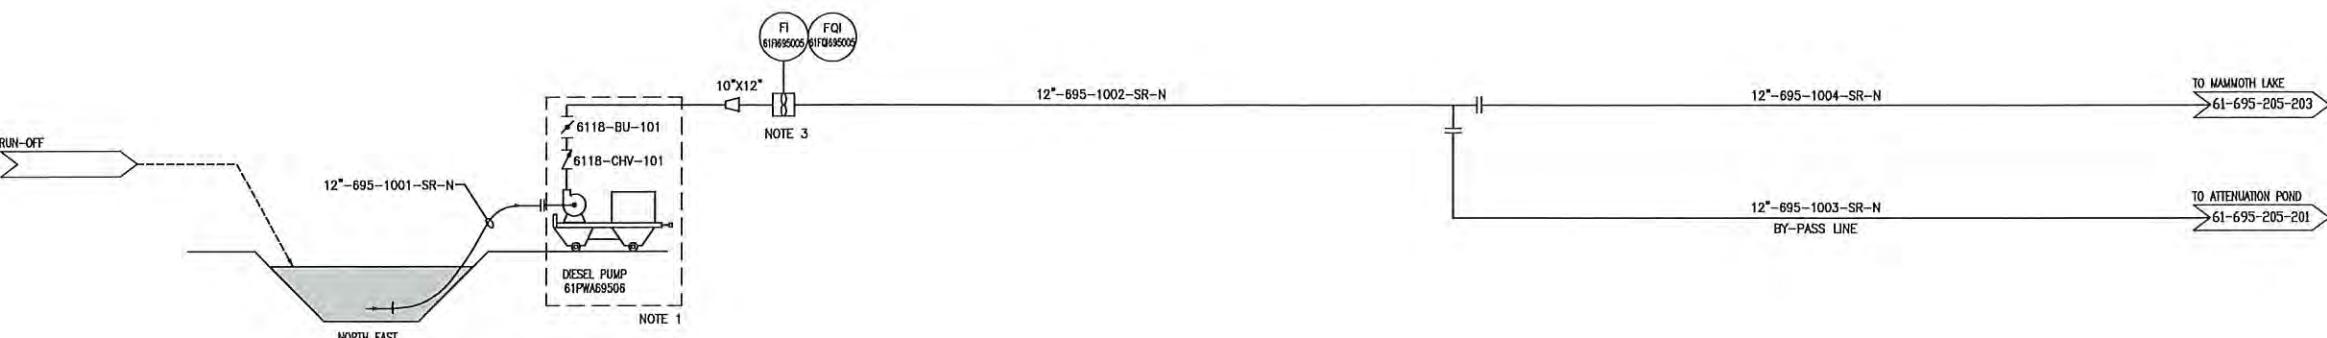

PLAN GÉO
KEY PLAN

SNC-LAVALIN

Mining & Metallurgy
5500, des Galeries Blvd., boul. 200, Québec (Québec), Canada G2K 2E2
Téléphone: (418) 621-6000, Fax: (418) 621-6837

PROJECT No.	SUBDIVISION	SUBJECT	SERIAL	REV.
651298	8200	49-D4	0001	E00

NOTES GÉNÉRALES / GENERAL NOTES

- NOTES :
1. DIESEL PUMP MOUNTED ON A SKID.
 2. WHALE TAIL PIT PUMPS & PIPING SYSTEM WILL BE DEFINED BY AEM DURING THE DEVELOPMENT OF THE OPEN PIT.
 3. FLOWMETER INSTALLED TEMPORARILY TO DEVELOP FLOW VS PUMP CAPACITY SYSTEM CURVE.

LEGEND:

Chiffres à droite de la ligne de diamètre indiquent une valeur de diamètre réel. Les chiffres à droite de l'unité de mesure indiquent une valeur pour la largeur d'épaisseur de pièce. C'est à dire que si le diamètre réel est de 100 mm, alors la largeur d'épaisseur sera de 10 mm.

DESSINS EN RÉFÉRENCE / REFERENCE DRAWINGS

TITLE / TITLE	# DWG

AGNICO EAGLE

PO	2018-07-24	ISSUED FOR DESIGN	D.C.	A.I.M.	R.C.
PO	2018-08-10	ISSUED FOR COMMENTS	D.C.	A.I.M.	R.C.
RA	2018-05-30	ISSUED FOR COMMENTS	D.C.	A.I.M.	R.C.
REV.	DATE	DESCRIPTION	PW/DM	APP.	CLOUD

REVISIONS

TIME / TITLE
**AGNICO EAGLE - AMARUQ DIVISION
695 - WATER MANAGEMENT**

205-PIPING AND INSTRUMENTATION DIAGRAM
NE POND, WRSF POND AND WHALE TAIL PIT
PUMPING STATIONS

DESIGNED BY	M. MOYLA	DATE
VERIFIED BY	D. CHEN	2018-05-30
APPROVED BY	A.L. NGUYEN	2018-05-30


RECHECKED BY	DATE
--------------	------


NO. DESIGN DRAWING NO.	DATE
---------------------------	------

PERMIT TO PRACTICE SNC-LAVALIN INC. Signature:	PERMIT NUMBER: P 260 The Association of Professional Engineers, Geologists and Geophysicists of NWTNU
--	---

NO. PROJECT PROJECT NO.	REVISION	FEASIBILITY / SHFT
----------------------------	----------	--------------------


6118	RO	1 / 1
------	----	-------

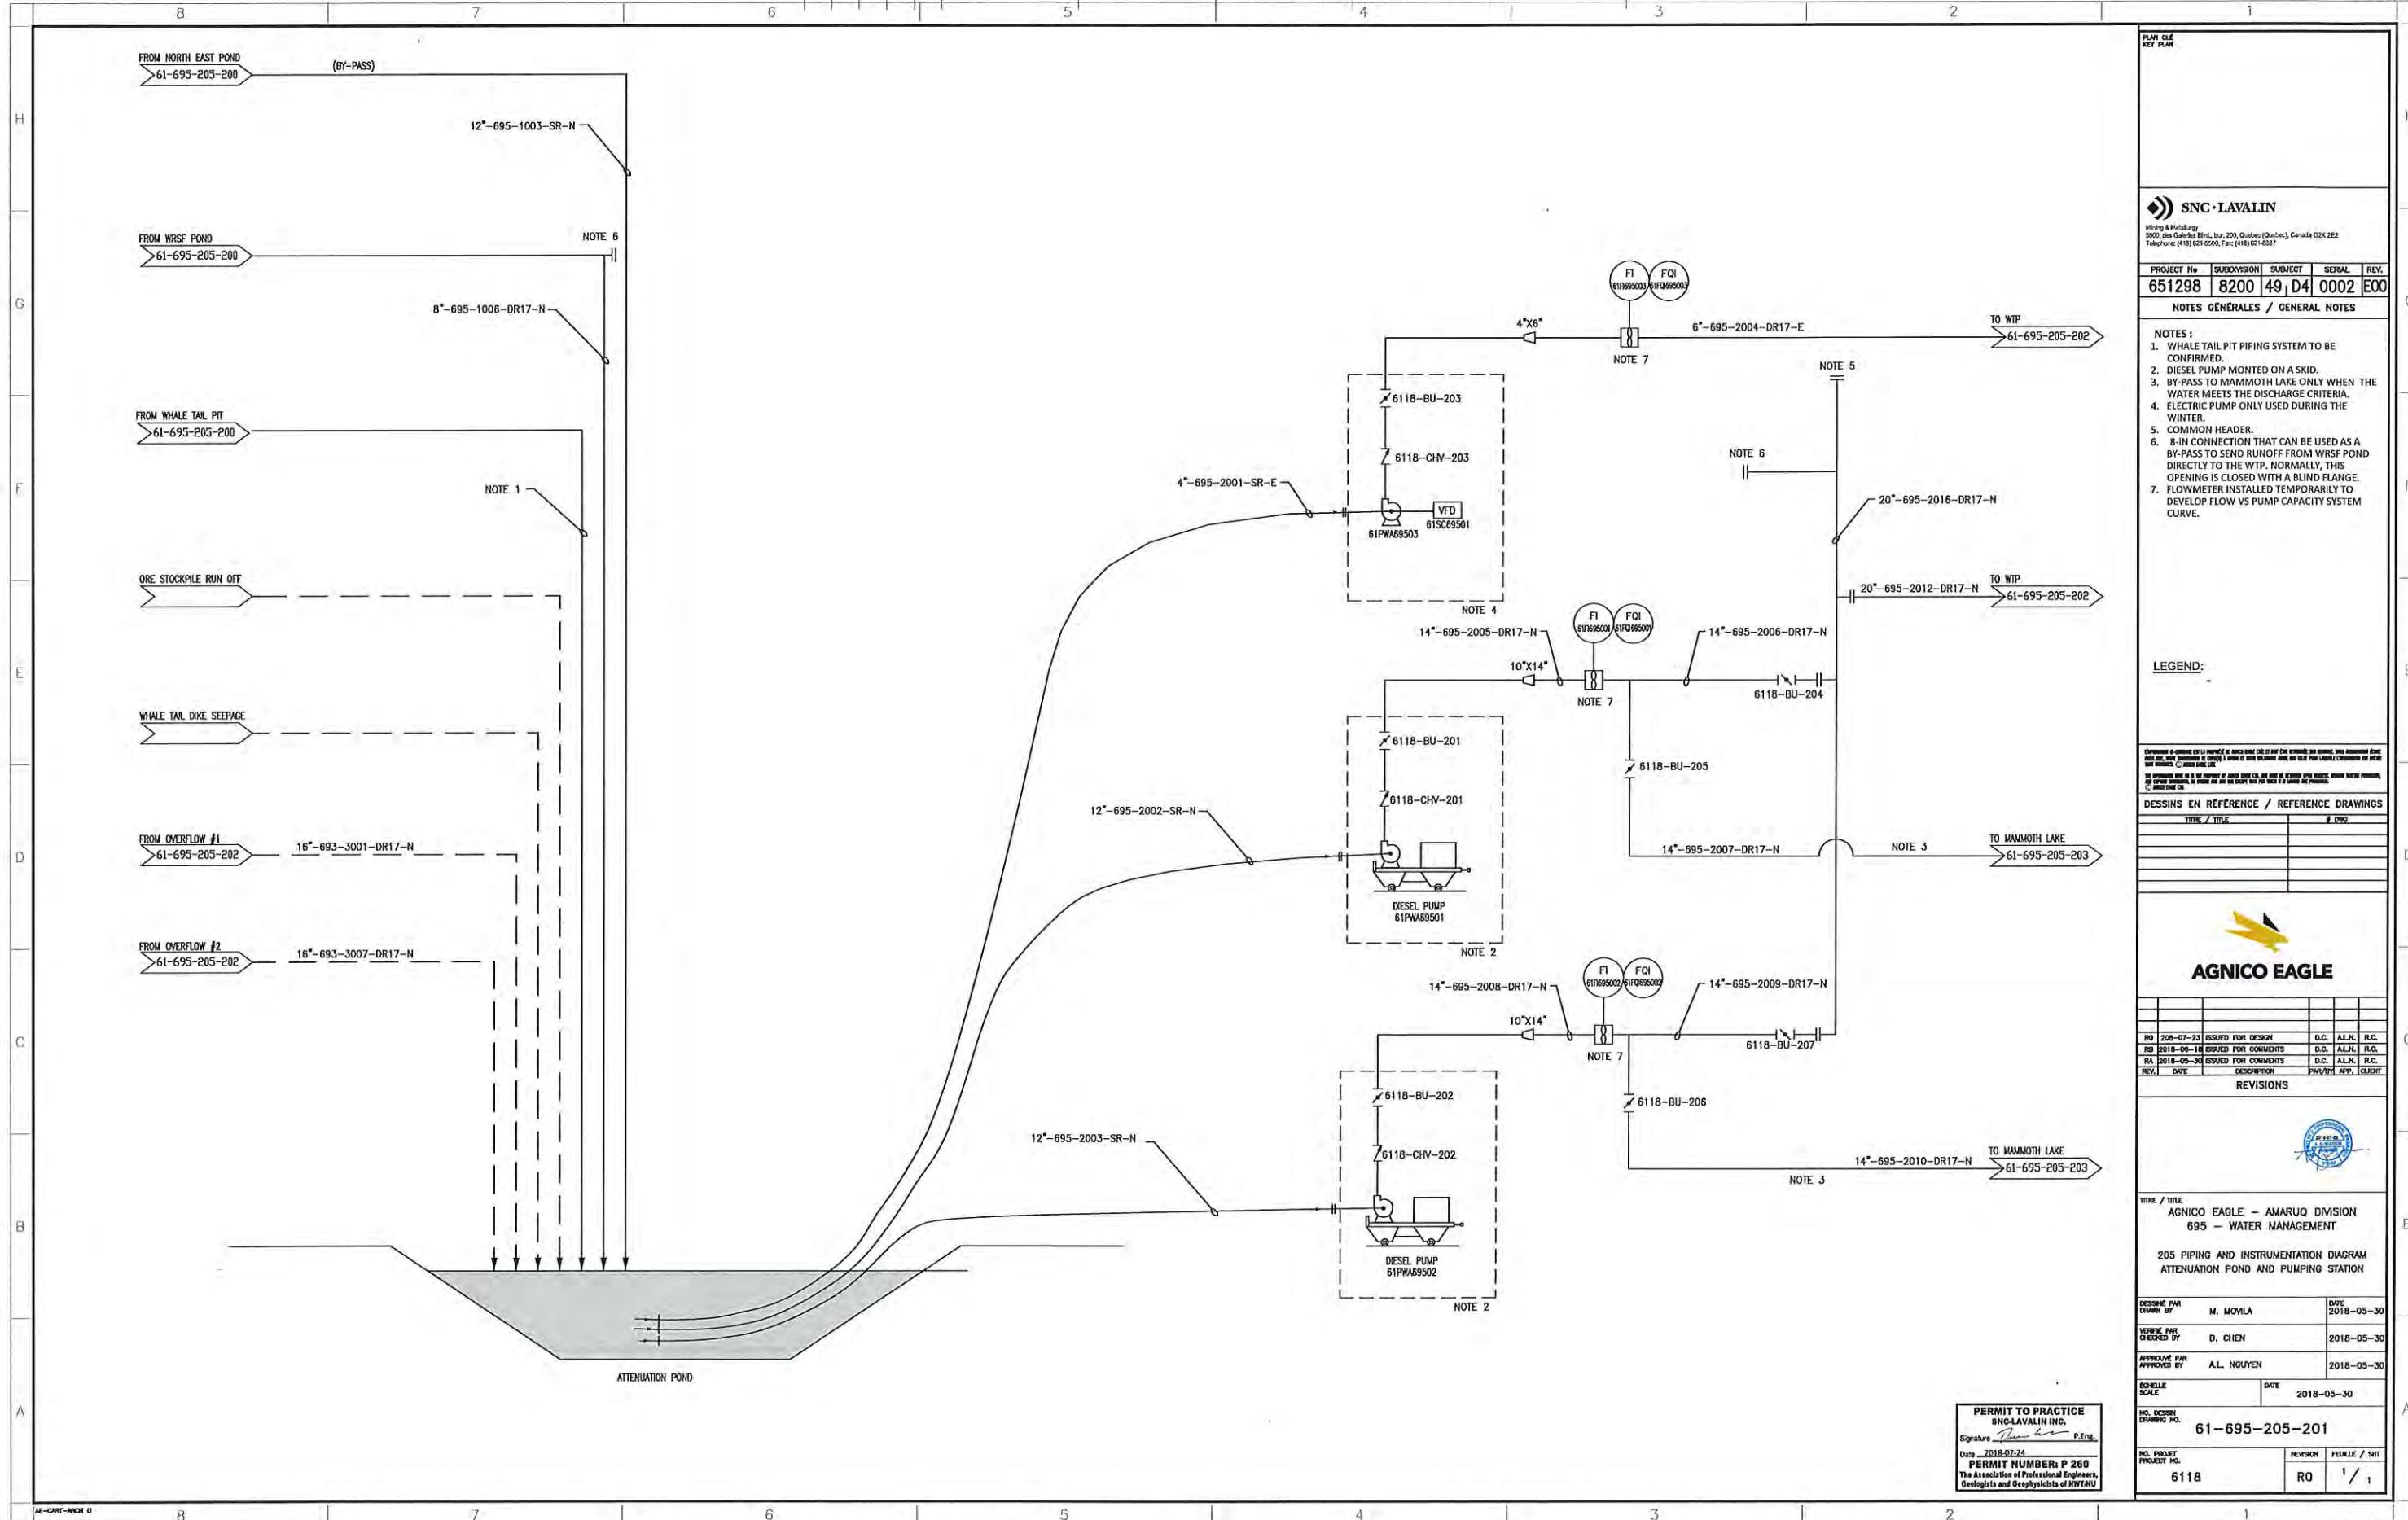

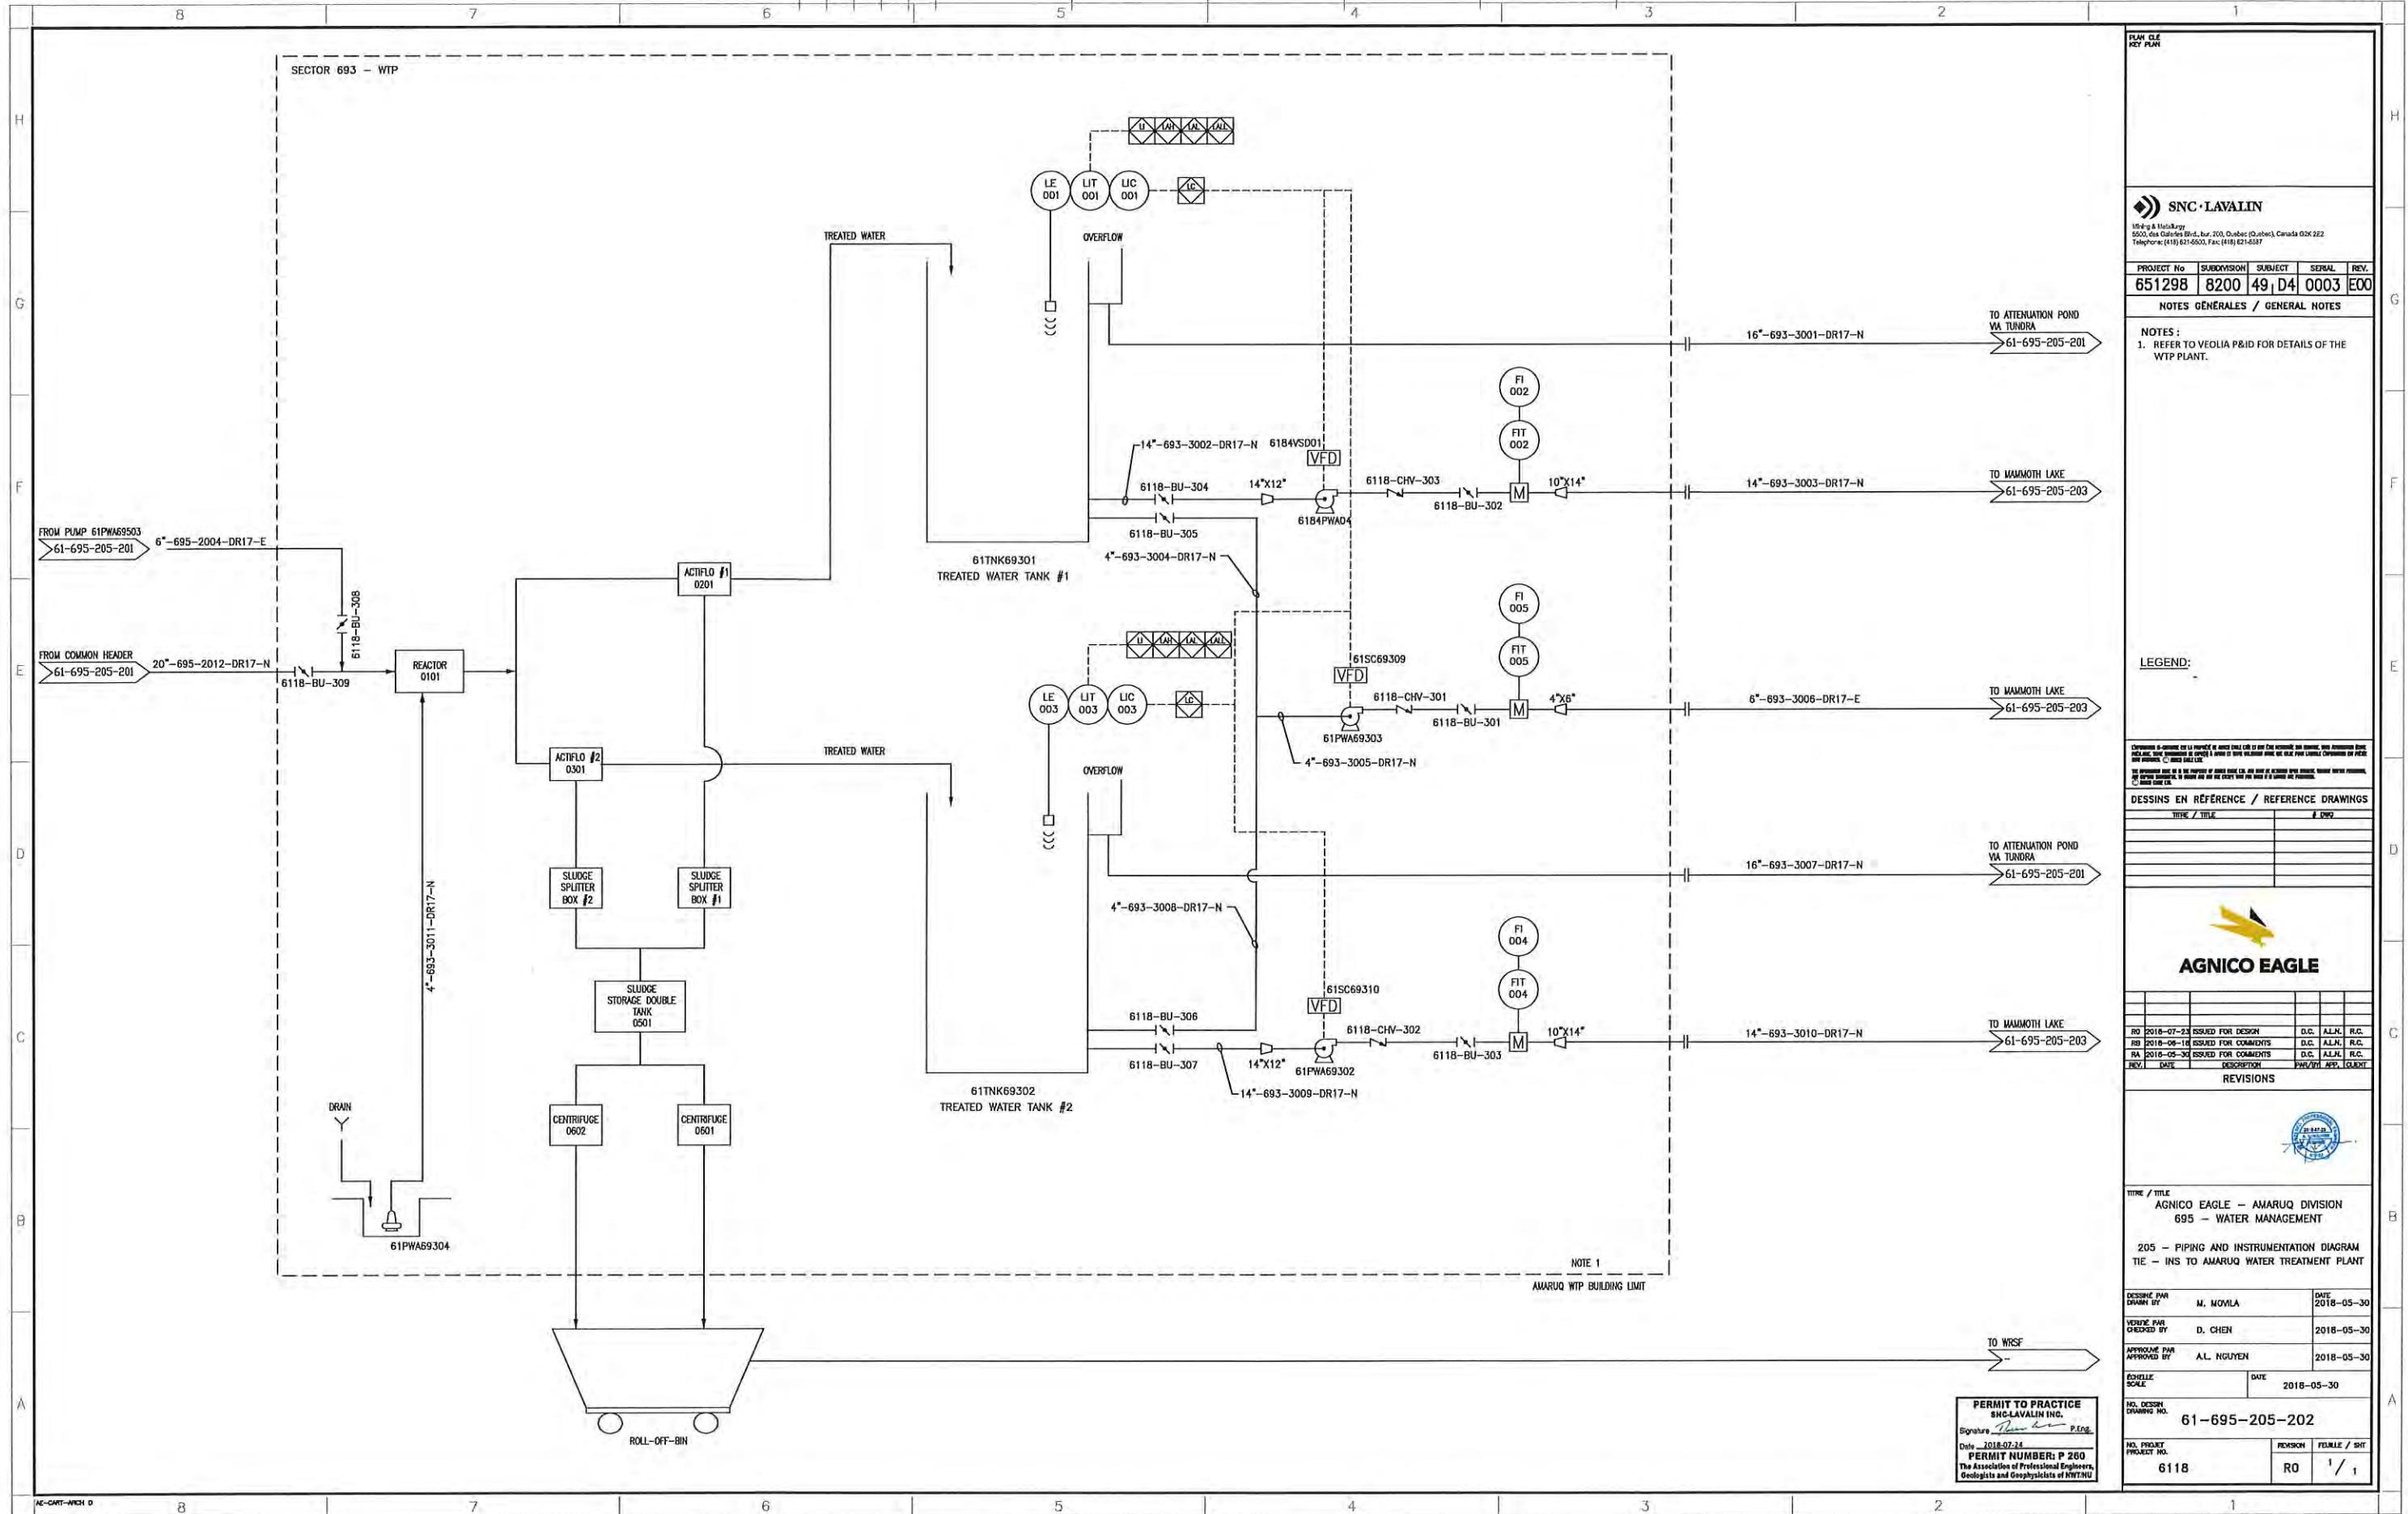

0 50 100 150 200 250 300mm

8 7 6 5 4 3 2 1

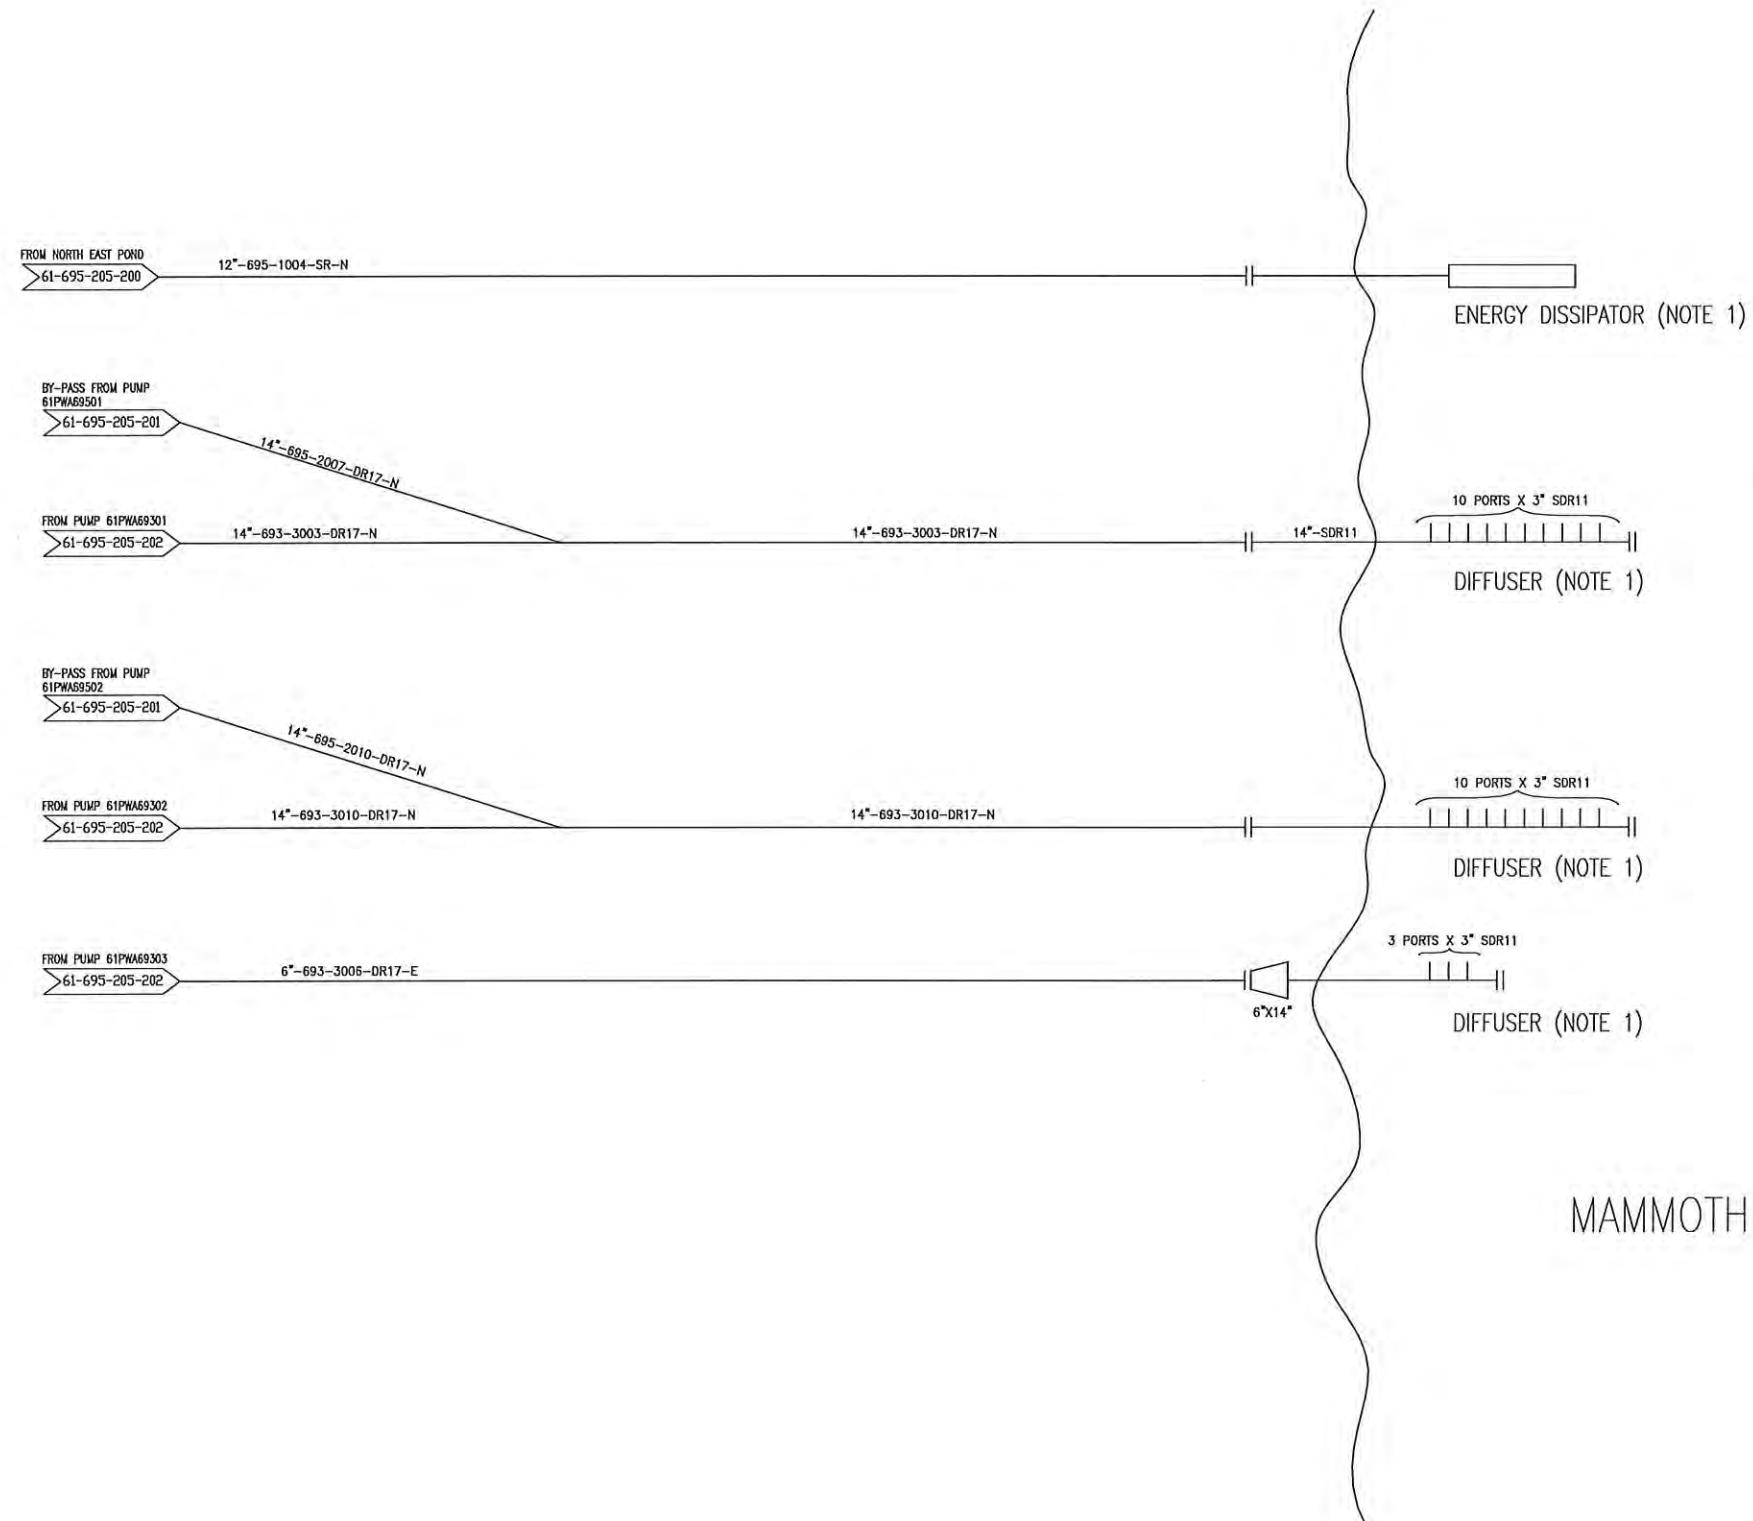

PLAN GÉO KEY PLAN			
SNC-LAVALIN Mining & Metallurgy 5500, ces Galeries Blvd., bld. 200, Québec (Québec), Canada G2K 2E2 Telephone: (418) 621-5500, Fax: (418) 621-6881			
PROJECT No. 651298	SUBDIVISION 8200	SUBJECT 49-D4	SERIAL REV. 0004 E00
NOTES GÉNÉRALES / GENERAL NOTES			
1. DETAILS OF MAMMOTH LAKE DIFFUSERS & ENERGY DISSIPATOR TO BE CONFIRMED.			
LEGEND:			
DESSINS EN RÉFÉRENCE / REFERENCE DRAWINGS			
TIME / TITLE # Dwg			
REVISIONS			
AGNICO EAGLE			
REVISIONS			
TIME / TITLE AGNICO EAGLE - AMARUQ DIVISION 695 - WATER MANAGEMENT			
205 - PIPING AND INSTRUMENTATION DIAGRAM TREATED WATER TO MAMMOTH LAKE			
DESIGNER DRAWN BY M. NOVILA DATE 2018-05-30			
VERIFICA DRAWN BY D. CHEN 2018-05-30			
APPROVED BY APPROVED BY A.L. NGUYEN 2018-05-30			
CHECKLIST SCALE DATE 2018-05-30			
NO. DESSIN DRAWING NO. 61-695-205-203			
NO. PROJECT PROJECT NO. REVISION FEEABLE / SHIP 6118 RO 1 / 1			


Appendix C

Pumps and Piping technical Specifications



Horizontal Pump 12/10 AH

CURVE SHOWS APPROXIMATE PERFORMANCE FOR CLEAR WATER (International Test Standard ISO9906:1999 - Grade 2 unless otherwise specified). For media other than water, corrections must be made for density, viscosity and/or other effects of solids. WEIR MINERALS reserves the right to change pump performance and/or delete impellers without notice. Frame suitability must be checked for each duty and drive arrangement. Not all frame alternatives are necessarily available from each manufacturing centre.

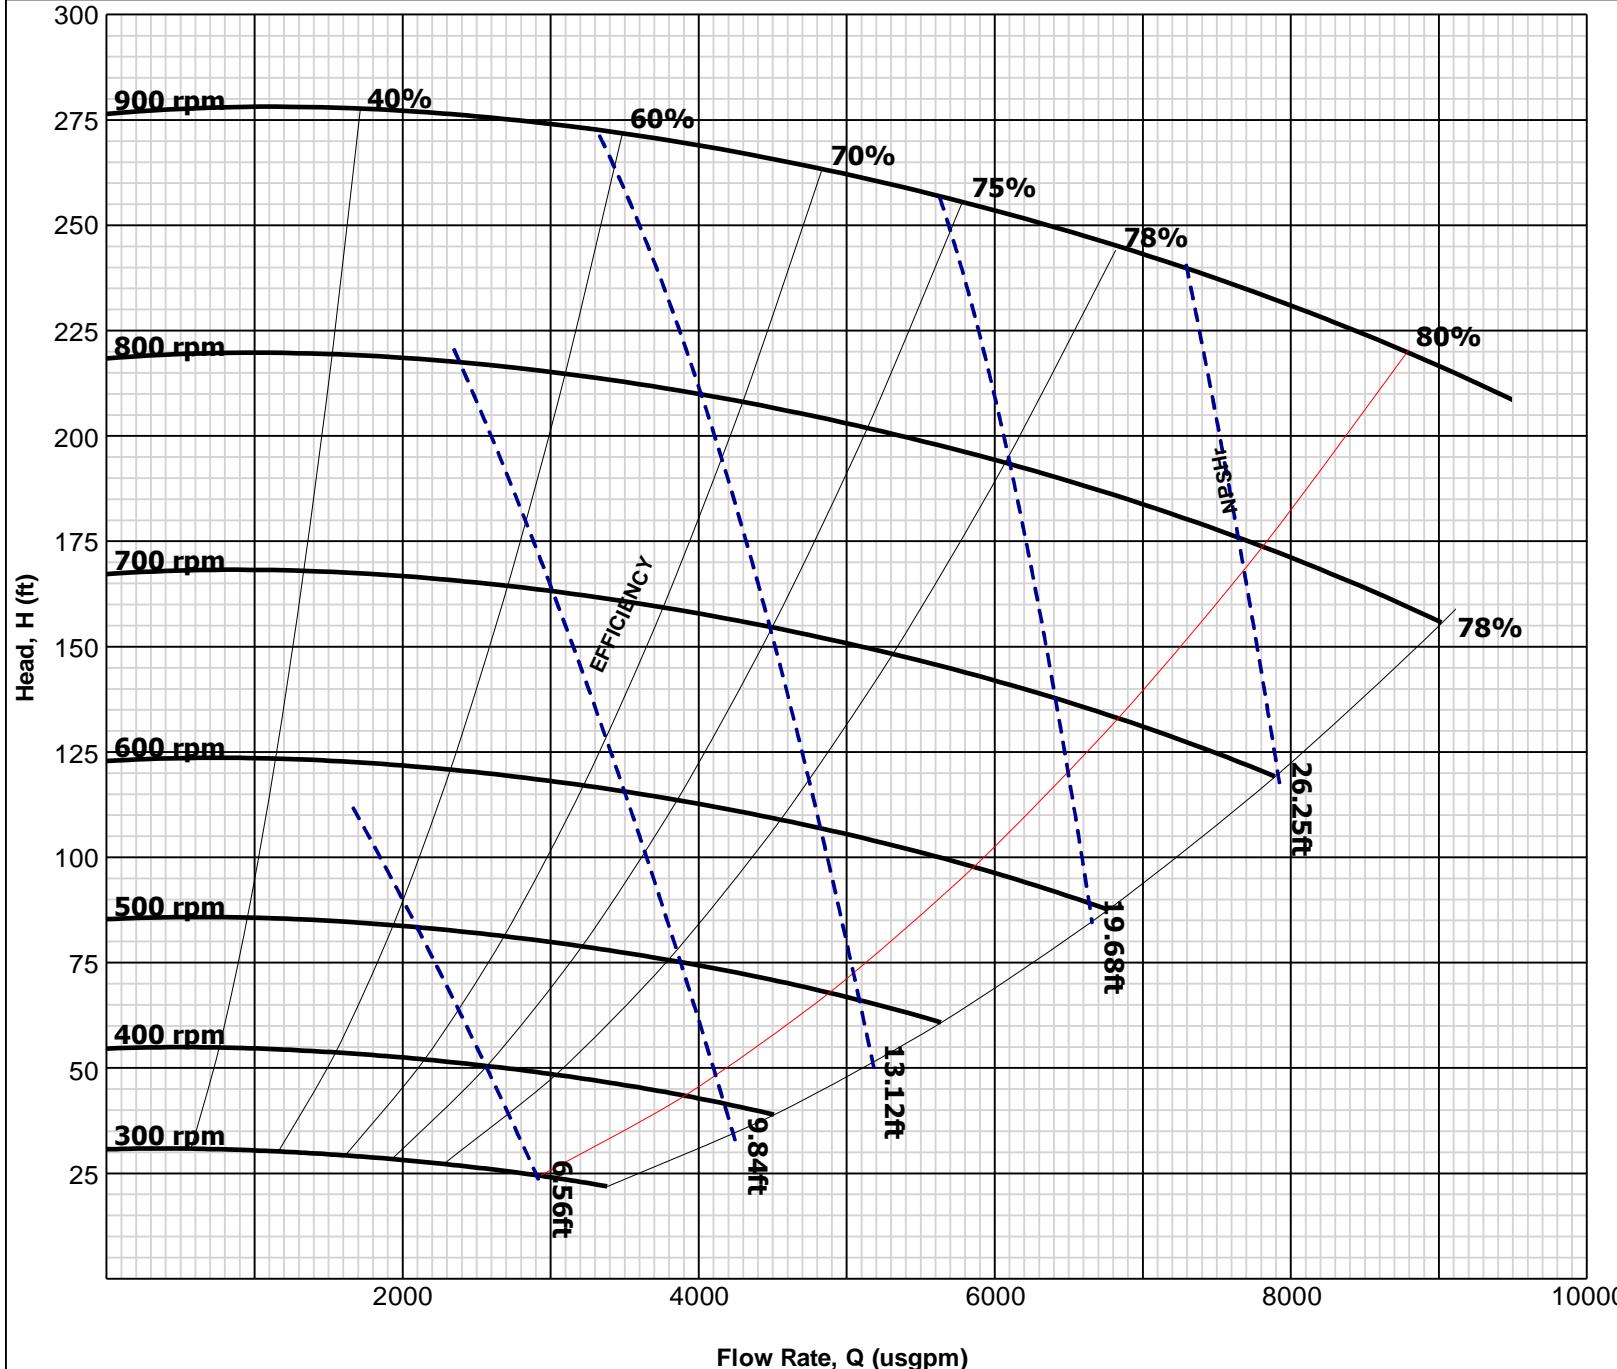


Pump	
Discharge	10"
Suction	12"
Impeller	
Vanes	5
Vane ø	30"
Type	Closed
Part No	
G10147	Metal
FAM10147	Metal
Frame (Rating - HP)	
F	349
FFX	570
FF	570
STX	751
ST	751
G	805
GG	1207
T	1609
Seal	
Gland Sealed Pump	
Liner (Norm Max r/min)	
Polymer	650
Metal	900
Min Passage Size	
3.39"	
Curve	
Revision	1
Revision Notes	MAX. r/min. WAS 800
Reference	TEST 25
Issued	Feb 88
© 4/2018 Weir Minerals Australia (PTC) All Rights Reserved	
TYPICAL PUMP PERFORMANCE CURVE	
WPA1210A01/1	

HL250M Dri-Prime Pump

The Godwin Dri-Prime HL250M pump offers flow rates to 5,389 USGPM and discharge heads to 389' (119 m). Also it has the capability of handling solids up to 3" (65mm) in diameter.

The HL250M is able to prime to 28' (8.5 m) of suction lift from dry.

Indefinite dry-running is no problem due to the unique Godwin oil bath mechanical seal design. Solids handling, dry-running and portability make the HL250M the perfect choice for dewatering and bypass applications. The standard model is mounted on a skid, with a highway trailer option.

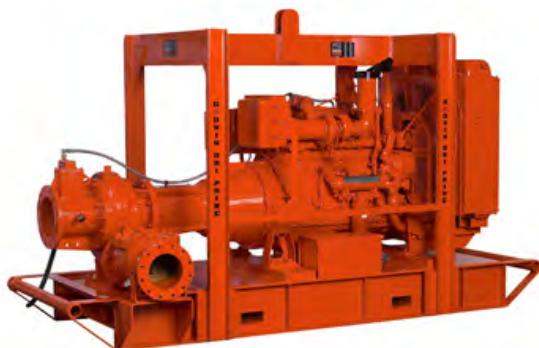


Features

- Simple maintenance normally limited to checking fluid levels.
- Close coupled centrifugal pump with vacuum priming compressor mounted to a diesel engine. Also available in electric drive or as a bare shaft pumpend.
- Extensive application flexibility. It will handle sewage, slurries and liquids with solids up to 3" in diameter.
- Continuously operated Godwin venturi air ejector priming device requiring no form of periodic adjustment or control.
- Dry-running heavy duty mechanical seal with abrasion resistant interfaces.
- Also available as a Critically Silenced unit which drastically reduces noise levels of the pump.
- Standard engine Caterpillar C15.
- The volute & suction cover are made from cast iron bs1452:1990 grade 220 and the impeller is made from cast steel bs3100 a5 hardness to 200 hb brinell.

Specifications

Suction connection	12" 125# ANSI B16.1
Delivery connection	10" 125# ANSI B16.1
Max capacity	5389 USGPM
Max head	389' (119 m)
Max solids handling	3" (65mm)
Max Impeller diameter	17" (440mm)
Max operating temp	176°F (80°C)
Max working pressure	188.5 psi (13.0 bar)
Max suction pressure	87.0 psi (6.0 bar)
Max casing pressure	282.8 psi (19.5 bar)
Max operating speed	2000 rpm

Performance Curve

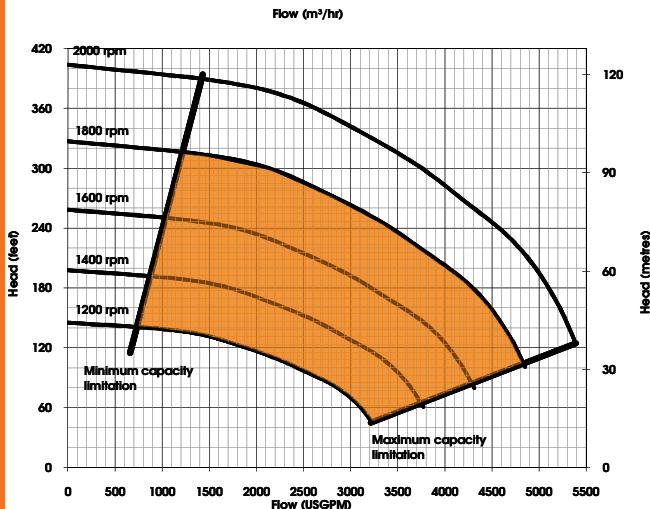

Materials

Pump casing & suction cover	Cast iron BS1452:1990 Grade 220
Wearplates	Cast Iron - Chrome 1.0/1.5% Nickle 2%
Pump Shaft	Nickel Chrome Steel to BS970-1:1991 Grade 817M40T EN24T
Impeller	Cast Steel BS3100 A5 Hardness to 200 HB Brinell
Non-return valve body	Cast Iron
Mechanical seal faces	Silicon carbide vs silicon carbide

Engine option 1

Caterpillar, C15, 474.4 HP @ 1800 rpm

Impeller diameter 17" (440mm)

Suction Lift Table


Total Suction Head (')	Total Delivery Head (')				
	93	133	194	247	295
Output (USGPM)					
8.0	4815	4557	3864	3012	1783
12.2	4755	4526	3764	2972	1486
16.2	4359	4161	3772	2853	1308
20.2	3467	3368	3170	2708	-

Fuel capacity (Full) 215 US Gal, (Usable) 215 US Gal

Fuel consumption @ 1800 rpm BEP 17 US Gal/hr

Weight: (Dry) 11,464 lbs, (Wet) 13,250 lbs

Dimensions: (L) 161" x (W) 61" x (H) 100"

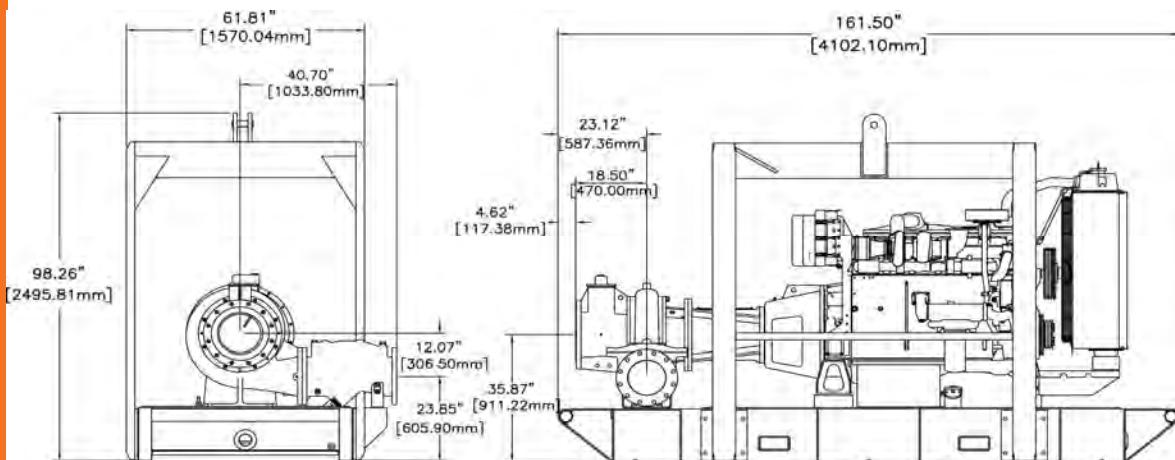

Performance data provided in tables is based on water tests at sea level and 68°F ambient.

All information is approximate and for general guidance only.

Please contact Godwin Pumps for further details.

Reference number : 95-1114-3000

Date of issue : August 25, 2011

Issue : 1

godwin
a xylem brand

84 Floodgate Road | Bridgeport, NJ 08014
P:(856) 467-3636 | F:(856) 467-4841
sales@godwinpumps.com | godwinpumps.com

CD103M Dri-Prime® Pump

The Godwin Dri-Prime CD103M pump offers flow rates to 1020 USGPM and has the capability of handling solids up to 3.0" in diameter.

The CD103M is able to automatically prime to 28' of suction lift from dry. Automatic or manual starting/stopping available through integral mounted control panel or optional wireless-remote access.

Indefinite dry-running is no problem due to the unique Godwin liquid bath mechanical seal design. Solids handling, dry-running, and portability make the CD103M the perfect choice for dewatering and bypass applications.

Features and Benefits

- Simple maintenance normally limited to checking fluid levels and filters.
- Dri-Prime (continuously operated Venturi air ejector priming device) requiring no periodic adjustment. Optional compressor clutch available.
- Extensive application flexibility handling sewage, slurries, and liquids with solids up to 3.0" in diameter.
- Dry-running high pressure liquid bath mechanical seal with high abrasion resistant solid silicon carbide faces.
- Close-coupled centrifugal pump with Dri-Prime system coupled to a diesel engine or electric motor.
- All cast iron construction (stainless steel construction option available) with cast steel impeller.
- Also available in a critically silenced unit which reduces noise levels to less than 70 dBA at 30'.
- Standard engine Caterpillar C2.2T (IT4 Flex). Also available with John Deere 4024TF281 (IT4 Flex).




Specifications

Suction connection	4" 150# ANSI B16.5
Delivery connection	4" 150# ANSI B16.5
Max capacity	1020 USGPM †
Max solids handling	3.0"
Max impeller diameter	10.1"
Max operating temp	176°F*
Max pressure	75 psi
Max suction pressure	58 psi
Max casing pressure	113 psi
Max operating speed	2200 rpm

* Please contact our office for applications in excess of 176°F.

† Larger diameter pipes may be required for maximum flows.

Performance Curve

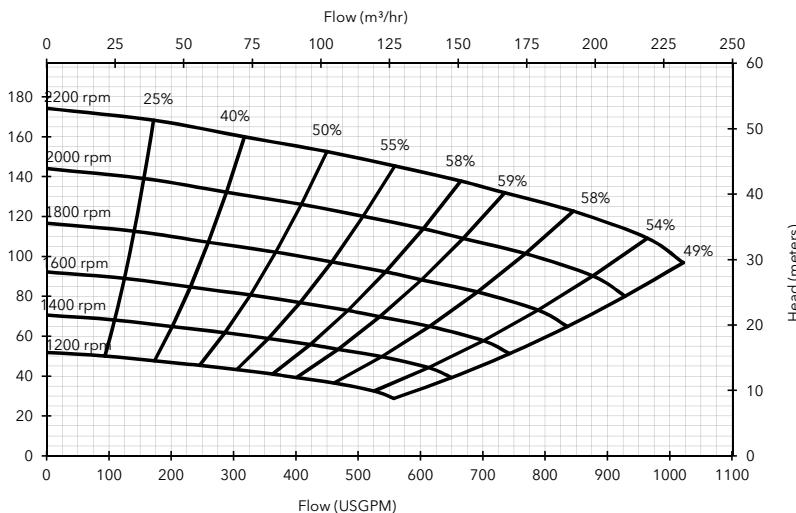

Materials

Pump casing & suction cover	Cast iron BS EN 1561 - 1997
Wearplates	Cast iron BS EN 1561 - 1997
Pump Shaft	Carbon steel BS 970 - 1991 817M40T
Impeller	Cast Steel BS3100 A5 Hardness to 200 HB Brinell
Non-return valve body	Cast iron BS EN 1561 - 1997
Mechanical seal	Silicon carbide face; Viton elastomers; Stainless steel body

Engine option 1

Caterpillar C2.2T (IT4 Flex), 41 HP @ 2200 rpm

Impeller diameter 10.1"

Pump speed 2200 rpm

Suction Lift Table

Total Suction Head (feet)	Total Delivery Head (feet)				
	78	103	127	152	176
Output (USGPM)					
10	1022	915	646	350	-
15	996	834	538	215	-
20	888	753	431	-	-
25	807	646	269	-	-

Fuel capacity: 60 US Gal

Max Fuel consumption @ 2200 rpm: 2.4 US Gal/hr

Max Fuel consumption @ 1800 rpm: 2.0 US Gal/hr

Weight (Dry): 2,240 lbs

Weight (Wet): 2,650 lbs

Dim.: (L) 119" x (W) 66" x (H) 77"

Performance data provided in tables is based on water tests at sea level and 20°C ambient. All information is approximate and for general guidance only. Please contact the factory or office for further details.

Engine option 2

John Deere 4024TF281 (IT4 Flex), 46 HP @ 2200 rpm

Impeller diameter 10.1"

Pump speed 2200 rpm

Suction Lift Table

Total Suction Head (feet)	Total Delivery Head (feet)				
	78	103	127	152	176
Output (USGPM)					
10	1022	915	646	350	-
15	996	834	538	215	-
20	888	753	431	-	-
25	807	646	269	-	-

Fuel capacity: 60 US Gal

Max Fuel consumption @ 2200 rpm: 2.6 US Gal/hr


Max Fuel consumption @ 1800 rpm: 2.3 US Gal/hr

Weight (Dry): 2,400 lbs

Weight (Wet): 2,800 lbs


Dim.: (L) 119" x (W) 66" x (H) 77"

Performance data provided in tables is based on water tests at sea level and 20°C ambient. All information is approximate and for general guidance only. Please contact the factory or office for further details.

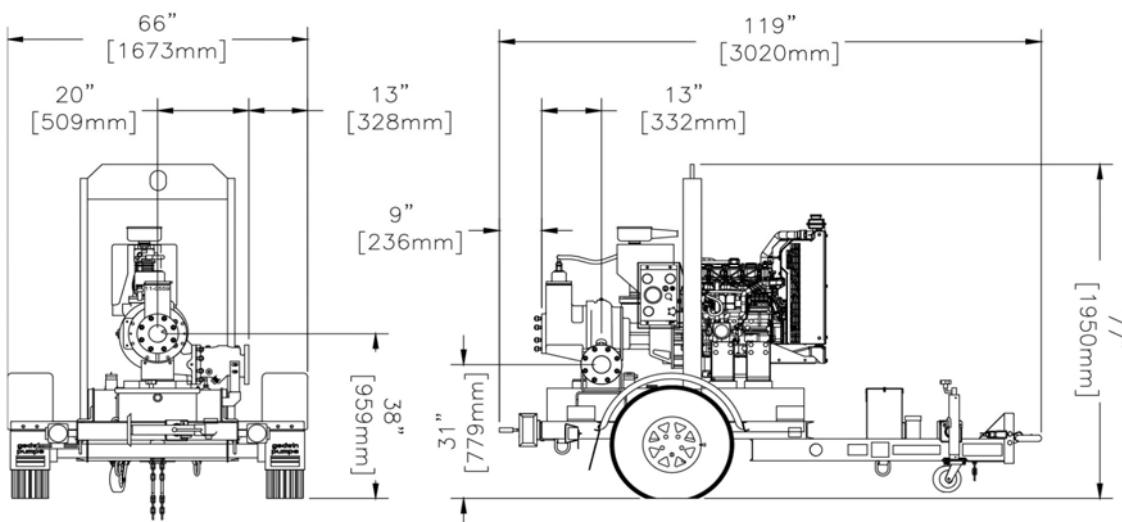

Appendix D

Chemical MSDS

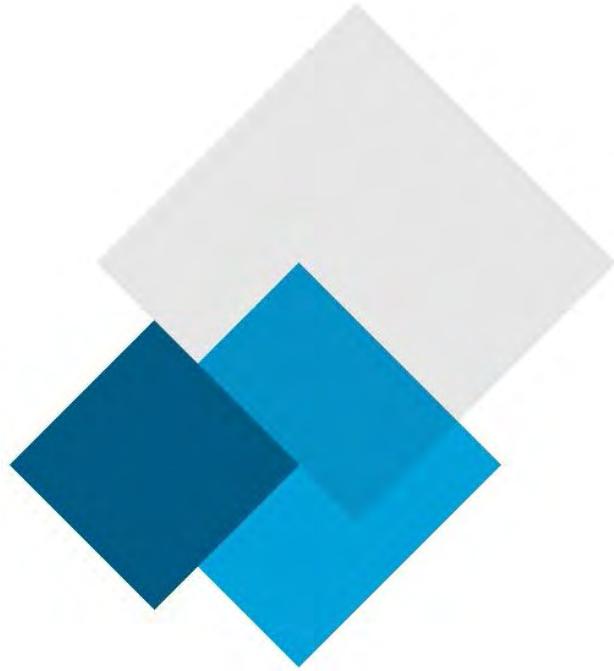

1. Product and Company Identification

Product identifier	Hydrex 6105
Version #	01
Issue date	08-15-2014
CAS #	Mixture
Product use	Wastewater Flocculant
Manufacturer	
Supplier	VWS Canada
Address	2000 Argentia Road, Plaza IV, Suite 430 Mississauga, ON L5N 1W1 Canada
Contact Person	Hydrex Product Specialist
Telephone	(905) 286-4846
Fax	(905) 286-0488
e-mail	vwsanada.hydrex@veoliawater.com
24-Hour Emergency telephone	+1-760-476-3962 (Code:333239)

2. Hazards Identification

Potential health effects

Eyes	Health injuries are not known or expected under normal use.
Skin	Health injuries are not known or expected under normal use.
Inhalation	Health injuries are not known or expected under normal use.
Ingestion	Health injuries are not known or expected under normal use.

3. Composition / Information on Ingredients

The components are not hazardous or are below required disclosure limits.

4. First Aid Measures

First aid procedures

Eye contact	Rinse with water. Get medical attention if irritation develops and persists.
Skin contact	Rinse skin with water/shower. Get medical attention if irritation develops and persists.
Inhalation	If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a physician if symptoms develop or persist.
Ingestion	Rinse mouth. If ingestion of a large amount does occur, call a poison control center immediately.
General advice	If you feel unwell, seek medical advice (show the label where possible). Show this safety data sheet to the doctor in attendance.

5. Fire Fighting Measures

Flammable properties

Dust accumulation from this product may present an explosion hazard in the presence of an ignition source.

Extinguishing media

Suitable extinguishing media Water spray, fog, CO₂, dry chemical, or alcohol resistant foam.

Protection of firefighters

Protective equipment for firefighters In the event of fire, wear self-contained breathing apparatus.

Fire fighting equipment/instructions

Use water spray to cool unopened containers. Dust may form an explosive mixture in the atmosphere.

Specific methods

Use water spray to cool unopened containers.

Explosion data

Sensitivity to static discharge	Not available.
Sensitivity to mechanical impact	Not available.

6. Accidental Release Measures

Personal precautions	Slippery when wet.
Environmental precautions	Prevent further leakage or spillage if safe to do so. Do not contaminate water.
Methods for cleaning up	Should not be released into the environment. Following product recovery, flush area with water. For waste disposal, see section 13 of the MSDS.

7. Handling and Storage

Handling	Avoid release to the environment. Material can be slippery when wet.
Storage	Store in a dry area. Store in closed original container at temperatures between 5°C and 30°C.

8. Exposure Controls / Personal Protection

Biological limit values	No biological exposure limits noted for the ingredient(s).
--------------------------------	--

Personal protective equipment

Eye / face protection	Chemical goggles are recommended.
Skin protection	Normal work clothing (long sleeved shirts and long pants) is recommended.
Respiratory protection	No specific recommendation made, but protection against nuisance dust must be used when the general level exceeds 10 mg/m ³ .

9. Physical & Chemical Properties

Appearance	Not available.
Physical state	Solid.
Form	Not available.
Color	White
Odor	Not available.
pH	Not available.
Vapor pressure	0 hPa estimated
Vapor density	Not available.
Boiling point	Not available.
Melting point/Freezing point	Not available.
Solubility (water)	Not available.
Specific gravity	0.65 - 0.9
Flash point	Not available.
Auto-ignition temperature	Not available.
Ph Of 1% Solution	5 - 7

10. Chemical Stability & Reactivity Information

Chemical stability	Material is stable under normal conditions.
Conditions to avoid	None under normal conditions.
Incompatible materials	Not available.
Hazardous decomposition products	Upon decomposition, this product may yield oxides of nitrogen and ammonia, carbon dioxide, carbon monoxide and other low molecular weight hydrocarbons.

11. Toxicological Information

Toxicological data

Product	Species	Test Results
Hydrex 6105 (CAS Mixture)		
Acute		
<i>Dermal</i>		
LD50	Rabbit	> 10000 mg/kg
<i>Oral</i>		
LD50	Rat	> 5000 mg/kg

* Estimates for product may be based on additional component data not shown.

Chronic effects Not expected to be hazardous by WHMIS criteria.

12. Ecological Information

Ecotoxicological data

Product	Species	Test Results
Hydrex 6105 (CAS Mixture)		
Algae	IC50	Algae
Crustacea	EC50	Daphnia
Other	LC50	Rainbow Trout
Aquatic		
Fish	LC50	Zebra danio (Danio rerio)

* Estimates for product may be based on additional component data not shown.

Ecotoxicity Contains a substance which causes risk of hazardous effects to the environment.

Environmental effects An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.

Persistence and degradability Not available.

13. Disposal Considerations

Disposal instructions

Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow this material to drain into sewers/water supplies. This product, in its present state, when discarded or disposed of, is not a hazardous waste according to Federal regulations (40 CFR 261.4 (b)(4)). Under RCRA, it is the responsibility of the user of the product to determine, at the time of disposal, whether the product meets RCRA criteria for hazardous waste. Dispose in accordance with all applicable regulations.

Contaminated packaging

Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport Information

TDG

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

15. Regulatory Information

Canadian regulations

This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

WHMIS status

Non-controlled

Inventory status

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes

Material name: Hydrex 6105

2414 Version #: 01 Issue date: 08-15-2014

MSDS Canada



Country(s) or region	Inventory name	On inventory (yes/no)*
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	Yes
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s). A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information

Further information

HMIS® is a registered trade and service mark of the NCPA.

HMIS® ratings

Health: 0
Flammability: 1
Physical hazard: 0

NFPA ratings

Health: 0
Flammability: 1
Instability: 0

Disclaimer

Veolia Water Solutions & Technologies is not able to anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use and or non respect of Veolia Water Solutions & Technologies' requirement.

Product and Company Identification: Product and Company Identification

This data sheet contains changes from the previous version in section(s):



MATERIAL SAFETY DATA SHEET

1. Product and Company Identification

Product identifier	Hydrex 6266
Version #	01
Issue date	11-12-2013
CAS #	Mixture
Product use	Wastewater Coagulant
Manufacturer	
Supplier	VWS Canada
Address	2000 Argentia Road, Plaza IV, Suite 430 Mississauga, ON L5N 1W1 Canada
Contact Person	Hydrex Product Specialist
Telephone	(905) 286-4846
Fax	(905) 286-0488
e-mail	vwsanada.hydrex@veoliawater.com
24-Hour Emergency telephone	+1-760-476-3962 (Code:333239)

2. Hazards Identification

Emergency overview	WARNING
	Harmful in contact with skin.
Potential health effects	
Routes of exposure	Inhalation. Ingestion. Skin contact. Eye contact.
Eyes	Harmful in contact with eyes. Do not get this material in contact with eyes.
Skin	Harmful in contact with skin. Do not get this material in contact with skin.
Inhalation	Prolonged inhalation may be harmful. Do not breathe dust/fume/gas/mist/vapors/spray.
Ingestion	Do not ingest.

3. Composition / Information on Ingredients

Non-hazardous components	CAS #	Percent
IRON, WATER-SOLUBLE SALTS, N.O.S.	10028-22-5	60 - 100
Other components below reportable levels		15 - 40

4. First Aid Measures

First aid procedures	
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. If a contact lens is present, DO NOT delay irrigation or attempt to remove the lens. Continue rinsing. Get medical attention immediately.
Skin contact	Remove and isolate contaminated clothing and shoes. Immediately flush skin with plenty of water. Get medical attention immediately. For minor skin contact, avoid spreading material on unaffected skin. Wash clothing separately before reuse.
Inhalation	Move to fresh air. Oxygen or artificial respiration if needed. Do not use mouth-to-mouth method if victim inhaled the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device. Call a physician or poison control center immediately.
Ingestion	IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Rinse mouth thoroughly. Do not induce vomiting without advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Do not use mouth-to-mouth method if victim ingested the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
Notes to physician	Symptoms may be delayed.

Material name: Hydrex 6266

4015 Version #: 01 Issue date: 11-12-2013

MSDS Canada



General advice Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire Fighting Measures

Flammable properties	Not flammable by WHMIS criteria.
Extinguishing media	
Suitable extinguishing media	Water fog. Foam. Dry chemical powder. Dry chemical, CO ₂ , sand, earth, water spray or regular foam.
Fire fighting equipment/instructions	In the event of fire, cool tanks with water spray.
Specific methods	Cool containers exposed to flames with water until well after the fire is out.
Explosion data	
Sensitivity to static discharge	Not available.
Sensitivity to mechanical impact	Not available.

6. Accidental Release Measures

Personal precautions	Keep unnecessary personnel away. Keep upwind. Keep out of low areas. Ventilate closed spaces before entering them. For personal protection, see section 8 of the MSDS.
Methods for cleaning up	Following product recovery, flush area with water. For waste disposal, see section 13 of the MSDS.

7. Handling and Storage

Handling	Do not breathe dust/fume/gas/mist/vapors/spray. Do not get this material in contact with eyes. Do not get this material in contact with skin. Avoid prolonged exposure. Do not get this material on clothing. Do not use in areas without adequate ventilation. Wear personal protective equipment. Wash thoroughly after handling.
Storage	Store in a closed container away from incompatible materials. Store in a well-ventilated place. Keep container dry. Store away from incompatible materials (see Section 10 of the MSDS).

8. Exposure Controls / Personal Protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

Components	Type	Value
FERRIC SULFATE (CAS 10028-22-5)	TWA	1 mg/m ³

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

Components	Type	Value
FERRIC SULFATE (CAS 10028-22-5)	TWA	1 mg/m ³

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

Components	Type	Value
FERRIC SULFATE (CAS 10028-22-5)	STEL	2 mg/m ³
	TWA	1 mg/m ³

Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

Components	Type	Value
FERRIC SULFATE (CAS 10028-22-5)	TWA	1 mg/m ³

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

Components	Type	Value
FERRIC SULFATE (CAS 10028-22-5)	TWA	1 mg/m ³

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

Components

Type

Value

FERRIC SULFATE (CAS 10028-22-5)	TWA	1 mg/m3
Biological limit values	No biological exposure limits noted for the ingredient(s).	
Engineering controls	Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Ensure adequate ventilation, especially in confined areas.	
Personal protective equipment		
Eye / face protection	Wear safety glasses with side shields (or goggles) and a face shield. Chemical goggles and face shield are recommended.	
Skin protection	Wear suitable protective clothing. Chemical resistant gloves.	
Respiratory protection	When workers are facing concentrations above the exposure limit they must use appropriate certified respirators.	

9. Physical & Chemical Properties

Appearance	Granular
Physical state	Solid.
Form	Solid.
Color	Yellowish or Tan or Grey.
Odor	Slight
Odor threshold	Not available.
pH	Not available.
Vapor pressure	Not available.
Vapor density	Not available.
Boiling point	Not available.
Melting point/Freezing point	> 572 °F (> 300 °C)
Solubility (water)	Soluble
Specific gravity	3.1 estimated
Relative density	Not available.
Flash point	Not available.
Flammability limits in air, upper, % by volume	Not available.
Flammability limits in air, lower, % by volume	Not available.
Auto-ignition temperature	Not available.
Other data	
Density	3.10 g/cm3 estimated

10. Chemical Stability & Reactivity Information

Chemical stability	Material is stable under normal conditions.
Conditions to avoid	Contact with incompatible materials.
Incompatible materials	Not available.
Hazardous decomposition products	Not available.
Possibility of hazardous reactions	Hazardous polymerization does not occur.

11. Toxicological Information

Toxicological data

Product	Species	Test Results
Hydrex 6266 (CAS Mixture)		
Acute		
<i>Dermal</i>		
LD50	Mouse	>= 200 mg/kg Calculation
<i>Oral</i>		
LD50	Rat	>= 650 mg/kg Calculation

* Estimates for product may be based on additional component data not shown.

Chronic effects Prolonged inhalation may be harmful. Not expected to be hazardous by WHMIS criteria.

12. Ecological Information

Ecotoxicological data

Product	Species	Test Results
Hydrex 6266 (CAS Mixture)		
Aquatic		
<i>Acute</i>		
Algae	EC50	Green algae (Scenedesmus acutus) > 13 mg/l, 7 day
Fish	LC50	Mosquitofish (Gambusia affinis affinis) >= 50 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability Not available.

13. Disposal Considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose in accordance with all applicable regulations.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport Information

TDG

UN number	UN3077
UN proper shipping name	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S. (IRON, WATER-SOLUBLE SALTS, N.O.S.)
Transport hazard class(es)	
Class	9
Subsidiary risk	-
Packing group	III
Environmental hazards	D
Special precautions for user	Read safety instructions, MSDS and emergency procedures before handling.

IATA

UN number	UN3077
UN proper shipping name	Environmentally hazardous substance, solid, n.o.s. (IRON, WATER-SOLUBLE SALTS, N.O.S.)
Transport hazard class(es)	
Class	9
Subsidiary risk	-
Packing group	III
Environmental hazards	No.
ERG Code	9L


Material name: Hydrex 6266

4015 Version #: 01 Issue date: 11-12-2013

MSDS Canada

Special precautions for user	Read safety instructions, MSDS and emergency procedures before handling.
Other information	
Passenger and cargo aircraft	Allowed.
Cargo aircraft only	Allowed.
IMDG	
UN number	UN3077
UN proper shipping name	ENVIRONMENTALLY HAZARDOUS SUBSTANCE, SOLID, N.O.S.
Transport hazard class(es)	
Class	9
Subsidiary risk	-
Packing group	III
Environmental hazards	
Marine pollutant	No.
EmS	F-A, S-F
Special precautions for user	Read safety instructions, MSDS and emergency procedures before handling.

IATA; IMDG; TDG



15. Regulatory Information

Canadian regulations

This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

WHMIS status

Controlled

WHMIS classification

D2B - Other Toxic Effects-TOXIC

WHMIS labeling



Inventory status

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes

Country(s) or region	Inventory name	On inventory (yes/no)*
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes
*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s). A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).		

16. Other Information

HMIS® ratings	Health: 2 Flammability: 0 Physical hazard: 0
NFPA ratings	Health: 2 Flammability: 0 Instability: 0
Disclaimer	The information in the sheet was written based on the best knowledge and experience currently available. Veolia Water Solutions & Technologies is not able to anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use and or non respect of Veolia Water Solutions & Technologies' requirement.



MATERIAL SAFETY DATA SHEET

1. Product and Company Identification

Product identifier	Hydrex 6324
Version #	01
Issue date	03-31-2016
CAS #	Mixture
Product use	Wastewater Flocculant
Manufacturer information	
Supplier	Veolia Water Technologies Canada Inc.
Address	2000 Argentia Road, Plaza IV, Suite 430 Mississauga, ON L5N 1W1 Canada
Contact Person	Hydrex Product Specialist
Telephone	(905) 286-4846
Fax	(905) 286-0488
e-mail	vwtcanada-hydrex@veolia.com
24-Hour Emergency telephone	+1-760-476-3962 (Code:333239)
Supplier	Not available.

2. Hazards Identification

Potential health effects

Routes of exposure	Eye contact. Ingestion. Inhalation. Skin contact.
Eyes	Health injuries are not known or expected under normal use.
Skin	Health injuries are not known or expected under normal use.
Inhalation	Health injuries are not known or expected under normal use.
Ingestion	Health injuries are not known or expected under normal use.
Potential environmental effects	May cause long-term adverse effects in the environment.

3. Composition / Information on Ingredients

Components	CAS #	Percent
ADIPIC ACID	124-04-9	1 - 5
Other components below reportable levels		60 - 100
Composition comments	None by WHMIS criteria.	

4. First Aid Measures

First aid procedures

Inhalation	If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. Call a physician if symptoms develop or persist.
Skin contact	Rinse skin with water/shower. Get medical attention if irritation develops and persists.
Eye contact	Rinse with water. Get medical attention if irritation develops and persists.
Ingestion	Rinse mouth. If ingestion of a large amount does occur, call a poison control center immediately.
General advice	If you feel unwell, seek medical advice (show the label where possible). Show this safety data sheet to the doctor in attendance.

5. Fire Fighting Measures

Flammable properties	Not flammable by WHMIS criteria.
-----------------------------	----------------------------------

Extinguishing media

Suitable extinguishing media	Not available.
-------------------------------------	----------------

Material name: Hydrex 6324

2648 Version #: 01 Issue date: 03-31-2016

MSDS Canada

Unsuitable extinguishing media	Not available.
Protection of firefighters	
Specific hazards arising from the chemical	Material can be slippery when wet.
Fire fighting equipment/instructions	Use water spray to cool unopened containers.
Explosion data	
Sensitivity to static discharge	Not available.
Sensitivity to mechanical impact	Not available.
Hazardous combustion products	Not available.

6. Accidental Release Measures

Personal precautions	Keep unnecessary personnel away. For personal protection, see section 8 of the MSDS. Slippery when wet.
Environmental precautions	Do not contaminate water.
Methods for cleaning up	Should not be released into the environment. This product is miscible in water. Following product recovery, flush area with water. For waste disposal, see section 13 of the MSDS.

7. Handling and Storage

Handling	Material can be slippery when wet. Avoid release to the environment.
Storage	Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the MSDS).

8. Exposure Controls / Personal Protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

Components	Type	Value
ADIPIC ACID (CAS 124-04-9)	TWA	5 mg/m3

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

Components	Type	Value
ADIPIC ACID (CAS 124-04-9)	TWA	5 mg/m3

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

Components	Type	Value
ADIPIC ACID (CAS 124-04-9)	TWA	5 mg/m3

Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

Components	Type	Value
ADIPIC ACID (CAS 124-04-9)	TWA	5 mg/m3

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

Components	Type	Value
ADIPIC ACID (CAS 124-04-9)	TWA	5 mg/m3

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

Components	Type	Value
ADIPIC ACID (CAS 124-04-9)	TWA	5 mg/m3

Biological limit values No biological exposure limits noted for the ingredient(s).

Engineering controls	Not available.
Personal protective equipment	
Eye/face protection	Wear safety glasses with side shields (or goggles).
Skin protection	Wear suitable protective clothing. Chemical resistant gloves.
Respiratory protection	No personal respiratory protective equipment normally required. In case of insufficient ventilation, wear suitable respiratory equipment.
Hand protection	Chemical resistant gloves.

9. Physical & Chemical Properties

Appearance	Granular or Powder.
Physical state	Solid.
Form	Solid.
Color	White.
Odor	Odorless.
pH	Not available.
Vapor pressure	Not available.
Vapor density	Not available.
Boiling point	Not available.
Melting point/Freezing point	Not available.
Solubility (water)	Limited by viscosity
Specific gravity	Not available.
Flash point	Not available.
Flammability limits in air, upper, % by volume	Not available.
Flammability limits in air, lower, % by volume	Not available.
Auto-ignition temperature	Not available.
Bulk density	650 - 850 kg/m ³
Other data	
pH in aqueous solution	7 - 9 in a 0.5% aq. sol.

10. Chemical Stability & Reactivity Information

Chemical stability	Material is stable under normal conditions.
Conditions to avoid	Contact with incompatible materials.
Incompatible materials	Not available.
Hazardous decomposition products	Not available.
Possibility of hazardous reactions	Not available.

11. Toxicological Information

Toxicological data

Product	Species	Test Results
Hydrex 6324		
Acute		
<i>Dermal</i>		
Presumed Non-Toxic	Rabbit	> 2000 mg/kg
<i>Inhalation</i>		
LC50	Rat	> 20 mg/l, 4 hours
<i>Oral</i>		
LD50	Rat	> 5000 mg/kg

Components	Species	Test Results
ADIPIC ACID (CAS 124-04-9)		
Acute		
<i>Dermal</i>		
LD50	Rabbit	> 5000 mg/kg
<i>Inhalation</i>		
NOEL	Rat	0.126 mg/l, 6 Hours
<i>Oral</i>		
LD50	Mouse	1900 mg/kg
	Rabbit	> 11000 mg/kg
	Rat	> 11000 mg/kg
Acute effects		
Sensitization	Not available.	
Chronic effects	Not expected to be hazardous by WHMIS criteria.	
Carcinogenicity	Not available.	
Skin corrosion/irritation	Not available.	
Serious eye damage/irritation	Not available.	
Mutagenicity	Not available.	
Reproductive effects	Not available.	
Teratogenicity	Not available.	
Synergistic materials	Not available.	

12. Ecological Information

Ecotoxicological data		
Product	Species	Test Results
Hydrex 6324		
Aquatic		
<i>Acute</i>		
Crustacea	EC50	Daphnia magna
Fish	LC50	Danio rerio
Components	Species	Test Results
ADIPIC ACID (CAS 124-04-9)		
Aquatic		
Algae	EC50	Algae
Crustacea	EC50	Daphnia
Fish	LC50	Fathead minnow (Pimephales promelas)
<i>Acute</i>		
Fish	EC50	Rainbow trout,donaldson trout (Oncorhynchus mykiss)
Ecotoxicity	Contains a substance which causes risk of hazardous effects to the environment.	
Environmental effects	An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.	
Aquatic toxicity	Not available.	
Persistence and degradability	Not available.	
Partition coefficient		
ADIPIC ACID		0.08
Mobility in environmental media	This product is miscible in water.	

Material name: Hydrex 6324

2648 Version #: 01 Issue date: 03-31-2016

MSDS Canada

13. Disposal Considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Do not allow this material to drain into sewers/water supplies. Dispose in accordance with all applicable regulations.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied.

14. Transport Information

TDG

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

15. Regulatory Information

Canadian regulations	This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.
-----------------------------	---

WHMIS status

Non-controlled

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s). A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information

Recommended restrictions	PROFESSIONAL USE ONLY
---------------------------------	-----------------------

HMIS® ratings	Health: 0 Flammability: 0 Physical hazard: 0
----------------------	--

NFPA ratings	Health: 0 Flammability: 0 Instability: 0
---------------------	--

Disclaimer	Veolia Water Technologies is not able to anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use and or non respect of Veolia Water Technologies' requirement.
-------------------	--

Prepared by	Hydrex Global Platform
--------------------	------------------------

**This data sheet contains
changes from the previous
version in section(s):**

This document has undergone significant changes and should be reviewed in its entirety.



MATERIAL SAFETY DATA SHEET

1. Product and Company Identification

Material name	Hydrex 9571
Version #	01
Issue date	08-27-2013
Chemical name	POTASSIUM PERMANGANATE
Product use	Wastewater Metal Precipitant
Manufacturer	
Supplier	VWS Canada
Address	2000 Argentia Road, Plaza IV, Suite 430 Mississauga, ON L5N 1W1 Canada
Contact Person	Hydrex Product Specialist
Telephone	(905) 286-4846
Fax	(905) 286-0488
e-mail	vwschina.hydrex@veoliawater.com
24-Hour Emergency telephone	+1-760-476-3962 (Code:333239)

2. Hazards Identification

Emergency overview	DANGER
	Oxidizing material.
	Causes skin and eye burns.
Potential health effects	
Routes of exposure	Inhalation. Ingestion. Skin contact. Eye contact.
Eyes	Corrosive to the eyes and may cause severe damage including blindness. Causes chemical burns. Do not get this material in contact with eyes.
Skin	Causes chemical burns. Do not get this material in contact with skin.
Inhalation	Dust extremely irritating to the respiratory tract. Inhalation of dusts may cause respiratory irritation. Prolonged inhalation may be harmful. Do not breathe dust.
Ingestion	Harmful if swallowed. Ingestion causes burns of the upper digestive and respiratory tracts. Irritating. May cause nausea, stomach pain and vomiting. Do not ingest.
Chronic effects	Frequent or prolonged contact may defat and dry the skin, leading to discomfort and dermatitis.
Signs and symptoms	Contact with this material will cause burns to the skin, eyes and mucous membranes. Symptoms may include redness, edema, drying, defatting and cracking of the skin.
Potential environmental effects	Components of this product are hazardous to aquatic life. May cause long-term adverse effects in the environment.

3. Composition / Information on Ingredients

Components	CAS #	Percent
POTASSIUM PERMANGANATE	7722-64-7	60 - 100
Other components below reportable levels		1 - 5

4. First Aid Measures

First aid procedures

Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. If a contact lens is present, DO NOT delay irrigation or attempt to remove the lens. Continue rinsing. Get medical attention immediately.
--------------------	--

Skin contact	Before washing use a dry brush to remove dust from skin. Remove and isolate contaminated clothing and shoes. Immediately flush skin with plenty of water. Get medical attention immediately. For minor skin contact, avoid spreading material on unaffected skin. Wash clothing separately before reuse.
Inhalation	Move to fresh air. If symptoms are experienced, remove source of contamination or move victim to fresh air. Get medical attention if symptoms persist.
Ingestion	IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Never give anything by mouth to a victim who is unconscious or is having convulsions. Rinse mouth thoroughly. Do not induce vomiting without advice from poison control center. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
General advice	If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance. Do not use mouth-to-mouth method if victim ingested the substance.

5. Fire Fighting Measures

Flammable properties	Contact with combustible material may cause fire. These substances will accelerate burning when involved in a fire. Some will react explosively with hydrocarbons (fuels). Runoff may create fire or explosion hazard.
Extinguishing media	
Suitable extinguishing media	Water.
Unsuitable extinguishing media	Dry chemicals or foams.
Protection of firefighters	
Specific hazards arising from the chemical	Fire may produce irritating, corrosive and/or toxic gases. Some may decompose explosively when heated or involved in a fire.
Protective equipment for firefighters	Firefighters should wear full protective clothing including self contained breathing apparatus.
Fire fighting equipment/instructions	Do not move cargo or vehicle if cargo has been exposed to heat. If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions. ALWAYS stay away from tanks engulfed in flame. Move containers from fire area if you can do so without risk. In the event of fire, cool tanks with water spray. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.
Specific methods	Cool containers exposed to flames with water until well after the fire is out.
Explosion data	
Sensitivity to static discharge	Not available.
Sensitivity to mechanical impact	Not available.

6. Accidental Release Measures

Personal precautions	Keep unnecessary personnel away. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Keep people away from and upwind of spill/leak. Keep upwind. Ventilate closed spaces before entering them.
Environmental precautions	Prevent further leakage or spillage if safe to do so. Runoff from fire control or dilution water may cause pollution. Do not contaminate water.
Methods for containment	ELIMINATE all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk. This material is classified as a water pollutant under the Clean Water Act and should be prevented from contaminating soil or from entering sewage and drainage systems which lead to waterways.

Methods for cleaning up	Should not be released into the environment.
	Large Spills: Do not get water inside container. Use clean non-sparking tools to collect absorbed material. Following product recovery, flush area with water.
	Small Spills: Clean surface thoroughly to remove residual contamination. Clean up in accordance with all applicable regulations. For waste disposal, see section 13 of the MSDS.

Other information Clean up in accordance with all applicable regulations.

7. Handling and Storage

Handling	DO NOT handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. When using do not smoke. Do not get this material in contact with eyes. Do not get this material in contact with skin. Do not get this material on clothing. Avoid prolonged exposure. Avoid release to the environment.
Storage	Keep away from heat and sources of ignition. Store in a closed container away from incompatible materials. Keep out of the reach of children.

8. Exposure Controls / Personal Protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

Material	Type	Value
Hydrex 9571	TWA	0.2 mg/m ³

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

Material	Type	Value
Hydrex 9571	TWA	0.2 mg/m ³

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

Material	Type	Value
Hydrex 9571	TWA	0.2 mg/m ³

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

Material	Type	Value
Hydrex 9571	TWA	0.2 mg/m ³

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

Material	Type	Value	Form
Hydrex 9571	TWA	5 mg/m ³	Dust.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Material	Type	Value
Hydrex 9571	Ceiling	5 mg/m ³

Engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Personal protective equipment

Eye / face protection Do not get in eyes. Chemical goggles are recommended.

Skin protection Do not get this material in contact with skin. Chemical resistant gloves.

Respiratory protection Use a positive-pressure air-supplied respirator if there is any potential for an uncontrolled release, exposure levels are not known, or any other circumstances where air-purifying respirators may not provide adequate protection. If ventilation is not sufficient to effectively prevent buildup of aerosols or mists, appropriate NIOSH/MSHA respiratory protection must be provided.

9. Physical & Chemical Properties

Physical state Solid.

Form Solid.

Color Dark purple

Odor Odorless.

Other data

Decomposition temperature	464 °F (240 °C) Decomp at about 240°C with evolution of oxygen; decomp by alcohol and many other org solvents, also by concn acids with liberation of oxygen; with hydrochloric acid, chlorine liberated; readily decomp by many reducing substances, such as ferrous salts, io
Density	1.45 - 1.60 g/cm ³

10. Chemical Stability & Reactivity Information

Chemical stability	Decomposes on heating.
Conditions to avoid	Avoid temperatures exceeding the decomposition temperature.
Incompatible materials	Peroxides. Acids. Glycol. Avoid contact with oxidizers or reducing agents. Powdered metal.
Hazardous decomposition products	Irritating and/or toxic fumes and gases may be emitted upon the products decomposition.
Possibility of hazardous reactions	Hazardous polymerization does not occur.

11. Toxicological Information

Toxicological data

Product	Species	Test Results
Hydrex 9571		
Acute		
<i>Oral</i>		
LD50	Guinea pig	>= 800 mg/kg, Calculated
	Mouse	>= 700 mg/kg, Calculated
	Rat	525 - 780 mg/kg, 14 days, Calculated

* Estimates for product may be based on additional component data not shown.

Acute effects Causes burns.

Chronic effects Prolonged inhalation may be harmful. Not expected to be hazardous by WHMIS criteria.

12. Ecological Information

Ecotoxicological data

Product	Species	Test Results
Hydrex 9571		
Other	LC50	Rainbow Trout
Aquatic		1.8 mg/l, 96 hr
Fish	LC50	Bluegill (Lepomis macrochirus)
		Milkfish, salmon-herring (Chanos chanos) > 1.4 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Ecotoxicity Components of this product are hazardous to aquatic life.

Environmental effects Harmful to aquatic organisms.

Persistence and degradability Not available.

13. Disposal Considerations

Disposal instructions	Consult authorities before disposal. Incinerate the material under controlled conditions in an approved incinerator. Do not incinerate sealed containers. Do not allow this material to drain into sewers/water supplies. Dispose in accordance with all applicable regulations.
Contaminated packaging	Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport Information

TDG

UN number	UN1490
------------------	--------

UN proper shipping name	Potassium Permanganate
Hazard class	5.1
Packing group	II
Special provisions	16
IATA	
UN number	UN1479
UN proper shipping name	Oxidizing solid, n.o.s. (POTASSIUM PERMANGANATE)
Transport hazard class(es)	5.1
Packing group	III
ERG code	5L

IATA; TDG



15. Regulatory Information

Canadian regulations This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

WHMIS status Controlled

WHMIS classification C - Oxidizing
D2B - Other Toxic Effects-TOXIC

WHMIS labeling



Inventory status

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

16. Other Information

Further information HMIS® is a registered trade and service mark of the NPCA.

HMIS® ratings

Health: 1
Flammability: 0
Physical hazard: 0
Personal protection: E

NFPA ratings

Health: 1
Flammability: 0
Instability: 0
Special hazards: OX

Disclaimer

Veolia Water Solutions & Technologies is not able to anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use and or non respect of Veolia Water Solutions & Technologies' requirement.

This data sheet contains changes from the previous version in section(s):

Product and Company Identification: Product Review
Toxicological Information: Toxicological Data
Transport Information: Material Transportation Information

SAFETY DATA SHEET

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1. Product identifier

Trade name or designation of the mixture NaOH 1N

Registration number -

Synonyms None.

Issue date 02-February-2017

Version number 01

1.2. Relevant identified uses of the substance or mixture and uses advised against

Identified uses Not available.

Uses advised against None known.

1.3. Details of the supplier of the safety data sheet

Supplier Veolia Water STI

Address Z.A.C. du Haut de Wissous - 3, avenue Le Concorde
91325 Wissous Cedex - FRANCE
www.veoliawatersti.fr

Contact person Hydrex Product Manager

Telephone +33 (0)1 69 75 25 75

Fax +33 (0)1 69 75 27 01

e-mail hydrex.vwtfr@veolia.com

1.4. Emergency telephone number +1-760-476-3961 (Code: 333239)

SECTION 2: Hazards identification

2.1. Classification of the substance or mixture

The mixture has been assessed and/or tested for its physical, health and environmental hazards and the following classification applies.

Classification according to Regulation (EC) No 1272/2008 as amended

Health hazards

Skin corrosion/irritation	Category 1B	H314 - Causes severe skin burns and eye damage.
Serious eye damage/eye irritation	Category 2	H319 - Causes serious eye irritation.

Hazard summary

Causes severe skin burns and eye damage. Causes serious eye irritation. Occupational exposure to the substance or mixture may cause adverse health effects.

2.2. Label elements

Label according to Regulation (EC) No. 1272/2008 as amended

Hazard pictograms



Signal word

Danger

Hazard statements

H314	Causes severe skin burns and eye damage.
H315	Causes skin irritation.
H319	Causes serious eye irritation.

Precautionary statements

Prevention

P260	Do not breathe mist or vapour.
P264	Wash hands thoroughly after handling.
P280	Wear protective gloves/protective clothing/eye protection/face protection.

Response	
P301 + P330 + P331	IF SWALLOWED: rinse mouth. Do NOT induce vomiting.
P303 + P361 + P353	IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water/shower.
P304 + P340	IF INHALED: Remove person to fresh air and keep comfortable for breathing.
P305 + P351 + P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P312	Call a POISON CENTER/doctor/paramedic if you feel unwell.
P337 + P313	If eye irritation persists: Get medical advice/attention.
P342 + P311	If experiencing respiratory symptoms: Call a poison center/doctor/paramedic.
P363	Wash contaminated clothing before reuse.
Storage	Not available.
Disposal	
P501	Dispose of contents/container in accordance with local/regional/national/international regulations.
Supplemental label information	None.
2.3. Other hazards	None known.

SECTION 3: Composition/information on ingredients

3.2. Mixtures

General information

Chemical name	%	CAS-No. / EC No.	REACH Registration No.	INDEX No.	Notes
Sodium hydroxide	1 - < 5	1310-73-2 215-185-5	01-2119457892-27-xxxx	011-002-00-6	
Classification:	Skin Corr. 1A;H314				

Other components below reportable levels 90 - 100

List of abbreviations and symbols that may be used above

#: This substance has been assigned Union workplace exposure limit(s).

M: M-factor

PBT: persistent, bioaccumulative and toxic substance.

vPvB: very persistent and very bioaccumulative substance.

All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

Composition comments The full text for all H-statements is displayed in section 16.

SECTION 4: First aid measures

General information	Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.
----------------------------	--

4.1. Description of first aid measures

Inhalation	Move to fresh air. Call a physician if symptoms develop or persist.
Skin contact	Take off immediately all contaminated clothing. Rinse skin with water/shower. Call a physician or poison control centre immediately. Chemical burns must be treated by a physician. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Call a physician or poison control centre immediately.
Ingestion	Call a physician or poison control centre immediately. Rinse mouth. Do not induce vomiting. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs.

4.2. Most important symptoms and effects, both acute and delayed	Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.
---	---

4.3. Indication of any immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Chemical burns: Flush with water immediately. While flushing, remove clothes which do not adhere to affected area. Call an ambulance. Continue flushing during transport to hospital. Keep victim under observation. Symptoms may be delayed.
--	--

SECTION 5: Firefighting measures

General fire hazards No unusual fire or explosion hazards noted.

5.1. Extinguishing media

Suitable extinguishing media Water fog. Foam. Dry chemical powder. Carbon dioxide (CO₂).

Unsuitable extinguishing media	Not available.
5.2. Special hazards arising from the substance or mixture	During fire, gases hazardous to health may be formed.
5.3. Advice for firefighters	
Special protective equipment for firefighters	Self-contained breathing apparatus and full protective clothing must be worn in case of fire.
Special fire fighting procedures	Move containers from fire area if you can do so without risk.
Specific methods	Use standard firefighting procedures and consider the hazards of other involved materials.

SECTION 6: Accidental release measures

6.1. Personal precautions, protective equipment and emergency procedures

For non-emergency personnel	Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapour. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8.
For emergency responders	Keep unnecessary personnel away. Use personal protection recommended in Section 8 of the SDS.

6.2. Environmental precautions

Avoid discharge into drains, water courses or onto the ground.

6.3. Methods and material for containment and cleaning up

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Never return spills to original containers for re-use.

6.4. Reference to other sections

For personal protection, see section 8. For waste disposal, see section 13 of the SDS.

SECTION 7: Handling and storage

7.1. Precautions for safe handling

Avoid forming spray/aerosol mists. Do not breathe mist or vapour. Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Provide adequate ventilation. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

7.2. Conditions for safe storage, including any incompatibilities

Protect from sunlight. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). Store in cool, dry place.

7.3. Specific end use(s)

Not available.

SECTION 8: Exposure controls/personal protection

8.1. Control parameters

Occupational exposure limits

France. Threshold Limit Values (VLEP) for Occupational Exposure to Chemicals in France, INRS ED 984

Components	Type	Value
Sodium hydroxide (CAS 1310-73-2)	VME	2 mg/m ³
Biological limit values	No biological exposure limits noted for the ingredient(s).	
Recommended monitoring procedures	Follow standard monitoring procedures.	
Derived no-effect level (DNEL)	Not available.	
Predicted no effect concentrations (PNECs)	Not available.	

8.2. Exposure controls

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment**General information**

Use personal protective equipment as required. Personal protection equipment should be chosen according to the CEN standards and in discussion with the supplier of the personal protective equipment.

Eye/face protection

Wear safety glasses with side shields (or goggles). Before any handling, wear protective glasses side-shields complying with the NF EN 166.

Skin protection**- Hand protection**

Chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

- Other

Wear appropriate chemical resistant clothing. Chemical resistant gloves.

Respiratory protection

In case of insufficient ventilation, wear suitable respiratory equipment. Avoid forming spray/aerosol mists.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

**Hygiene measures**

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

Environmental exposure controls

Environmental manager must be informed of all major releases.

SECTION 9: Physical and chemical properties**9.1. Information on basic physical and chemical properties****Appearance**

Physical state Liquid.

Form Liquid.

Colour Colourless.

Odour Odourless.

pH 12

Melting point/freezing point Not available.

Initial boiling point and boiling range Not available.

Flash point Not available.

Flammability (solid, gas) Not applicable.

Vapour pressure Not available.

Solubility(ies)

Solubility (water) Not available.

Solubility (other) Not available.

Partition coefficient (n-octanol/water) Not available.

Viscosity Not available.

Explosive properties Not explosive.

Oxidising properties Not oxidising.

9.2. Other information

Density 1,00 g/cm³

SECTION 10: Stability and reactivity

10.1. Reactivity Reacts violently with strong acids. This product may react with oxidizing agents.

10.2. Chemical stability Material is stable under normal conditions.

10.3. Possibility of hazardous reactions No dangerous reaction known under conditions of normal use.

10.4. Conditions to avoid Contact with incompatible materials. Do not mix with other chemicals.

10.5. Incompatible materials Strong acids. Acids. Oxidizing agents.

10.6. Hazardous decomposition products No hazardous decomposition products are known.

SECTION 11: Toxicological information

General information Occupational exposure to the substance or mixture may cause adverse effects.

Information on likely routes of exposure

Inhalation May cause irritation to the respiratory system. Prolonged inhalation may be harmful.

Skin contact Causes severe skin burns.

Eye contact Causes serious eye damage.

Ingestion Causes digestive tract burns.

Symptoms Burning pain and severe corrosive skin damage. Causes serious eye damage. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Permanent eye damage including blindness could result.

11.1. Information on toxicological effects

Components	Species	Test results
Sodium hydroxide (CAS 1310-73-2)		
Acute		
Dermal		
<i>Solid</i>		
LD50	Rabbit	1350 mg/kg
Oral		
<i>Solid</i>		
LD50	Rat	> 300 mg/kg
<i>Liquid</i>		
LD50	Rat	> 300 mg/kg
* Estimates for product may be based on additional component data not shown.		
Skin corrosion/irritation	Causes severe skin burns and eye damage.	
Serious eye damage/eye irritation	Causes serious eye damage.	
Respiratory sensitisation	Due to partial or complete lack of data the classification is not possible.	
Skin sensitisation	Due to partial or complete lack of data the classification is not possible.	
Germ cell mutagenicity	Due to partial or complete lack of data the classification is not possible.	
Carcinogenicity	Due to partial or complete lack of data the classification is not possible.	
Reproductive toxicity	Due to partial or complete lack of data the classification is not possible.	
Specific target organ toxicity - single exposure	Due to partial or complete lack of data the classification is not possible.	
Specific target organ toxicity - repeated exposure	Due to partial or complete lack of data the classification is not possible.	
Aspiration hazard	Due to partial or complete lack of data the classification is not possible.	
Mixture versus substance information	No information available.	
Other information	Not available.	

SECTION 12: Ecological information

12.1. Toxicity Based on available data, the classification criteria are not met for hazardous to the aquatic environment.

Components	Species	Test results
Sodium hydroxide (CAS 1310-73-2)		
Aquatic		
Acute		
Crustacea	EC50	Water flea (Ceriodaphnia dubia) 34,59 - 47,13 mg/l, 48 hours
Fish	LC50	Western mosquitofish (Gambusia affinis) 125 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

12.2. Persistence and degradability	No data is available on the degradability of this product.
12.3. Bioaccumulative potential	No data available.
Partition coefficient n-octanol/water (log Kow)	Not available.
Bioconcentration factor (BCF)	Not available.
12.4. Mobility in soil	No data available.
12.5. Results of PBT and vPvB assessment	Not available.
12.6. Other adverse effects	No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

SECTION 13: Disposal considerations

13.1. Waste treatment methods

Residual waste	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.
EU waste code	The Waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Disposal methods/information	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of contents/container in accordance with local/regional/national/international regulations.
Special precautions	Dispose in accordance with all applicable regulations.

SECTION 14: Transport information

ADR

14.1. UN number	UN3266
14.2. UN proper shipping name	Corrosive liquid, basic, inorganic, n.o.s.
14.3. Transport hazard class(es)	
Class	8
Subsidiary risk	-
Label(s)	8
Hazard No. (ADR)	80
Tunnel restriction code	E
14.4. Packing group	II
14.5. Environmental hazards	No.
14.6. Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

RID

14.1. UN number	UN3266
14.2. UN proper shipping name	Corrosive liquid, basic, inorganic, n.o.s.
14.3. Transport hazard class(es)	
Class	8
Subsidiary risk	-
Label(s)	8
14.4. Packing group	II
14.5. Environmental hazards	No.
14.6. Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

ADN

14.1. UN number	UN3266
14.2. UN proper shipping name	Corrosive Liquid, Inorganic, N.o.s.
14.3. Transport hazard class(es)	
Class	8

Material name: NaOH 1N

4793 Version #: 01 Issue date: 02-February-2017

SDS France

Subsidiary risk	-
Label(s)	8
14.4. Packing group	II
14.5. Environmental hazards	No.
14.6. Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

IATA

14.1. UN number	UN3266
14.2. UN proper shipping name	Corrosive liquid, basic, inorganic, n.o.s.
14.3. Transport hazard class(es)	
Class	8
Subsidiary risk	-
14.4. Packing group	II
14.5. Environmental hazards	No.
ERG Code	8L
14.6. Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Other information	
Passenger and cargo aircraft	Allowed with restrictions.
Cargo aircraft only	Allowed with restrictions.

IMDG

14.1. UN number	UN3266
14.2. UN proper shipping name	CORROSIVE LIQUID, BASIC, INORGANIC, N.O.S.
14.3. Transport hazard class(es)	
Class	8
Subsidiary risk	-
14.4. Packing group	II
14.5. Environmental hazards	
Marine pollutant	No.
EmS	F-A, S-B
14.6. Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
14.7. Transport in bulk according to Annex II of Marpol and the IBC Code	Not established.

ADN; ADR; IATA; IMDG; RID



SECTION 15: Regulatory information

15.1. Safety, health and environmental regulations/legislation specific for the substance or mixture

EU regulations

Regulation (EC) No. 1005/2009 on substances that deplete the ozone layer, Annex I and II, as amended

Not listed.

Regulation (EC) No. 850/2004 On persistent organic pollutants, Annex I as amended

Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 1 as amended

Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 2 as amended

Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 3 as amended

Not listed.

Regulation (EU) No. 649/2012 concerning the export and import of dangerous chemicals, Annex V as amended

Not listed.

Regulation (EC) No. 166/2006 Annex II Pollutant Release and Transfer Registry

Not listed.

Regulation (EC) No. 1907/2006, REACH Article 59(10) Candidate List as currently published by ECHA

Not listed.

Authorisations

Regulation (EC) No. 1907/2006, REACH Annex XIV Substances subject to authorization, as amended

Not listed.

Restrictions on use

Regulation (EC) No. 1907/2006, REACH Annex XVII Substances subject to restriction on marketing and use as amended

Not listed.

Directive 2004/37/EC: on the protection of workers from the risks related to exposure to carcinogens and mutagens at work

Not listed.

Directive 92/85/EEC: on the safety and health of pregnant workers and workers who have recently given birth or are breastfeeding

Not listed.

Other EU regulations

Directive 2012/18/EU on major accident hazards involving dangerous substances

Not listed.

Directive 98/24/EC on the protection of the health and safety of workers from the risks related to chemical agents at work

Sodium hydroxide (CAS 1310-73-2)

Directive 94/33/EC on the protection of young people at work

Sodium hydroxide (CAS 1310-73-2)

Other regulations

The product is classified and labelled in accordance with EC directives or respective national laws. This Safety Data Sheet complies with the requirements of Regulation (EC) No 1907/2006, as amended.

National regulations

Follow national regulation for work with chemical agents. Young people under 18 years old are not allowed to work with this product according to EU Directive 94/33/EC on the protection of young people at work, as amended.

France Classified Installations (ICPE): Listed substance/ICPE Number

Not listed.

15.2. Chemical safety assessment

No Chemical Safety Assessment has been carried out.

SECTION 16: Other information

List of abbreviations	Not available.
References	Not available.
Information on evaluation method leading to the classification of mixture	The classification for health and environmental hazards is derived by a combination of calculation methods and test data, if available.
Full text of any H-statements not written out in full under Sections 2 to 15	H314 Causes severe skin burns and eye damage.
Revision information	None.
Training information	Follow training instructions when handling this material.
Disclaimer	Veolia Water Technologies is not able to anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use and or non respect of Veolia Water Technologies' requirement.

SAFETY DATA SHEET

1. Identification

Product identifier	VEOLIA ACTISAND
Other means of identification	None.
Recommended use	Wastewater Treatment
Recommended restrictions	Workers (and your customers or users in the case of resale) should be informed of the potential presence of respirable dust and respirable crystalline silica as well as their potential hazards. Appropriate training in the proper use and handling of this material should be provided as required under applicable regulations. PROFESSIONAL USE ONLY

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Supplier Veolia Water Technologies Canada Inc.
Address 2000 Argentia Road, Plaza IV, Suite 430
Mississauga, ON L5N 1W1
Canada

Contact Person Hydrex Product Specialist

Telephone (905) 286-4846

Fax (905) 286-0488

e-mail vwtcanada-hydrex@veolia.com

24-Hour Emergency telephone +1-760-476-3962 (Code:333239)

Supplier Not available.

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Carcinogenicity Category 1A

Environmental hazards Not classified.

Label elements



Signal word Danger

Hazard statement May cause cancer.

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Wear protective gloves/protective clothing/eye protection/face protection.

Response IF exposed or concerned: Get medical advice/attention.

Storage Not available.

Disposal Dispose of contents/container in accordance with local/regional/national/international regulations.

Other hazards None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Crystalline silica		14808-60-7	100

All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

4. First-aid measures

Inhalation	Move to fresh air. Call a physician if symptoms develop or persist.
Skin contact	Wash off with soap and water. Get medical attention if irritation develops and persists.
Eye contact	Rinse with water. Get medical attention if irritation develops and persists.
Ingestion	Rinse mouth. Get medical attention if symptoms occur.
Most important symptoms/effects, acute and delayed	Coughing.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire-fighting measures

Suitable extinguishing media	Water fog. Foam. Dry chemical powder. Carbon dioxide (CO2).
Unsuitable extinguishing media	Not available.
Specific hazards arising from the chemical	During fire, gases hazardous to health may be formed.
Special protective equipment and precautions for firefighters	Self-contained breathing apparatus and full protective clothing must be worn in case of fire.
Fire fighting equipment/instructions	Use water spray to cool unopened containers.
Specific methods	Use standard firefighting procedures and consider the hazards of other involved materials.
General fire hazards	No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Wear appropriate protective equipment and clothing during clean-up. Ensure adequate ventilation. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.
Methods and materials for containment and cleaning up	The product is immiscible with water and will spread on the water surface. Stop the flow of material, if this is without risk. Following product recovery, flush area with water. For waste disposal, see section 13 of the SDS.
Environmental precautions	Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling	Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep formation of airborne dusts to a minimum. Provide appropriate exhaust ventilation at places where dust is formed. Do not breathe dust. Avoid prolonged exposure. Should be handled in closed systems, if possible. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.
Conditions for safe storage, including any incompatibilities	Protect from sunlight. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). Store in cool, dry place.

8. Exposure controls/personal protection

Occupational exposure limits

US. ACGIH Threshold Limit Values

Material	Type	Value	Form
VEOLIA ACTISAND Components	TWA Type	0.025 mg/m ³ Value	Respirable fraction. Form
Crystalline silica (CAS 14808-60-7)	TWA	0.025 mg/m ³	Respirable fraction.

Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

Material	Type	Value	Form
VEOLIA ACTISAND	TWA	0.025 mg/m3	Respirable particles.
Components	Type	Value	Form

Crystalline silica (CAS 14808-60-7)

Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

Material	Type	Value	Form
VEOLIA ACTISAND	TWA	0.025 mg/m3	Respirable fraction.
Components	Type	Value	Form

Crystalline silica (CAS 14808-60-7)

Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

Components	Type	Value	Form
Crystalline silica (CAS 14808-60-7)	TWA	0.025 mg/m3	Respirable fraction.

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

Material	Type	Value	Form
VEOLIA ACTISAND	TWA	0.1 mg/m3	Respirable.
Components	Type	Value	Form

Crystalline silica (CAS 14808-60-7)

Canada. Quebec OELs. (Ministry of Labor - Regulation Respecting the Quality of the Work Environment)

Material	Type	Value	Form
VEOLIA ACTISAND	TWA	0.1 mg/m3	Respirable dust.
Components	Type	Value	Form

Crystalline silica (CAS 14808-60-7)

Biological limit values

No biological exposure limits noted for the ingredient(s).

Exposure guidelines

Occupational exposure to nuisance dust (total and respirable) and respirable crystalline silica should be monitored and controlled.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment**Eye/face protection** Wear safety glasses with side shields (or goggles).**Skin protection****Hand protection** Chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.**Other**

Use of an impervious apron is recommended. Chemical resistant gloves.

Respiratory protection

Use a particulate filter respirator for particulate concentrations exceeding the Occupational Exposure Limit.

Thermal hazards

Not available.

General hygiene considerations

Observe any medical surveillance requirements. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance****Physical state** Solid.**Form** Solid.**Color** Not available.

Material name: VEOLIA ACTISAND

2725 Version #: 01 Issue date: 08-16-2016

SDS Canada

Odor	Not available.
Odor threshold	Not available.
pH	Not available.
Melting point/freezing point	Not available.
Initial boiling point and boiling range	Not available.
Flash point	Not available.
Evaporation rate	Not available.
Flammability (solid, gas)	Not available.
Upper/lower flammability or explosive limits	
Flammability limit - lower (%)	Not available.
Flammability limit - upper (%)	Not available.
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.
Vapor pressure	< 0.0000001 kPa at 25 °C
Vapor density	Not available.
Relative density	Not available.
Solubility(ies)	
Solubility (water)	Insoluble
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	Not available.
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Explosive properties	Not explosive.
Heat of combustion (NFPA 30B)	0 kJ/g
Molecular formula	O ₂ Si
Oxidizing properties	Not oxidizing.

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	No dangerous reaction known under conditions of normal use.
Conditions to avoid	Contact with incompatible materials.
Incompatible materials	Powerful oxidizers. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	Prolonged inhalation may be harmful.
Skin contact	No adverse effects due to skin contact are expected.
Eye contact	Direct contact with eyes may cause temporary irritation.
Ingestion	Expected to be a low ingestion hazard.

Symptoms related to the physical, chemical and toxicological characteristics

Coughing.

Information on toxicological effects

Acute toxicity

Not available.

Skin corrosion/irritation

Prolonged skin contact may cause temporary irritation.

Serious eye damage/eye irritation

Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization

Not a respiratory sensitizer.

Skin sensitization

This product is not expected to cause skin sensitization.

Germ cell mutagenicity

No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity

In 1997, IARC (the International Agency for Research on Cancer) concluded that crystalline silica inhaled from occupational sources can cause lung cancer in humans. However in making the overall evaluation, IARC noted that "carcinogenicity was not detected in all industrial circumstances studied. Carcinogenicity may be dependent on inherent characteristics of the crystalline silica or on external factors affecting its biological activity or distribution of its polymorphs." (IARC Monographs on the evaluation of the carcinogenic risks of chemicals to humans, Silica, silicates dust and organic fibres, 1997, Vol. 68, IARC, Lyon, France.) In June 2003, SCOEL (the EU Scientific Committee on Occupational Exposure Limits) concluded that the main effect in humans of the inhalation of respirable crystalline silica dust is silicosis. "There is sufficient information to conclude that the relative risk of lung cancer is increased in persons with silicosis (and, apparently, not in employees without silicosis exposed to silica dust in quarries and in the ceramic industry). Therefore, preventing the onset of silicosis will also reduce the cancer risk..." (SCOEL SUM Doc 94-final, June 2003) According to the current state of the art, worker protection against silicosis can be consistently assured by respecting the existing regulatory occupational exposure limits. May cause cancer. Occupational exposure to respirable dust and respirable crystalline silica should be monitored and controlled.

ACGIH Carcinogens

Crystalline silica (CAS 14808-60-7)

A2 Suspected human carcinogen.

Canada - Alberta OELs: Carcinogen category

Crystalline silica (CAS 14808-60-7)

Suspected human carcinogen.

Canada - Manitoba OELs: carcinogenicity

SILICA, CRYSTALLINE-.ALPHA.-QUARTZ, RESPIRABLE FRACTION (CAS 14808-60-7)

Suspected human carcinogen.

Canada - Quebec OELs: Carcinogen category

Crystalline silica (CAS 14808-60-7)

Suspected carcinogenic effect in humans.

IARC Monographs. Overall Evaluation of Carcinogenicity

Crystalline silica (CAS 14808-60-7)

1 Carcinogenic to humans.

Reproductive toxicity

This product is not expected to cause reproductive or developmental effects.

Specific target organ toxicity

- single exposure

Not classified.

Specific target organ toxicity

- repeated exposure

Not classified.

Aspiration hazard

Not an aspiration hazard.

Chronic effects

Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity

The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.

Persistence and degradability

No data is available on the degradability of this product.

Bioaccumulative potential

No data available.

Mobility in soil

No data available.

Other adverse effects

No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport information

TDG

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

15. Regulatory information

Canadian regulations

Controlled Drugs and Substances Act

Not regulated.

Export Control List (CEPA 1999, Schedule 3)

Not listed.

Greenhouse Gases

Not listed.

Precursor Control Regulations

Not regulated.

International regulations

Stockholm Convention

Not applicable.

Rotterdam Convention

Not applicable.

Kyoto protocol

Not applicable.

Montreal Protocol

Not applicable.

Basel Convention

Not applicable.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No

Country(s) or region	Inventory name	On inventory (yes/no)*
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s). A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other Information

Issue date	08-16-2016
Version #	01
Disclaimer	Veolia Water Technologies is not able to anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use and or non respect of Veolia Water Technologies' requirement.
Revision information	Product and Company Identification: Product Review



SAFETY DATA SHEET

1. IDENTIFICATION OF THE SUBSTANCE/PREPURATION AND OF THE COMPANY/UNDERTAKING

Identification of the substance/preparation	Sulphuric Acid 98%
Use of the substance/preparation	Industrial Process Water Treatment; Water Treatment Chemical
Version #	01
Issue date	12-06-2016
CAS #	Mixture
Manufacturer	VWS, Saudi - Chemical Industries
Supplier	Prince Musaed Bin Abdul Aziz Street
Address	PO Box 58515, Riyadh 11515 Saudi Arabia
Contact Person	Product Manager
Telephone	+966 11 478 7721
Fax	+966 11 478 2560
e-mail	vwsme.hydrex@veolia.com
Global Emergency Contact	+1-760-476-3961 (Code:333239)

2. HAZARDS IDENTIFICATION

This preparation is classified as dangerous according to Directive 1999/45/EC and its amendments.

Classification	C;R35
Physical hazards	Not classified as a physical hazard.
Health hazards	Causes severe burns.
Environmental hazards	Not classified as an environmental hazard.
Specific hazards	Very toxic by inhalation. Causes severe burns. Prolonged exposure may cause chronic effects.
Main symptoms	Contact with this material will cause burns to the skin, eyes and mucous membranes.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Components	CAS #	Percent	EC-No.	Classification
SULFURIC ACID	7664-93-9	50 - < 60	231-639-5	C;R35

Other components below reportable levels 40 - < 50

Composition comments The full text for all R-phrases is displayed in Section 16 of the SDS.

4. FIRST AID MEASURES

Inhalation	Move to fresh air. For breathing difficulties, oxygen may be necessary. Get medical attention immediately.
Skin contact	Remove and isolate contaminated clothing and shoes. Immediately flush skin with plenty of water. Get medical attention immediately. Wash clothing separately before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention immediately.
Ingestion	IF SWALLOWED: Immediately call a POISON CENTER or doctor/physician. Rinse mouth thoroughly. Do not induce vomiting without advice from poison control center. Do not use mouth-to-mouth method if victim ingested the substance. Induce artificial respiration with the aid of a pocket mask equipped with a one-way valve or other proper respiratory medical device.
General advice	In case of shortness of breath, give oxygen. In the case of accident or if you feel unwell, seek medical advice immediately (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Keep victim warm. Do not use mouth-to-mouth method if victim ingested the substance.
Notes to physician	In case of shortness of breath, give oxygen. Keep victim warm.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media Foam. Powder. Carbon dioxide (CO2).

Extinguishing media which must not be used for safety reasons	DO NOT USE WATER. Alcohol resistant foam.
Unusual fire & explosion hazards	The product is not flammable.
Specific hazards	During fire, gases hazardous to health may be formed.
Special protective equipment for fire-fighters	Self-contained breathing apparatus and full protective clothing must be worn in case of fire.
Fire fighting equipment/instructions	Move containers from fire area if you can do so without risk.
Specific methods	Use standard firefighting procedures and consider the hazards of other involved materials.
Hazardous combustion products	sulfur

6. ACCIDENTAL RELEASE MEASURES

Containment procedures	Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Prevent entry into waterways, sewer, basements or confined areas.
Personal precautions	Keep unnecessary personnel away. Keep upwind. Keep out of low areas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. For personal protection, see section 8 of the SDS.
Environmental precautions	Contact local authorities in case of spillage to drain/aquatic environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.
Methods for cleaning up	<p>This product is miscible in water.</p> <p>Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Use a non-combustible material like vermiculite, sand or earth to soak up the product and place into a container for later disposal. Following product recovery, flush area with water.</p> <p>Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.</p> <p>Never return spills to original containers for re-use. This material and its container must be disposed of as hazardous waste. For waste disposal, see section 13 of the SDS. Neutralize with slaked lime (calcium hydroxide) or soda ash (sodium carbonate) and flush with plenty of water.</p>

7. HANDLING AND STORAGE

Handling	Never add water to this product. Avoid forming spray/aerosol mists. Do not breathe dust/fume/gas/mist/vapors/spray. Do not get this material in contact with eyes. Do not get this material in contact with skin.
Storage	Never allow product to get in contact with water during storage. Keep at temperature not exceeding 43 °C. Protect from sunlight. Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS). Store in accordance with local/regional/national/international regulation. Store in cool, dry place.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Occupational exposure limits

US. ACGIH Threshold Limit Values

Components	Type	Value	Form
SULFURIC ACID (CAS 7664-93-9)	TWA	0.2 mg/m3	Thoracic fraction.

Bahrain. TLVs. Resolution No. 4 Regarding the Management of Hazardous Chemicals, Exposure Limits for Dangerous and Poisonous Chemicals, Annex. 3

Components	Type	Value
SULFURIC ACID (CAS 7664-93-9)	STEL	3 ppm
	TWA	1 mg/m3

Egypt. OELs. Threshold limits of air pollutants in the workplace (Decree No. 388, Annex 8)

Components	Type	Value
SULFURIC ACID (CAS 7664-93-9)	STEL	3 mg/m3
	TWA	1 mg/m3

Kuwait. OELs. Maximum Limits Allowance for Occupational Exposure to Chemical Substances (TVLs) (Decision No. 210/2001 Appendix No. (3-1))

Components	Type	Value
SULFURIC ACID (CAS 7664-93-9)	STEL	3 mg/m3
	TWA	1 mg/m3

UAE. OELs. Maximum Allowable Limits for Air Pollutants in Working Areas [Law to Protect the Air from Pollution, Resolution of the Cabinet of Ministers No. 12 of 2006]

Components	Type	Value
SULFURIC ACID (CAS 7664-93-9)	STEL	3 mg/m3
	TWA	1 mg/m3

UAE. Abu Dhabi. TLVs. Maximum Allowable Limits for Air Pollutants in Working Areas (AD EHSMS RF - Occupational Standards and Guideline Values, Schedule A)

Components	Type	Value	Form
SULFURIC ACID (CAS 7664-93-9)	TWA	0.2 mg/m3	Thoracic fraction.

UAE. Dubai. OELs. Maximum Allowable Limits for Indoor Air Pollutants. Industrial Operation Regulation IO-11.0: Appendix, Tables 2 & 2A

Components	Type	Value
SULFURIC ACID (CAS 7664-93-9)	STEL	1 mg/m3
	TWA	1 mg/m3

Biological limit values No biological exposure limits noted for the ingredient(s).

Recommended monitoring procedures

Additional exposure data Not available.

Engineering measures to reduce exposure General ventilation normally adequate. Ventilation should effectively remove and prevent buildup of any aerosols or mists generated from the handling of this product.

Personal protective equipment

Respiratory protection Use a particulate filter respirator for particulate concentrations exceeding the Occupational Exposure Limit. Avoid forming spray/aerosol mists. Personal protection equipment should be chosen according to the CEN standards and in discussion with the supplier of the personal protective equipment. Wear a disposable respiratory equipment against droplets or dust and which complies with NF EN 149, category FFP2.

Hand protection or Rubber (natural, latex). Polyvinyl chloride (PVC). Chemical resistant gloves. Nitrile rubber. Wear protective gloves which comply with the NF EN 374. Solvent-resistant gloves (butylrubber).

Eye protection Before any handling, wear protective glasses side-shields complying with the NF EN 166.

Skin and body protection Do not get this material in contact with skin. Wear suitable protective clothing. Chemical resistant gloves. Structural firefighters protective clothing provides limited protection in fire situations ONLY; it is not effective in spill situations. In case of splashing, wear protective chemical clothes (class 6) according to the NF EN 13034, in order to avoid any contact with skin.

General Avoid contact with skin. Avoid contact with eyes. Use personal protective equipment as required. Eye wash fountain is recommended. Keep working clothes separately. In case of splashing, wear protective chemical clothes (class 6) according to the NF EN 13034, in order to avoid any contact with skin.

Environmental exposure controls Environmental manager must be informed of all major releases.

Hygiene measures Wash hands after handling.

9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	Liquid
Physical state	Liquid.
Form	Not available.
Color	Colorless
Odor	Not available.
pH	< 1
Specific gravity	Not available.
Boiling point	626 °F (330 °C)
Flash point	Not available.

Flammability limits in air, upper, % by volume	Not available.
Flammability limits in air, lower, % by volume	Not available.
Vapor pressure	0 hPa estimated
Solubility (water)	100 % Exothermic decomp causes a dangerously fast pressure increase.
Partition coefficient (n-octanol/water)	Not available.
Viscosity	26.9 mPa·s (20°C)
Vapor density	Not available.
Evaporation rate	Not available.
Melting point/Freezing point	5 °F (-15 °C)
Auto-ignition temperature	Not available.
VOC	Not available.
Other data	
Density	1.40 - 1.84 g/cm³
Miscible (water)	100 %

10. STABILITY AND REACTIVITY

Conditions to avoid	Exposure to moisture. Reacts violently with strong alkaline substances. None under normal conditions. Avoid exposing to heat and contact with strong oxidizing substances. Do not allow water to get into container because of reaction.
Hazardous decomposition products	Sulphur oxides.
Stability	Material is stable under normal conditions. Material reacts with water.
Materials to avoid	Organic compounds. Metals. Reducing agents. Bases.

11. TOXICOLOGICAL INFORMATION

Toxicological data

Product	Species	Test Results
Sulphuric Acid 98%		
Acute		
Inhalation		
<i>Liquid</i>		
LC50	Rat	0.51 mg/l, 2 hours
Oral		
LD50	Rat	> 2140 mg/kg

* Estimates for product may be based on additional component data not shown.

Acute toxicity	Very toxic by inhalation. Toxic by inhalation. Causes severe burns.
Routes of exposure	Inhalation. Skin contact. Eye contact.
Toxicological information	Occupational exposure to the substance or mixture may cause adverse effects.
Chronic toxicity	Prolonged exposure may cause chronic effects.
Carcinogenicity	Risk of cancer cannot be excluded with prolonged exposure.

Egypt OELs Carcinogen rating

SULFURIC ACID (CAS 7664-93-9) C2 Suspected human carcinogen.

IARC Monographs. Overall Evaluation of Carcinogenicity

SULFURIC ACID (CAS 7664-93-9) 1 Carcinogenic to humans.

Kuwait OELs (Decision No. 210/): Carcinogen Category

SULFURIC ACID (CAS 7664-93-9) A2 Suspected human carcinogen.

UAE - Abu Dhabi TLVs: Carcinogen Category

SULFURIC ACID (CAS 7664-93-9) GROUP A2 Suspected human carcinogen.

Mutagenicity	No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.
Reproductivity	Not classified.

Epidemiology	No epidemiological data is available for this product.
---------------------	--

Local effects	Very toxic by inhalation. Causes severe burns. Irritating to respiratory system. May produce corrosive solutions on contact with water.
----------------------	---

Symptoms and target organs

Contact with this material will cause burns to the skin, eyes and mucous membranes.

12. ECOLOGICAL INFORMATION**Ecotoxicological data**

Product	Species	Test Results
Sulphuric Acid 98%		
Aquatic Acute Fish LC50 Fish > 42 mg/l, 96 hours		
* Estimates for product may be based on additional component data not shown.		
Ecotoxicity Because of the low pH of this product, it would be expected to produce significant ecotoxicity upon exposure to aquatic organisms and aquatic systems. Not expected to be harmful to aquatic organisms.		
Environmental effects An environmental hazard cannot be excluded in the event of unprofessional handling or disposal.		
Persistence / degradability		
Bioaccumulation No data available.		
Aquatic toxicity The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.		
Mobility This product is miscible in water.		
Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.		

13. DISPOSAL CONSIDERATIONS

Disposal instructions	Consult authorities before disposal. This material and its container must be disposed of as hazardous waste. Do not discharge into drains, water courses or onto the ground. Dispose in accordance with all applicable regulations.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions). Avoid discharge into water courses or onto the ground.
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. TRANSPORT INFORMATION**DOT**

UN number	UN1830
UN proper shipping name	Sulfuric acid with more than 51 percent acid
Transport hazard class(es)	
Class	8
Subsidiary risk	-
Label(s)	8
Packing group	II
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Special provisions	A3, A7, B3, B83, B84, IB2, N34, T8, TP2, TP12
Packaging exceptions	154
Packaging non bulk	202
Packaging bulk	242

IATA

UN number	UN1830
UN proper shipping name	Sulphuric acid with more than 51% acid
Transport hazard class(es)	
Class	8
Subsidiary risk	-
Packing group	II
Environmental hazards	No.
ERG Code	8L
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo aircraft	Allowed with restrictions.
Cargo aircraft only	Allowed with restrictions.

IMDG

UN number	UN1830
------------------	--------

Material name: Sulphuric Acid 98%

4098 Version #: 01 Issue date: 12-06-2016

SDS Middle East

UN proper shipping name	SULPHURIC ACID with more than 51% acid
Transport hazard class(es)	
Class	8
Subsidiary risk	-
Packing group	II
Environmental hazards	
Marine pollutant	No.
EmS	F-A, S-B
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code	Not established.

DOT



IATA; IMDG



15. REGULATORY INFORMATION

Labeling

Contains SULFURIC ACID

Symbol(s)



Corrosive

R-phrase(s) R35 Causes severe burns.

S-phrase(s) S26 In case of contact with eyes, rinse immediately with plenty of water and seek medical advice.

S30 Never add water to this product.

S36/37/39 Wear suitable protective clothing, gloves and eye/face protection.

S45 In case of accident or if you feel unwell, seek medical advice immediately (show the label where possible).

S60 This material and its container must be disposed of as hazardous waste.

Follow national regulation for work with chemical agents.

Bahrain. Chemicals Subject to the Prior Informed Consent Procedure under the Rotterdam Convention (Law No. 14 of 2012, Annex III)

Not listed.

Bahrain. CWC Chemical Substances (Decree No. 6 of 1997, Schedules 1, 2 and 3; Law No. 51 of 2009)

Not listed.

Bahrain. Prohibited Chemicals (Ministry of State for Municipal & Environmental Affairs, Resolution No 7 of 2002, On Control of Importing & Use of Prohibited & Restricted Chemicals, Table 1)

Not listed.

Not listed.

Regulatory information

The product is classified and labelled in accordance with EC directives or respective national laws. Young people under 18 years old are not allowed to work with this product according to EU Directive 94/33/EC on the protection of young people at work. This Safety Data Sheet complies with the requirements of Regulation (EC) No 1907/2006, as amended. Young people under 18 years old are not allowed to work with this product according to EU Directive 94/33/EC on the protection of young people at work, as amended.

16. OTHER INFORMATION

Wording of the R-phrases in sections 2 and 3

R35 Causes severe burns.

International Inventories

Country(s) or region

Europe

Inventory name

European Inventory of Existing Commercial Chemical Substances (EINECS)

On inventory (yes/no)*

Yes

Europe

European List of Notified Chemical Substances (ELINCS)

No

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s). A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

Recommended use

Use in accordance with supplier's recommendations.

Recommended restrictions

PROFESSIONAL USE ONLY

Disclaimer

Veolia Water Technologies is not able to anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use and or non respect of Veolia Water Technologies' requirement.

Revision information

This document has undergone significant changes and should be reviewed in its entirety.