



MELIADINE GOLD PROJECT

Landfill Design and Management Plan

Water Licence 2BB-MEL0914

March 2012

EXECUTIVE SUMMARY

This Landfill Design and Management Plan outlines the conceptual design, operation and closure for a temporary industrial waste landfill as part of Agnico-Eagle Mines Limited's (AEM) Meliadine Gold Project in Nunavut. This Plan was developed for the Nunavut Water Board (NWB) to operate a landfill as part of advanced exploration at the Meliadine Gold Project.

The landfill is required for the disposal of non-salvageable, non-hazardous, solid wastes from camp and mining activities. The proposed landfill will be located within the area where the future tailing/waste rock storage facility will be located should a gold mine be approved. The camp is expected to accommodate a maximum of 150 to 300 persons during advanced exploration, dependent on the time of year.

The leachate from the landfill is anticipated to be very weak ionic strength (dilute) due to the controls on materials placed in the landfill, and thus specific leachate management is not considered to be required. Also, abundant landfill cover material is to be found in the area, which will result in sufficient cover to isolate the waste in the landfill from the environment. Once the mine is in operation, any leachate will report to the future tailing/waste rock storage facility contact water collection system.

During operations, the slopes of the landfill will be protecting from erosion by covered them with waste rock or coarse granular material. Additional surface water and erosion control measures could be incorporated into landfill design, as appropriate.

At the end of its life, the landfill will be covered by tailings or waste rock to isolate it from the environment, and to chemically and physically stabilize it.

To meet NWB guidelines, AEM conducted an environmental overview effects assessment to characterize environmental resources and determine the anticipated environmental effects of a landfill. The primary potential environmental effects from landfill activities included leachate generation, windblown debris, and habitat (vegetation) loss. Given the effective implementation of mitigation plans, no residual environmental effects to valued ecosystem components from construction, operation or closure of the landfill are anticipated.

This Plan will be implemented once approved, subject to any improvements proposed by the NWB.

DISTRIBUTION LIST

Nunavut Water Board

Nunavut Impact Review Board

Meliadine – General project Manager

Meliadine – Environment Coordinator

DOCUMENT CONTROL

Version	Date (YMD)	Section	Page	Revision
1	12/03/30			Version 1 of the Landfill Plan

Plan Prepared by:



John Witteman
Environmental Consultant to Agnico-Eagle

Plan approved by:



Eric M. Lamontagne
Project Manager – Meliadine Gold Project
Agnico-Eagle Mines Limited

TABLE OF CONTENTS

EXECUTIVE SUMMARY	I
DISTRIBUTION LIST.....	I
DOCUMENT CONTROL	II
1. INTRODUCTION	1
1.1 PROJECT OVERVIEW	1
1.2 PROJECT DESCRIPTION	4
1.3 LOCATION OF THE LANDFILL	4
2. REGULATORY SETTING	5
3. PLAN FOR THE ON-SITE DISPOSAL OF SOLID WASTE APPROACH	6
3.1 WASTE ACCEPTABLE FOR PLACEMENT IN LANDFILL.....	6
3.2 WASTE UNACCEPTABLE FOR PLACEMENT IN LANDFILL.....	7
3.3 TOTAL VOLUME OF WASTE	9
3.4 INCINERATOR ASH TESTING PROTOCOL.....	9
4. LANDFILL LOCATION AND CONSTRUCTION.....	10
4.1 LANDFILL PROTOCOL FOR PLACEMENT OF MATERIAL.....	11
4.2 LEACHATE MANAGEMENT	11
5. LANDFILL CONCEPTUAL OPERATIONS PLAN	14
6. CONCEPTUAL CLOSURE PLAN	15
7. POTENTIAL ENVIRONMENTAL EFFECTS	16
8. EFFECTS SUMMARY	21
9. PLAN REVIEW AND CONTINUAL IMPROVEMENT	21
10. REFERENCES	22

LIST OF TABLES

Table 3.1: Guidelines For Solid Waste/Process Residuals Suitable For Landfill	10
Table 7.1: Environmental Overview Effects Assessment Summary	17

LIST OF FIGURES

Figure 1-1 Landfill Design - Overall Site Plan	2
Figure 1-2 Location of the Proposed Landfill on the Commercial Lease	3
Figure 4-1 Landfill Detailed Design	12
Figure 4-2 Conceptual Cross Section.....	13

LIST OF APPENDICES

Appendix A	Government of Nunavut Environmental Guidelines: Environmental Guideline for Waste Asbestos Environmental Guideline for Ozone Depleting Substances Disposal Guidelines for Fluorescent Lamp Tubes
------------	---

1. Introduction

1.1 Project Overview

This Landfill Design and Management Plan outlines the conceptual design, operation and closure for a temporary solid waste landfill as part of the advanced exploration program at Agnico-Eagle Mines Limited's (AEM) Meliadine Gold Project. Advanced exploration includes underground exploration comprising of bulk sample collection and ramp extension while surface activities are restricted to diamond drilling.

The Meliadine Gold Project is located on Inuit-owned land in the Kivalliq Region of Nunavut, approximately 25 km north of Rankin Inlet. Figure 1-1 provides an overview of the major infrastructure associated with the proposed landfill while figure 1-2 shows its proposed location on the commercial lease AEM holds with the Kivalliq Inuit Association¹.

The Meliadine Gold Project operates under Water License 2BB-MEL0914 issued by the Nunavut Water Board on July 31, 2009. This Landfill Design and Management Plan is one of a series of environmental management plans that have been prepared for the Meliadine Gold Project, with all earlier plans required by terms and conditions of the water licence. The objectives of this Plan are summarized as follows:

1. To define the location, design and operating procedures to be used in the landfill disposal of non-hazardous solid waste generated at the Meliadine camp;
2. To define acceptable/non-acceptable types of solid waste to be placed in the Meliadine landfill; and
3. To define monitoring requirements for the landfill.


A landfill is required for the disposal of non-salvageable, non-hazardous industrial wastes from advanced exploration activities that cannot be incinerated. The Landfill Design and Management Plan was developed in concordance with the best management practices. Hazardous wastes will not be placed in the landfill. All waste materials considered unsuitable for landfill deposition would be packaged for shipment south to a certified waste management company for treatment, recycling and/or disposal.


Dependant on the time of year, the camp is expected to accommodate from 150 to 300 persons during advanced exploration. A four year landfill life has been assumed, June 2012 to June 2016².

To meet NWB guidelines, AEM conducted an environmental overview effects assessment to characterize environmental resources and determine the anticipated environmental effects of the proposed landfill.

¹ The Kivalliq Inuit Association has approved the construction, operation and closure of a landfill on the commercial lease.

² The landfill could remain active for part of the construction period should the mine be approved.

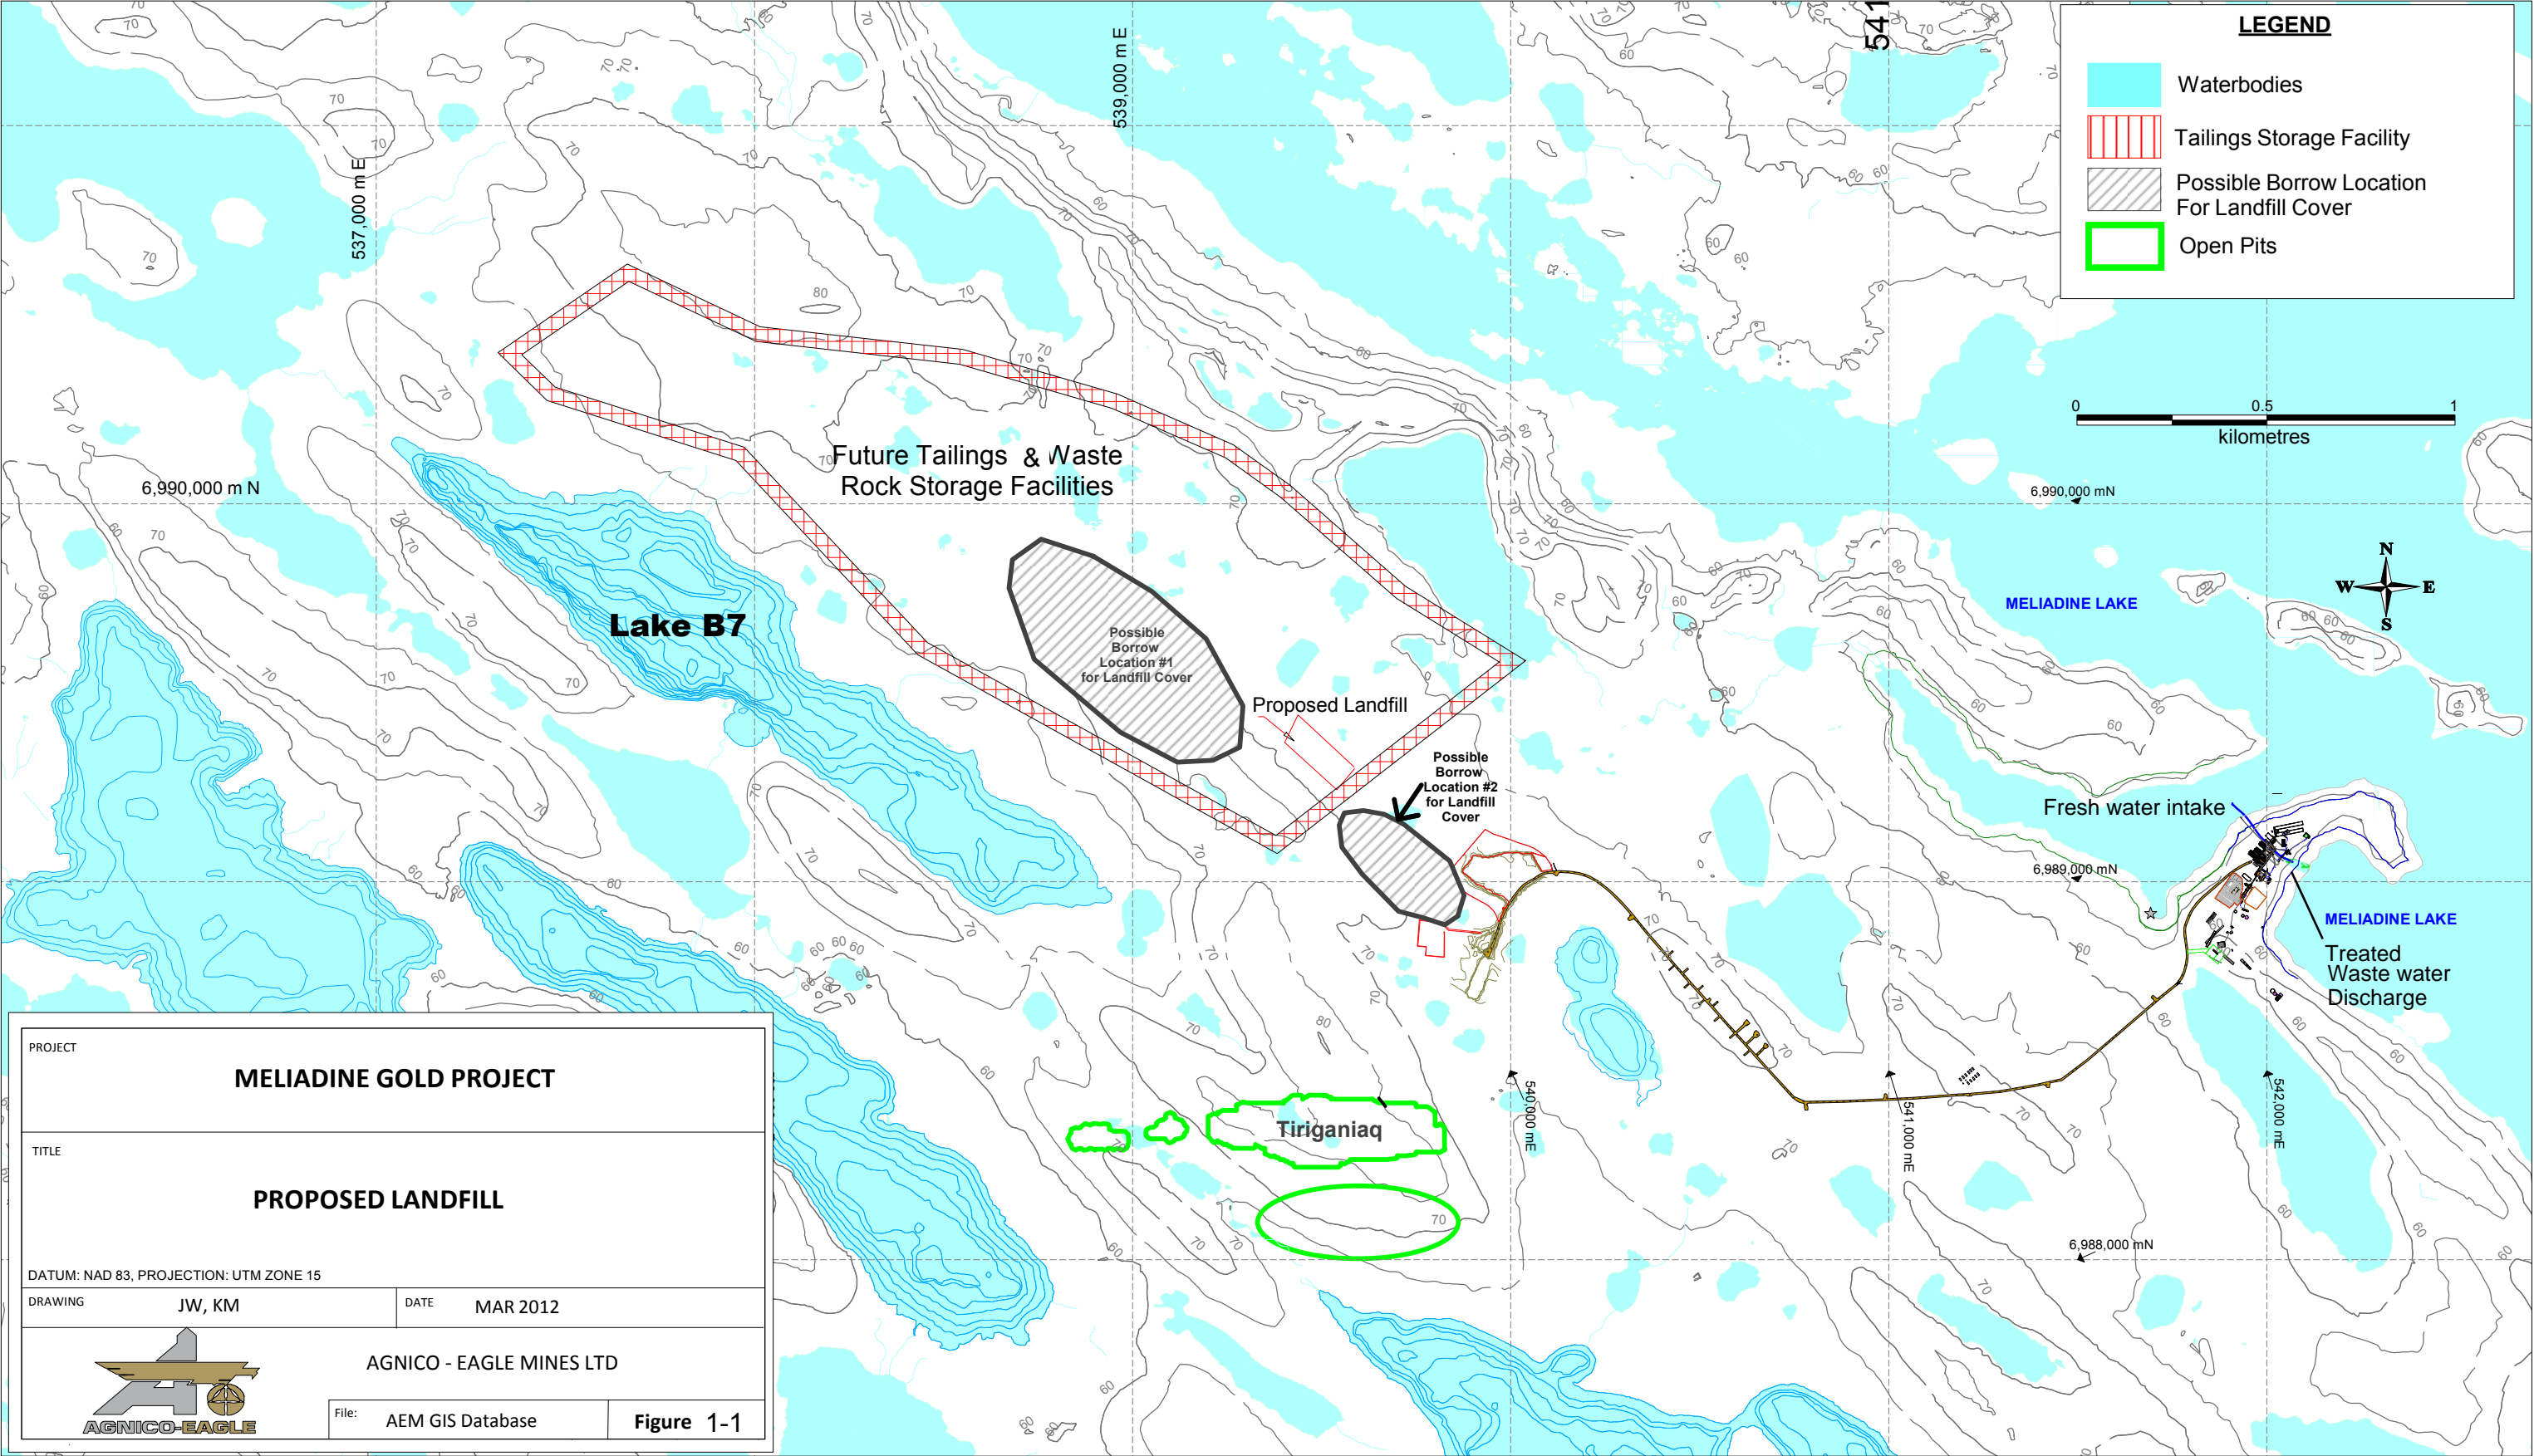

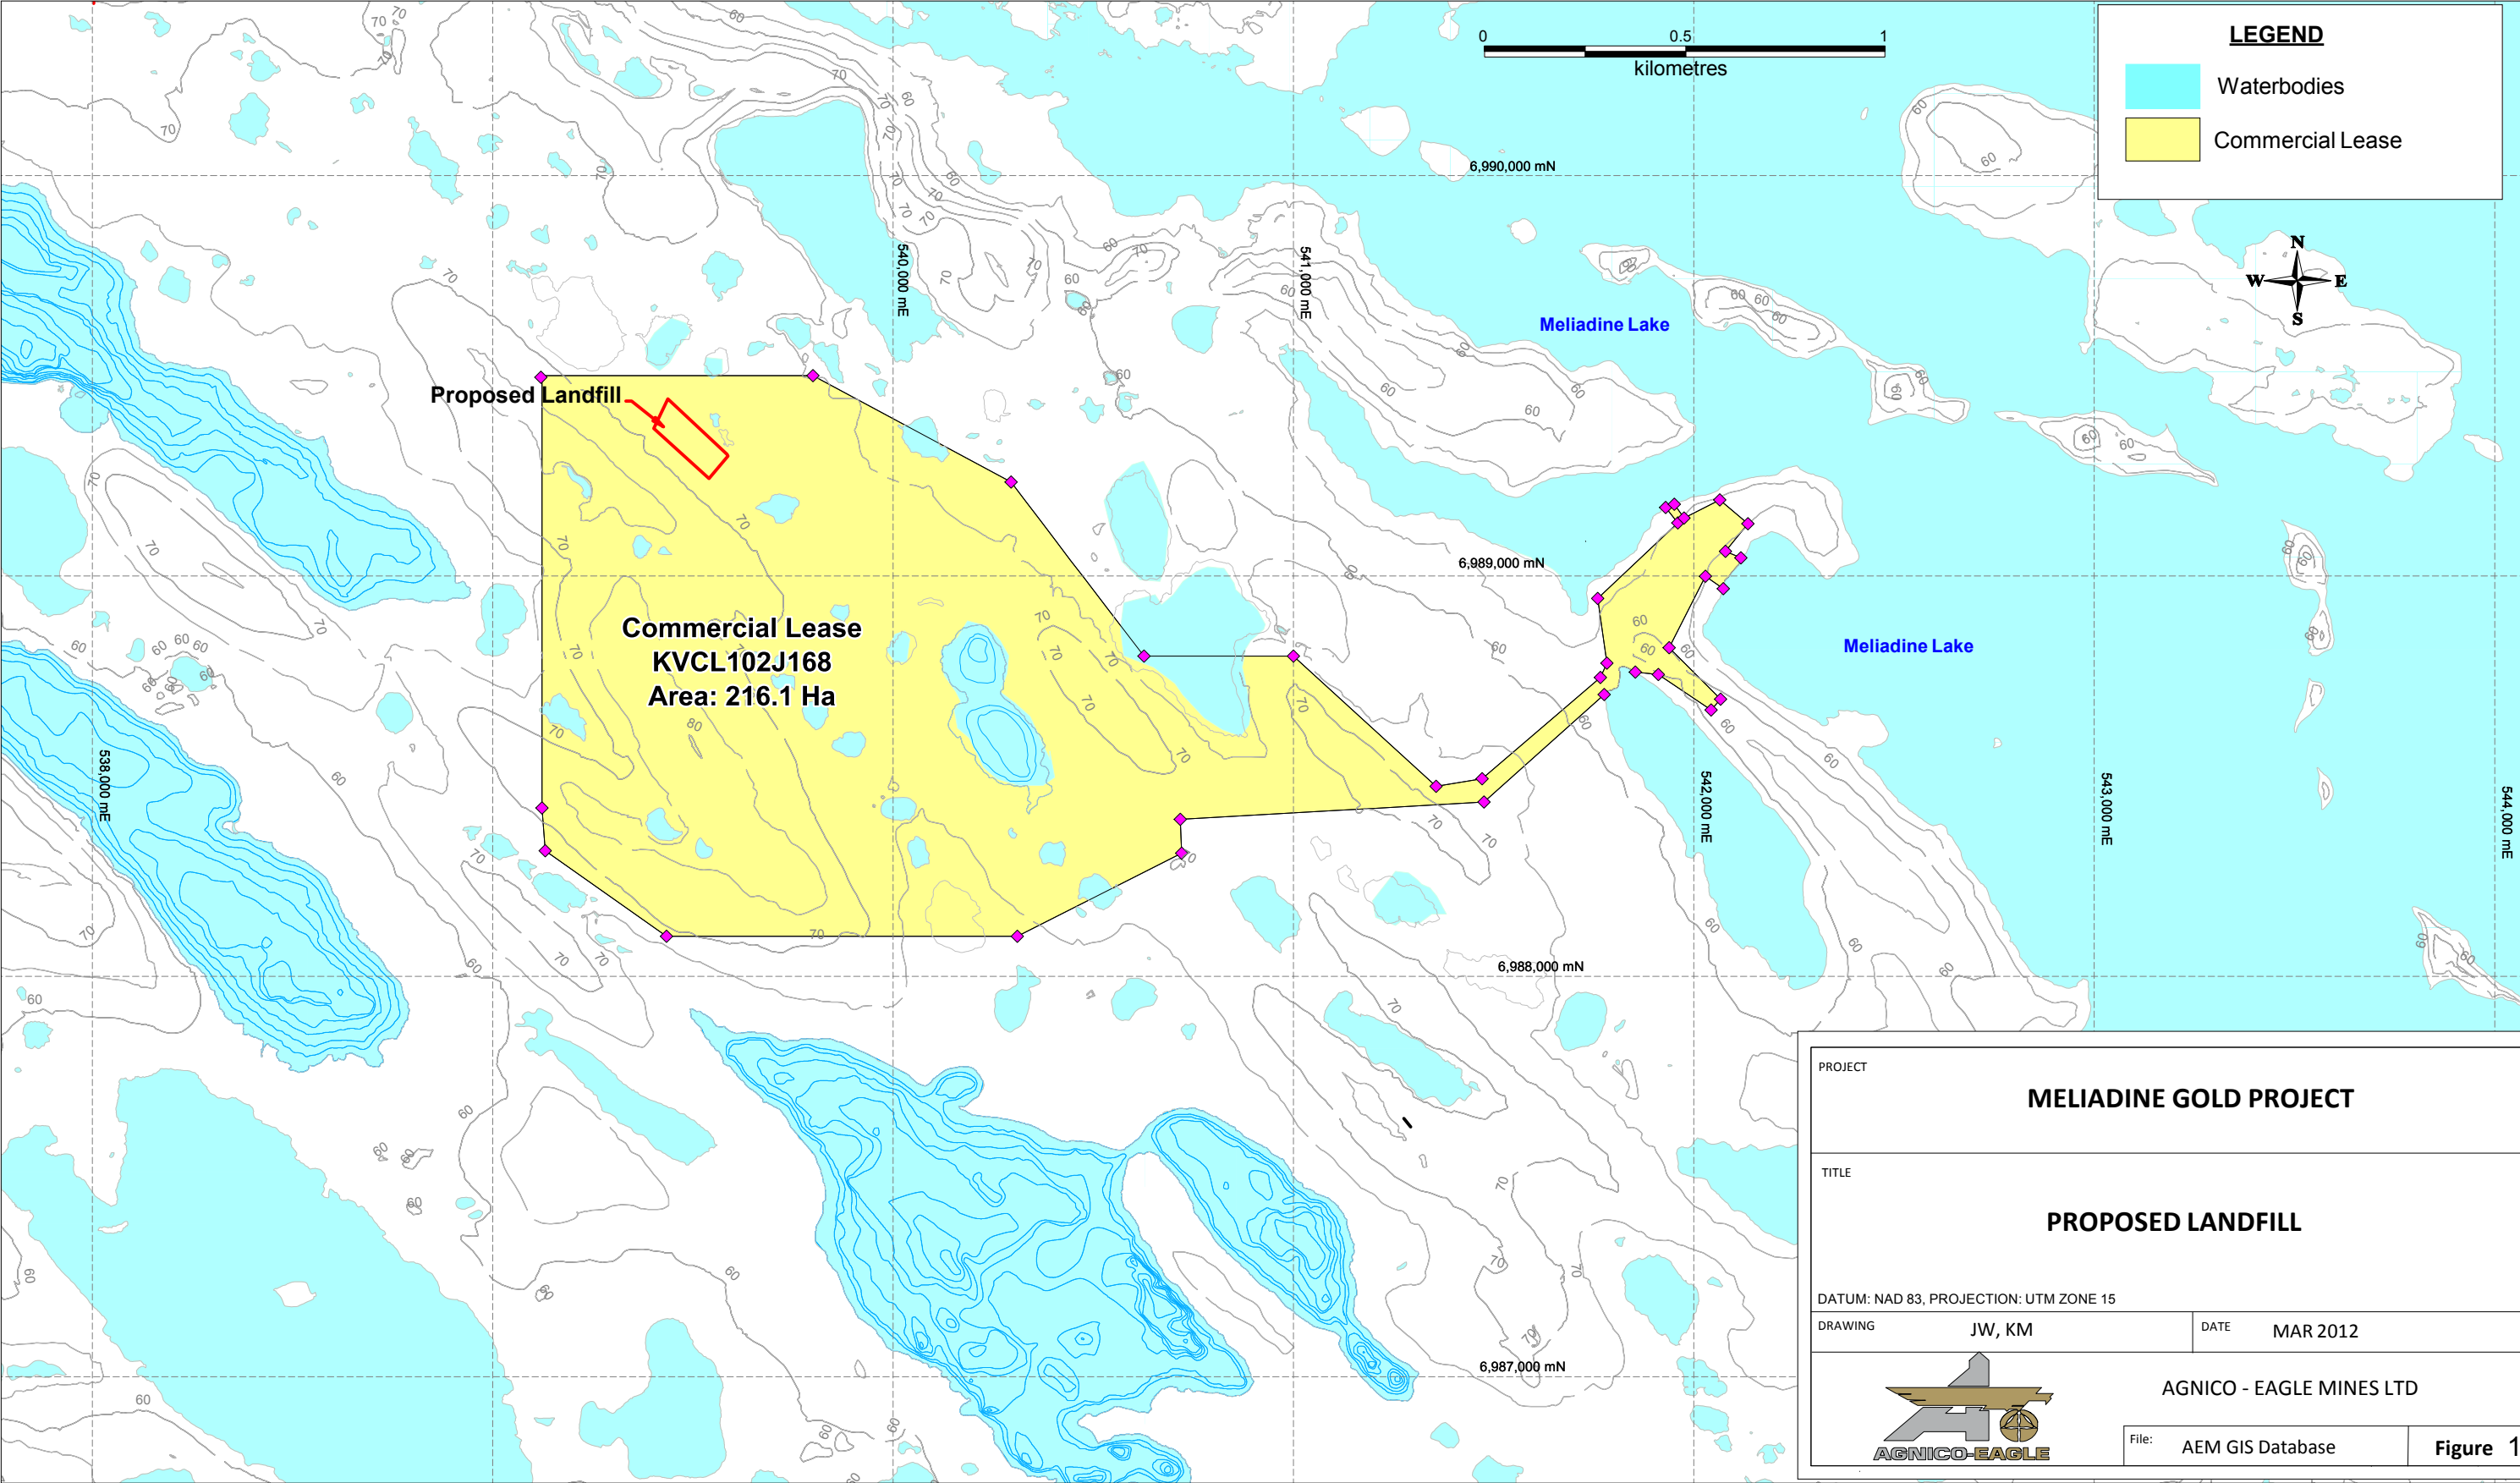

1.2 Project Description

The Meliadine advanced exploration site includes the following structures and facilities:

- Camp, dormitories and kitchen;
- Portal and underground workings;
- Waste rock pads and underground bulk sample facility ;
- Roads and ore storage on waste pads;
- Granular borrow pits;
- Water management facilities; and
- A proposed industrial waste landfill.

The Meliadine camp is designed to minimize the areas of surface disturbance, stabilize disturbed land surfaces against erosion, and return the land to a post-mining use that is chemically and physically stable, and consistent with past traditional pursuits and wildlife habitat (MGP, 2010a).

1.3 Location of the Landfill

The landfill will be sited considering the following criteria:

- Drainage – sites that drain into areas where water will be collected and monitored as part of the overall site plan are preferred.
- Avoid Ice Rich Soil Excavation – sites where bedrock is at relatively shallow depth are preferred.
- Disturbed Areas – sites that will be within or near areas that will be disturbed as part of the future overall mine plan are preferred.
- Access – sites that are located close to existing access roads are preferred.

The first three criteria are recommendations from the Mine Site Reclamation Guidelines for the Northwest Territories (INAC, 2006).

Based on the above criteria, a temporary landfill is planned east of Lake B7 as shown on figure 1-1.

The temporary Landfill will be developed and serve as the non-hazardous solid waste disposal site for four years of advanced exploration.

2. Regulatory Setting

Waste management in Nunavut is regulated under the *Nunavut Public Health Act*, the *Nunavut Environmental Protection Act* and the federal *Environmental Protection Act*. AEM is also bound by the terms and conditions of its commercial lease with the Kivalliq Inuit Association.

In addition to mandatory requirements, a number of waste management guidelines are commonly used in the NWT and Nunavut. The most recent of these was developed for municipal solid waste, and is titled “*Guidelines for the Planning, Design, Operations and Maintenance of Modified Solid Waste Sites in the NWT*”³. While not all of the recommendations provided in this guideline are appropriate for the management of industrial waste such as those generated at the Meliadine exploration camp, those principles that are considered applicable have been adopted in this Plan.

In addition, the *Mine Site Reclamation Guidelines for the Northwest Territories* (INAC 2006) were followed in this current document regarding specific landfill design and mitigation for impacts pertaining to waste. Where appropriate, recommendations from *Implications of Global Warming and the Precautionary Principle in Northern Mine Design and Closure* (BGC 2003) were also incorporated into this document,.

³ Report was prepared by Ferguson Simek Clark, April 2003, on behalf of the Department of Municipal and Community Affairs, Government of Northwest Territories

3. Plan for the On-Site Disposal of Solid Waste Approach

The strategy for the disposal of solid waste is to first identify and segregate acceptable disposal items from non-acceptable items. Acceptable items that can be disposed of at the on-site facility are those that are non-hazardous, non-putrescible, with a low leachate and heat generation potential. All other materials will either be incinerated or hauled offsite for shipment to a licenced hazardous waste management company. This strategy for limiting the materials that can be placed in the landfill greatly reduces the concentration of constituents in the leachate.

All solid wastes that may contain food waste, food packaging waste or other organic waste that could attract wildlife will be incinerated in the site's incinerator. This will include all garbage from the camp, camp kitchen, site lunchrooms and offices. The ash from the incinerator will be placed in containers (either jute bags or drums) and disposed of at the landfill. Incinerator ash samples will be collected and tested for metals according to the Government of Nunavut Environmental Guideline for Industrial Waste Discharges (Department of Sustainable Development, 2002). Ash that does not meet these guidelines will be packaged in drums and sent to a licensed hazardous waste management facility in the south.

The development of the landfill will minimize the area required for waste storage and the re-handling of waste. The landfill at the selected location will allow any leachate that may be generated to be collected, monitored and managed in the future tailing/waste rock area. The leachate from the landfill is anticipated to be weak due to the controls on materials placed in the landfill and thus site specific landfill leachate management is not considered to be required.

Based on the above strategy, a liner is not considered to be required for the landfill, nor is any special monitoring recommended. However, the landfill will conform to best management practice allowing for orderly landfill development, which reduces the potential for windblown debris.

3.1 Waste Acceptable for Placement in Landfill

The following materials will be acceptable for disposal at the temporary landfill:

- Plastic (except expanded polystyrene);
- Steel, copper, aluminum, iron;
- White goods;
- Wire;
- Wood;
- Fiberglass insulation;
- Fiberglass;
- Roofing;
- Asphalt;

- Concrete;
- Carpet;
- Bricks;
- Ceramics;
- Rubber
- Empty caulking tubes;
- Hardened caulk;
- Clothing;
- Glass including light bulbs, (fluorescent bulbs will require special handling, see below for more details);
- Waste Asbestos (see below for more details);
- Small appliances (with batteries removed);
- Gyproc;
- Ash provided it has cooled to 60°C or less; and
- Vehicles and machinery provided all liquids, grease, batteries, and electronics have been removed.

Waste Asbestos

Waste asbestos includes any type of material with greater than 1% asbestos by weight (Government of Nunavut, Environmental Protection Service, 2002a). Asbestos that has been immersed or fixed in a natural or artificial binder or included in a manufactured product is not considered waste asbestos, it is considered a hazardous waste (and will be disposed of accordingly). Waste asbestos can either be backhauled off-site for disposal in an approved facility or it can be landfilled. The following are guidelines for landfilling waste asbestos:

- Immediately buried and covered with 0.5 m of cover material
- Buried where it will not be disturbed
- The location should be maintained on a map or diagram for future reference

The complete *Environmental Guideline for Waste Asbestos* is included in Appendix A.

3.2 Waste Unacceptable for Placement in Landfill

Materials that are not listed above will be unacceptable for placement at the landfill, unless approved in writing by the Meliadine Environment department. These materials include:

- Organic matter including food, septic tank pumpings or sludge from waste water treatment, dead animals, paper, cardboard;
- Food containers and wrappings, unless cleaned;
- Whole tires;
- Hazardous waste including mercury, medical waste, batteries, solvents, glues, ethylene glycol antifreeze, adhesives (except empty caulking tubes);
- Electronics;
- Petroleum products, including materials contaminated with petroleum products; and
- Expanded polystyrene.

In particular, organic matter will not be accepted in the landfill, thus eliminating the attraction to carnivores and/or raptors. This will be accomplished by requiring all personnel to dispose domestic waste in designated receptacles and by sending all collected domestic waste (e.g. from kitchens and living quarters) to the site incinerator.

Fluorescent Lamp Tubes

Fluorescent tubes contain mercury phosphor powder and traces of lead and cadmium, which are considered environmental contaminants under the Nunavut *Environmental Protection Act*. The only disposal method for fluorescent tubes is through an approved hazardous waste recycling or disposal facility (Government of Nunavut, Environmental Protection Service, 2003). The *Disposal Guidelines for Fluorescent Lamp Tubes* are included in Appendix A.

At the Meliadine site and Rankin Inlet Marshaling Area, hazardous waste materials will be stored in secure facilities until they can be backhauled for off-site recycling or disposal at an approved facility in another provincial or territorial jurisdiction. AEM has registered as a Hazardous Waste Storage Facility with the Government of Nunavut Department of Environment.⁴

Ozone Depleting Substances

Ozone depleting substances (ODSs) include chlorofluorocarbons (CFCs) or halons. Common sources include refrigeration equipment, air conditioning equipment, motor vehicle air conditioners and fire extinguishing equipment (Government of Nunavut, Environmental Protection Service, 2002b). These materials are hazardous in nature; consequently, all disposal of ODS will take place at an approved facility in another provincial or territorial jurisdiction.

Any equipment containing ozone depleting substances should have the ODS removed by a certified technician prior to disposal in the landfill. The *Environmental Guideline for Ozone Depleting Substances* is included in Appendix A.

⁴ Waste Generator Number - NUG100031

3.3 Total Volume Of Waste

An estimate of waste volume is required to estimate the appropriate size of the landfill. However, an exact waste volume is not a critical parameter in the design because of the flexibility of design to accommodate extensions (larger to accept more waste) or contractions (smaller to accept less waste) of the landfill.

For the proposed conservative population of 150 to 300 persons⁵, it has been assumed that each person will produce 1 tonne of refuse per year, and that 50% by weight of that refuse can be incinerated (i.e. not landfilled except for the ash). Thus, 75 to 150 tonnes of solid waste would need to be landfilled each year. If it is further assumed that the density of this solid waste is 0.5 tonnes / m³, then 150 to 300 m³ of waste would need to be landfilled each year for the four year life of the temporary landfill.

The quantity of ash from the incinerator is estimated to be between 22.5 to 45 tonnes / yr., assuming incineration results in a 70% reduction in mass. Incinerator ash will be packaged in drums or sacks and the whole container landfilled, thereby eliminating any windblown effects.

3.4 Incinerator Ash Testing Protocol

Upon commissioning the new incinerator at Meliadine exploration Camp (a Camp Waste Incinerator - model: SN2000 purchased from Super Nova Manufacturing), an ash testing protocol will be implemented to ensure that the incinerator ash is suitable for disposal in the landfill.

Three ash samples will be collected, (one per month for the first three months the incinerator is in operation), and the leachate tested for trace metals. The samples will be compared to the Government of Nunavut guidelines for solid waste/process residual concentrations suitable for landfill, as described in the Environmental Guideline for Industrial Waste Discharges and presented in Table 3.1 (Department of Sustainable Development, 2002). Following the initial testing, ash samples will be collected and tested annually, or upon a significant change in the source or type of material sent to the incinerator.

If monitoring indicates the ash is above the guidelines and not suitable for landfilling, an investigation will be undertaken to identify the cause and eliminate the source for this exceedance. Ash with elevated metals concentrations will be packaged in drums and sent to a licensed hazardous waste disposal facility in the south.

⁵ For conceptual planning of landfill capacity, it was estimated that 300 persons (size of on-site camp facility) will be employed at any one time on-site. Environment Canada's 'State of the Environment InfoBase', Environmental Indicator Series 2003 (<http://www.ec.gc.ca>), indicates that the per capita non-hazardous solid waste generation in 2000 for Canada was almost 1 tonne per person per year. Thus, for landfill conceptual planning purposes, 300 tons of waste has been assumed to be generated each year. If this solid waste is incinerated, then incineration will result in ash with about 25% of the weight and 10% of the volume of the original solid waste.

Table 3.1: Guidelines for Solid Waste/Process Residuals Suitable for Landfill

Parameter	Concentration maximum (mg/L)
Arsenic	2.5
Barium	100
Cadmium	0.5
Chromium	0.5
Lead	5
Mercury	0.1
Selenium	1
Silver	5
Zinc	500

NOTE: Standards based on leachate test results

4. Landfill Location And Construction

The proposed location of landfill is shown on figure 1-1 to the east of Lake B7. This is an area of level topography having nearby an ample source of coarse granular esker material available for covering the material placed in the landfill. It is anticipated that this landfill will serve as the solid waste disposal facility for 4 years of advanced exploration. The design of landfill will require no exacting survey data or measurement. This is due to the restriction on materials that can be landfilled and the location of the landfill being within the future waste rock and/or tailing storage facilities. These factors reduce the need for leachate collection or control or mitigation measures against vectors such as carnivores or raptors. Thus, the main environmental mitigation measure required is a wind screen to reduce windblown debris.

The area to receive waste will be bounded on sides by a granular material or rockfill berm as shown in figure 4-1. The purpose of the berm is to confine the waste and to act as a wind shield to reduce windblown debris. The landfill will be a rectangular shape with the length perpendicular to the prevailing wind direction so that much of the waste will be protected from wind by the berm. The temporary landfill will be oriented so that the main wind direction has a minimal impact on the content in the landfill.

Provided the materials that go into the incinerator are controlled to exclude all hazardous materials (*i.e.*, even small quantities of hazardous waste such as batteries are not disposed in the landfill), then the incinerator ash should be non-hazardous. An ash testing protocol will be implemented to ensure that the incinerator ash is suitable for disposal in the landfill.

4.1 Landfill Protocol For Placement of Material




Annual landfill operation will involve clearing of snow prior to spring melt, placement of waste rock or granular material over the waste during the summer period, and placement of a graded cover prior to the winter period of snow accumulation.

An area method of dumping will be used such that materials will be dumped in rows and covered as required. Wastes will be disposed directly on the ground and compacted with heavy equipment against the berm or an existing row of compacted debris. This is followed by a final cover in excess of 1.5 metres of non acid generating rock and/or material from the esker as shown on figure 4-2.


4.2 Leachate Management

The leachate from the landfill is anticipated to be of very low ionic strength (dilute) due to controls on materials to be placed in the landfill, and as a result site-specific landfill leachate management is not considered to be required.

Owing to their placement within the future waste rock/tailing storage facility, the landfill will also become encapsulated within waste rock/tailings. AEM plans to use NPAG waste rock or granular material to surround and cover the landfill wherever practical. A minimum of 4 m thick layer of rock would also be placed over the landfill cover as part of planned closure activities for the temporary landfill as shown on figure 4 above.

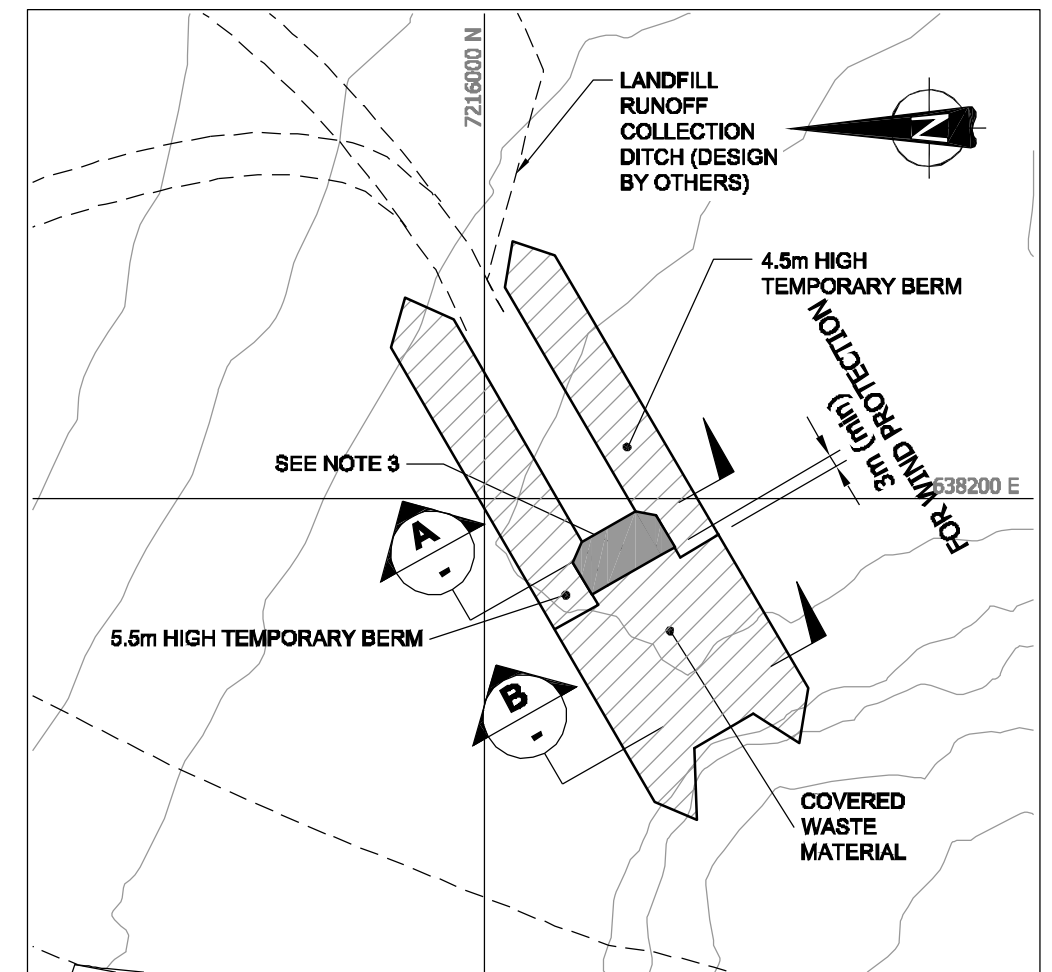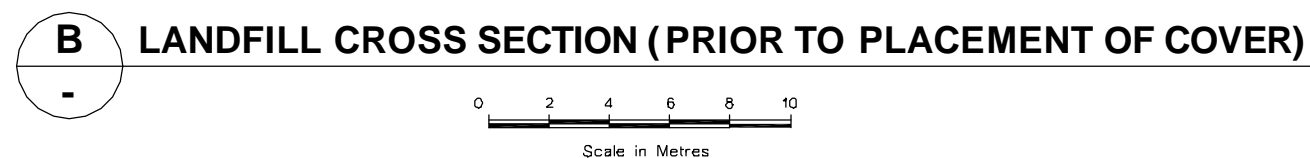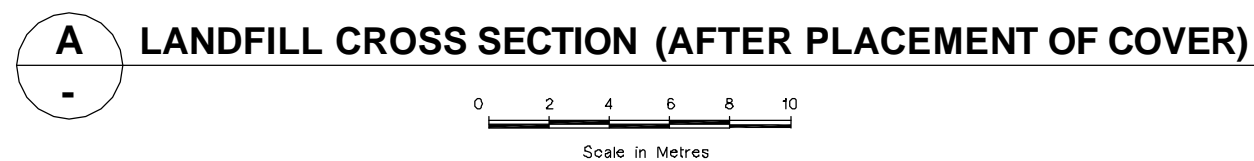


PROGRESSIVE PLACEMENT OF ROCKFILL COVER **DURING LANDFILL OPERATION**



- 1) EXCAVATION SOIL TO BEDROCK OR 2.1m DEPTH, WHICHEVER IS LESS AND REPLACE WITH 100mm MINUS GRAVEL HAVING LESS THAN 5% PASSING THE USS NO.100 SIEVE.
- 2) TEMPORARY BERM MATERIAL SHALL BE ROCKFILL.
- 3) ACTIVE AREA WITH EXPOSED WASTE MATERIAL SHALL BE MAXIMUM 15m LONG BY 24m WIDE AREA.

NOT FOR CONSTRUCTION

[illegible]

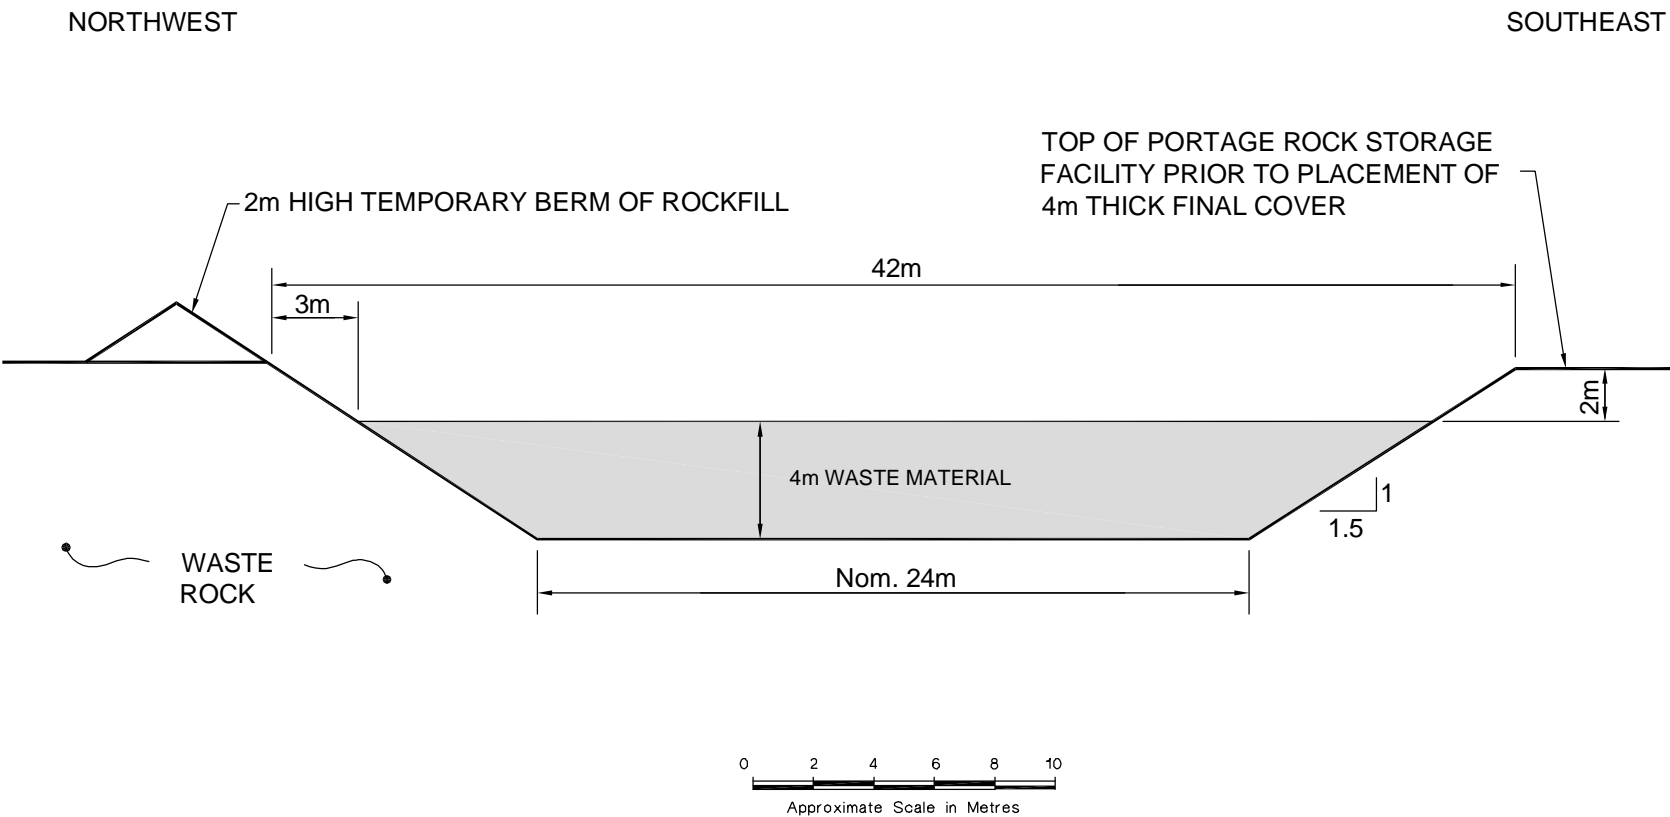

NOT FOR CONSTRUCTION

PROJECT					
MELIADINE GOLD PROJECT					
TITLE					
CONCEPTUAL CROSS SECTION OF LANDFILL #2 PRIOR TO PLACEMENT OF COVER					
PROJECT No. 06-1413-089			FILE No. 061413089-1400-FIG_4		
DESIGN	CW	23MAR07	SCALE	AS SHOWN	REV. -
CADD	AS	15AUG07	Figure 4-2		
CHECK					
REVIEW					



5. Landfill Conceptual Operations Plan

The following is a conceptual plan for operating the landfill:

a) Materials Acceptable for Disposal

See Section 3.1.

b) Materials Not Acceptable for Disposal

See Section 3.2.

c) Waste disposal rate

The proposed landfill capacity assumes an average of 300 to 600 m³ of waste will be landfilled per year.

d) Site Development and Landfilling Method

The site for the landfill will be prepared by first excavating soil down to bedrock or to 2.1 m depth, whichever is less. The excavation will then be filled with granular material. This will provide a suitable working surface for the landfill for all seasons.

The landfill will be filled progressively in an orderly manner. Specifically, waste will be placed at one end of the landfill at full height and then the active waste area would progressively advance. Areas where the waste has been placed to full height and levelled would be progressively covered by placement of a minimum 0.3 m thickness of rock fill or granular material on top of the waste.

e) Staffing and Equipment

The landfill will not require a full-time attendant. Trucks will haul waste to the landfill and a dozer would be used to spread and level the waste.

f) Leachate Management

The leachate from the landfill is anticipated to be of very weak (dilute) ionic strength due to the controls on materials placed in the landfill. Therefore, specific leachate management is not considered to be required.

g) Surface Water and Erosion Control

The slopes of the landfill will be covered with rockfill or coarse granular material, thereby protecting them from erosion. Additional surface water and erosion control will be incorporated into the landfill design, as appropriate.

h) Operational Inspections

The Meliadine General Manager will designate a landfill inspector to undertake periodic inspections of the landfill operations to verify compliance with the water licence, and operations and closure plan, including the condition of landfill works, evidence of erosion, excessive ponding or unusual landfill settlement, and adequacy of safety measures.

6. Conceptual Closure plan

The following is a conceptual plan for closing the landfill:

a) Estimate of Total Waste Volumes, Tonnage and Life of Landfill

Upon closure, it is estimated that the landfill will have a maximum volume of 2,400 m³ of waste.

b) Final Cover Design

The waste in the landfill will be covered granular material, waste rock or tailings and should therefore be stable.

c) Water Management

Contact water from the landfill in closure will continue to be managed under best management practices.

7. Potential Environmental Effects

The landfill will be designed and built as part of the future waste rock/tailing storage facilities. The access road to the Tiriganiaq esker borrow pit will be used to access the landfill. Landfill activities that were identified to have potential effects on VECs include site preparation and construction, operations and closure.

Potential effects from the landfill on VECs were assessed as follows:

- Degradation of permafrost;
- Change in surface water and groundwater drainage patterns due to the landfill footprint (altered landscape);
- Change in groundwater and surface water quality from leachate percolation, leading to degradation of aquatic habitat;
- Change in air quality from dust and windblown debris;
- Loss of vegetation cover and terrestrial mammal habitat due to landfill footprint;
- Attraction of predatory, small mammals to waste and raptors; and
- Loss of sites of heritage significance or traditional ways of life.

A summary of the environmental overview effects assessment, including mitigation measures and potential for residual effects is provided in Table 7.1.

Table 7.1: Environmental Overview Effects Assessment Summary

Valued Ecosystem Component	Description of Potential Project Effect	Mitigation of Effect	Residual Effect
Permafrost	<u>Permafrost Degradation</u> The construction, operations and closure of the landfill may disturb permafrost.	The landfill will be designed and built as part of the future waste rock/ tailing facilities to minimize ground disturbance and permafrost degradation, as per the Pre-mining Planning Option objectives outlined in the Mine Site Reclamation Guidelines for the Northwest Territories (INAC, 2006).	None
Surface Water and Groundwater Quantity and Distribution	<u>Change in Drainage Pattern</u> The construction, operations and closure of the landfill may alter surface water and groundwater drainage patterns.	The landfill will be designed and built as part of the future waste rock/ tailing storage facilities. Construction control measures are available for existing facilities to limit impacts to groundwater.	None
Water Quality	<u>Change in Water Quality</u> Leachate generation from landfill waste during operations may have an effect on water quality in the nearby water bodies.	Waste that can result in high toxicity leachate will be incinerated or hauled offsite, and will not be landfilled. Incinerator ash will be tested periodically to confirm that it is not hazardous waste. The leachate from the landfill is anticipated to be very low ionic strength (dilute) due to controls on materials to be placed in the landfill. At the end the landfill will be capped with under tons of material as it will be under the waste rock/ tailing storage facilities.	None
Air Quality	<u>Change in Air Quality (Emissions and Dust)</u> Emissions, dust and windblown debris from landfill operations may affect air quality.	Emissions and dust deposition are anticipated to be low due to the small quantity of waste and the covering by waste rock or coarse granular material. A rockfill or granular material berm will be constructed to act as a wind shield to reduce amount of windblown debris.	None

Valued Ecosystem Component	Description of Potential Project Effect	Mitigation of Effect	Residual Effect
Vegetation Cover	<u>Vegetation Loss</u> Landfill construction and operation will reduce vegetation.	The landfill will be designed and built as part of the future waste rock/ tailing facility; therefore there will be no additional effects to vegetation cover. Where appropriate, these mitigation measures will be incorporated into landfill closure.	None
Predatory Mammals	<u>Attraction to Landfill</u> Food and camp wastes attract scavengers during landfill operations including grizzly bear, Arctic fox and wolverine. Mortality of animals may occur if they are a threat to human safety.	Putrescible waste will be incinerated and will not be landfilled and thus there should be no food attraction for animals.	None
Small Mammals	<u>Attraction to Landfill and Habitat Loss</u> Landfill construction and operation will reduce vegetation cover and habitat for small mammals. Food and camp wastes attract scavengers during landfill operations.	Putrescible waste will be incinerated and will not be landfilled and thus there should be no food attraction for animals.	None
Raptors	<u>Nesting and Foraging Habitat Loss</u> Construction and operation of the landfill will reduce vegetation cover and habitat for raptor prey (small mammals and birds).	The landfill will be designed and built as part of the future waste rock/ tailing facility; therefore there will be no additional effects to vegetation cover.	None

Valued Ecosystem Component	Description of Potential Project Effect	Mitigation of Effect	Residual Effect
Breeding Birds	<p><u>Roosting, Foraging and Nesting Habitat Loss</u></p> <p>Construction and operation of the landfill will reduce vegetation cover resulting in loss of nesting sites.</p>	<p>The landfill will be designed and built as part of the future waste rock/ tailing facility; therefore there will be no additional effects to vegetation cover (breeding bird habitat).</p> <p>Progressive reclamation of the landfill will restore small breeding bird habitat after mine closure.</p>	None
Ungulates (caribou and muskoxen)	<p><u>Habitat Loss (foraging)</u></p>	<p>The landfill will be designed and built as part of the future waste rock/ tailing facility; therefore there will be no additional effects to vegetation loss (ungulate foraging habitat).</p> <p>Progressive reclamation of the landfill will restore foraging habitat for ungulates after mine closure.</p>	None

Valued Ecosystem Component	Description of Potential Project Effect	Mitigation of Effect	Residual Effect
Fish Habitat and Fish Populations	<u>Aquatic Habitat Degradation</u> Leachate generation from landfill waste during operations and closure may have an effect on water quality in the nearby water bodies.	Waste that can result in high toxicity leachate will be incinerated or hauled offsite and will not be landfilled. Incinerator ash will be tested periodically to confirm that it is not a hazardous waste. The leachate from the landfill is anticipated to be very low ionic strength (dilute) due to controls on materials to be placed in the landfill. At the end of mine life, the landfill would be capped under many metres of material as it will be under the waste rock/ tailing facility.	None
Sites of Heritage Significance	<u>Loss to Heritage Sites</u>	Project design was adjusted to the extent practicable to ensure that identified/known heritage resources sites are away from planned infrastructure.	N/A
Traditional Way of Life	<u>Loss to Traditional Way of Life</u>	According to traditional knowledge, there has been a lack of human activity in the Meliadine area where the proposed temporary landfill is to be located.	N/A

8. Effects Summary

The primary potential environmental effects from landfill activities included leachate generation, windblown debris and habitat (vegetation) loss. Given the effective implementation of mitigation plans, no residual environmental effects to VECs from construction, operation or closure of the landfill are anticipated. See summary below:

- The leachate that will be generated by the landfill is anticipated to be of very low ionic strength (dilute) due to restrictions on the materials that would be placed in the landfill. A rockfill or granular material berm will be constructed to act as a wind shield to reduce amount of windblown debris.
- Habitat loss will be minimized because the landfill will be designed and built within the footprint of future waste rock/ tailing storage area. With the implementation of terrestrial habitat reclamation strategies, the final surfaces of the landfill will be graded to blend into the existing topography and enhance conditions for wildlife.
- The temporary landfill will be within the future tailings/waste rock storage facility for the mine. As a result the landfill will be under many metres of either tailings and/or waste rock by the time the facility will be closed and encapsulated within the permafrost layer.

9. Plan Review And Continual Improvement

The Landfill Design and Management Plan will be reviewed annually by the Meliadine General Manager in consultation with the Landfill Inspector and Environmental Manager, and updated every two years as required. Improvements suggested through these reviews would be implemented in consultation with the Nunavut Water Board.

10. References

BGC (BGC Engineering Incorporated), 2003. Implications of Global Warming and the Precautionary Principle in Northern Mine Design and Closure. Prepared for Indian and Northern Affairs Canada, March 27, 2003.

Department of Sustainable Development (D of SD), 2002. Environmental Guideline for Industrial Waste Discharges. January 2002.

Ferguson Simek Clark Engineers and Architects, 2003. Guidelines for the Planning, Design, Operations and Maintenance of Modified Solid Waste Sites in the NWT. Prepared for Indian and Northern Affairs Canada, April 21, 2003.

Government of Nunavut, Environmental Protection Service, 2002a. Environmental Guideline for Waste Asbestos.

Government of Nunavut, Environmental Protection Service, 2002b. Environmental Guideline for Ozone Depleting Substances.

Government of Nunavut, Environmental Protection Service, 2003. Disposal Guidelines for Fluorescent Lamp Tubes.

INAC (Indian and Northern Affairs Canada), 2006. Mine Site Reclamation Guidelines for the Northwest Territories.

MGP (Meliadine Gold Project), 2010a MGP Reclamation and Closure Plan, November 2010


MGP (Meliadine Gold Project) 2010b MGP Waste Management Plan, August 2010

Appendix A

Government of Nunavut Environmental Guidelines

**Environmental Guideline for Waste Asbestos
Environmental Guideline for Ozone Depleting Substances
Disposal Guidelines for Fluorescent Lamp Tubes**

ENVIRONMENTAL GUIDELINE FOR Waste asbestos

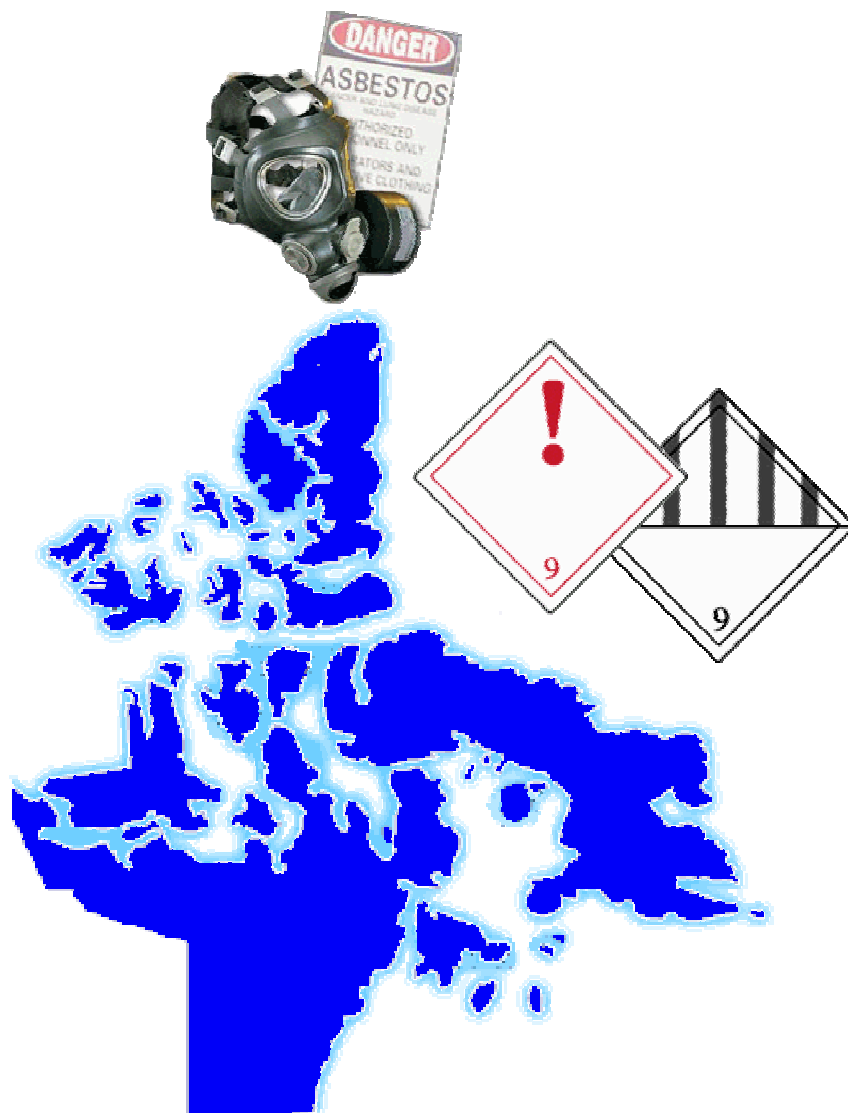

GUIDELINE: MANAGEMENT OF WASTE ASBESTOS

AS AMENDED BY:

USE OF GUIDELINE

A guideline is not law and is therefore not enforceable. It does however, assist an inspector to determine what action(s) may be required of him or her. Paragraph 2.2(c) of the *Environmental Protection Act* allows the Minister to "develop, co-ordinate and administer" guidelines. The Act [subsection 5(1)] makes it an offence to discharge a contaminant into the environment, subject to some exceptions [subsection 5(3)]. When a discharge occurs and it is inconsistent with the guidelines, the discharge is considered an unacceptable risk. The inspector may then consider issuing an order or laying an information.

A guideline allows for some leniency in applying the law. A court would probably be inclined to consider the application of a guideline favorably because the public is aware of the standards they are expected to meet.

This Guideline is not law.
It is prepared by Environmental Protection Service,
Department of Sustainable Development
Government of the Nunavut

Guideline for the Management of Waste Asbestos

1 Introduction

- 1.1 Definitions
- 1.2 Characteristics
- 1.3 Potential Effects

2 Roles and Responsibilities

- 2.1 Environmental Protection Service
- 2.2 Occupational Health and Safety
- 2.3 Generators of Waste Asbestos
- 2.4 Contractors

3 Waste Management

- 3.1 Pollution Prevention
- 3.2 Storage
- 3.3 Transportation
- 3.4 Asbestos Abatement
- 3.5 Disposal

4 Conclusion

Contact List

GUIDELINE FOR THE MANAGEMENT OF WASTE ASBESTOS

1 Introduction

This guideline provides general information on the proper management of waste asbestos. Waste asbestos is a contaminant under the *Environmental Protection Act* (EPA) and must be managed as a hazardous waste.

Asbestos is a cancer causing substance. The public, workers, and the environment must be protected from any air-borne exposure to this material.

This guideline is specific to the management of waste asbestos and should be read in conjunction with the Guideline for the General Management of Hazardous Waste In Nunavut (referred to as the General Guideline). Section 2.2 of the EPA gives the Minister of Sustainable Development the authority to develop, coordinate and administer these guidelines.

1.1 Definitions

<i>Asbestos</i>	Magnesium silicate minerals that occur naturally in fibrous forms. The regulated (TDGR) asbestos types include: chrysotile, actinolite, anthophyllite, tremolite (white), crocidolite (blue), amosite, myosorite (brown).
<i>Friable waste material</i>	A material which when dry can be crumbled, pulverized or reduced to powder by hand pressure.
<i>Generator</i>	The owner or person in charge, management or control of a hazardous waste at the time it is generated, or a facility that generates hazardous waste.
<i>Transport authority</i>	<p>The regulations controlling the management of hazardous waste under that mode of transport. These include:</p> <p>Road and rail - <i>Transportation of Dangerous Goods Act</i> (TDGA) and <i>Regulations</i> (TDGR)</p> <p>Air - <i>International Civil Aviation Organization Technical Instruction</i> (ICAO)</p> <p>Marine - <i>International Maritime Dangerous Goods Code</i> (IMDG).</p>
<i>Waste Asbestos</i>	Asbestos which is no longer useable for its intended purpose and is intended for storage, recycling or disposal. It includes any type of material with greater than 1% asbestos by weight but not asbestos that is immersed or fixed in a natural or artificial binder or included in a manufactured product.

1.2 Characteristics

Asbestos is a silicate mineral which is strong, flexible and resistant to heat and chemicals. Asbestos was used in a variety of materials including: fireproof fabrics, gaskets, electrical and heat insulation, chemical filters, brake lining, siding and concrete reinforcement.

1.3 Potential Effects

Respiratory exposure to asbestos particles and fibers causes cancer.

The fibrous nature of asbestos is a health concern. Friable asbestos readily floats in air and is easily inhaled. Due to the mineral nature it is not readily dissolved and may not be excreted from the body. If enough asbestos particles are taken into the respiratory tract cancer may develop.

Environmental and occupational exposure to asbestos is primarily from air-borne sources. This includes weathered or poorly maintained asbestos materials and particles from asbestos abatement (removal) projects. Natural exposures of asbestos (rock outcrops) and dust from vehicle brake pad wear are beyond the scope of this guideline.

2 Roles and Responsibilities

2.1 Environmental Protection Service

The Environmental Protection Service (EPS) of the Department of Sustainable Development is the Government of Nunavut's (GN) agency responsible for initiatives which control the discharge of contaminants and their impact on the environment. EPS is responsible for ensuring that environmentally acceptable management procedures, emission levels and disposal methods are maintained. EPS programs are applied primarily to Commissioner's Land, lands administered by municipal governments or GN undertakings. Legislative authority is provided by the *Environmental Protection Act* and *Pesticide Act*. Contact EPS for a listing of relevant regulations and guidelines.

2.2 Occupational Health and Safety

Worker protection from air-borne asbestos particles is regulated by the Prevention Services Division, Workers Compensation Board. The *Asbestos Safety Regulations*, under the *Safety Act*, require that employee exposure to hazardous air-borne asbestos be maintained below specified levels. The exposure levels correspond to the type of asbestos and the friability of the material. Contact the Prevention Services Division of the Worker's Compensation Board for the regulations and procedures required for the containment of asbestos dusts and worker protection.

2.3 Generators of Waste Asbestos

The responsibility for proper waste management rests with the generator and should be considered as part of the cost of doing business.

Waste asbestos is a hazardous waste. The owner (generator) of the asbestos is responsible for ensuring the waste asbestos is properly managed from the time it is generated to final disposal. Waste asbestos must be safely removed, handled, packaged, stored, transported, treated and/or disposed in accordance with this guideline and all applicable Acts and regulations.

2.4 Contractors

Contractors can manage waste asbestos on behalf of a generator. However, the generator is responsible for insuring that the waste management method complies with this guideline, the General Guideline and the requirements of other legislative authorities. (Including the *Asbestos Safety Regulations* under the *Safety Act* and the *Transportation of Dangerous Goods Act and Regulations* (TDGR) or other transport authority).

3 Waste Management

Minimizing or avoiding the creation of pollutants and wastes can be more effective in protecting the environment than treating them, or cleaning them up after they have been created.

Canadian Council of Ministers of the Environment

3.1 Pollution Prevention

Pollution prevention methods reduce or eliminate the creation of waste. Pollution control practices treat waste after it has been created. Pollution prevention opportunities for asbestos include the following:

Reduce

- Consider using less hazardous materials i.e.: fiberglass, metals, wherever possible. In some applications there is no replacement for asbestos.

Reuse

- Encapsulation of the existing asbestos by sealing with paint or an epoxy product, covering with paneling or other non-asbestos materials may be considered. The Prevention Services Division, Workers Compensation Board must be consulted prior to sealing areas that contain asbestos.
- Non-friable asbestos materials can be re-used (i.e.: fire-break asbestos cementous boards), to reduce replacement costs and extend the life of the product.

3.2 Storage

Waste storage is not a long term solution.

Store waste asbestos according to the following:

- Store in sealed, airtight containers and labeled "Asbestos" as directed by the *Asbestos Safety Regulations*.
- Use containers that are sound, sealable and not damaged or leaking.
- Label containers according to the requirements of the Work Site Hazardous Materials Information System (WHMIS) of the *Safety Act* or the relevant Transport Authority if transport to a disposal location is planned. (see Section 3.3 Transportation).
- Protect containers from the weather and physical damage.
- Storage should be in a secure area with controlled access.
- Train personnel in the safe use, storage and shipping procedures for waste asbestos. Only trained persons should have access to the storage area.

The short term storage of waste asbestos is only acceptable as an interim measure to permit time for the collection of sufficient volumes for cost effective transport to a disposal facility.

Storage of waste asbestos in quantities greater than 1000 kilograms for a period greater than 180 days requires the site to be a registered hazardous waste storage facility. Consult the General Guideline or contact EPS for application procedures.

3.3 Transportation

The transport of waste asbestos requires proper classification, packaging, labeling and documentation as required by the transport authority (air, marine, rail, road). Requirements for waste generators and carriers are detailed in the General Guideline.

Special Provisions 37 and 44 of TDGR are two exemptions for road transport of waste asbestos. These provisions allow for the substitution of a shipping document for the hazardous waste manifest, and, provided the shipping name and product identification number appear on the outer package or small container, labels are not required.

The shipping document must include the following information and should be mailed or sent by facsimile to EPS:

- Date of consignment
- Consignor identification, mark or signature
- Shipping name
- Product Identification Number
- Quantity

For road transportation purposes, waste asbestos can be classified in the following ways, depending on the type of asbestos.

Shipping Name: **Waste White Asbestos**
 P. 1. N.: UN 2590
 Classification: 9.1
 Packing Group: 111
 Special provisions: 37,44

Shipping Name: **Waste Blue Asbestos**
 P.I.N.: UN 2212
 Classification: 9.1
 Packing Group: 111
 Special provisions: 37,44

Shipping Name: **Waste Brown Asbestos**
 P.I.N.: UN 2212
 Classification: 9.1
 Packing Group: 111
 Special provisions: 37,44

Further consultation with the transport authority is recommended.

Generator numbers, waste manifests and registered hazardous waste carrier lists are available from the Environmental Protection Service.

3.4 Asbestos Abatement

Prevention of asbestos fibre release into the air is the primary objective of all asbestos abatement projects.

The removal of asbestos materials requires a thorough understanding of the potential hazards and knowledge of measures available to prevent worker, public and environmental exposure to asbestos fibers.

The *Asbestos Safety Regulations* require that employers conducting an asbestos removal project provide the following training to workers who are likely to come in contact with asbestos:

- (a) demonstration and instruction in the use of all protective equipment;
- (b) the safe handling and disposal of waste asbestos;
- (c) health education including information relating to pneumoconiosis, lung cancer and the effects of smoking; and,
- (d) any other information a safety officer considers necessary.

Other requirements, such as soaking the asbestos with water through its entire thickness prior to disturbing are designed for safety purposes.

Materials containing non-friable asbestos, such as asbestos cementous board (used as building siding), ceiling tiles, linoleum, tar papers, are generally non-hazardous if they remain intact. However, if these are broken or shredded, asbestos fibers may be released into the air. Minimal safety apparel is required when proper handling procedures are exercised. Contact the Prevention Services Division, Workers Compensation Board, for more information on worker protection or to obtain a copy of the regulations.

The names and location of asbestos training centers are available by contacting the waste management associations listed in Appendix B of the General Guideline.

3.5 Disposal

Two options are available for the disposal of waste asbestos.

Burial at the local landfill. Approval for local landfill disposal must be obtained from the municipal authority. Acceptance of the asbestos materials by the local authority must be confirmed to EPS by telephone or in writing. This ensures that the municipality is registered as a receiver of waste asbestos.

At the landfill, the waste asbestos shall be immediately buried and covered with one half meter of cover material (two feet). Cover materials can be locally available soils, refuse or other materials provided the asbestos containment is not ruptured. If a landfill practices open burning, waste asbestos should be placed in a dedicated trench isolated from the burning. The excavated soils from the trench should then be used to cover the asbestos to the required depth.

In addition:

- the excavation must be isolated from future burning activities.
- the asbestos waste should be buried where it will not be disturbed.
- the location of the asbestos should be maintained on a map or diagram of the property by the municipal authority for future reference.

The second disposal option for asbestos is to contract a registered waste management company. These companies can be contacted through their associations listed in Appendix II of the General Guideline.

Consideration will be given to proposals for alternate disposal methods that provide a level of environmental protection equivalent to complying with this guideline. The Environmental Protection Service may approve the method, subject to conditions.

4 Conclusion

This guideline presents a brief introduction into the management of waste asbestos. It is intended as a source of basic information and should be read in conjunction with the Guideline for the General Management of Hazardous Waste in Nunavut.

For more information contact:

- 1) Environmental Protection Service
Department of Sustainable Development
P.O. Box 1000, Station 1195
Iqaluit, Nunavut, X0A 0H0
Phone: (867) 975-5900; Fax (867) 975-5990
- 2) Motor Vehicle Division
Department of Community Government and Transportation
P.O. Box 207
Gjoa Haven, Nunavut, X0E 1J0
Phone (867) 360-4614 Fax (867) 360-4619
- 3) Prevention Services Division
Workers' Compensation Board
P.O. Box 669
Iqaluit, Nunavut, X0A 0H0
Phone: (867) 979-8500; Fax: (867) 979-8501
(867) 873-7468 (accident report); Fax: (867) 873-0262
1-800-661-0792

If you would like to be placed on a mailing list to receive guideline amendments or for public consultation on Environmental Protection Service legislation please fill this out and mail or fax to:

Environmental Protection Service
Department of Sustainable Development
P.O. Box 1000, Station 1195
Iqaluit, Nunavut, X0A 0H0
Fax: (867) 979-5990

Users of this guide are encouraged to report any errors, misspellings, etc. contained within, to EPS at the above address

Mailing List for Environmental Protection Service Information

Name: _____

Title: _____

Address: _____

Phone / Fax Number: _____

Disposal Guidelines for Fluorescent Lamp Tubes

Fluorescent tubes contain mercury phosphor powder and traces of lead and cadmium. These chemicals are environmental contaminants under the Nunavut *Environmental Protection Act* (EPA).

The only disposal method for fluorescent tubes is through an approved hazardous waste recycling or disposal company. The *Guideline for Industrial Waste Discharges* prohibits landfill disposal if mercury is present in excess of 0.2 mg/Litre (parts per million) based on leachate quality test results.

Provided the fluorescent tubes are not broken and are packaged in their original shipping box, no special requirements are needed for transport purposes; transport, as a hazardous waste is not necessary. Nevertheless, if the fluorescent tubes are broken, compliance with the *Guideline for the General Management of Hazardous Waste and Transportation of Dangerous Goods Regulations* is required. Also, special handling and safety procedures are required to prevent worker exposure to mercury. The Nunavut *Safety Act* and *General Safety Regulations* is the legislative authority. To ensure worker safety when handling mercury, contact a Safety Officer at the Prevention Services Division.

Recycling and Disposal Services:

- Sorci Industries, Langly BC; tel: (604) 857-5588, fax: (604) 857-5775
- RFL, Coteau-du Lac, PQ; tel: 1-800-567-8027 or (514) 345-0066, fax: (514) 763-0072
- Electro Waste 2002Ltd., Gloucester, ON, tel: (613) 744-6659, fax (613) 744-5981
- Environmental Services Association of Alberta, tel: 1-800-661-9278 or (403) 439-6363, fax: (403) 439-4249

For more information contact:

- 1) Environmental Protection Service
Department of Sustainable Development
Government of Nunavut,
P.O. Box 1000, Station 1195, 3rd Floor W. Brown Building,
Iqaluit, NU X0A 0H0, Telephone (867) 975-5900 or Fax (867) 975-5990
- 2) Motor Vehicle Division
Department of Transportation
P.O. Box 1000, Station 775, Iqaluit, NU X0A 0H0,
Telephone: (867) 975-5380 or Fax: (867) 975-5385
- 3) Prevention Services Division
Workers Compensation Board
P.O. Box 669, Iqaluit, NU X0A 0H0,
Tel: (867) 979-8500 or 1-877-404-4407 or Fax: (867) 979-8501

ENVIRONMENTAL GUIDELINE FOR OZONE DEPLETING SUBSTANCES



GUIDELINE: MANAGEMENT OF OZONE DEPLETING SUBSTANCES

AS AMENDED BY:

USE OF GUIDELINE

A guideline is not law and is therefore not enforceable. It does however, assist an inspector to determine what action(s) may be required of him. Paragraph 2.2(c) of the Environmental Protection Act allows the Minister to develop, co-ordinate and administer guidelines. The Act [subsection 5(1)] makes it an offence to discharge a contaminant into the environment, subject to some exceptions [subsection 5(3)]. When a discharge occurs and it is inconsistent with the guidelines, the discharge is considered an unacceptable risk. The inspector may then consider issuing an order or laying an information.

A guideline allows for some leniency in applying the law. A court would probably be inclined to consider the application of guideline favourably because the public is aware of the standards they are expected to meet.

This Guideline is not law.
It is prepared by Environmental Protection Service,
Department of Sustainable Development
Government of the Nunavut

January, 2002

Guideline for Ozone Depleting Substances (ODSs)

1 Introduction

1.1 Definitions

2 Roles and Responsibilities

2.1 Environmental Protection Service

2.2 Other Regulatory Agencies

2.3 Owners

2.4 Service Technicians

2.5 Vendors of ODSs

3 Standards

3.1 Release of ODS

3.1.1 Reported Release

3.2 Servicing Certification

3.3 Sales Record

3.4 Record Keeping and Labelling

3.5 Servicing

3.6 Disposal of Refrigeration Equipment

3.7 Motor Vehicle Air Conditioners

3.8 Fire Extinguishing Equipment

4 Conclusion

5 Bibliography

Appendices

GUIDELINE FOR OZONE DEPLETING SUBSTANCES (ODSs)

1 Introduction

The stratospheric ozone layer helps filter the sun's harmful ultraviolet (UV) radiation from the earth. Increased UV radiation harms human health and damages animal and plant life. Evidence shows that the main causes of ozone depletion are the releases of manufactured chlorofluorocarbons (CFC's), halons and a few other chemicals into the atmosphere. Hence, these materials are known as ozone depleting substances (ODSs). As one of 134 nations ratifying the Montreal Protocol, an international agreement to protect the ozone layer, Canada is committed to eliminating releases of ODSs.

The intent of this guideline is to assist in the management of ozone depleting substances in Nunavut. This guideline provides requirements and direction regarding the release, servicing, training, record keeping, labelling and disposal of equipment containing ODSs. For the purposes of this guideline, ozone depleting substances include certain air conditioning and refrigerant agents as well as substances contained in certain fire extinguishing equipment. The guideline targets commercial applications which account for 78% of the total sum of stored, leaked and consumed ozone depleting substances in the NWT and Nunavut. The total quantity of ODSs in the NWT and Nunavut amounts to over 65 tonnes.

The *Guideline for Ozone Depleting Substances* does not cover the production, importing or exporting of new, unused ODSs. These activities are controlled under federal regulations by Environment Canada.

This publication is a general guideline affecting the use of ozone depleting substances in Nunavut. Section 2.2 of the *Environmental Protection Act* (EPA) gives the Minister of Sustainable Development the authority to develop, coordinate and administer guidelines. This guideline complements existing acts and regulations that should be consulted for interpretation and application.

1.1 Definitions

<i>Air conditioning or Refrigeration equipment</i>	Heat pump, air conditioning, or refrigeration equipment including any motor vehicle air conditioners which contain an ozone depleting substance.
<i>Certified service technician</i>	A technician who is otherwise qualified to service ODS containing equipment and has successfully completed an environmental awareness course for ozone depleting substances certified by Environment Canada.
<i>Code of Practice</i>	The Environment Canada publication entitled <u><i>Code of Practice for the Reduction of Chlorofluorocarbon Emissions from Refrigeration and Air Conditioning Systems</i></u> (EPS/1/RA/1 March 1991, original date) and subsequent updates.
<i>Fire extinguishing equipment</i>	A portable or fixed unit or system used to extinguish fire, that contains an ozone depleting substance.

<i>Motor vehicle air conditioner</i>	An air conditioning system on a motor vehicle which is a mechanical vapour compression refrigerant system that provides cooling for the passenger compartment of the vehicle and contains an ozone depleting substance as a refrigerant.
<i>Ozone depleting substance (ODS)</i>	A chlorofluorocarbon, halon or any other substance listed in Schedule I of this guideline that has the potential to destroy ozone in the stratosphere.
<i>Portable fire extinguisher</i>	A hand-held or wheeled fire extinguisher containing an ozone depleting substance.
<i>Recover</i>	Collecting an ozone depleting substance in a container which is not regularly a component of the system from which the ODS was removed.
<i>Recycle</i>	Restoring a recovered ozone depleting substance to acceptable purity levels by filtering, drying or distilling.
<i>Servicing</i>	The act of repairing, maintaining or adjusting a component of fire extinguishing, air conditioning, or refrigeration equipment, where the component contains an ozone depleting substance.

2 Roles & Responsibilities

2.1 Environmental Protection Service

The Department of Sustainable Development, Environmental Protection Service (EPS) is responsible for initiatives which control the discharge of contaminants and reduce the impact on the natural environment. EPS is responsible for ensuring that waste management procedures, emission levels and environmentally acceptable disposal methods are maintained. Contact EPS for a listing of relevant regulations and guidelines.

A waste manifest form must accompany ODSs recovered from commercial equipment if moved off site for storage, recycling or disposal. For further information on hazardous waste manifesting please refer to the *Guideline for the General Management of Hazardous Waste in Nunavut* or contact EPS. Registration numbers and waste manifest forms are available by contacting EPS.

2.2 Other Regulatory Agencies

Environment Canada under the Canadian Environmental Protection Act's *Chlorofluorocarbon Regulations* (SOR/90-127), *Ozone-depleting Substances Regulations* (SOR/94-408) and *Ozone-depleting Substances Products Regulations* (SOR/90-584) control the import, manufacture, use, sale

and export of bulk chlorofluorocarbons, hydrobromofluorocarbons, halons, carbon tetrachloride and methyl chloroform. These regulations reflect Canada's international commitments under the Montreal Protocol to eliminate production and consumption of ozone depleting substances.

The Nunavut Department of Community Government and Transportation, through the Office of the Fire Marshal is involved with ODSs because several types of fire extinguishing equipment contain halons.

2.3 Owners

Building/facility owners may be affected by phase-outs of ozone depleting substances. ODSs are most often found in air conditioning or refrigeration equipment or as halons in fire extinguishing systems. Owners have the responsibility to prevent releases of ODS from equipment.

Automobile owners must not ignore leaky air conditioning equipment containing ODS.

Owners of fire extinguishing equipment containing a halon should be aware of the presence of an ODS in the equipment. Replacement halons are no longer being manufactured or imported into Canada. As a result, these owners should consider plans to phase out the use of halon containing fire extinguishing equipment.

2.4 Service Technicians

Certified service technicians should be hired to repair leaks or damages to equipment containing the ODS as quickly as possible. Service technicians should not fill leaking equipment. Technicians must use proper recovery/recycling equipment and methods to prevent the release of the ODS into the environment. Section 3.5 of this guideline provides additional information on servicing. The technician should inform the building owner when they become aware of leaking equipment.

Automobile service technicians have similar responsibilities to those described above. Only certified technicians should repair leaks to automobile air conditioning equipment.

2.5 Vendors of ODSs

Vendors who sell ODSs other than as part of equipment also have a role in the management of these materials. Vendors are responsible for selling ODSs to only certified technicians. Vendors are encouraged to ensure industry stewardship of ODS refrigerants and fire extinguishing equipment.

3 Standards

The following sections outline the requirements for managing ODSs substances in Nunavut.

3.1 Release of ODS

ODS releases should not be allowed. The following are the major sources of ODSs in Nunavut;

- refrigeration equipment, including some indoor ice making equipment
- air conditioning equipment
- motor vehicle air conditioners
- fire extinguishing equipment

- equipment used in the recovery, recycling or storage of an ODS

Careful attention should be paid when handling these pieces of equipment. Any leaks in equipment should be repaired before adding an ODS. When servicing, testing or discarding fire extinguishing, air conditioning or refrigeration equipment the certified technician should recover the ODS for reuse or recycling.

Small communities where certified service technicians are not generally available may contact EPS for assistance on developing a plan to properly handle ODS containing equipment including discarded refrigerators and freezers.

3.1.1 Reported Release

The following release limits are in accordance with the *Environmental Protection Act's Spill Contingency Planning and Reporting Regulations*.

Any release of an ODS listed in Schedule I of this guideline, and classified as a class 2 (compressed gas), under *Transportation of Dangerous Goods Regulations* (TDGR) from containers with a capacity greater than 100L, must be reported immediately to the 24 Hour Spill Report Line by calling (867) 920-8130.

Similarly, a release of 5L or greater of an ODS listed in Schedule I of this guideline, and classified as a class 6 (poisonous substance), under TDGR, must be reported immediately to the 24 Hour Spill Report Line by calling (867) 920-8130.

3.2 Servicing Certification

Only certified technicians should service air conditioning, fire extinguishing, refrigeration or motor vehicle air conditioner equipment. To become certified, a service technician shall successfully complete an environmental awareness course for ozone depleting substances certified by Environment Canada¹. Only a certified technician may purchase or possess an ozone depleting substance for the purpose of servicing equipment containing an ODS. Companies employing service technicians will maintain records indicating which employees are certified to service ODS containing equipment.

3.3 Sales Record

If a certified technician purchases an ODS other than as a component in another product, the vendor will require the certified technician to sign an acknowledgement of receipt of the ODS. The vendor should keep a sales record indicating the type of ODS, the date of sale, as well as the name and company of the certified technician.

3.4 Record Keeping and Labelling

All persons who service refrigeration, fire extinguishing or air conditioning equipment with an ozone

¹ For environmental awareness certification in NWT and Nunavut contact Aurora College, Thebacha campus. Contact the Environmental Protection Service for a listing of courses elsewhere.

depleting substance should keep an accurate log of the particulars of the event including quantities, date, name of business and certified technician involved. The record should be tabled chronologically and be made available for inspection by an inspector under the *Environmental Protection Act*. All information and records referred to in this guideline should be maintained for a period of two years.

All new equipment imported into, installed or sold in Nunavut that contains an ODS should be clearly labelled with the quantity and type of ODS contained in the equipment.

All vendors and service companies who are required to maintain records are requested to initially provide the Environmental Protection Service (EPS) in writing, the name and mailing address of the company as well as a contact name.

3.5 Servicing

Any technician who services refrigeration, fire extinguishing or air conditioning equipment should do so in accordance with the Code of Practice and this guideline. An ozone depleting substance should never be used for the purposes of leak testing refrigeration or air conditioning equipment. Technicians servicing air conditioning or refrigeration equipment should use equipment that can recover and contain an ODS. Recovery and recycling equipment should meet or exceed minimum performance standards set out in Schedule II.

3.6 Disposal of Refrigeration Equipment

Any equipment that contains an ozone depleting substance should be serviced by a certified technician, and the CFCs or HCFCs removed prior to disposal. Technicians should place a notice on the piece of equipment stating; the date of the service, the certified technician and company name as well as an indication that the equipment no longer contains refrigerant.

Household refrigeration equipment delivered to a municipal solid waste landfill is exempt from requiring removal of ODSs providing the landfill has a separate area identified and prepared for storage of this equipment. Municipalities are encouraged to bring in certified technicians to remove ODSs from stored equipment when quantities warrant. Remote, isolated, small communities where certified service technicians are not generally available may contact EPS for assistance on developing a plan to properly manage ODS containing equipment including discarded refrigerators and freezers.

3.7 Motor Vehicle Air Conditioners

Servicing a motor vehicle air conditioner requires the technician to follow the methods set out in the *Code of Practice and the Society of Automotive Engineers (SAE) Standard J-1989*. A motor vehicle cannot be discarded unless the ozone depleting substance used as a refrigerant in the air conditioner is recovered. Any motor vehicle delivered to a municipal solid waste landfill is exempted from requiring removal of ODSs providing the landfill has a separate area identified and prepared for storage of this equipment. Municipalities are encouraged to bring in certified technicians to remove ODSs from stored equipment when quantities warrant.

3.8 Fire Extinguishing Equipment

Fire extinguishing equipment cannot be disposed of unless the ODS is recovered. Recovered halons

can be used to provide recharge quantities to existing systems. The Underwriters' Laboratories of Canada (ULC) has published two standards that address halon recycling; *Servicing of Halon Extinguishing Systems* and *Halon Recovery and Re-conditioning Equipment*.

It is recommended that a person who owns fire extinguishing equipment that contains more than 40 kgs of an ODS should evaluate alternatives. They should prepare a management plan to eliminate the use of halons. Environment Canada's *Environmental Code of Practice on Halons* can be used as a guide in developing a halon management plan.

The Montreal Protocol required a phase-out of halon production and consumption by January 1, 1994. However, the Montreal Protocol allows the continued trade of recycled halons, i.e. those produced before January 1, 1994.

Owners of portable fire extinguishers, including marine and household systems, containing an ODS are encouraged to be taken out of service and sales stopped by December 31, 1996.

4 Conclusion

This document is intended as a source of basic information about the issues involved in the management of ozone depleting substances. It does not replace the existing legislation which is referenced in the guideline. If you have any questions or concerns please contact the appropriate agency before proceeding.

1. Environmental Protection Service
Department of Sustainable Development
P.O. Box 1000, Station 1195
Iqaluit, Nunavut, X0A 0H0
Phone: (867) 975-5900; Fax: (867) 975-5990
2. Office of the Fire Marshal
Department of Community Government and Transportation
P.O. Box 1000, Station 700
Iqaluit, Nunavut, X0A 0H0
Phone (867) 975-5316; Fax (867) 979-4221
3. Environmental Protection Branch
Environment Canada
P.O. Box 1870
Iqaluit, Nunavut, X0A 0H0
Phone: (867) 979-3660; Fax: (867) 975-4645
4. Commercial Chemicals Evaluation Branch
Environment Canada
351 St. Joseph Blvd.
Hull, PQ, K1A 0H3
Phone (819) 953-1675; Fax (819) 953-4936
5. The Heating, Refrigerating and Air Institute of Canada (HRAI)
5045 Orbiter Drive, Bldg. 11, Suite 300
Mississauga, ON, L4W 4Y4
Phone: 1-800-661-3369

6. Manitoba Ozone Protection Industry Association Inc. (MOPIA)
19-1110 Henderson Highway
Winnipeg, MB, R2G 1L1
Phone (204) 338-0804; Fax (204) 338-0810

5 Bibliography

B.C. Environment, Ozone Depleting Substances & You, Victoria, BC, Air Resources Branch, (1994).

Environment Canada, Code of Practice for Elimination of Fluorocarbon Emissions from Refrigeration and Air Conditioning Systems, Ottawa, ON, (1996).

Environment Canada, Environmental Code of Practice on Halons, Ottawa, ON, (1995).

New Brunswick Department of the Environment, Status Report on the Ozone Depleting Substances Regulation, Fredericton, NB, Air Quality Section, (1994).

Government of Nunavut, General Guideline for the Management of Hazardous Wastes, Iqaluit, Nunavut, Environmental Protection Service, Department of Sustainable Development, (2002).

Government of Nunavut, Ozone Depleting Substances in Nunavut, Iqaluit, Nunavut, Environmental Protection Service, Department of Sustainable Development, (2002).

Government of Ontario, Ozone Depleting Substances - Reg.356, Refrigerants-Reg. 189, Toronto, ON, Queen's Printer of Ontario, (1994).

Government of Prince Edward Island, Ozone Depleting Substances and Replacement Regulations, Charlottetown, P.E.I., Environmental Protection Service, Department of Environmental Resources, (1994).

Government of the Yukon, Ozone Depleting Substances & Other Halocarbons Regulations, Whitehorse, YT, Environmental Protection & Assessment Branch, Department of Renewable Resources, (2000).

Society of Automotive Engineers (SAE), Standard J-1989.

Underwriters Laboratories of Canada (ULC), Halon Recovery and Reconditioning Equipment, ULC/ORD-C1058.5-1993.

Underwriters Laboratories of Canada (ULC), The Servicing of Halon Extinguishing Systems, ULC/ORD-C1058.18-1993.

Appendix A

SCHEDULE I

OZONE DEPLETING SUBSTANCES

1. Chlorofluorocarbons (CFC's)

a)	CFC-11	trichlorofluoromethane	Not restricted under TDG
	CFC-12	dichlorofluoromethane	TDG class 2.2 Non-flammable gas
	CFC-113	trichlorotrifluoroethane	Not restricted under TDG
	CFC-114	dichlorotetrafluoroethane	TDG class 2.2 Non-flammable gas
	CFC-115	chloropentafluoroethane	TDG class 2.2 Non-flammable gas

b) All other CFC's. Consult TDGA for classification.

c) All isomers and mixtures containing any of the above.

2. Hydrochlorofluorocarbons (HCFC's)

a)	HCFC-22	chlorodifluoromethane	TDG class 2.2 Non-flammable gas
	HCFC-123	dichlorotrifluoroethane	Not restricted under TDG
	HCFC-124	chlorotetrafluoroethane	TDG class 2.2 Non-flammable gas

b) All other HCFC's not specifically listed. Consult TDGA for classification.

c) All isomers and mixtures containing any if the above.

3. Bromofluorocarbons (Halon's)

a)	Halon-1211	bromochlorodifluoromethane	Not restricted under TDG
	Halon-1301	bromotrifluoromethane	TDG class 2.2 Non-flammable gas
	Halon-2402	dibromotetrafluoroethane	Not restricted under TDG

b) All other halons not specifically listed. Consult TDGA for classification.

c) All isomers and mixtures containing any of the above.

4. Chlorocarbons

a)	Trichloroethane or methyl chloroform	TDG class 6.1 Poison
	Carbon tetrachloride	TDG class 6.1 Poison

b) All isomers and mixtures containing any of the above.

Appendix B

SCHEDULE II

PERFORMANCE STANDARDS FOR ODS RECYCLING OR RECOVERY AND RECYCLING DEVICES

1. Devices for the recovery and recycling of an ozone depleting substance designed to be used with the type of air conditioning or refrigeration equipment listed in Column I of Table 1 must, during normal operation, be capable of ensuring removal of the refrigerant from the equipment being serviced by reducing the system pressure, below atmosphere, to the level listed in Column II of Table 1 opposite the type of equipment.

Table 1

COLUMN I		COLUMN II
	INCHES OF MERCURY (VACUUM)	MICROMETERS OF MERCURY (ABSOLUTE PRESSURE)
Very high pressure equipment	0	760000
High pressure equipment with a charge of 23 kg or less	10	506000
High pressure equipment with a charge of more than 23 kgs	20	252000
Intermediate pressure equipment	25	125000
Low pressure equipment	29	23000

2. Devices for recovery or recovery and recycling intended for use with small appliances that contain an ozone depleting substance in their cooling system such as household refrigerants, or household freezers must recover a minimum of 90 % of the refrigerant in the cooling system of the appliance. Devices for recovery and recycling intended for use with small appliances that do not have an operational compressor must recover a minimum of 80% of the refrigerant in the cooling system of the appliance.

If you would like to be placed on a mailing list to receive guideline amendments or for public consultation on Environmental Protection Service legislation please fill this out and mail or fax to:

Environmental Protection Service
Department of Sustainable Development
P.O. Box 1000, Station 1195
Iqaluit, Nunavut, X0A 0H0
Fax: (867) 975-5990

Users of this guide are encouraged to report any errors, misspellings, etc. contained within, to EPS at the above address.

Mailing List for Environmental Protection Service Information

Name: _____

Title: _____

Address : _____

Phone / Fax Number: _____