



Photo 97 shows a shot of Dam 3 looking towards the north. The erosional gully noted here last year has been graded over and some changes to the crest have been made at the top of this reclaimed area.

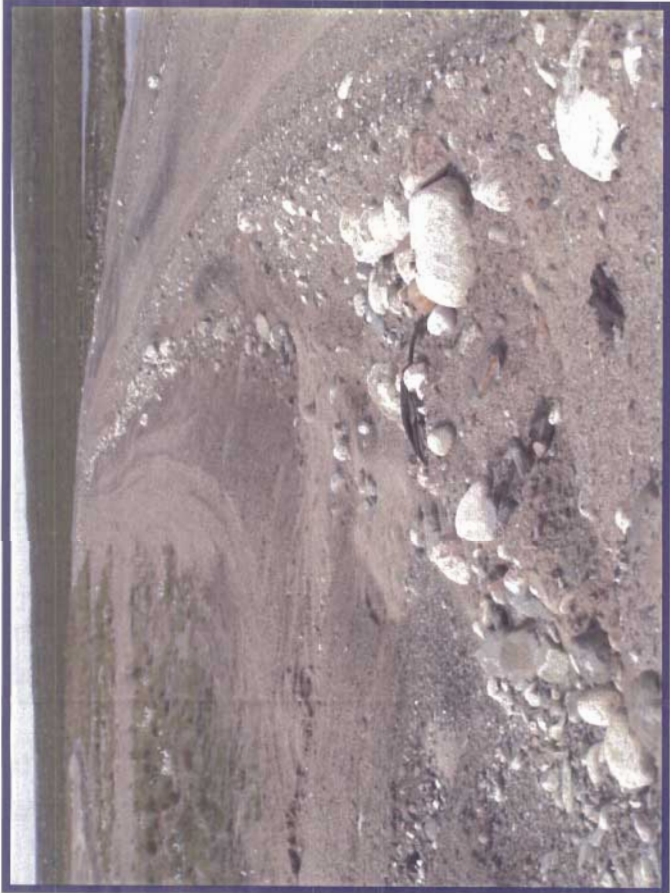


Photo 98 shows where a new ditch has somewhat established just to the upstream side of the access road berm.



Photo 103 shows a view directly on the toe looking towards the north-northwest.

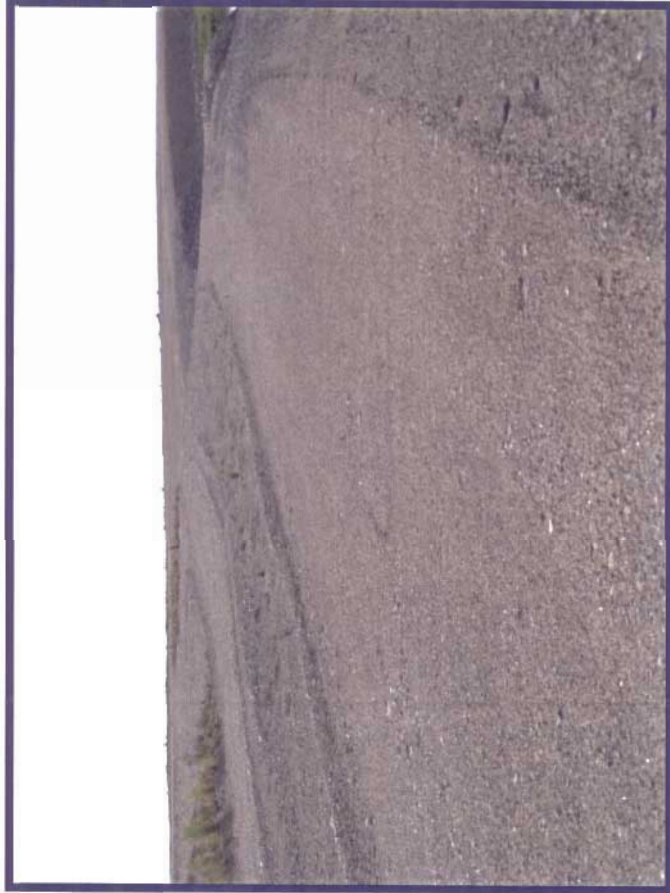


Photo 109 shows the upper crest of the reclaimed area. There are no signs of instability, settlement or cracking noted within these berms.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA STATEMENTS CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL.

	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED	

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC

PROJECT	Annual Inspection of Perimeter Tailings Dams			
TITLE	Dam 3 Inspection Photos			
PROJECT No.	0256-007-01	DWG. No.	Figure 11	REV.
				0

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185

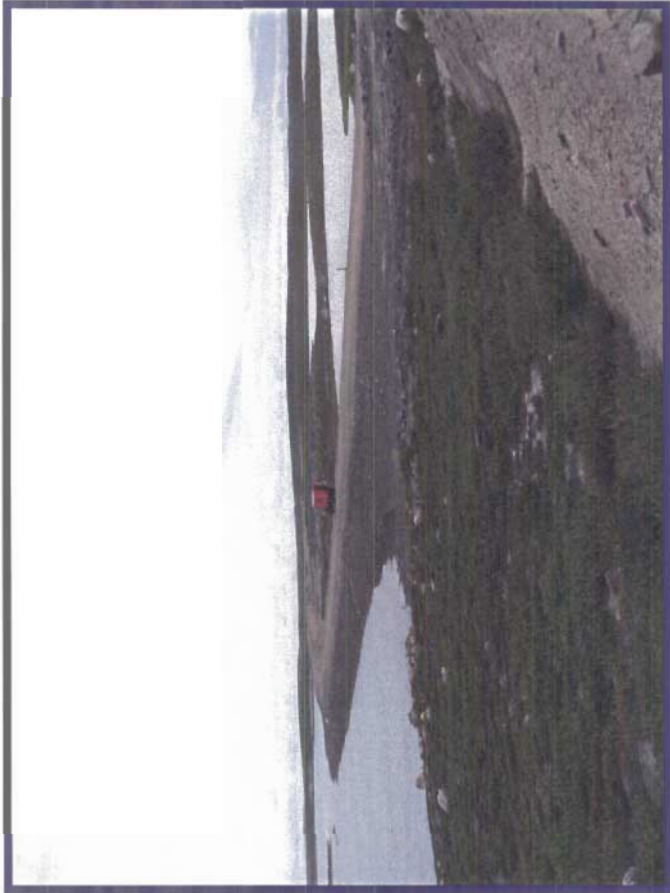


Photo 2 is a view of the crest and upstream side. The pump trunk on the crest is used to drain the water at the toe of Dam 4.



Photo 4 shows the upstream side of this dam. The distance from the current water level to the physical crest of the dam would be approximately 3 metres or just slightly less. There does not appear to be any signs of instability or settlement of the upstream face.



Photo 13 shows an erosional gully on the downstream face. This gully is located approximately 8 to 10 metres west of Thermistor 4-1. This gully should be backfilled to prevent any further erosion.



Photo 25 shows the steep toe located just above the seepage collection pond.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA, STATEMENTS, CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL.

-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC

PROJECT	Annual Inspection of Perimeter Tailings Dams			
TITLE	Dam 4 Inspection Photos			
PROJECT No.	0256-007-01	DWG. No.	Figure 12	REV.
				0

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185

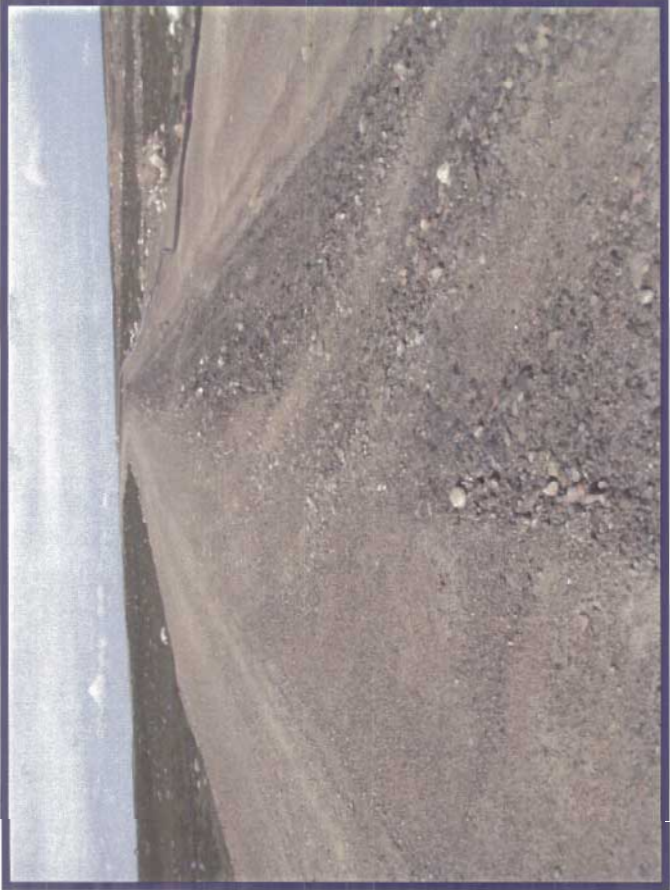


Photo 29 shows a view of the crest and upstream side of Dam 5 looking towards the west abutment. The dam doesn't currently hold any water or tailings.



Photo 33 shows some minor erosional gullies located on the downstream side of Dam 5.



Photo 34 shows a significant erosional gully right in the middle of the downstream face. This gully should be repaired.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA STATEMENTS CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL.

-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED	

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC

PROJECT	Annual Inspection of Perimeter Tailings Dams	
TITLE	Dam 5 Inspection Photos	
PROJECT No.	0256-007-01	REV.
	DWG No.	Figure 13
		0

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185

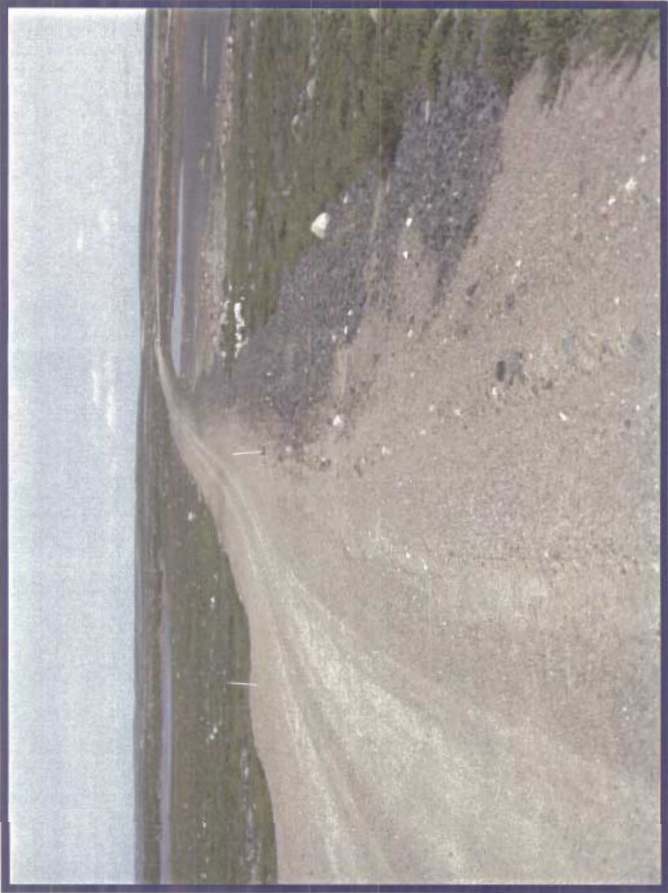


Photo 40 shows a view of Dam 6 taken from its south abutment looking north. There is only a minor pond currently retained at the far north end.

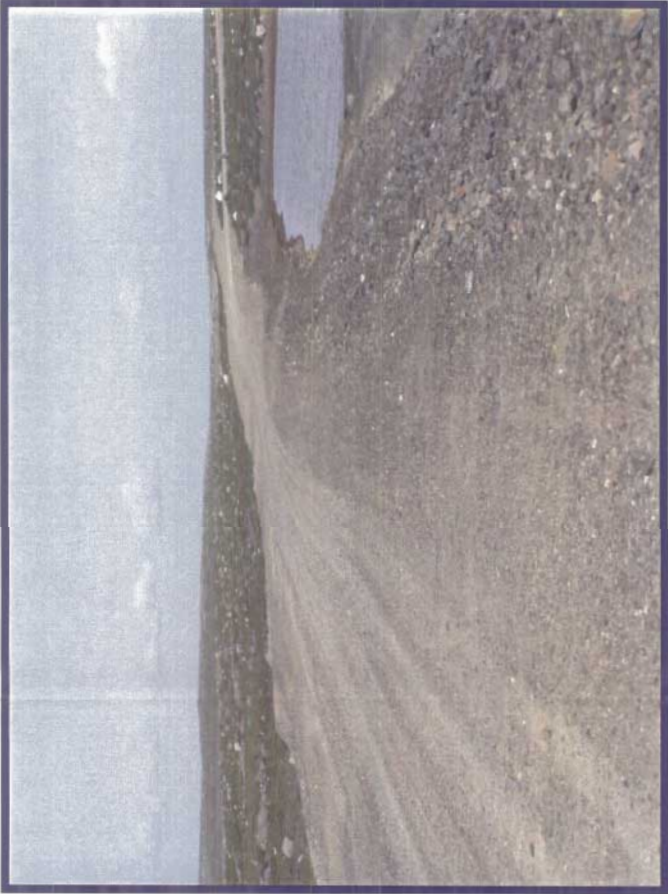


Photo 43 shows the crest over towards the north abutment of Dam 6. Some settlement on the crest has occurred perhaps due to thawing from this pond.



Photo 45 shows some sand which has blown off the crest and has accumulated at the toe of the upstream side against the tailings.

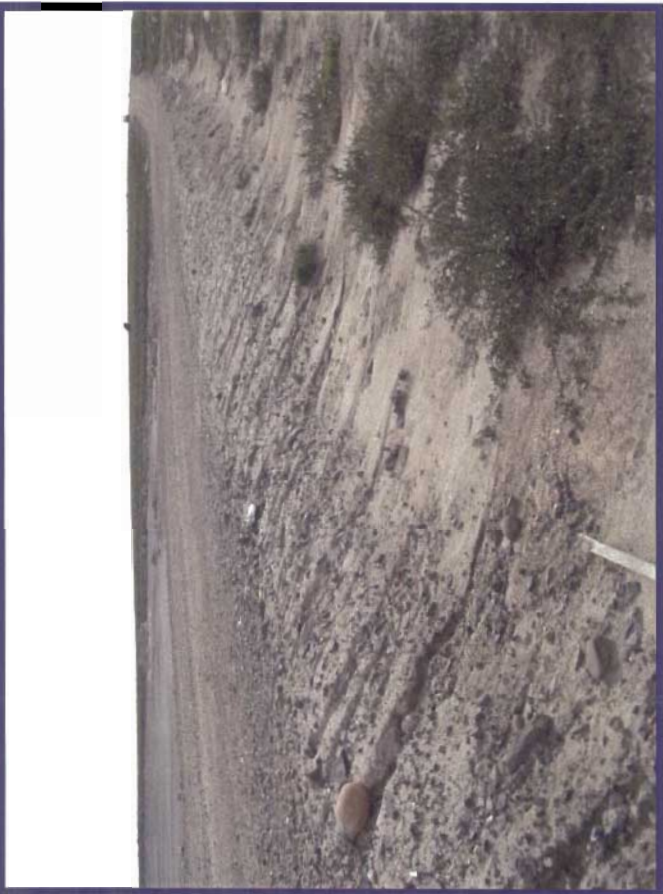


Photo 53 shows some minor erosional gullies located at this toe portion of Dam 6. There are no signs of seepage at this location along the toe.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA STATEMENTS CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL.

	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED	

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC



PROJECT	Annual Inspection of Perimeter Tailings Dams		
TITLE	Dam 6 Inspection Photos		
PROJECT No.	0256-007-01	DWG No.	Figure 14
		REV.	0

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185



Photo 206 shows an overall view of the dump pond and retention dike. On the far left side is also the access road berm and sewage retention dike.

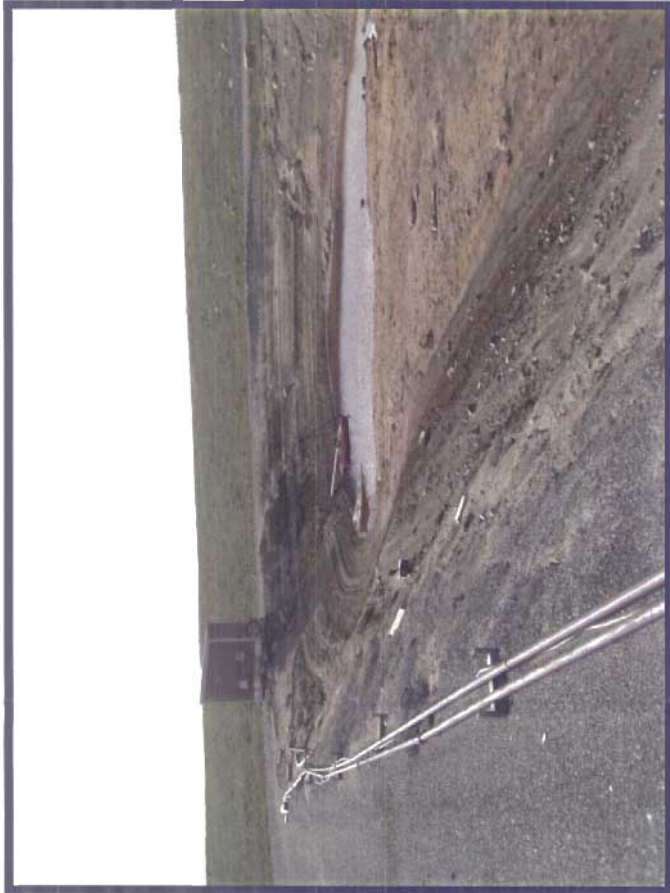


Photo 209 shows the small pond, the floating barge and the pump shack located on the bend of the retention dike.

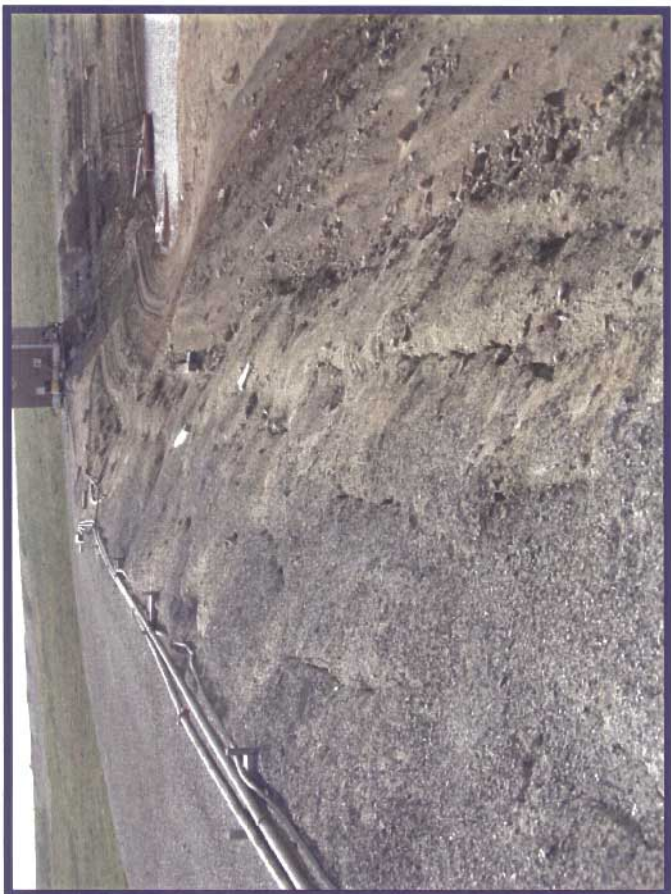


Photo 210 shows numerous longitudinal tension cracks on the inside slope. Each crack has a settlement trough, indicative of the marginal stability of the upstream side. We also have several scarps which were notched by the higher water mark of ponds.

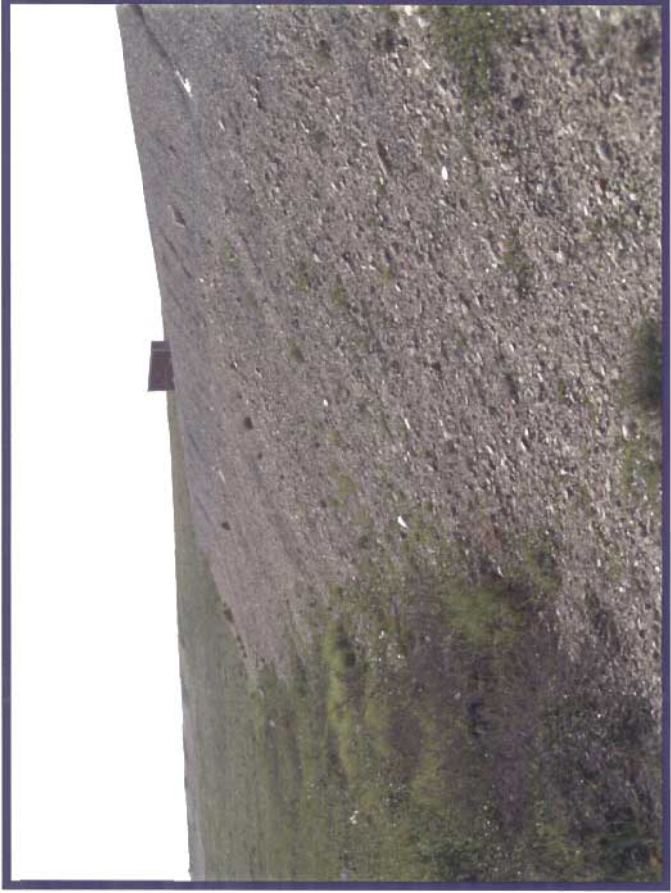


Photo 208 is a view taken along the toe looking towards the east. From this viewpoint there are no indications of seepage at the toe. No seepage would be expected since there is only a very small pond being retained on the upstream side.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA, STATEMENTS, CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL.

-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED	

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC

PROJECT	Annual Inspection of Perimeter Tailings Dams		
TITLE	Tailings Dump Pond #1 Dike Inspection Photos		
PROJECT No.	0256-007-01	DWG. No.	Figure 15
REV.	0		

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185



Photo 194 shows the crest of the northern leg of the retention dike. This crest is approximately 4 metres wide. The dike appears to be constructed with esker sand and gravel. There is no riprap on the upstream slope at all.

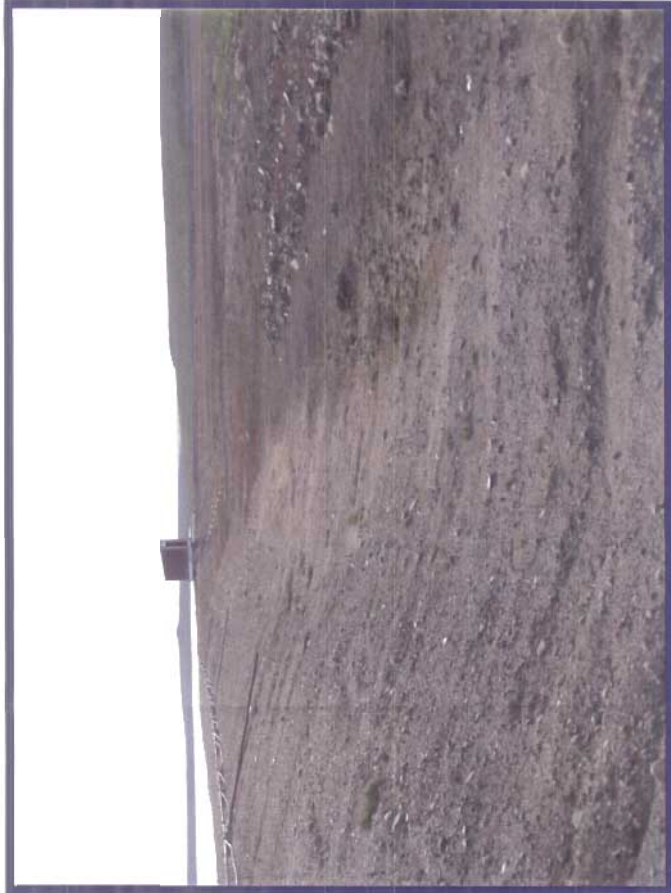


Photo 195 shows a view of the low point on the upstream side of the retention dike. At the current time, there is no water within this area.



Photo 196 is a photo of the downstream side of the retention dike showing the fill placed directly on native material.



Photo 197 shows a longitudinal tension crack located just left of the steel pipeline. In addition, we see a number of small scarp on the upstream side.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA STATEMENTS CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL

-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC

PROJECT	Annual Inspection of Perimeter Tailings Dams
TITLE	Tailings Dump Pond #2 Dike Inspection Photos
PROJECT No.	0256-007-01
DWG No.	Figure 16
REV.	0

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185

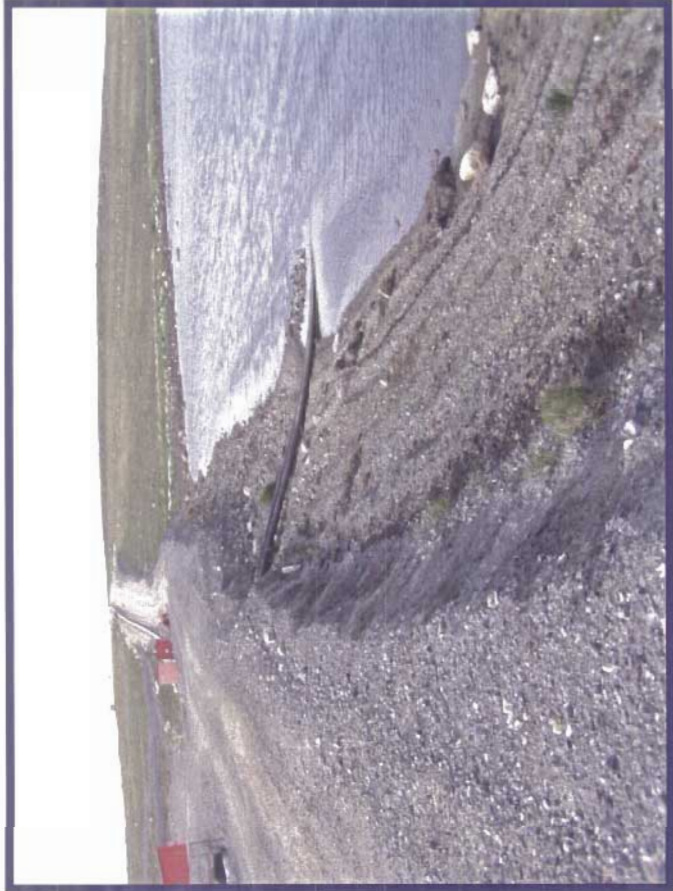


Photo 223 is a view of the upstream side looking towards the south. We see an oversteepened initial part of the slope for the first 1 metre of height. Then we get to a flatter slope where it has been eroded down by higher pond levels.



Photo 227 shows the crest, looking towards the south in this viewpoint. The tailings pipeline sits on the lower berm.

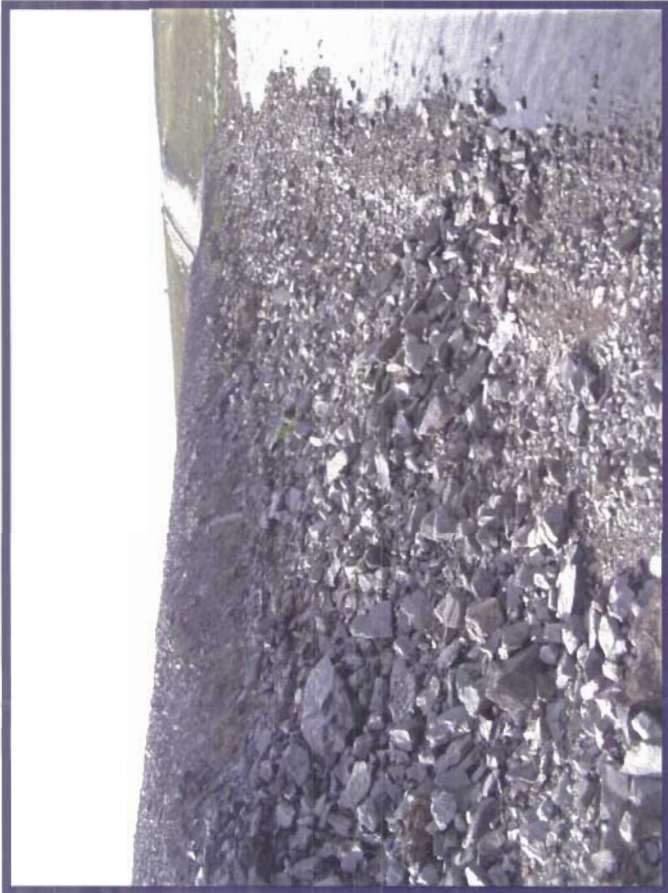


Photo 225 is another view on the upstream side. From the current water level to the physical crest would be approximately 2.5 metres at this particular location.



Photo 228 shows a longitudinal tension crack near the crest edge on the upstream side. This crack is related to the oversteepened slope immediately to the right.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA, STATEMENTS, CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL.

-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED	

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC

PROJECT	Annual Inspection of Perimeter Tailings Dams	
TITLE	Upper Sewage Containment Dike Inspection Photos	
PROJECT No.	0256-007-01	DWG No.
		Figure 17
		REV.
		0

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185



Photo 240 shows a view of the crest of this dike. The entire crest is approximately 14 metres across. The central portion is well traveled. Rockfill armours both sides of this dike.

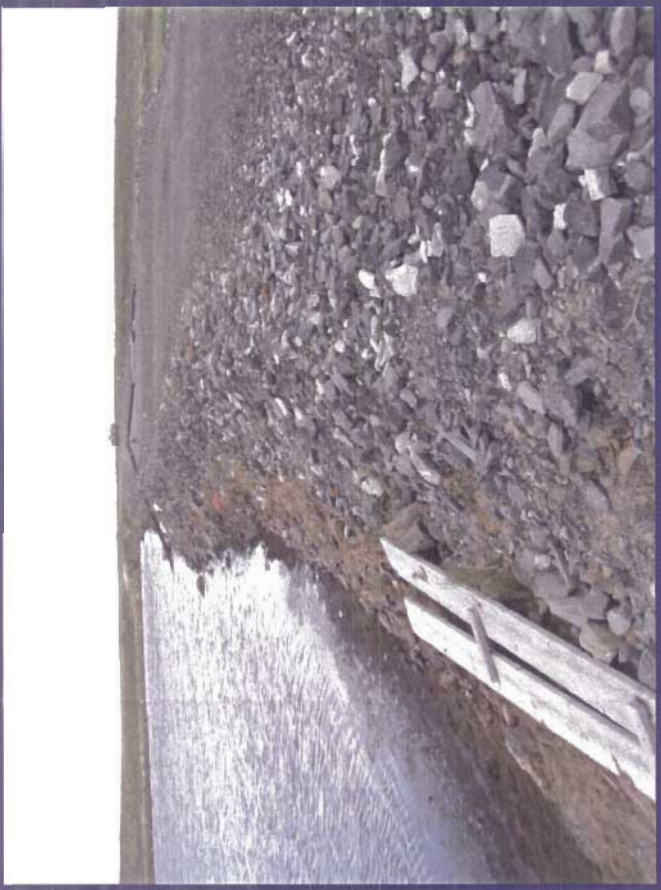


Photo 245 shows the upstream side looking towards the north abutment. We see that vegetation has been washed up to a higher level than the current pond level.



Photo 247 shows some standing water directly at the toe of the dam. There are no indications that the water is flowing into this area. It may be surficial runoff that has drained towards this local low spot.

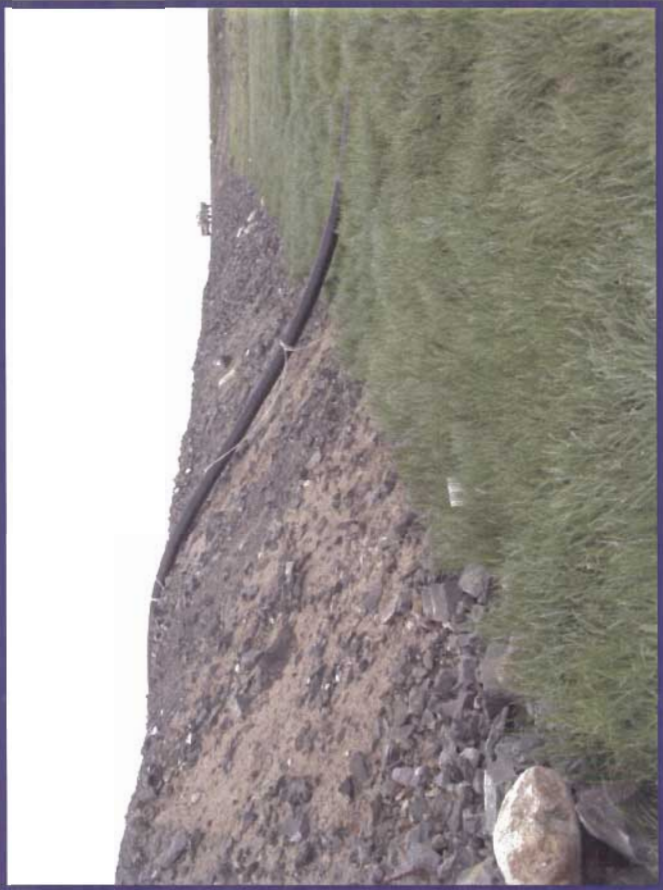


Photo 248 shows a view of the toe of the dike looking back towards the truck at the north abutment. The height of the dike above natural grade is approximately 3 metres at this location.

CLIENT:

KINROSS
Gold Corporation

AS A MUTUAL PROTECTION TO OUR CLIENT, THE PUBLIC AND OURSELVES, ALL REPORTS AND DRAWINGS ARE SUBMITTED FOR THE CONFIDENTIAL INFORMATION OF OUR CLIENT FOR A SPECIFIC PROJECT AND AUTHORIZATION FOR USE AND/OR PUBLICATION OF DATA STATEMENTS CONCLUSIONS OR ABSTRACTS FROM OR REGARDING OUR REPORTS AND DRAWINGS IS RESERVED PENDING OUR WRITTEN APPROVAL.

	-	-	-	-	-	-
	-	-	-	-	-	-
	-	-	-	-	-	-
REV.	DATE	REVISION NOTES	DRAWN	CHECKED	APPROVED	

SCALE:	N/A
DATE:	September 2003
DRAWN:	SLF
DESIGNED:	GKC
CHECKED:	GKC
APPROVED:	JWC

PROJECT	Annual Inspection of Perimeter Tailings Dams		
TITLE	Lower Sewage Retention Dike Inspection Photos		
PROJECT No.	0256-007-01	DWG No.	Figure 18
REV	0		

BGC

BGC Engineering Inc.
AN APPLIED EARTH SCIENCES COMPANY

Calgary Alberta Phone: (403) 250-5185