

WPC Resources Incorporated

DETAILS TO BE ADDED ONCE AVAILABLE AND PROGRAM HAS BEEN INITIATED (2016):

ULU CAMP TELEPHONE NUMBER(S)

HOOD RIVER PROJECT: (CO20: HOODRIVER-001 Mineral Exploration Agreement)

FUEL SPILL CONTINGENCY PLAN

**In the
Hood River (Ulu-Penthouse Lake) Area,
Nunavut.**

(Valid For the period between June 01, 2014 and December 31, 2019.)

PREPARED FOR:

WPC Resources Incorporated,
Suite 202, 750 West Pender Street,
Vancouver, British Columbia.
CANADA V6C 2T7

PREPARED BY:

Bruce E. Goad, P. Geo., M. Sc.,
INUKSHUK EXPLORATION INCORPORATED,
Suite 202, 750 West Pender Street,
Vancouver, British Columbia.
CANADA V6C 2T7

DATE PREPARED:

May 25, 2014.

DATE REVISED:

September 23, 2015.

FUEL SPILL CONTINGENCY PLAN

WPC Resources Incorporated

TABLE OF CONTENTS

	Page No.
<i>Table of Contents</i>	ii.
<i>List of Figures</i>	iii.
<i>List of Appendices</i>	iii.
<i>List of Addenda</i>	iii.
<hr/>	
1.0 INTRODUCTION	1.
2.0 FACILITIES	2.
3.0 PETROLEUM AND CHEMICAL PRODUCT STORAGE AND INVENTORY	4.
3.1 Remote Location Fuel Inventory, Storage and Handling Procedures	4.
3.2 Petroleum Product Transfer	4.
4.0 RISK ASSESSMENT AND MITIGATION OF RISK	6.
4.1 Petroleum Products and Other Fuels	6.
5.0 RESPONDING TO FAILURES AND SPILL	8.
5.1 Internal Spill Response Contact List	8.
5.2 Basic Steps - Spill Procedure	8.
5.3 Basic Steps - Chain of Command	9.
5.4 Other Contacts for Spill Response/Assistance	9.
6.0 TAKING ACTION	11.
6.1 Before the Fact: Preventative Measures	11.
6.2 After the Fact: Mitigative Measures	11.
6.3 Fuel Spills on Land	12.
6.3.1 <i>Procedures for Spills on Rock</i>	12.
6.3.2 <i>Procedures for Spills on Land</i>	12.
6.4 Fuel Spills on Water	12.
6.4.1 <i>Procedure for Spills on Water</i>	13.
6.4.2 <i>Fuel Spills on Water As a Result of Aircraft Refueling</i>	13.
6.4.3 <i>Fuel Spills on Water As a Result of Boat Refueling</i>	14.
6.5 Fuel Spills on Snow and Ice	14.
6.5.1 <i>Procedures for Spills on Snow</i>	14.
6.5.2 <i>Procedures for Spills on Ice</i>	14.
6.6 Procedures for Chemical Spills	14.
6.7 Procedures for Propane Spills	15.
6.8 Procedures for Loss of External Load	15.
7.0 SPILL EQUIPMENT	16.
8.0 TRAINING AND PRACTICE DRILLS	17.

8.1	Training	17.
8.2	Practice Drills	17.
9.0	MONITORING OF HAZARDOUS WASTES	18.
10.0	SITE MAP	19.
ADDENDA		20.
APPENDICES		23.

LIST OF FIGURES

		Page No.
FIGURE 1.	- The Hood River Project Location Map, Nunavut.	3.
FIGURE 2.	- HoodRiver-001 MEA Site Layout Map, Nunavut.	32.

LIST OF ADDENDA

		Page No.
ADDENDUM 1.	- September 23, 2015.	20.

LIST OF APPENDICIES

		Page No.
APPENDIX I.	- Site Map; the Ulu mine site camp layout.	23.
APPENDIX II.	- Location of Camp(s) and Fuel Storage.	24.
APPENDIX III.	- Listing of On-Site Fuel and Chemical Storage.	25.
APPENDIX IV.	- Distribution List.	26.
APPENDIX V.	- Amendment Record Form.	27.
APPENDIX VI.	- Nunavut Spill Report Form.	28.
APPENDIX VII.	- Emergency Contact Information.	31.
APPENDIX VIII.	- Material Safety Data Sheets (MSDS).	32.

1.0 INTRODUCTION

WPC Resources Incorporated (“WPC”) is a Vancouver-based exploration company committed to exploration and development of precious and base metals resources within Canada. WPC Resources exploration activity will be focused on the Hood River Project that covers the southern section of the High Lake Greenstone Belt in the Slave Craton area of Nunavut, Canada.

WPC Resources through an agreement with Inukshuk Exploration Incorporated (“Inukshuk”) has proposed to undertake a 5 year mineral exploration program designed to identify gold, diamond and potential base metal mineral resources within the area designated by the HOODRIVER-001 Mineral Exploration Agreement (“MEA”) that is currently in force between Inukshuk and Nunavut Tunngavik Incorporated (“NTI”). This agreement covers a portion of the CO20 IOL area and lies within the Kitikmeot Land Claims Parcel. The MEA covers an area of 8015 hectares immediately north of the Hood River and immediately adjacent to the Ulu Deposit that is currently held by Mandalay Resources (“Mandalay”) under option to WPC. The HOODRIVER-001 MEA is owned 100% by Inukshuk Exploration Incorporated.

No base camp will be required as the WPC exploration crews will be based out of the adjacent, fully permitted Ulu Minesite camp (2BM-ULU1520¹).

The following Fuel Spill Contingency Plan has been prepared by Inukshuk Exploration Incorporated on behalf of WPC Resources Incorporated and will be in force during the company’s 2014 to 2019 proposed exploration programs to be undertaken in the Hood River area of Nunavut. This plan was originally prepared on May 25, 2014 and this latest revision was updated on September 23, 2015.

The four main types of fuel used in exploration are: diesel, gasoline, Jet-B and propane. Diesel is used for machinery in camp and the drill site. Gasoline is for small machinery and equipment. Jet-B fuel is used by helicopters or turbine powered aircraft. Propane is used in appliances in camp and heating at the drill site. Stove Oil/Diesel is used for heating the tents.

This Fuel Spill Contingency Plan will be posted at operational remote sites for easy reference in the event of an unplanned discharge of fuels.

WPC will endeavour to take every reasonable precaution toward ensuring the protection and conservation of the natural environment, the safety and health of WPC employees, contractors and sub-contractors and to protect the community at large from any harmful effects of its materials and operations.

All fuel caches will be stored within berms of sufficient volume to contain the contents of all drummed fuel stored within the berm. All fuel caches (and any potentially hazardous materials) will be located within secondary containment systems, using “Insta-Berm,” “PREVENT AB,” or similar models, which utilize chemical and fire resistant fabric (generally a polyurethane coated nylon or vinyl coated polyester material) designed for extreme arctic temperatures and appropriate for waste water, petroleum products, and various chemicals.

¹ NWB Licence 2BM-ULU1520 is issued to Bonito Capital Corporation which is 100% owned by Mandalay Resources Corporation.

2.0 FACILITIES

At the time of revising this Spill Contingency Plan (September 23, 2015) no camp facilities have been established on the HOODRIVER-001 as WPC has made an arrangement with Mandalay for WPC crews to utilize space at the adjacent Ulu Minesite Base Camp for the duration of this proposed five year program.

This project has requested a conformity screening with the NIRB and Nunavut Planning Commission and has submitted all required permit applications to the NWB and the KIA. Screening requests, access and water use permit applications was submitted to the Nunavut Impact Review Board (NIRB: File No. 14EN033), Nunavut Water Board (Water Licence # 141104 2BE-HRP141), and the Kitikmeot Inuit Association (Land Use Licence: File No. KTL314C010, KTL114B014). The project has been screened and the required permits have been issued or are pending (KTL114B014) awaiting financial arrangements,

No INAC (AANDC) Land use permit is required as the property is under the jurisdiction of Nunavut Tunngavik Incorporated and the regional Kitikmeot Inuit Association.

Crews based at the adjacent and fully permitted Ulu Camp will be mobilized to the Hood River Property on a daily basis via a camp-based helicopter on contract to WPC Resources.

Diesel, gasoline and Jet-B will be stored in sealed 45 gallon drums. Propane is stored in 100 pound cylinders. The total number of barrels or cylinders kept on site will vary depending on requirements and will comply with the limit set by the appropriate governing body. Drums although stored in the appropriate horizontal position, will be stood up 1 to 2 days prior to the need to use them in order to allow time for any contaminants to settle in the drum. Upon regular inspection if any drums are found to be leaking or damaged the substance will be used immediately. All fuel will be stored within secondary containment to prevent any contamination of soils and water from spills and leakage.

The Ulu Camp will be re-opened for the 2016 field season. A map of the Ulu site is attached as Appendix I. Also, once the program becomes operational WPC fuel stored on site at Ulu will be regulated under the Ulu Water Permit (2BM-ULU1520). No fuel will be stored on the Hood Property (Appendix II). If fuel, at some point in the future, is to be stored on the Hood River Property, exact quantities documented in this plan will be updated and inventory included as Appendix II.

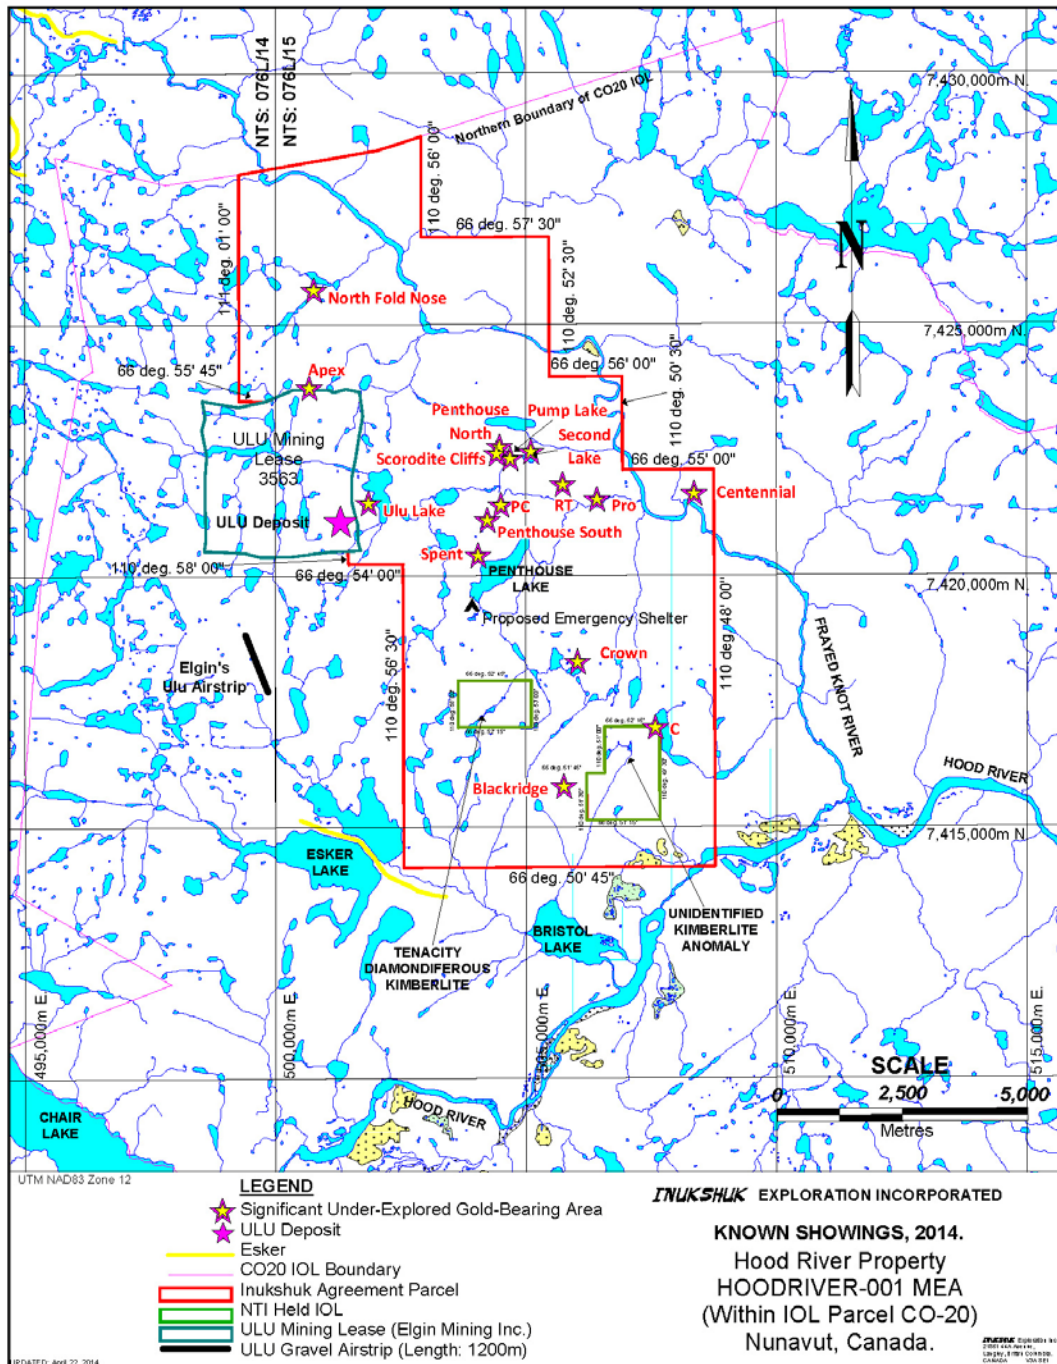


FIGURE 1: The Hood River Property and location of Ulu Base Camp and proposed emergency shelter tent (camp). This site will consist of one tent, heated by an oil stove. WPC will be utilizing the fully permitted Ulu Base Camp located on the adjacent Ulu Mining lease belonging to Mandalay Resources Corp. as their base of operations during the duration of the proposed multi-year program.

3.0 PETROLEUM AND CHEMICAL PRODUCT STORAGE AND INVENTORY

At the time of the current update of this Fuel Spill Contingency Plan no fuel had yet been purchased nor had it been transported onsite. Also a drill contract had yet to be assigned; consequently the amount of drilling chemicals/additives is unknown as of the date of preparation of this Plan. Except for small volumes (max 3 drums) for short term, immediate use (at active drill sites/potentially at the emergency shelter tent), no fuel will be stored on the Hood River Property. All fuel will be stored appropriately at the adjacent Ulu Camp under licence 2BM-ULU1520. If at some point, fuel is to be stored on the Hood River Property, this plan will be revised and exact quantities documented in an updated version of this plan and all inventory will be included as Appendix II.

3.1 Remote Location Fuel Inventory, Storage and Handling Procedures

At times, WPC may establish remote, short term, fuel caches for company use. Typically these caches would consist of 1 to possibly up to 5 drums of jet fuel, drill fuel or both; stored in accordance with CSA approved methods of storage of drummed product. This remote fuel cache will be required to extend the flight distance from the base camp of the company's charter helicopter. One to three drums of fuel will also be stored at the drill site while the drill is in operation and will be replenished on an as required basis. In both cases, empty drums will be back hauled to the Ulu Base Camp and subsequently to Yellowknife for refilling/refund once the fuel has been consumed. All fuel will be stored within secondary containment to prevent any contamination of soils and water from spills and leakage.

Where fuel is onsite at the drill, pending consumption, and is not being stored within the berm at the base camp, all drums will be stored on their side, positioned so that a line drawn between the two bung openings is horizontal.

To prevent spreading in the event of a spill, fuel stored in drums will be located, whenever practical, in a natural depression a minimum distance of 31 metres from all streams, preferably in an area of low permeability. All fuel storage containers/berms will be situated in a manner that will allow easy access and removal of containers in the event of spills or leaks. Any large fuel cache (defined as any cache containing over 20 drums) will be inspected daily. All fuel caches shall be located above the high water mark of any water body.

3.2 Petroleum Product Transfer

Manual and electric pumps (with aviation fuel filters for jet fuel) will be used for the transfer of all petroleum products. Smoking, sparks, or open flame will be prohibited in fuel storage and fuelling areas at all times. All transfer operations will be attended by trained personnel at all times. Drip pans, or other similar preventative measures, will be used when refuelling equipment on site. Spill kits will be immediately available at all fuel/fuelling sites.

All drummed fuel will be slung to the drill sites via helicopter.

When refueling, the fuel drum will be stood on end and blocked with the high side at 12 o'clock, the bung at 3 o'clock and the vent at 9 o'clock to prevent water or dirty fuel

from reaching the openings. The standpipe will be placed in a manner so that it will not be able reach the lowest point in the drum, therefore ensuring any water or dirt will remain in the drum.

4.0 RISK ASSESSMENT AND MITIGATION OF RISK

Fuel caches associated with exploration programs carry inherent risks of spillage. These risks can be significantly reduced by observing simple preventative measures. All materials storage will meet the requirements of the federal Environmental Protection Act. Environment Canada recommends secondary containment, such as self-supporting “installments”, or similar models, which utilize chemical and fire resistant fabric (generally a polyurethane coated nylon or vinyl coated polyester material) designed for extreme arctic temperatures and appropriate for waste water, petroleum products, and various chemicals. These berms are also be used when storing barrelled fuel in a remote location. If required, decanting of snow or water from the berm area will proceed only if the appropriate chemical analysis has determined the contents meet the requirements of Section 36.3 of the Fisheries Act.

- Valves will secured before and after fuel transfer,
- Fuel transfer will not be left unattended.
- Drums and hoses will be inspected regularly for leaks and pans or absorbent pads placed below fuel transfer areas and stationary machinery.
- Toxic materials will be stored away from sensitive areas (31 metres from any surface water body.)

4.1 Petroleum Products and Other Fuels

Following, is a list of potential sources of fuel spills:

- 1) **DRUM PRODUCT:** All drummed products are suspect as leaks or ruptures of the steel drums or plastic containers may occur. These products would include but not be limited to drums of Jet A, Jet B, Aviation fuel (Avgas 100/130), diesel, gasoline, hydraulic fluid, drill grease, oil, waste oil and waste fuel.
- 2) **PROPANE:** Propane fuel cylinders can leak and (non-catastrophic) leaks will usually occur at the valves. All cylinders will be secured in an upright position at all times. Propane cylinders will be equipped with a pressure relief valve that opens and closes to prevent excessive internal pressure due to abnormal conditions. Information marks will stamped onto the collar of cylinders identifying data such as the original date of manufacture and any subsequent re-testing dates. Even though propane is non-toxic and will not contaminate soil, prior to and after use the propane cylinders will be stored with the other fuel in the secondary containment berms.
- 3) **VEHICLES AND EQUIPMENT:** This would include all wheeled vehicles and equipment, aircraft (fixed and rotary wing), snowmobiles, oil stoves, oil stove fuel reservoirs, generators and pumps. Incidents involving leaking or dripping fuels and oils may occur due to malfunctions, misuse, impact damage, and lack of regular maintenance, improper storage, or faulty operation or as a result of improper or sloppy refueling procedures due to carelessness.

Regular inspection and maintenance in accordance with recognized and accepted standard practices at all WPC camps and/ or fuel caches will reduce risks associated with the potential hazards listed above.

Spill response training will be provided to personnel who handle fuels and other petroleum products and in addition, at least one emergency response drill will be held during the season. A report will be prepared by the response coordinator following each drill, noting response time, personnel involved and any problems or deficiencies encountered. This report will be used to evaluate emergency response capability and remedy any deficiencies if required.

Oil/Fuel Spill Kits will be positioned at all camps, fuel caches, and drill sites. A list of Spill Kits, their locations and contents is presented in Section 7 of this plan.

5.0 RESPONDING TO FAILURES AND SPILLS

Fuel spills, once they occur can become a bigger problem if not dealt with immediately and it is imperative that all personnel have the knowledge of how to initially respond to a spill and who to contact in event of a spill. To achieve this outcome:

- This plan will be posted at camp, fuel storage area and drill site.
- Spill kits will be located at camp (1), fuel storage area (1) and active drill site (1).
- Material safety data sheets (MSDS) will be on site for all products (Appendix VIII).
- All persons onsite will be trained on the use of MSDS sheets, the use of spill kits and how to respond to and report a spill.

5.1 Internal Spill Response Contact List

WPC Resources Incorporated can be contacted during any 24 hour period at one of the following telephone numbers:

Stephen Wilkinson, President, (604) 787-6006

s.wilkinson@shaw.ca

Ian Graham, Director, (604)-671-1353

ian@nkwazi.ca

WPC Resources Incorporated,
Suite 202, 750 West Pender Street,
Vancouver, British Columbia.
CANADA V6C 2T7
Telephone: 778-379-1433

OR

Bruce Goad, P. Geo.,

InukshukGeological@Shaw.ca

(Consulting Geologist to WPC)

INUKSHUK GEOLOGICAL CONSULTING,
21861 44A Avenue,
Langley, British Columbia,
CANADA V3A 8E1
Telephone: 604-533-2255

OR

The WPC Camp Manager at the Ulu Base Camp can be contacted directly at:

Telephone service has yet to be acquired at Ulu.

5.2 Basic Steps - Spill Procedure

In the case of any spill or other environmental emergency, it is necessary to react in the most immediate, safe, and environmentally responsible manner. No spill or incident is so minor that it can be ignored.

The basic steps of the response plan are as follows:

- 1) **Ensure** the safety of all persons at all times.
- 2) **Identify** and find the spilled substance and its source, and if possible, stop the process or shut off the source.

- 3) **Inform** the immediate supervisor or higher designate at once, so that he/she may take appropriate action. (Appropriate action would include the notification of a government official, if required; Spill Report Forms are included in Appendix VI.
- 4) **Contain** the spill or environmental hazard, as per its nature, and as per the advice of the Spill Line as required.
- 5) **Implement** any necessary cleanup or remedial action.

5.3 Basic Steps - Chain of Command

- 1) Immediately notify the WPC Resources Incorporated onsite geologist or camp manager of the spill. You may then be instructed to directly contact the Nunavut 24 HOUR SPILL LINE, NWT 24 HOUR SPILL LINE, the DIAND 24 Hour Line and/or the Nunavut Spill Inspector at:

Nunavut 24 Hour Spill Line, Manager of Operations:

Telephone 1-867-975-4295,
Facsimile 1-867 873-6924.

NWT 24 Hour Spill Line:

Telephone 1-867-920-8130,
Facsimile 1-867-873-6924.

KIA Senior Lands Officer (Permit # KTL314C010):

Telephone 1-867-982 3310
Facsimile 1-867 982-3311

DIAND 24 Hour Spill Line:

Telephone 1-867-975 4298

Nunavut Water Board:

Telephone 1-867-360-6338

Environment Canada 24 Hour Pager:

Telephone 1-867-920-5131

Nunavut Spill Inspector (Nunavut 24 Hour Spill Line):

Telephone 1-867-975-4295

- 2) A Spill Report Form (found as Appendix VI) will be filled out as completely as possible before or after contacting the 24 Hour Spill Line.
- 3) Other members of the team are notified as deemed necessary.

5.4 Other contacts for Spill Response Assistance

Environmental Protection Officer,

Environment Canada. _____: 867-975-4644

24 Hour Emergency Pager,

Environment Canada: _____: 867-766-3737

GN Dept. of Environmental Protection,

Officer in Kugluktuk: _____: 868-982-7455

Environment Canada: Craig Broome: 867-669-4730

Aboriginal Affairs and Northern Development,
Resource Management Officer,
Kitikmeot:

Baba Pedersen: 869-982-4306

Aboriginal Affairs and Northern Development,
Field Operations Division Manager

_____: 867-975-4295

Fisheries and Oceans Canada

Julian Lim: 867-979-8016

GN Environmental Protection Service

Rob Eno: 867-975-7748

6.0 TAKING ACTION

Preventing a spill prior to it occurring would obviously be the best preventative solution; however, if a spill occurs, a prompt response is required and onsite personnel must be aware of how to respond.

6.1 Before the Fact: Preventative Measures

The following actions pre-emptive actions will be in place at all camps to protect the environment. These actions will minimize the potential for spills during fuel handling, transfer and storage:

- 1) Fuel transfer hoses with cam lock mechanisms will be used.
- 2) The level of the fuel content in the receiving vessel will be carefully monitored during transfer to avoid overfilling the container.
- 3) Drips and minor spills will be remediated immediately.
- 4) Fuel drums, tanks and hoses will be inspected regularly for leaks or the inherent potential to leak.
- 6) Personnel, especially those who will be operators, will be trained in proper fuel handling and spill response procedures.
- 7) To prevent spreading in the event of a spill, fuel stored in drums should be located, whenever practical, in a natural depression a minimum distance of 31 metres from all streams, preferably in an area of low permeability.
- 8) All fuel storage containers will be situated in a manner that allows easy access and removal of containers in the event of leaks or spills. Large fuel caches in excess of 20 drums will be inspected daily. All fuel caches will be stored within berms large enough to contain all drummed fuel

6.2 After the Fact: Mitigative Measures

Primary steps to take when a spill occurs:

- a) **Ensure** your own safety and that of others around you, beginning with those nearest to the scene.
- b) **Control** danger to human life, if necessary.
- c) **Identify** the source of the spill.
- d) **Notify** your supervisor.
- e) **Assess** whether or not the spill can be readily stopped.
- f) **Contain** or stop the spill at the source, if possible, by following these actions:
 - If filling is in progress, STOP THE FUEL FLOW AT ONCE.
 - Close or shut off all valves.
 - Place plastic sheeting at the foot of the tank, barrel, or piece of equipment to prevent seepage into the ground or the runoff of fuel
 - Use absorbent materials (sheets, pads, booms) to absorb and contain the fuel spill.
 - Use a patch kit to seal leaks, if practical to do so.

Secondary steps to take:

- a) Determine status of the spill event.

- b) If necessary, pump fuel from a damaged and/or leaking tank or drum into an empty, non-compromised, replacement drum or refuge container.
- c) Notify the 24-hour Spill Report Line
- d) Complete and Fax a copy of the Spill Report Form (Appendix VI).
- e) Notify permitting authorities.
- f) If possible, resume cleanup and containment operations.

6.3 Fuel Spills on Land

For the purpose of this Spill Contingency Plan, "Land" may be defined as soil, gravel, sand, rock, and vegetation.

6.3.1 Procedure for Spills on Rock

For hydrocarbon spills on rock outcrops, boulder fields, etc.:

- 1) First responder or his designate will obtain plastic tarp(s) and absorbent sheeting on-site and notify on-site staff.
- 2) A berm of peat, native soil or snow will be constructed down slope of the seepage or spill.
- 3) The tarp will be placed in such a way that the fuel can pool for collection and removal (e.g. at the foot of the berm). If there is a large volume of spilled product, the liquid will be pumped into empty, non-compromised drums for sealing and subsequent disposal.
- 4) Absorbent sheeting will be placed on the rock to soak up spilled oil, fuel, etc.
- 5) Multi Sorb (crushed lava rock) can be used to scrub the rock surface.
- 6) Saturated material will be disposed of in an empty drum, which is then labeled and sealed. Alternatively, the pads may be wrung out into the empty drum(s), the drums marked and then secured for eventual disposal.
- 7) Contact the 24-Hour Spill Line after Step 4 or Step 5.

6.3.2 Procedure for Spills on Land

- 1) First responder or his designate will obtain plastic tarp(s), absorbent sheeting, Multi Sorb or other ultra-dry absorbent and any other necessary spill containment equipment, pump, hoses, etc. The on-site staff will be notified.
- 2) A berm of peat, native soil or snow will be constructed down slope of the seepage or spill.
- 3) The tarp will be placed in such a way that the fuel can pool for collection and removal (e.g. at the foot of the berm). If there is a large volume of spilled product, pump the liquid into spare empty drums, and dispose of the spilled product as required.
- 4) Petroleum-product sheen on vegetation may be controlled by applying a thin dusting of Multi Sorb or other ultra-dry absorbent to the groundcover.
- 5) Contact the 24-Hour Spill Line.

6.4 Fuel Spills on Water

For the purpose of this Spill Contingency Plan, "Water" may be defined as any lake, river, creek or swamp albeit flowing or stagnant, liquid (water) or solid (ice).

All fuel spills onto water regardless of the amount must be reported to:

- Nunavut 24 hour Spill Reporting Line (867) 975-4295
- NWT 24 hour Spill Reporting Line (867) 920-8130
- Field Operations Division Manager, INAC (AANDC) (867) 975-4295
- Environment Canada 24-hour Emergency Pager (867) 766-3737

6.4.1 Procedure for Spills on Water

It is important to immediately limit the extent of spills. The following is the procedure to be implemented when an incident occurs:

- 1) If the spill is small, hydrophobic (water repellent) absorbent pads will be deployed on the water. Hydrophobic pads readily absorb hydrocarbons. Alternatively, an ultra-dry absorbent designed for use on water-based spills may be deployed.
- 2) If the spill is larger, several empty drums will be prepared to act as refuge containers for the spill.
- 3) Containment booms will be deployed on the water surface to "fence in" the spill area gradually and to prevent it from spreading. Keep in mind those environmental factors such as high winds and wave action can adversely affect attempts at spill cleanup.
- 4) Absorbent booms may then be deployed to encircle and then absorb any hydrocarbon spillage that may have escaped the containment boom.
- 5) Once a boom has been secured, a skimmer may be brought on-scene to aid in capture of the hydrocarbon; once captured the product should be pumped to the empty fuel drums and held for disposal.
- 6) As soon as possible either during or after the incident, contact the 24-Hour Spill Line. (This will ensure government agencies are informed).

6.4.2 Fuel Spills on Water As a Result of Aircraft Refueling

Fixed wing aircraft will be utilized to supply the camp on a weekly basis. They may use a temporary wooden dock erected on the shore of the lake to facilitate unloading. Fuel may be spilled onto a waterway during potential refueling of supply fixed wing aircraft that use the lakes/river as landing sites. Although the company does not expect to have to refuel supply aircraft on site, if this process does occur care must be taken during the refueling process. If refueling occurs at the dock, a Spill Kit will be made available.

It is important to immediately limit the area of the spill on the water surface. Booms can be drawn in to encircle the spilled fuel. The absorbent mats are hydrophobic in that they absorb hydrocarbons and repel water.

Booms will be deployed to contain the area affected by the fuel spill. Recognize that boom effectiveness will be affected negatively by factors such as currents, winds and waves.

Absorbent mats and similar absorbent material will be used to capture small spills on the water surface.

Used absorbent material will be disposed of in an appropriate manner; material will be collected and subsequently removed to an approved site for disposal.

A map indicating the location (if established) of the dock and camp facilities will be attached once the camp has been established.

6.4.3 Fuel Spills on Water As a Result of Boat Refueling

No boats will be utilized during the proposed program. If plans are changed, all refueling will be undertaken onshore at a fuel station where Spill Kits will be readily available. Onboard refueling will NOT be permitted.

6.5 Fuel spills on Snow and Ice

By its nature, snow is an absorbent, and fuel spilled on snow is collected with relative ease, either by shovel, in the case of small-range spills, and by loader, in the case of more extensive spills.

6.5.1 Procedure for Spills on Snow

- 1) The nature of the spill will be assessed. Necessary equipment might include shovels, plastic tarp(s), empty drums, and wheeled equipment.
- 2) Contaminated snow will be shovelled or scraped and deposited in empty refuge drums. If the spill is more extensive, a peat-bale berm or compacted snow berms with plastic over top, will be built around the affected area.
- 3) Dispose of the spilled product as required.
- 4) Either during or immediately after the accident, notify the 24-Hour Spill Line.

6.5.2 Procedure for spills on Ice

Spills on ice are handled in similar fashion as those on snow. However, as ice presents the added danger of immediate access to water, care must be taken to respond quickly to such spills. Should fuel seep or flow through cracks or breaks in the ice, despite all precautions, assistance should be sought immediately.

- 1) A compacted-snow berm will be constructed around the edge of the spill area.
- 2) Although hard ice will retard or prevent fuel entry to the receiving waters below, all contaminated snow and ice, as well as objects embedded in the ice (such as gravel or frozen absorbent pads) must be scraped from the ice surface and disposed of in an appropriate manner.
- 3) Contact the 24-Hour Spill Line.

6.6 Procedure for Chemical Spills

- 1) Assess the hazard of the spilled material. REFER TO THE ATTACHED MSDS SHEETS. Any members of the emergency response team who might be susceptible in certain situations, (such as asthmatics, where fumes or airborne particles are evident), should be replaced with alternates.
- 2) Assemble the necessary safety equipment before response (e.g. latex or other protective gloves, goggles, or safety glasses. masks or breathers, etc.)
- 3) Apply absorbents to soak up liquids.
- 4) Place plastic sheeting over solid chemicals, such as dusts and powders, to prevent their disbursement by wind or investigation by birds or other mammals.

- 5) Neutralize acids or bases (caustics). Place spilled material and contaminated cleanup supplies in an empty refuge drum and seal for disposal.
- 6) Dispose of the spilled product as required.
- 7) Contact the 24-Hour Spill Line.

6.7 Procedure for Propane Spills

Take action only if safety permits. Gases stored in cylinders can explode when ignited. Keep vehicles away from area. NO SMOKING is permitted when dealing with these types of spills. On land, water ice or snow, do not attempt to contain the propane release as it is not possible to contain propane vapours once released. In general:

- 1.) Water spray can be used to knock down vapours if there is no chance of ignition.
- 2.) Small, isolated propane fires can be extinguished with dry chemical or CO₂.
- 3.) Personnel should withdraw immediately from area unless a small leak is stopped immediately after it has been detected.
- 4.) If tanks are damaged, gas should be allowed to disperse and no recovery attempt should be made.
- 5.) Personnel should avoid touching release point on containers as frost forms at this site very rapidly.
- 6.) Keep away from the ends of the tank.

If the equipment has been damaged or thought to have been damaged dispose of all defective equipment that resulted in the release immediately. If the tank is defective, do not refill.

6.8 Procedure for Loss of External Load

The loss of external loads of fuel, oil, or chemicals from aircraft almost certainly results in complete and catastrophic failure of the container that once held the product. Immediate response is imperative.

- 1.) Mark the loss target with GPS coordinates and relay to base camp as quickly as possible. Include in this information transfer, the quantity and type of load loss.
- 2.) Base camp will contact 24-Hour Spill Line,
- 3.) Begin to administer the appropriate procedure for spills on land, water, snow, or ice as appropriate.

7.0 SPILL EQUIPMENT

Complete spill kits, including oil absorbent kits, will be kept on hand at all camp fuel caches, generator shack, drill sites, helipad, and at camp fuel depots. Spill kits may contain the following items:

- 20 lb ABC fire extinguisher
- Polaski tool
- oil absorbent pads (package of polypropylene pads) that will also contain spills on water
- hydrocarbon-absorbent socks (polypropylene – one approximately 4' by 3" and one 10' by 3")
- 1 bag treated oil only cellulose particulate
- 1 roll poly plastic sheet 110'x 6'x 6 mil thickness
- 6 poly disposal bags and ties (45 gal drum size, 6 mil)
- shovel
- 2 pair nitrile gloves (large)
- 2 pair safety goggles
- 1 Plug it sealing compound (500 ml)
- utility knife
- labels / marker
- plastic pails
- extra disposal bags
- plastic sheets
- absorbent pads and socks

On the HOODRIVER-001 MEA, spill kits are maintained at the following locations:

- 1.) At all drill sites while drilling is in progress.
- 2.) At the emergency shelter (once/if the shelter has been established).
- 3.)
- 4.)
- 5.)

8.0 TRAINING AND PRACTICE DRILLS

Members of the field crew will be familiar with this document and practice drill(s) will be mandatory.

8.1 Training

A Spill Response Team will be designated and all members will be familiar with the spill response resources at hand, this Contingency Plan, and appropriate spill response methods. Involvement of other employees may be required, from time to time.

This familiarity will be acquired through:

- 1.) Initial or refresher training, as appropriate, provided once per season.
- 2.) Regular inventory updates are provided in list form to all team members. Information to be reported includes listing of all resources, number of items, their location, condition, date of last inspection and any special comments (such as expiry dates, under whose authority they may be accessed and special handling instructions).

8.2 Practice Drills

WPC Resources Incorporated is aware that without practice, no Contingency Plan has value. With that in mind, at least one practice drill will be held per season to give personnel a chance to practice emergency response skills. Each practice will be evaluated and a report prepared with the objective of learning where gaps and deficiencies (either in skills or physical resources) exist, and in what areas more practice might be required.

9.0 MONITORING OF HAZARDOUS WASTES

The DOE monitors the movement of hazardous wastes from generators, carriers to receivers, through a tracking document (Waste Manifest). A Waste Manifest must accompany all movements, and all parties must register at the DOE with Robert Eno at reno@gov.nu.ca or at (867) 975-7748.

Guidelines for general management of hazardous waste can be found here:

[http://env.gov.nu.ca/sites/default/files/Guideline%20-%20General%20Management%20of%20Hazardous%20Waste%20\(revised%20Oct%202010\).pdf](http://env.gov.nu.ca/sites/default/files/Guideline%20-%20General%20Management%20of%20Hazardous%20Waste%20(revised%20Oct%202010).pdf)

A listing of the quantities of fuel and chemicals initially delivered and stored on-site is documented in Appendix III. This appendix will be updated once the fuel and drilling chemicals have been purchased if any material is to be stored within HOODRIVER-001 MEA.

10.0 SITE MAP

A site map of the Ulu Camp (under 2BM-ULU1520) is included in the Hood River Project Spill Contingency Plan as Appendix I. This map is drawn to scale and includes the location of the camp, storage facility, nearby tents, all drainages and any adjacent bodies of water.

ADDENDUM 1.

WPC FUEL SPILL CONTINGENCY PLAN

(Revised: 23-09-2015.)

Hood River Project

Nunavut Water Board Licence 2BE-HRP1419

WPC Resources Inc.,
Suite 202, 750 West Pender Street,
Vancouver, British Columbia.
CANADA V6C 2T7

Telephone: 778-379-1433
Facsimile: 778-379-1434

The following document is presented as an addendum to the 2015 Spill Contingency Plan and the Abandonment and Decommissioning Plan, both revised on September 23, 2015 and subsequently submitted to the Nunavut Water Board (NWB) by WPC Resources Inc. This addendum has been prepared in response to the request to supply additional information as noted in the Board's response to the 2015 Annual Report.

Items for revision:

➤ ***Fuel Spill Contingency Plan: requested under Part H, Item 2 of NWB Licence No. 2BE-HRP1416***

(1.) Inclusion of updated contact information for the Ulu camp facility and AANDC's representative (Replace "Peter Kusugak" with "Field Operations Division Manager");

- As a result of the current market conditions there has been no exploration program undertaken on the Hood River Property during 2015, therefore, the Ulu Camp has not been opened. Consequently, there is no telephone service available onsite. Once the Ulu Camp has been opened (planned for Spring 2016) WPC will contact the NWB with the current contact information/telephone number.
- Contact information has been updated in Appendix VII of this document ("**Fuel Spill Contingency Plan**" (23-09-2015). AANDC contact "Peter Kusugak" has been replaced with "Field Operations Division Manager". The telephone number remains as: 1-687-975-4295

(2.) Inclusion of details related to the types and quantities of fuel stored on site;

- No fuel will be stored on the Hood River Property. Activities will be based out of the adjacent Ulu Mining Camp and all fuel will be stored onsite there in approved, bermed fuel storage areas under NWB licence 2BM-ULU1520.
- Once drilling is initiated on the Hood River Property limited (up to 3 drums) amounts of fuel will be onsite at the active drill site – for immediate consumption. On completion of each drill hole, any remaining fuel will be moved to the next drill site or off site, back to the Ulu Storage area.
- If the temporary emergency shelter (location shown on the following figure) is erected, one drum of fuel will be located here to fuel the heater in the shelter. It will be removed at the end of each field season.

(3.) Inclusion of a detailed site or topographic map showing the location of the emergency shelter, Ulu camp facility, fuel caches, spill kits, nearby water bodies and other relevant information.

- See the attached Figure 3: HoodRiver-001 Site Layout map (below).


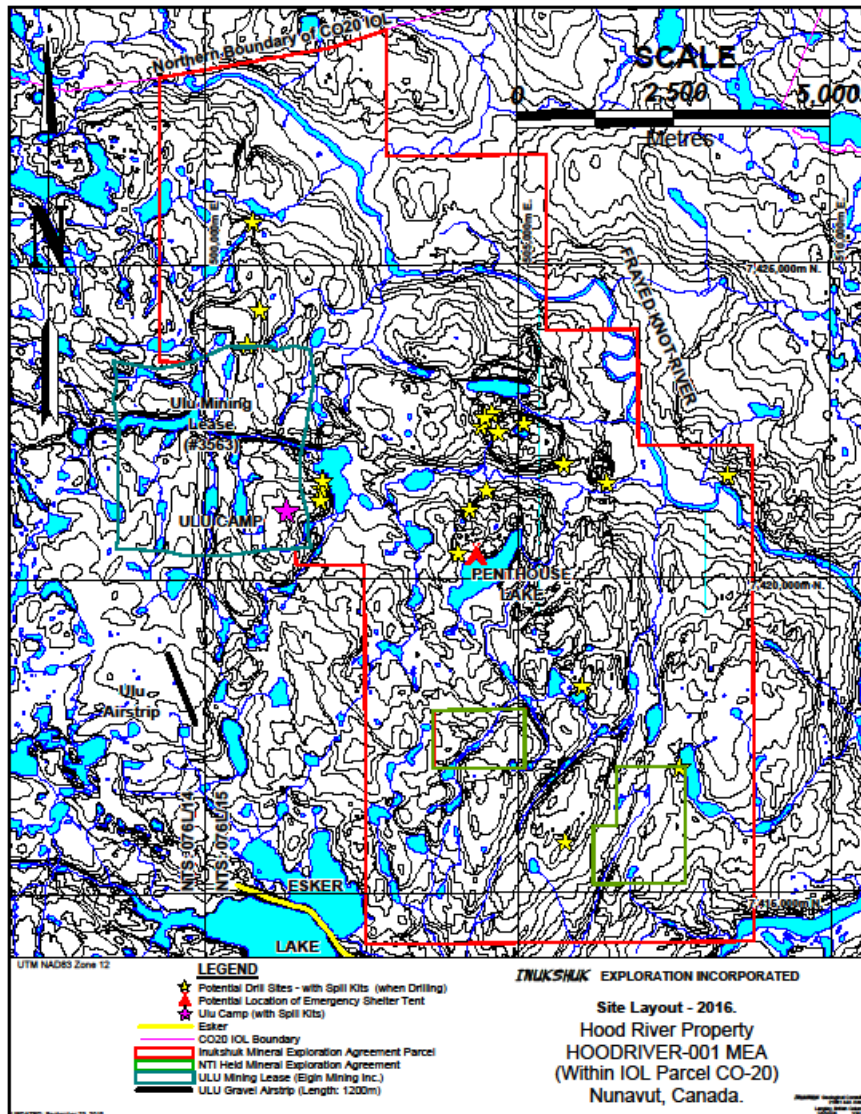


FIGURE 2: HoodRiver-001 MEA Site Layout Map, Nunavut.

Appendix I.

ULU Site Map (No fuel to be stored on HOODRIVER-001 MEA)

Site maps should be included in the spill plan once camp layout is confirmed as the maps are intended to illustrate the facilities relationship to other areas that may be affected by the spill. The maps should be to scale and be large enough to include the location of your facility, nearby buildings or facilities, roads, culverts, drainage patterns, and any nearby bodies of water.

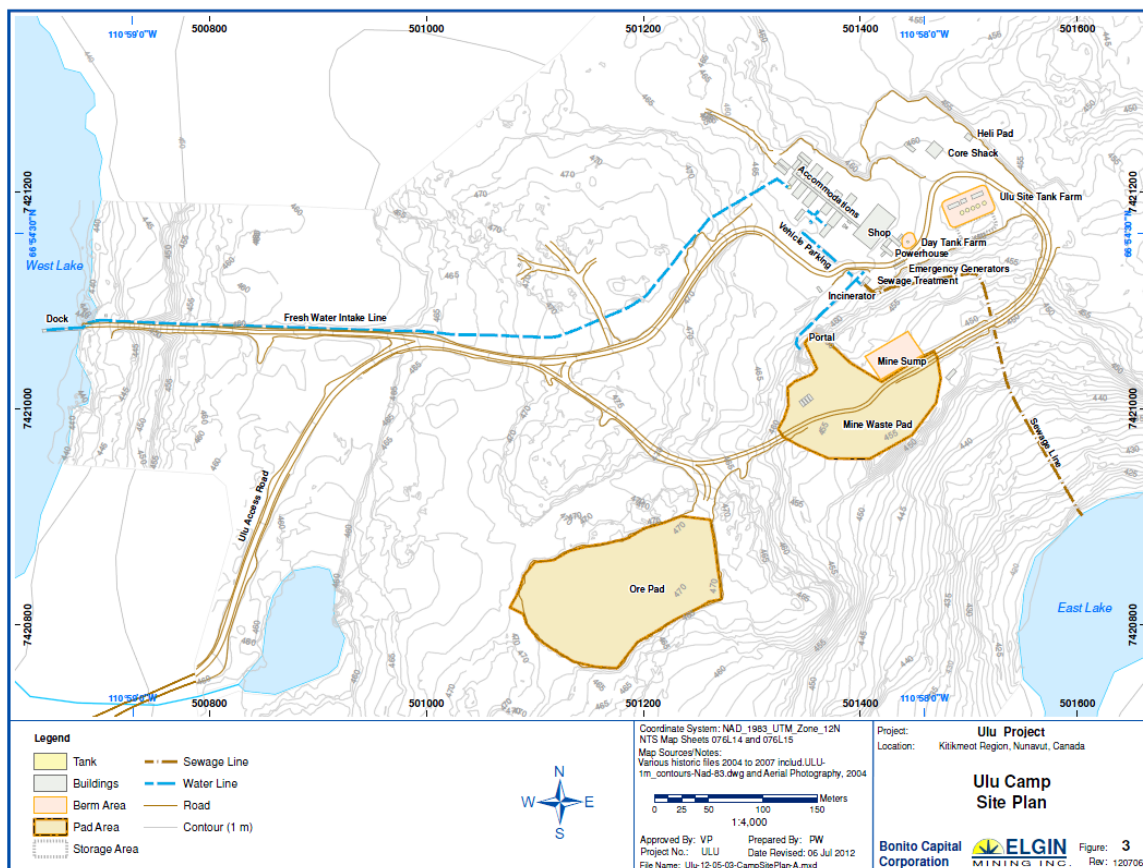

APPENDIX 1. Site Map; the Ulu mine site camp layout.

Appendix II.

Location of Camp(s) and Fuel Storage.

LOCATION OF CAMP(S) (UTM NAD 83 Zone 12)

Ulu Base Camp (Established):

Lat (degree/minute): 66° 54' 02" N

Long (degree/minute): 110° 58' 30" W

Map Sheet - 076L/15

Penthouse Lake Emergency Tent Site: **Yet to be Established**

Lat (degree/minute): 66° 54' " N.

Long (degree/minute): 110° 54' " W

Map Sheet – 076L/15

LOCATION OF FUEL STORAGE (NAD 83)

No fuel is currently onsite nor are there any plans to store any fuel within the HOODRIVER-001 MEA.

Lat (degree/minute): 00° 00' 00"

Long (degree/minute): 00° 00' 00"

Map Sheet – 076L/15

Appendix III.

Listing of On-Site Fuel and Chemical Storage

Names and quantity (in volumes or weights) of both fuel and chemicals such as drill additives to be used on site are provided in the spill plan as follows:

ITEM	CONTAINER	NUMBER	VOLUME (liters)	WEIGHT (kilograms)
➤ FUEL:				
Diesel	205 litre drum	0	0	0
Jet B	205 litre drum	0	0	0
Gasoline	205 litre drum	0	0	0
Stove Oil	205 litre drum	0	0	0
Motor Oil	1 litre	0	0	0
Anti-freeze	1 litre	0	0	0
Chain Saw Oil	1 litre	0	0	0
➤ DRILL ADDITIVES:				
		0	0	0
		0	0	0
		0	0	0

Appendix IV.

Distribution List.

This manual is to be distributed to the following WPC personnel:

WPC Resources Incorporated,

Company President:

Stephen Wilkinson,
S.Wilkinson@Shaw.ca
(Cell: +1 (604) 787-6006)

Suite 202, 750 West Pender Street,
Vancouver, British Columbia.
CANADA V6C 2T7
Telephone: 778-379-1433
Facsimile: 778-379-1434

Directors:

Stephen Wilkinson, President	s.wilkinson@shaw.ca
Allan Fabbro, Director	afabbro@imiming.com
Ian Graham, Director	ian@nkwazi.ca
Wayne Moorhouse, CFO	waynemoorhouse@shaw.ca
Robert Metcalfe, Director	rmetcalfe@sympatico.ca
and	
Ken Yurichuk, Director	kyurichuk@bobot-yurichuk.com

Geologic Contact / Consulting Geologist:

Bruce Goad, P. Geo., M. Sc.
INUKSHUK GEOLOGICAL CONSULTING.
(Langley, British Columbia)
InukshukGeological@Shaw.ca

Geologists:

Yet to be hired.
Yet to be hired.
Yet to be hired.
Yet to be hired.

All Field Staff:

Yet to be hired.
Yet to be hired.
Yet to be hired.
Yet to be hired.

Camp Manager:

Yet to be hired.

Safety Officer

Yet to be nominated.

All Camp Staff

Yet to be hired.
Yet to be hired.
Yet to be hired.

Appendix V.

Amendment Record Form

An amendment instruction sheet shall be included that lists and identifies sections in the manual to be added, enhanced or replaced.

Original Document Date: May 25, 2014.

DOCUMENT AMENDMENTS

	Description	Date
(1)	Updated the current list of Directors	March 20, 2015.
(2)	Noted that ALL fuel will be contained within berms	March 20, 2015
(3)	Updated contacts in Section 5.4	March 20, 2015
(4)	Updated edits requested by NWB (Addendum 1)	September 23, 2015
(5)	Updated company contact telephone numbers	September 23, 2015
(6)		
(7)		
(8)		
(9)		
(10)		

Suggested Amendments:

- 1.) Edits requested by Courtney Cox; AANDC letter of July 24, 2014.
- 2.) Edits requested by NWB Licence 2BE-HRP1419 and Letter of September 22, 2015 from NWB.
- 3.) _____.
- 4.) _____.
- 5.) _____.
- 6.) _____.
- 7.) _____.
- 8.) _____.
- 9.) _____.
- 10.) _____.
- 11.) _____.
- 12.) _____.
- 13.) _____.
- 14.) _____.
- 15.) _____.

Appendix VI.
Nunavut Spill Report Form

THIS PAGE IS EMPTY

Instructions for Completing the NT-NU Spill Report Form

This form can be filled out electronically and e-mailed as an attachment to spills@gov.nt.ca. Until further notice, please verify receipt of e-mail transmissions with a follow-up telephone call to the spill line. Forms can also be printed and faxed to the spill line at 867-873-6924. Spills can still be phoned in by calling collect at 867-920-8130.

A. Report Date/Time	The actual date and time that the spill was reported to the spill line. If the spill is phoned in, the Spill Line will fill this out. Please do not fill in the Report Number: the spill line will assign a number after the spill is reported.
B. Occurrence Date/Time	Indicate, to the best of your knowledge, the exact date and time that the spill occurred. Not to be confused with the report date and time (see above).
C. Land Use Permit Number /Water Licence Number	This only needs to be filled in if the activity has been licenced by the Nunavut Water Board and/or if a Land Use Permit has been issued. Applies primarily to mines and mineral exploration sites.
D. Geographic Place Name	In most cases, this will be the name of the city or town in which the spill occurred. For remote locations – outside of human habitations – identify the most prominent geographic feature, such as a lake or mountain and/or the distance and direction from the nearest population center. You must include the geographic coordinates (Refer to Section E).
E. Geographic Coordinates	This only needs to be filled out if the spill occurred outside of an established community such as a mine site. Please note that the location should be stated in degrees, minutes and seconds of Latitude and Longitude.
F. Responsible Party Or Vessel Name	This is the person who was in management/control/ownership of the substance at the time that it was spilled. In the case of a spill from a ship/vessel, include the name of the ship/vessel. Please include full address, telephone number and e-mail. Use box K if there is insufficient space. Please note that, the owner of the spilled substance is ultimately responsible for any spills of that substance, regardless of who may have actually caused the spill.
G. Contractor involved?	Were there any other parties/contractors involved? An example would be a construction company who is undertaking work on behalf of the owner of the spilled substance and who may have contributed to, or directly caused the spill and/or is responding to the spill.
H. Product Spilled	Identify the product spilled; most commonly, it is gasoline, diesel fuel or sewage. For other substances, avoid trade names. Wherever possible, use the chemical name of the substance and further, identify the product using the four digit UN number (eg: UN1203 for gasoline; UN1202 for diesel fuel; UN1863 for Jet A & B)
I. Spill Source	Identify the source of the spill: truck, ship, home heating fuel tank and, if known, the cause (eg: fuel tank overflow, leaking tank; ship ran aground; traffic accident, vandalism, storm, etc.). Provide an estimate of the extent of the contaminated/impacted area (eg: 10 m ²)
J. Factors Affecting Spill	Any factors which might make it difficult to clean up the spill: rough terrain, bad weather, remote location, lack of equipment. Do you require advice and/or assistance with the cleanup operation? Identify any hazards to persons, property or equipment: for example, a gasoline spill beside a daycare centre would pose a safety hazard to children. Use box K if there is insufficient space.
K. Additional Information	Provide any additional, pertinent details about the spill, such as any peculiar/unique hazards associated with the spilled material. State what action is being taken towards cleaning up the spill; disposal of spilled material; notification of affected parties. If necessary, append additional sheets to the spill report. Number the pages in the same format found in the lower right hand corner of the spill form: eg. "Page 1 of 2", "Page 2 of 2" etc. Please number the pages to ensure that recipients can be certain that they received all pertinent documents. If only the spill report form was filled out, number the form as "Page 1 of 1".
L. Reported to Spill Line by	Include your full name, employer, contact number and the location from which you are reporting the spill. Use box K if there is insufficient space.
M. Alternate Contact	Identify any alternate contacts. This information assists regulatory agencies to obtain additional information if they cannot reach the individual who reported the spill.
N. Report Line Use Only	Leave Blank. This box is for the Spill Line's use only.



NT-NU SPILL REPORT

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

NT-NU 24-HOUR SPILL REPORT LINE

TEL: (867) 920-8130

FAX: (867) 873-6924

EMAIL: spills@gov.nt.ca

REPORT LINE USE ONLY

A	REPORT DATE: MONTH – DAY – YEAR		REPORT TIME		<input type="checkbox"/> ORIGINAL SPILL REPORT OR <input type="checkbox"/> UPDATE # _____ TO THE ORIGINAL SPILL REPORT	REPORT NUMBER _____	
	OCCURRENCE DATE: MONTH – DAY – YEAR		OCCURRENCE TIME				
C	LAND USE PERMIT NUMBER (IF APPLICABLE)			WATER LICENCE NUMBER (IF APPLICABLE)			
D	GEOGRAPHIC PLACE NAME OR DISTANCE AND DIRECTION FROM NAMED LOCATION				REGION <input type="checkbox"/> NWT <input type="checkbox"/> NUNAVUT <input type="checkbox"/> ADJACENT JURISDICTION OR OCEAN		
E	LATITUDE DEGREES MINUTES SECONDS			LONGITUDE DEGREES MINUTES SECONDS			
F	RESPONSIBLE PARTY OR VESSEL NAME		RESPONSIBLE PARTY ADDRESS OR OFFICE LOCATION				
G	ANY CONTRACTOR INVOLVED		CONTRACTOR ADDRESS OR OFFICE LOCATION				
H	PRODUCT SPILLED		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER		
	SECOND PRODUCT SPILLED (IF APPLICABLE)		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER		
I	SPILL SOURCE		SPILL CAUSE		AREA OF CONTAMINATION IN SQUARE METRES		
J	FACTORS AFFECTING SPILL OR RECOVERY		DESCRIBE ANY ASSISTANCE REQUIRED		HAZARDS TO PERSONS, PROPERTY OR EQUIPMENT		
K	ADDITIONAL INFORMATION, COMMENTS, ACTIONS PROPOSED OR TAKEN TO CONTAIN, RECOVER OR DISPOSE OF SPILLED PRODUCT AND CONTAMINATED MATERIALS						
L	REPORTED TO SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLING FROM	TELEPHONE		
M	ANY ALTERNATE CONTACT	POSITION	EMPLOYER	ALTERNATE CONTACT LOCATION	ALTERNATE TELEPHONE		
REPORT LINE USE ONLY							
N	RECEIVED AT SPILL LINE BY	POSITION STATION OPERATOR	EMPLOYER	LOCATION CALLED YELLOWKNIFE, NT	REPORT LINE NUMBER (867) 920-8130		
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> INAC <input type="checkbox"/> NEB <input type="checkbox"/> TC			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED		
AGENCY		CONTACT NAME	CONTACT TIME	REMARKS			
LEAD AGENCY							
FIRST SUPPORT AGENCY							
SECOND SUPPORT AGENCY							
THIRD SUPPORT AGENCY							

PAGE 1 OF _____

The online reporting form can be found at:

<http://env.gov.nu.ca/sites/default/files/NT%20NU%20Spill%20Report%20Form.pdf>

Appendix VII.

EMERGENCY CONTACT INFORMATION

EMERGENCY CONTACT INFORMATION			
NAME	POSITION	TELEPHONE	E-MAIL
WPC Resources Inc. Bruce Goad, P. Geo.	Vancouver Office Project Manager, (Inukshuk Geological) Cell Number	1-604-685-1144 1-604-533-2255 1-604-866-2254	S.Wilkinson@Shaw.ca InukshukGeological@Shaw.ca
Kitikmeot Inuit Association	Front Desk (Cambridge Bay)	1-867-983-2458	
Luigi Torretti - KIA	Senior Environmental Officer (Kugluktuk)	1-867-982-3310	ltorretti@qiniq.com
Wynter Kuliktana - KIA	Lands Officer (Kugluktuk)	1-867-982-3310	landsofficerkia@qiniq.com
Mathieu Dumond	Wildlife Manager (Kitikmeot)	1-867-982-7441	MDumond@GOV.NU.CA
Shane Sather	Wildlife Officer III (Cambridge Bay)	1-867-983-4167	SSather@GOV.NU.CA
Allen Niptanatiak	Conservation Officer (Kugluktuk)	1-867-982-7451	ANiptanatiak1@GOV.NU.CA
Monica Angohiatok	Conservation Officer II (Kugluktuk)	1-867-982-7450	MAngohiatok@GOV.NU.CA
Lisa-Marie Leclerc	Regional Wildlife Biologist	1-867-982-7444	LLeclerc@GOV.NU.CA
Jorgen Bolt	Wildlife Technician II (Kugluktuk)	1-867-982-7446	jbolt@GOV.NU.CA
Drikus Gissing	Director Wildlife Management (Iqaluit)	1-867-975-7734	DGissing@GOV.NU.CA
Environment Canada		1-780-951-8600	
Environment Canada	24 hour pager	1-967-766-3737	
Nunavut Water Board		1-867-360-6338	
Nunavut Spill Line	Nunavut 24 Hour Spill Line	1-867-920-8130	spills@gov.nu.ca
AANDC	Field Operations Division Manager	1-867-975-4295	
Fisheries and Oceans		1-613-993-0999	

Wildlife contacts from Government of Nunavut Directory: <http://www.directory.gov.nu.ca/Search.aspx>
 KIA Contacts from KIA Directory: <http://kitia.ca/en/about-kia/staff>

List Updated: September 23, 2015.

Appendix VIII.

Material Safety Data Sheets (MSDS)

LOCATION OF MSDS FILES: - HOOD RIVER PROJECT			
<i>No.</i>	<i>Item</i>	<i>Page No.</i>	
1	Antifreeze	Appendix VIII	1
2	Aviation Gas	Appendix VIII	6
3	Calcium Chloride	Appendix VIII	11
4	Chain Oil	Appendix VIII	15
5	Diesel Fuel	Appendix VIII	20
6	Draino	Appendix VIII	26
7	Drill Rod Heavy Grease	Appendix VIII	30
8	ESSO Unleaded Gasoline	Appendix VIII	34
9	Ethylene Glycol	Appendix VIII	47
10	Gas Oil	Appendix VIII	54
11	Hydraulic Fluid: UNIVIS N-32	Appendix VIII	59
12	Hydraulic Fluid: UNIVIS N-22	Appendix VIII	65
13	Hydraulic Fluid: UNIVIS N-68	Appendix VIII	71
14	Javex	Appendix VIII	77
15	Jet A	Appendix VIII	79
16	Jet B	Appendix VIII	84
17	Joint Tool Compound	Appendix VIII	90
18	Kleen-Flo	Appendix VIII	94
19	Marvelube WR2 Grease	Appendix VIII	96
20	Middle Distillate	Appendix VIII	102
21	Moly Grease: UNIREX Lotemp.	Appendix VIII	109
22	Moly Grease: Epic E3	Appendix VIII	115
23	Motor Oil	Appendix VIII	121
24	Outboard Motor Oil	Appendix VIII	127
25	Plywood	Appendix VIII	132
26	Poly-Drill 133-X	Appendix VIII	137
27	Poly-Drill 1300	Appendix VIII	141
28	Poly-Drill K-ION	Appendix VIII	148
29	Poly-Drill O.B.X.	Appendix VIII	152
30	Portland Cement	Appendix VIII	154
31	Propane	Appendix VIII	160
32	Snowmobile Motor Oil	Appendix VIII	165
33	Stove Oil	Appendix VIII	169
34	Tilex	Appendix VIII	174
35	Tilex-Mold	Appendix VIII	176
36	Unleaded Gasoline	Appendix VIII	178
37	Windex	Appendix VIII	184
38	550-X Polymer	Appendix VIII	188
39	Linseed Soap	Appendix VIII	192
40	Big Bear Diamond Drill Rod Grease	Appendix VIII	195



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	D-2A, D-2B		

Section 1. Chemical Product and Company Identification

Product Name	ANTIFREEZE	Code	W269
Synonym	Universal Antifreeze, Radiator Antifreeze, Diesel Antifreeze, Petro-Canada Antifreeze-Coolant, Petro-Canada Heavy Duty Antifreeze-Coolant, Pre-Mix Antifreeze, Petro-Canada Premium Radiator Antifreeze, Diesel Engine Coolant.	Validated on	7/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as an engine antifreeze coolant.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Ethylene glycol	107-21-1	≥90	Not established	Not established	100 mg/m ³ (aerosol)
Sodium tetraborate pentahydrate (Diesel Engine Coolant only)	12179-04-3	≤5	1 mg/m ³	Not established	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Contact with this product may cause eye irritation. Not expected to cause more than slight skin irritation. Inhalation of this product may cause respiratory tract irritation. Ingestion may be extremely hazardous. May cause teratogenicity/embryotoxicity. May cause damage to reproductive organs. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Lower: 3.2%, Upper: 15.3%
Flash Points	Closed Cup: 116°C (241°F) (Tagliabue) Open Cup: 116°C (241°F) (Cleveland)	Auto-Ignition Temperature	413°C (775°F)

ANTIFREEZE		Page Number: 2	
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Store away from heat and sources of ignition. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	- The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Chemical splash goggles should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).
Respiratory	A minimum of NIOSH-approved air-purifying respirator with a organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Polyvinyl chloride (PVC). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear viscous liquid.	Viscosity	Not available
Colour	Green.	Pour Point	Not available
Odour	Odourless.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	129 to 197°C (264 to 387°F)	Penetration	Not applicable.
Density	1.115 to 1.145 (Water = 1)	Oil / Water Dist. Coefficient	Not available
Vapour Density	2.1 (Air=1).	Ionicity (in water)	Not available
Vapour Pressure	0.06 mmHg @ 20°C (68°F).	Dispersion Properties	Not available
Volatility	0% (w/w)	Solubility	Soluble in water, methanol and diethyl ether.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids, alkalis, perchloric acid, phosphorus, silvered copper wires carrying DC current, aliphatic amines, isocyanates, chlorosulfonic acid and oluem.	Decomposition Products	May release COx, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<u>Ethylene glycol (107-21-1):</u> LD50: 4700 mg/kg (oral/rat). LD50: 9530 mg/kg (dermal/rabbit). <u>Sodium tetraborate pentahydrate (12179-04-3):</u> LD50: 3200-3500 mg/kg (oral/rat) (Boric acid). [Sodium tetraborate pentahydrate]
Chronic or Other Toxic Effects	
Dermal Route:	Short-term exposure is expected to cause only slight irritation, if any.
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation.
Oral Route:	Extremely dangerous in case of ingestion.
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	Borates are possible reproductive toxins based upon available animal ingestion studies in several species. These studies usually involved high doses, over prolonged periods of time. A human study following occupational exposure to borate by inhalation concluded that, no adverse effects to reproduction were found in this population, under the conditions of this study.
Teratogenicity/Embryotoxicity:	This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin (Ethylene glycol).

ANTIFREEZE		Page Number: 4
Carcinogenicity (ACGIH):	ACGIH A4: not classifiable as a human carcinogen (Ethylene glycol). This product is not known to contain any chemicals at reportable quantities that are listed as Group A1, A2, or A3 carcinogens by ACGIH.	
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.	
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.	
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	The substance may be toxic to kidneys and liver. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			

Section 13. Disposal Considerations	
Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information	
TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada)
Special Provisions for Transport	Not applicable.

Section 15. Regulatory Information																									
Other Regulations		All of the components of this product are on the Domestic Substances List (DSL), are considered to be on the DSL, or are exempt from the New Substance Notification (NSN) requirements. All components of this formulation are listed on the US EPA-TSCA Inventory. This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. Please contact Product Safety for more information.																							
DSD/DPD (Europe)		Not evaluated.	HCS (U.S.A.) CLASS: Target organ effects. CLASS: Irritating substance.																						
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms) 																						
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>	Health Hazard	2*	Fire Hazard	1	Reactivity	0	Personal Protection	H	<table><tr><td>NFPA (U.S.A.)</td><td><table><tr><td>1</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr><tr><td>0</td><td>Specific hazard</td></tr></table></td><td>Rating</td><td>0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme</td></tr><tr><td>Health</td><td></td><td></td><td></td></tr></table>	NFPA (U.S.A.)	<table><tr><td>1</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr><tr><td>0</td><td>Specific hazard</td></tr></table>	1	Fire Hazard	2	Reactivity	0	Specific hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme	Health			
Health Hazard	2*																								
Fire Hazard	1																								
Reactivity	0																								
Personal Protection	H																								
NFPA (U.S.A.)	<table><tr><td>1</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr><tr><td>0</td><td>Specific hazard</td></tr></table>	1	Fire Hazard	2	Reactivity	0	Specific hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme																
1	Fire Hazard																								
2	Reactivity																								
0	Specific hazard																								
Health																									

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDSInternet: www.petro-canada.ca/msds**Fuels & Solvents:**

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax:
 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752








Prepared by Product Safety - TLM on 7/6/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2B	   	

Section 1. Chemical Product and Company Identification

Product Name	AVIATION GASOLINE 100LL	Code	060-100LL, W118
Synonym	AVGAS 100LL	Validated on	5/30/2005.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	This product is used as fuel for internal combustion aircraft engines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Complex mixture of aliphatic and aromatic hydrocarbons (C4-C12).	68527-27-5	85-95	Not established	Not established	Not established
Toluene	108-88-3	5-15	50 ppm	Not established	Not established
Contains 0-0.56g/L of lead [from Tetraethyl Lead].					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Flammable liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately.
Skin Contact	Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 20 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	LOWER: 1.4%, UPPER: 7.6%
Flash Points	Closed Cup: -50°C (-58°F), Tag, ASTM D56.	Auto-Ignition Temperature	257°C (494.6°F)
Fire Hazards in Presence of Various Substances	Easily ignites under almost all normal temperature conditions. Flammable in presence of open flames, sparks, shocks, heat, oxidizing materials. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), reactive hydrocarbons, aldehydes, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG2004, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient. If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions. SMALL FIRES: Dry chemical, CO ₂ , water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.		

Section 6. Accidental Release Measures

Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Notify appropriate authorities immediately. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Extinguish all ignition sources. Ventilate area. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Do not allow spilled materials to come into contact with incompatible materials (see Section 10). Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary.
----------------------------------	--

Section 7. Handling and Storage

Handling	FLAMMABLE MATERIAL. Handle with care. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid contact with any incompatible or reactive materials. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Ensure container is securely closed when not in use. Wear proper personal protective equipment (See Section 8). Exercise caution when washing/drying clothing contaminated with flammable materials. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning.
Storage	Store as flammable material. Store away from heat and sources of ignition. Store away from incompatible and reactive materials (See section 5 and 10). Store in a dry, cool and well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.)
Respiratory	A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): polyvinyl alcohol (PVA) and fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available
Colour	Bright Blue.	Pour Point	Not applicable.
Odour	Gasoline.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	30 to 170°C (86 to 338°F)	Penetration	Not applicable.
Density	0.69 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not measurable. The product is more soluble in oil.
Vapour Density	Heavier than air.	Ionicity (in water)	Insoluble in water.
Vapour Pressure	38 kPa @ 20°C (285 mmHg @ 68°F).	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins.

Section 10. Stability and Reactivity

Corrosivity	Non corrosive.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Can react with strong oxidizing agents, acids, tetranitromethane, uranium hexafluoride and sulfur dichloride.	Decomposition Products	May release COx, aldehydes, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: <u>Toluene (108-88-3):</u> Acute Oral toxicity (LD50): 636 mg/kg (rat) Acute Dermal toxicity (LD50): 12225 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 8800 ppm/4h (rat)
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis.
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any. This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.

AVIATION GASOLINE 100LL		Page Number: 4
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.	
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.	
Teratogenicity/Embryotoxicity:	There is a wealth of information about the teratogenic hazards of Toluene in the literature; however, based upon professional judgement regarding the body of evidence, WHMIS classification as a teratogen is not warranted.	
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1, A2 or A3 carcinogens by ACGIH.	
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.	
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.	
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	No additional remark.	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			

Section 13. Disposal Considerations	
Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information			
TDG Classification	GASOLINE, 3, UN1203, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.

Section 15. Regulatory Information																										
Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																								
		All components of this formulation are listed on the US EPA-TSCA Inventory.																								
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																								
		Please contact Product Safety for more information.																								
DSD/DPD (Europe)		Not evaluated.	HCS (U.S.A.) CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Irritating substance. CLASS: Target organ effects.																							
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms) Not evaluated for transport Non évalué pour le transport																							
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(4)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table>	Health Hazard	(2*)	Fire Hazard	(4)	Reactivity	(0)	Personal Protection	(H)	<table><tr><td>NFPA (U.S.A.)</td><td><table><tr><td>4</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr><tr><td>0</td><td>Specific hazard</td></tr></table></td><td>Rating</td><td>0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme</td></tr><tr><td></td><td>Health</td><td></td><td></td></tr></table>		NFPA (U.S.A.)	<table><tr><td>4</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr><tr><td>0</td><td>Specific hazard</td></tr></table>	4	Fire Hazard	2	Reactivity	0	Specific hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme		Health		
Health Hazard	(2*)																									
Fire Hazard	(4)																									
Reactivity	(0)																									
Personal Protection	(H)																									
NFPA (U.S.A.)	<table><tr><td>4</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr><tr><td>0</td><td>Specific hazard</td></tr></table>	4	Fire Hazard	2	Reactivity	0	Specific hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme																	
4	Fire Hazard																									
2	Reactivity																									
0	Specific hazard																									
	Health																									

Section 16. Other Information

References Available upon request.
 * Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System
ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%
ASTM - American Society for Testing and Materials	LDLo/LCLo - Lowest Published Lethal Dose/Concentration
BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)
CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association
CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health
CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)
CFR - Code of Federal Regulations	NTP - National Toxicology Program
CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration
CNS - Central Nervous System	PEL - Permissible Exposure Limit
COD5 - Chemical Oxygen Demand in 5 days	RCRA - Resource Conservation and Recovery Act
CPR - Controlled Products Regulations	RTECS - Registry of Toxic Effects of Chemical Substances
DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act
DSCL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)	STEL - Short Term Exposure Limit (15 minutes)
DSL - Domestic Substance List	TDG - Transportation Dangerous Goods (Canada)
EEC/EU - European Economic Community/European Union	TDLo/TCLo - Lowest Published Toxic Dose/Concentration
EINECS - European Inventory of Existing Commercial Chemical Substances	TLm - Median Tolerance Limit
EPA - Environmental Protection Agency	TLV-TWA - Threshold Limit Value-Time Weighted Average
EPCRA - Emergency Planning and Community Right to Know Act	TSCA - Toxic Substances Control Act
FDA - Food and Drug Administration	USEPA - United States Environmental Protection Agency
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act	USP - United States Pharmacopoeia
HCS - Hazard Communication Standard	WHMIS - Workplace Hazardous Material Information System
HMIS - Hazardous Material Information System	
IARC - International Agency for Research on Cancer	

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 5/30/2005.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Calcium Chloride, Dihydrate

CX0134

Page: 1/1

Material Safety Data Sheet

Calcium Chloride, Dihydrate



Section 1. Product and Company Identification

Product name	: Calcium Chloride, Dihydrate
Product code	: CX0134
Synonym	: CALCIUM CHLORIDE
Material uses	: Other non-specified industry: Analytical reagent.
Manufacturer	: EMD Chemicals Inc. P.O. Box 70 480 Democrat Road Gibbstown, NJ 08027 856-423-6300 Technical Service Monday - Friday: 8:00 - 5:00 PM
Validation date	: 6/1/2006.
Print date	:
In case of emergency	: 800-424-9300 CHEMTREC (USA) 613-996-6666 CANUTEC (Canada) 24 Hours/Day: 7 Days/Week

Section 2. Hazards Identification

Physical state	: Solid. (Powder or flakes. Granular solid.)
OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Emergency overview	: WARNING! CAUSES SEVERE RESPIRATORY TRACT, EYE AND SKIN IRRITATION. Avoid contact with skin and clothing. Avoid breathing dust. Keep container closed. Use only with adequate ventilation. Wash thoroughly after handling.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
Potential acute health effects	
Eyes	: Severely irritating to eyes.
Skin	: Severely irritating to the skin.
Inhalation	: Severely irritating to the respiratory system.
Ingestion	: Ingestion may cause gastrointestinal irritation and diarrhea.
Carcinogenic effects	: No known significant effects or critical hazards.
Mutagenic effects	: No known significant effects or critical hazards.
Teratogenicity / Reproductive toxicity	: No known significant effects or critical hazards.
Medical conditions aggravated by over-exposure	: Repeated skin exposure can produce local skin destruction or dermatitis. Repeated or prolonged exposure to the substance can produce lung damage. Repeated exposure of the eyes to a low level of dust can produce eye irritation.

See toxicological information (section 11)

Section 3. Composition/Information on Ingredients

United States		
Name	CAS number	% by Weight
Calcium Chloride, Dihydrate	10035-04-8	100

Section 4. First Aid Measures

Eye contact	: Get medical attention immediately. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Chemical burns must be treated promptly by a physician.
Skin contact	: Flush contaminated skin with plenty of water. Continue to rinse for at least 10 minutes. Get medical attention. Remove contaminated clothing and shoes. Wash clothing before reuse. Clean shoes thoroughly before reuse.
Inhalation	: Move exposed person to fresh air. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. Keep person warm and at rest. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

- Ingestion** : Wash out mouth with water. Remove dentures if any. Move exposed person to fresh air. Keep person warm and at rest. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention if symptoms occur. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training.

Section 5. Fire Fighting Measures

- Flammability of the product** : No specific hazard.
- Extinguishing media**
- Suitable** : Use an extinguishing agent suitable for the surrounding fire.
- Not suitable** : None known.
- Special exposure hazards** : Not available.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental Release Measures

- Personal precautions** : Immediately contact emergency personnel. Keep unnecessary personnel away. Use suitable protective equipment.
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.
- Methods for cleaning up** : If emergency personnel are unavailable, vacuum or carefully scoop up spilled material and place in an appropriate container for disposal by incineration. Avoid creating dusty conditions and prevent wind dispersal.

Section 7. Handling and Storage

- Handling** : Avoid contact with eyes, skin and clothing. Keep container closed. Use only with adequate ventilation. Avoid breathing dust. Wash thoroughly after handling.
- Storage** : Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Consult local authorities for acceptable exposure limits.

- Engineering measures** : Use only with adequate ventilation. If user operations generate dust, fumes, vapor or mist, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits.
- Personal protection**
- Eyes** : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts.
Recommended: safety glasses with side-shields
- Skin** : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
Body: Recommended: lab coat
- Respiratory** : Use a properly fitted, particulate filter respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
- Hands** : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Recommended: nitrile rubber
- Hygiene measures** : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Section 9. Physical and Chemical Properties

- Physical state** : Solid. (Powder or flakes. Granular solid.)
- Color** : White.
- Molecular weight** : 147.02 g/mole
- Molecular formula** : CaCl₂ · 2H₂O
-

Section 10. Stability and Reactivity

Stability and reactivity	: The product is stable.
Incompatibility with various substances	: Reactive or incompatible with the following materials: metals and moisture.
Hazardous decomposition products	: These products are halogenated compounds, hydrogen chloride.
Hazardous polymerization	: Will not occur.

Section 11. Toxicological Information

Toxicity data	
Other toxic effects on humans	: Very hazardous in case of eye contact (irritant). Hazardous in case of skin contact (irritant).
Specific effects	
Carcinogenic effects	: No known significant effects or critical hazards.
Mutagenic effects	: No known significant effects or critical hazards.
Teratogenicity / Reproductive toxicity	: No known significant effects or critical hazards.
Sensitization	
Ingestion	: No known significant effects or critical hazards.
Inhalation	: Severely irritating to the respiratory system.
Eyes	: Severely irritating to eyes.
Skin	: Severely irritating to the skin.

Section 12. Ecological Information

Environmental precautions	: No known significant effects or critical hazards.
Products of degradation	: These products are halogenated compounds. Some metallic oxides.
Toxicity of the products of biodegradation	: The products of degradation are more toxic than the product itself.

Section 13. Disposal Considerations

Waste disposal	: The generation of waste should be avoided or minimized wherever possible. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements.
-----------------------	--

Disposal should be in accordance with applicable regional, national and local laws and regulations. Local regulations may be more stringent than regional or national requirements.

The information presented below only applies to the material as supplied. The identification based on characteristic(s) or listing may not apply if the material has been used or otherwise contaminated. It is the responsibility of the waste generator to determine the toxicity and physical properties of the material generated to determine the proper waste identification and disposal methods in compliance with applicable regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

Section 14. Transport Information

Regulatory information	UN number	Proper shipping name	Class	PG*	Label	Additional information
DOT Classification	-	CHEMICALS, N.O.S.	-	-		Not available.

PG* : Packing group

Section 15. Regulatory Information

United States	
HCS Classification	: Irritating material
U.S. Federal regulations	: TSCA 8(b) inventory: Listed SARA 302/304/311/312 extremely hazardous substances: No products were found. SARA 302/304 emergency planning and notification: No products were found. SARA 302/304/311/312 hazardous chemicals: Calcium Chloride, Dihydrate SARA 311/312 MSDS distribution - chemical inventory - hazard identification: Calcium Chloride, Dihydrate : Immediate (acute) health hazard, Delayed (chronic) health hazard Clean Water Act (CWA) 307: No products were found. Clean Water Act (CWA) 311: No products were found. Clean Air Act (CAA) 112 accidental release prevention: No products were found.

Clean Air Act (CAA) 112 regulated flammable substances: No products were found.

Clean Air Act (CAA) 112 regulated toxic substances: No products were found.

: No products were found.

State regulations

Canada

WHMIS (Canada)

: Class D-2B: Material causing other toxic effects (Toxic).

CEPA DSL/CEPA NDSL

: CEPA DSL: CALCIUM CHLORIDE

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

EU regulations

Hazard

:

symbol/symbols



Risk phrases

: R36- Irritating to eyes.

Safety phrases

: S2- Keep out of the reach of children.

S22- Do not breathe dust.

S24- Avoid contact with skin.

International regulations

International lists

: Australia (NICNAS): Calcium Chloride, Dihydrate

China: Calcium Chloride, Dihydrate

Japan (METI): Calcium Chloride, Dihydrate

Philippines (RA6969): Calcium Chloride, Dihydrate

Section 16. Other Information

Label requirements

: WARNING!

CAUSES SEVERE RESPIRATORY TRACT, EYE AND SKIN IRRITATION.

National Fire Protection

:

Association (U.S.A.)

Health

0

Flammability

0

Instability

Special

Notice to reader

The statements contained herein are based upon technical data that EMD Chemicals Inc. believes to be reliable, are offered for information purposes only and as a guide to the appropriate precautionary and emergency handling of the material by a properly trained person having the necessary technical skills. Users should consider these data only as a supplement to other information gathered by them and must make independent determinations of suitability and completeness of information from all sources to assure proper use, storage and disposal of these materials and the safety and health of employees and customers and the protection of the environment. EMD CHEMICALS INC. MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE, WITH RESPECT TO THE INFORMATION HEREIN OR THE PRODUCT TO WHICH THE INFORMATION REFERS.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	CHAIN OIL (SUMMER, WINTER)	Code	CHAS, 490-431 CHAW, 490-430
Synonym	Not available	Validated on	5/6/2003.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	These products are designed for lubrication of chain saw chains in both high and low ambient temperatures.		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: $\geq 168^{\circ}\text{C}$ (334.4°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), phosphorus compounds (PO _x), smoke and irritating vapours as products of incomplete combustion.		

CHAIN OIL (SUMMER, WINTER)		Page Number: 2
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.	

Section 6. Accidental Release Measures	
Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.

Section 7. Handling and Storage	
Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection	
Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties			
Physical State and Appearance	Stringy liquid.	Viscosity	CHAS: 155 cSt @ 40°C (104°F), 16.2 cSt @ 100°C (212°F), VI=109 CHAW: 32 @ 40°C (104°F), 6.29 cSt @ 100°C (212°F), VI=151
Colour	Dark red.	Pour Point	CHAS: -21°C (-6°F) CHAW: -42°C (-44°F)
Odour	Slight petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.831 - 0.88 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 100°C (ASTM D0130): 1a		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, reducing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, POx, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	Not available		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.		
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.		
Oral Route:	Low toxicity; has laxative effect.		
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.		
Immunotoxicity:	Not available		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	Not available		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		




Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.		
-----------------------	--	--	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations <p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this formulation are listed on EINECS or are exempt.</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>											
DSD/DPD (Europe) <p>Not classified under the Dangerous Substances or Dangerous Preparations Directives.</p>		HCS (U.S.A.) <p>Not controlled under the HCS (United States).</p>									
ADR (Europe) (Pictograms) <div></div>		DOT (U.S.A) (Pictograms) <div></div>									
HMIS (U.S.A.) <table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	NFPA (U.S.A.) <div><div><div>Health</div><div></div><div><div>Fire Hazard</div><div>Reactivity</div><div>Specific hazard</div></div></div><div><div>Rating</div><div>0 Insignificant</div><div>1 Slight</div><div>2 Moderate</div><div>3 High</div><div>4 Extreme</div></div></div>	
Health Hazard	1										
Fire Hazard	1										
Reactivity	0										
Personal Protection	B										

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark		
Glossary	<div><div>ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials (BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer</div><div>IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLm - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System</div></div>		
For Copy of MSDS	Prepared by Product Safety - JDW on 5/6/2003.		
Internet: www.petro-canada.ca	Data entry by Product Safety - JDW.		
Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564 Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285 Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285			
For Product Safety Information: (905) 804-4752			








CHAIN OIL (SUMMER, WINTER)

Page Number: 5

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B	   	

Section 1. Chemical Product and Company Identification

Product Name	DIESEL FUEL	Code	W104, W293; SAP: 120, 121, 122, 287
Synonym	Seasonal Diesel, #1 Diesel, #2 Heating Oil, #1 Heating Oil, D50, P50, Arctic Diesel, Farm Diesel, Marine Diesel, Low Sulphur Diesel, LSD, Ultra Low Sulphur Diesel, ULSD, Mining Diesel, Naval Distillate, Dyed Diesel, Marked Diesel, Coloured Diesel	Validated on	2/5/2007.
Manufacturer	PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Distillates (petroleum), hydrodesulfurized middle	64742-80-9	100	Not established	Not established	Not established
Kerosine (petroleum), hydrodesulfurized	64742-81-0		200 mg/m ³	Not established	Not established
Fuels, diesel	68334-30-5		100 mg/m ³	Not established	Not established
Fuel oil no. 2	68476-30-2		100 mg/m ³	Not established	Not established
Manufacturer Recommendation	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 15-20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately.
Skin Contact	Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 15-20 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.

DIESEL FUEL		Page Number: 2
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility.	
Note to Physician	Not available.	

Section 5. Fire-fighting Measures			
Flammability	Combustible liquid.	Flammable Limits	Lower: 0.7% Upper: 6%
Flash Points	Diesel Fuel: Closed Cup: $\geq 45^{\circ}\text{C}$ (113°F) Marine Diesel Fuel: Closed Cup: $\geq 64^{\circ}\text{C}$ (147°F) Mining Diesel: Closed Cup: $\geq 52^{\circ}\text{C}$ (126°F)	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	<p>NAERG2004, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures	
Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Evacuate non-essential personnel. Ventilate area. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. Ensure clean-up personnel wear appropriate personal protective equipment.

Section 7. Handling and Storage	
Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Avoid confined spaces and areas with poor ventilation. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection

Engineering Controls For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - *The selection of personal protective equipment varies, depending upon conditions of use.*

Eyes As a minimum, safety glasses with side shields should be worn when handling this material. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.)

Respiratory A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): nitrile, neoprene, polyvinyl alcohol (PVA), fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Bright oily liquid.	Viscosity	1.3 - 4.4 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown (may be dyed for taxation purposes).	Pour Point	Not available.
Odour	Mild petroleum oil like.	Softening Point	Not available.
Odour Threshold	Not available.	Dropping Point	Not available.
Boiling Point	150 to 371°C (302 to 699.8°F)	Penetration	Not available.
Density	0.8 to 0.88 kg/L @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available.
Vapour Density	4.5 [Air = 1]	Ionicity (in water)	Not available.
Vapour Pressure	1 kPa (7.5 mm Hg) @ 20°C (68°F)	Dispersion Properties	Not available.
Volatility	Semivolatile to volatile.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: <u>Distillates (petroleum), hydrodesulfurized middle (64742-80-9):</u> Acute Inhalation toxicity (LC50): 4600 mg/m³/4h (rat) <u>Kerosine (petroleum), hydrosulfurized (64742-81-0):</u> Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >2000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >5000 mg/m³/4h (rat) <u>Fuels, diesel (68334-30-5):</u> Acute Oral toxicity (LD50): 7500 mg/kg (rat) Acute Dermal toxicity (LD50): 24500 mg/kg (mouse)

DIESEL FUEL		Page Number: 4
Fuel oil no. 2 (68476-30-2): Acute Oral toxicity (LD50): 12000 mg/kg (rat)		
Chronic or Other Toxic Effects		
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations)	
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.	
Immunotoxicity:	Not available.	
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.	
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.	
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.	
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.	
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.	
Carcinogenicity (ACGIH):	Considered to be A3 by the ACGIH (Kerosine (petroleum), hydrosulfurized; Fuels, diesel; Fuel oil no. 2) (See Other Considerations)	
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.	
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.	
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).	

Section 12. Ecological Information			
Environmental Fate	Not available.	Persistence/Bioaccumulation Potential	Not available.
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks No additional remark.			

Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	DIESEL FUEL, 3, UN1202, PGIII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	--	---	--

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																													
		All components of this formulation are listed on the US EPA-TSCA Inventory.																													
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																													
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																													
		Please contact Product Safety for more information.																													
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).																											
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) Not evaluated for transport Non évalué pour le transport																											
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(2)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table>		Health Hazard	(2*)	Fire Hazard	(2)	Reactivity	(0)	Personal Protection	(H)	NFPA (U.S.A.)		<table><tr><td rowspan="4">Health</td><td rowspan="4"><div><div>2</div><div>2</div><div>0</div></div></td><td rowspan="4">Fire Hazard</td><td rowspan="4">Reactivity</td><td rowspan="4">Specific hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>1 Slight</td></tr><tr><td>2 Moderate</td></tr><tr><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table>		Health	<div><div>2</div><div>2</div><div>0</div></div>	Fire Hazard	Reactivity	Specific hazard	Rating	0 Insignificant	1 Slight	2 Moderate	3 High						4 Extreme
Health Hazard	(2*)																														
Fire Hazard	(2)																														
Reactivity	(0)																														
Personal Protection	(H)																														
Health	<div><div>2</div><div>2</div><div>0</div></div>	Fire Hazard	Reactivity	Specific hazard	Rating	0 Insignificant																									
					1 Slight																										
					2 Moderate																										
					3 High																										
					4 Extreme																										

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
-------------------	---

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemical Hazard Information and Packaging Approved Supply List
 COD - Chemical Oxygen Demand
 CPR - Controlled Products Regulations
 DOT - Department of Transportation (U.S.A.)
 DSCl - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substance or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List (Canada)
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning And Community Right-To-Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide, and Rodenticide Act

HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer
 IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TLM - Median Tolerance Limit
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System



For Copy of MSDS

Prepared by Product Safety - JDW on 2/5/2007.

DIESEL FUEL	Page Number: 6
Internet: www.petro-canada.ca/msds Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228 For Product Safety Information: (905) 804-4752	Data entry by Product Safety - JDW.
<i>To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.</i>	

Material Safety Data Sheet

INSTITUTIONAL FORMULA DRANO

National Fire Protection Association (NFPA)	Fire Hazard		Hazardous Material Information System (HMIS)	Health	3	
	Health			Reactivity	0	
	Reactivity			Reactivity	1	
				Specific Hazard		
Protective Clothing			Emergency Overview	Clear Straw color. Liquid. See Section 9. DANGER. CORROSIVE. CAUSES EYE AND SKIN BURNS. HARMFUL OR FATAL IF SWALLOWED.		

Section 1. Chemical Product and Company Identification

Product Name	INSTITUTIONAL FORMULA DRANO	Code	90485
Product Use	Industrial/Institutional: Cleaning product.	PMS#	433205
MSDS#	126061002	Validation Date	4/3/2002
U.S. Headquarters Drackett Professional A Division of S.C. Johnson Commercial Markets, Inc. 8310 16th Street Sturtevant, Wisconsin 53177-0902 Phone: (888) 352-2249	Print Date		4/3/2002
	Supersedes		No Previous Validation.
	In Case of Emergency		(800) 851-7145

Section 2. Composition and Information on Ingredients

Ingredients	CAS #	% by Weight	Exposure Limits	LC50/LD50
Sodium Hydroxide	1310-73-2	30-60	CEIL: 2 (mg/m ³) from OSHA (PEL) [United States] STEL: 2 (mg/m ³) from ACGIH (TLV) [United States]	Not available.
Water	7732-18-5	60-100	Not available.	Not applicable.

Section 3. Hazards Identification

Routes of Entry	Inhalation. Skin contact. Eye contact.
Potential Acute Health Effects	
<i>Eyes</i>	Corrosive. May cause permanent damage including blindness.
<i>Skin</i>	Corrosive. May cause permanent damage.
<i>Inhalation</i>	May cause irritation and corrosive effects to nose, throat and respiratory tract.
<i>Ingestion</i>	Corrosive. May cause burns to mouth, throat, and stomach.
Medical Conditions	None known.
Aggravated by Overexposure:	
See Toxicological Information (section 11)	

Section 4. First Aid Measures

Eye Contact	Immediately flush eyes with running water for at least 15 minutes, keeping eyelids open. Get medical attention immediately.
Skin Contact	Flush immediately with plenty of water for at least 15 minutes. Get medical attention immediately.
Inhalation	If breathing is difficult: Remove to fresh air. Get medical attention immediately.
Ingestion	Do not induce vomiting! Immediately drink plenty of water. Never give anything by mouth to an unconscious person. Get medical attention immediately.

Continued on Next Page

Material Safety Data Sheet

INSTITUTIONAL FORMULA DRANO

Section 5. Fire Fighting Measures

Flammability of the Product	None known.
Flash Points	Not available.
Products of Combustion	None known.
Fire Fighting Media and Instructions	Extinguish with water spray or carbon dioxide, dry chemical powder or appropriate foam. Normal fire fighting procedure may be used.
Protective Clothing (Fire)	Put on appropriate personal protective equipment (see Section 8).
Special Remarks on Fire and Explosion Hazards	Corrosive material (See sections 8 and 10).

Section 6. Accidental Release Measures

Personal Precautions	Put on appropriate personal protective equipment (see Section 8).
Environmental Precautions and Clean-up Methods	In the event of major spillage: Use appropriate containment to avoid environmental contamination. Sweep or scrape up material. Place in suitable clean, dry containers for disposal by approved methods. Use a water rinse for final clean-up.

Section 7. Handling and Storage

Handling	Avoid contact with eyes, skin, and clothing. Do not taste or swallow. Avoid breathing vapors or spray mists. Wash thoroughly after handling. Remove and wash contaminated clothing and footwear before re-use. Product residue may remain on/in empty containers. All precautions for handling the product must be used in handling the empty container and residue. FOR INDUSTRIAL USE ONLY.
Storage	Store in a dry, cool and well-ventilated area. Protect from freezing. Keep container tightly closed. KEEP OUT OF REACH OF CHILDREN.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	Good general ventilation should be sufficient to control airborne levels. Respiratory protection is not required if good ventilation is maintained.
Personal Protection	
<i>Eyes</i>	Chemical splash goggles.
<i>Hands</i>	Chemical resistant gloves. Includes: Rubber gloves. Neoprene gloves.
<i>Respiratory</i>	If mists/vapors are not adequately controlled by ventilation, use appropriate respiratory protection to avoid over exposure. A respiratory protection program that meets OSHA's 29 CFR 1910.134 and ANSI Z88.2 requirements must be followed whenever workplace conditions warrant a respirator's use.
<i>Feet</i>	No special protective clothing is required.
<i>Body</i>	If major exposure is possible, wear suitable protective clothing and footwear.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Liquid.
Odor	Ammoniacal.
Color	Clear Straw color.
pH	>13 [Basic.]
Specific Gravity	1.35
Boiling/Condensation Point	120°C (248°F)
Melting/Freezing Point	0°C (32°F)
Solubility in water	Complete.

Material Safety Data Sheet

INSTITUTIONAL FORMULA DRANO

Section 10. Stability and Reactivity

Stability and Reactivity	The product is stable.
Conditions of Instability	None known.
Incompatibility with Various Substances	Reactive with oxidizing agents, acids. Do not mix with any other chemicals or products unless specified by label.
Hazardous Decomposition Products	When exposed to fire: Produces normal products of combustion.
Hazardous Polymerization	Will not occur.

Section 11. Toxicological Information

Acute toxicity	ORAL (LD50) Estimated to be less than 500 mg/kg (rat).
Effects of Chronic Exposure	None known.
Other Toxic Effects	Not available.

Section 12. Ecological Information

Not available.

Section 13. Disposal Considerations

Waste Information	Undiluted product is regulated under environmental and transportation laws as a corrosive waste. Dispose of according to all federal, state and local regulations.
--------------------------	--

Section 14. Transport Information**DOT Classification**

DOT Proper Shipping Name	Please refer to the Bill of Lading/receiving documents for up to date shipping information.
---------------------------------	---

TDG Classification

TDG Proper Shipping Name	Please refer to the Bill of Lading/receiving documents for up to date shipping information.
TDG Class	

Section 15. Regulatory Information**Reporting in this section is based on ingredients disclosed in Section 2****US Regulations**

Federal Clean Water Act (CWA) 311: Sodium hydroxide
CERCLA: Hazardous substances.: Sodium hydroxide

State New Jersey spill list: Sodium hydroxide
New Jersey: Sodium hydroxide
Massachusetts spill list: Sodium hydroxide
Massachusetts RTK: Sodium hydroxide
Pennsylvania RTK: Sodium hydroxide

This product is not subject to the reporting requirements under California's Proposition 65.

Registered Product Information Not applicable.

Canadian Regulations

WHMIS Classification Not applicable.

WHMIS Icon

Registered Product Information Not applicable.

Chemical Inventory Status All ingredients of this product are listed or are excluded from listing on the U.S. Toxic Substances Control Act (TSCA) Chemical Substance Inventory.

Continued on Next Page

INSTITUTIONAL FORMULA DRANO

Material Safety Data Sheet

Section 16. Other Information

Other Special Considerations	Not available.
------------------------------	----------------




Version	1.01
---------	------

Notice to Reader

This document has been prepared using data from sources considered technically reliable. It does not constitute a warranty, express or implied, as to the accuracy of the information contained within. Actual conditions of use and handling are beyond seller's control. User is responsible to evaluate all available information when using product for any particular use and to comply with all Federal, State, Provincial and Local laws and regulations.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	DRILL ROD HEAVY GREASE	Code	650-265, DRODH
Synonym	Not available.	DSL	See Section 15
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	TSCA	See Section 15
Material Uses	This product is recommended for the lubrication of diamond drill rods.	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked, and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. High pressure grease gun is capable of injecting grease through the skin. Grease gun injuries require immediate physician assessment. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	Mineral Oil Blend: OPEN CUP: 252°C (485.6°F). (Cleveland).	Auto-Ignition Temperature	Not available.
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

DRILL ROD HEAVY GREASE**Page Number: 2****Section 6. Accidental Release Measures**

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.
Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits. This product is not expected to form a mist based on its properties and expected use.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Paste of long fibred texture.	Viscosity	Mineral Oil Blend: 155.5 cSt @ 40°C (104°F), 14.42 cSt @ 100°C (212°F), VI=89
Colour	Dark greenish-brown	Pour Point	Mineral Oil Blend: -15°C (5°F)
Odour	Mild grease like.	Softening Point	Not available
Odour Threshold	Not available.	Dropping Point	201°C (394°F)
Boiling Point	Not available.	Penetration	234 (60 strokes)
Specific Gravity	Mineral Oil Blend: 0.8898 kg/L @ 15°C (59°F).	Oil / Water Dist. Coeff.	Not available.
Vapor Density	Not available.	Ionicity (in water)	Not available
Vapor Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available.
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not corrosive to copper.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids and alkalis.	Decomposition Products	May release COx, NOx, SOx, diphenylamine, alkenes, smoke and irritating vapours when heated to decomposition.

Continued on Next Page**Available in French**

DRILL ROD HEAVY GREASE**Page Number: 3****Section 11. Toxicological Information**

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available.	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--



Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

DRILL ROD HEAVY GREASE

Page Number: 4

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>								
DSD/DPD (Europe)	Not evaluated.								
DSD/DPD (Europe) (Pictograms)	<p>NOT EVALUATED FOR EUROPEAN TRANSPORT</p> <p>NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.</p> <p>DOT (U.S.A) (Pictograms) </p>								
HMIS (U.S.A.)	<p>NFPA (U.S.A.)</p> <table border="1" data-bbox="397 546 690 682"> <tr><td>Health Hazard</td><td>1</td></tr> <tr><td>Fire Hazard</td><td>1</td></tr> <tr><td>Reactivity</td><td>0</td></tr> <tr><td>Personal Protection</td><td>B</td></tr> </table> <p>Health  Fire Hazard 1 0 Reactivity Specific hazard</p>	Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B
Health Hazard	1								
Fire Hazard	1								
Reactivity	0								
Personal Protection	B								

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
Glossary	<p>ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials () BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer</p> <p>IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLm - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System</p>
<p>Information Contact Internet: www.petro-canada.ca</p> <p>Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564 Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285 Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285</p> <p>For Product Safety Information: (905) 804-4752</p>	<p>Prepared by Product Safety - JDW on 4/29/2003.</p> <p>Data entry by Product Safety - JDW.</p>

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 1 of 13

MATERIAL SAFETY DATA SHEET

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: (see Section 16 for Synonyms) **UNLEADED GASOLINE**
Product Description: Hydrocarbons and Additives
MSDS Number: 8522
Intended Use: Fuel

COMPANY IDENTIFICATION

Supplier: Imperial Oil Products Division
 240 4th Avenue
 Calgary, ALBERTA. T2P 3M9 Canada
24 Hour Environmental / Health Emergency Telephone 519-339-2145
Transportation Emergency Phone Number 519-339-2145
Product Technical Information 1-800-268-3183
Supplier General Contact 1-800-567-3776

SECTION 2 COMPOSITION / INFORMATION ON INGREDIENTS

Reportable Hazardous Substance(s) or Complex Substance(s)

Name	CAS#	Concentration*	Acute Toxicity
GASOLINE	86290-81-5	> 99%	None
METHYL-TERT-BUTYL ETHER	1634-04-4	0 - 15%	Dermal Lethality: LD50 > 10.0 g/kg (Rabbit); Inhalation Lethality: LC50 23576 ppm (Rat); Oral Lethality: LD50 4.0 g/kg (Rat)

Hazardous Constituent(s) Contained in Complex Substance(s)

Name	CAS#	Concentration*	Acute Toxicity
BENZENE	71-43-2	0 - 1.5%	Dermal Lethality: LD50 > 9.4 g/kg (Rabbit); Inhalation Lethality: LC50 13328 ppm (Rat); Oral Lethality: LD50 0.93 g/kg (Rat)
CUMENE	98-82-8	0 - 1%	Dermal Lethality: LD50 10.6 g/kg (Rabbit); Inhalation Lethality: LC50 8000 ppm (Rat); Oral Lethality: LD50 1.4 g/kg (Rat)
Cyclohexane	110-82-7	0 - 1%	Dermal Lethality: LD50 > 18 g/kg (Rabbit); Oral Lethality: 12 g/kg (Rat)
ETHYL BENZENE	100-41-4	0 - 3%	Dermal Lethality: LD50 15 g/kg (Rabbit); Inhalation Lethality: LC50 4000 ppm (Rat); Oral Lethality: LD50 3.5 g/kg (Rat)
n-Hexane	110-54-3	0 - 3%	Dermal Lethality: LD50 3.295 g/kg (Rabbit); Inhalation Lethality: LC50 97469 ppm (Rat); Oral Lethality: LD50



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 2 of 13

			28.7 g/kg (Rat)
Naphthalene	91-20-3	0 - 1%	Dermal Lethality: LD50 > 20 g/kg (Rabbit); Oral Lethality: LD50 0.49 g/kg (Rat)
TOLUENE	108-88-3	0 - 20%	Dermal Lethality: LD50 12.10 g/kg (Rabbit); Inhalation Lethality: LC50 8000 ppm (Rat); Oral Lethality: LD50 5.0 g/kg (Rat)
XYLENES	1330-20-7	0 - 10%	Dermal Lethality: LD50 4.5 g/kg (Rabbit); Inhalation Lethality: LC50 5000 ppm (Rat); Oral Lethality: LD50 4.3 g/kg (Rat)

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

Note: The concentration of the components shown above may vary substantially. In certain countries, benzene content may be limited to lower levels. Oxygenates such as tertiary-amyl-methyl ether, ethanol, di-isopropyl ether, and ethyl-tertiary-butyl ether may be present. Because of volatility considerations, gasoline vapor may have concentrations of components very different from those of liquid gasoline. The major components of gasoline vapor are: butane, isobutane, pentane, and isopentane. The reportable component percentages, shown in the composition/information on ingredients section, are based on API's evaluation of a typical gasoline mixture.

SECTION 3 HAZARDS IDENTIFICATION

This material is considered to be hazardous according to regulatory guidelines (see (M)SDS Section 15).

PHYSICAL/CHEMICAL EFFECTS

FLAMMABLE. Material can release vapours that readily form flammable mixtures. Vapour accumulation could flash and/or explode if ignited. Material can accumulate static charges which may cause an incendiary electrical discharge.

HEALTH EFFECTS

May cause cancer. Repeated exposure may cause skin dryness or cracking. If swallowed, may be aspirated and cause lung damage. May be irritating to the eyes, nose, throat, and lungs. May cause central nervous system depression. High-pressure injection under skin may cause serious damage. Prolonged and repeated exposure to benzene may cause serious injury to blood forming organs and is associated with anaemia and to the later development of acute myelogenous leukaemia (AML).

Target Organs: Blood and/or blood-forming organs |

NFPA Hazard ID:	Health: 1	Flammability: 3	Reactivity: 0
HMIS Hazard ID:	Health: 1*	Flammability: 3	Reactivity: 0

Note: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 4 FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 3 of 13

adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT

Wash contact areas with soap and water. Remove contaminated clothing. Launder contaminated clothing before reuse. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

Seek immediate medical attention. Do not induce vomiting.

NOTE TO PHYSICIAN

If ingested, material may be aspirated into the lungs and cause chemical pneumonitis. Treat appropriately.

PRE-EXISTING MEDICAL CONDITIONS WHICH MAY BE AGGRAVATED BY EXPOSURE

Benzene- Individuals with liver disease may be more susceptible to toxic effects.

SECTION 5 FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight streams of water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. If a leak or spill has not ignited, use water spray to disperse the vapours and to protect personnel attempting to stop a leak. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Unusual Fire Hazards: EXTREMELY FLAMMABLE. Vapour is flammable and heavier than air. Vapour may travel across the ground and reach remote ignition sources, causing a flashback fire danger.

Hazardous Combustion Products: Smoke, Fume, Sulphur Oxides, Aldehydes, Oxides of carbon, Incomplete combustion products

FLAMMABILITY PROPERTIES

Flash Point [Method]: -40C (-40F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 1.4 UEL: 7.6

Autoignition Temperature: >250°C (482°F)

SECTION 6 ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 4 of 13

regulations.

PROTECTIVE MEASURES

Avoid contact with spilled material. Warn or evacuate occupants in surrounding and downwind areas if required, due to toxicity or flammability of the material. See Section 5 for fire fighting information. See Section 3 for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for Personal Protective Equipment.

SPILL MANAGEMENT

Land Spill: Eliminate all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk. All equipment used when handling the product must be grounded. Do not touch or walk through spilled material. Prevent entry into waterways, sewer, basements or confined areas. A vapour-suppressing foam may be used to reduce vapour. Use clean non-sparking tools to collect absorbed material. Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers. Large Spills: Water spray may reduce vapour, but may not prevent ignition in enclosed spaces. Recover by pumping or with suitable absorbent.

Water Spill: Eliminate all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk. Do not confine in area of spill. Advise occupants and shipping in downwind areas of fire and explosion hazard and warn them to stay clear. Allow liquid to evaporate from the surface. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dyke far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Avoid breathing mists or vapour. Avoid contact with skin. Use non-sparking tools and explosion-proof equipment. Potentially toxic/irritating fumes/vapour may be evolved from heated or agitated material. Do not siphon by mouth. Use only with adequate ventilation. Use proper bonding and/or earthing procedures. Do not use as a cleaning solvent or other non-motor fuel uses. For use as a motor fuel only. It is dangerous and/or unlawful to put petrol into unapproved containers. Do not fill container while it is in or on a vehicle. Static electricity may ignite vapour and cause fire. Place container on ground when filling and keep nozzle in contact with container. Do not use electronic devices (including but not limited to cellular phones, computers, calculators, pagers or other electronic devices etc) in or around any fuelling operation or storage area unless the devices are certified intrinsically safe by an approved national testing agency and to the safety standards required by national and/or local laws and regulations. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source).

Static Accumulator: This material is a static accumulator.

STORAGE

Ample fire water supply should be available. A fixed sprinkler/deluge system is recommended. Keep container closed. Handle containers with care. Open slowly in order to control possible pressure release. Store in a cool, well-ventilated area. Outside or detached storage preferred. Storage containers should be earthed and bonded. Drums must be earthed and bonded and equipped with self-closing valves, pressure vacuum bungs



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 5 of 13

and flame arresters.

SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

Substance Name	Form	Limit/Standard			Note	Source
BENZENE		STEL	2.5 ppm		Skin	ACGIH
BENZENE		TWA	0.5 ppm		Skin	ACGIH
CUMENE		TWA	50 ppm			ACGIH
Cyclohexane		TWA	100 ppm			ACGIH
ETHYL BENZENE		STEL	125 ppm			ACGIH
ETHYL BENZENE		TWA	100 ppm			ACGIH
GASOLINE	Vapour.	TWA	300 mg/m3	100 ppm		Supplier
GASOLINE		STEL	500 ppm			ACGIH
GASOLINE		TWA	300 ppm			ACGIH
METHYL-TERT-BUTYL ETHER		TWA	50 ppm			ACGIH
n-Hexane		TWA	50 ppm		Skin	ACGIH
Naphthalene		STEL	15 ppm		Skin	ACGIH
Naphthalene		TWA	10 ppm		Skin	ACGIH
TOLUENE		TWA	20 ppm			ACGIH
XYLENES		STEL	150 ppm			ACGIH
XYLENES		TWA	100 ppm			ACGIH

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

Use explosion-proof ventilation equipment to stay below exposure limits.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

Half-face filter respirator

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Work conditions can greatly affect glove durability; inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

If prolonged or repeated contact is likely, chemical-resistant gloves are recommended. If contact with



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 6 of 13

forearms is likely, wear gauntlet-style gloves.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

If prolonged or repeated contact is likely, chemical, and oil resistant clothing is recommended.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

ENVIRONMENTAL CONTROLS

See Sections 6, 7, 12, 13.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Typical physical and chemical properties are given below. Consult the Supplier in Section 1 for additional data.

GENERAL INFORMATION

Physical State: Liquid

Colour: Clear (May Be Dyed)

Odour: Petroleum/solvent

Odour Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 C): 0.73

Flash Point [Method]: -40C (-40F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 1.4 UEL: 7.6

Autoignition Temperature: >250°C (482°F)

Boiling Point / Range: 35C (95F) - 210C (410F)

Vapour Density (Air = 1): 3.2 at 101 kPa

Vapour Pressure: > 26.6 kPa (200 mm Hg) at 20°C | 76 kPa (570 mm Hg) at 38 C - 103 kPa (772.5 mm Hg) at 38C

Evaporation Rate (N-Butyl Acetate = 1): > 10

pH: N/A

Log Pow (n-Octanol/Water Partition Coefficient): > 3

Solubility in Water: Negligible

Viscosity: <1 cSt (1 mm²/sec) at 40°C

Oxidizing properties: See Sections 3, 15, 16.

OTHER INFORMATION

Freezing Point: N/D

Melting Point: N/A

SECTION 10 STABILITY AND REACTIVITY

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Avoid heat, sparks, open flames and other ignition sources.



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 7 of 13

MATERIALS TO AVOID: Halogens, Strong Acids, Alkalies, Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

HAZARDOUS POLYMERIZATION: Will not occur.

SECTION 11	TOXICOLOGICAL INFORMATION
------------	---------------------------

Acute Toxicity

Route of Exposure	Conclusion / Remarks
INHALATION	
Toxicity (Rat): LC50 > 5000 mg/m ³	Minimally Toxic. Based on test data for structurally similar materials.
Irritation: No end point data.	Elevated temperatures or mechanical action may form vapours, mist, or fumes which may be irritating to the eyes, nose, throat, or lungs. Based on assessment of the components.
INGESTION	
Toxicity (Rat): LD50 > 2000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Skin	
Toxicity (Rabbit): LD50 > 2000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Irritation: No end point data.	Mildly irritating to skin with prolonged exposure. Based on test data for structurally similar materials.
Eye	
Irritation: Data available.	May cause mild, short-lasting discomfort to eyes. Based on test data for structurally similar materials.

CHRONIC/OTHER EFFECTS

For the product itself:

Laboratory animal studies have shown that prolonged and repeated inhalation exposure to light hydrocarbon vapours in the same boiling range as this product can produce adverse kidney effects in male rats. However, these effects were not observed in similar studies with female rats, male and female mice, or in limited studies with other animal species. Additionally, in a number of human studies, there was no clinical evidence of such effects at normal occupational levels. In 1991, The U.S. EPA determined that the male rat kidney is not useful for assessing human risk. Vapour concentrations above recommended exposure levels are irritating to the eyes and the respiratory tract, may cause headaches and dizziness, are anaesthetic and may have other central nervous system effects. Small amounts of liquid aspirated into the lungs during ingestion or from vomiting may cause chemical pneumonitis or pulmonary edema.

Contains:

BENZENE: Caused cancer (leukemia), damage to the blood-producing system, and serious blood disorders from prolonged, high exposure based on human epidemiology studies. Caused genetic effects and effects on the immune system in laboratory animal and some human studies. Caused toxicity to the fetus in laboratory animal studies. **CUMENE:** Repeated inhalation exposure of cumene vapour produced damage in the kidney of male rats only. These effects are believed to be species specific and are not relevant to humans. **GASOLINE UNLEADED:** Carcinogenic in animal tests. Chronic inhalation studies resulted in liver tumours in female mice and kidney tumours in male rats. Neither result considered significant for human health risk assessment by the United States EPA and others. Did not cause mutations in-vitro or in-vivo. Negative in inhalation developmental studies and reproductive tox studies. Inhalation of high concentrations in animals resulted in reversible central nervous system depression, but no persistent toxic effect on the nervous system.



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 8 of 13

Non-sensitizing in test animals. Caused nerve damage in humans from abusive use (sniffing). METHYL TERTIARY BUTYL ETHER (MTBE): Carcinogenic in animal tests. Inhalation exposure to high concentrations resulted in higher than expected mortality in male mice due to urinary tract obstructions and female mice displayed benign liver tumours. Inhalation exposure to high concentrations resulted in higher than expected mortality in male rats due to progressive kidney damage as well as increased benign and malignant kidney tumours, and benign testicular tumours. Did not cause mutations in-vitro or in-vivo. Rabbits exposed to high vapour concentrations did not have any offspring with adverse developmental effects. Mice exposed to high vapour concentrations (maternally toxic) had offspring with embryo/fetal toxicity and birth defects. Rats exposed to high vapour concentrations did not display any treatment-related effects in a two generation reproduction study. The significance of the animal findings at high exposures are not believed to be directly related to potential human health hazards in the workplace. NAPHTHALENE: Exposure to high concentrations of naphthalene may cause destruction of red blood cells, anemia, and cataracts. Naphthalene caused cancer in laboratory animal studies, but the relevance of these findings to humans is uncertain. N-HEXANE: Prolonged and/or repeated exposures to n-Hexane can cause progressive and potentially irreversible damage to the peripheral nervous system (e.g. fingers, feet, arms, legs, etc.). Simultaneous exposure to Methyl Ethyl Ketone (MEK) or Methyl Isobutyl Ketone (MIBK) and n-Hexane can potentiate the risk of adverse effects from n-Hexane on the peripheral nervous system. n-Hexane has been shown to cause testicular damage at high doses in male rats. The relevance of this effect for humans is unknown. TOLUENE : Concentrated, prolonged or deliberate inhalation may cause brain and nervous system damage. Prolonged and repeated exposure of pregnant animals (> 1500 ppm) have been reported to cause adverse fetal developmental effects. ETHYLBENZENE: Caused cancer in laboratory animal studies. The relevance of these findings to humans is uncertain. XYLENES: High exposures to xylenes in some animal studies have been reported to cause health effects on the developing embryo/fetus. These effects were often at levels toxic to the mother. The significance of these findings to humans has not been determined.

Additional information is available by request.

CMR Status:

Chemical Name	CAS Number	List Citations
BENZENE	71-43-2	1, 4, 5
CUMENE	98-82-8	4
Cyclohexane	110-82-7	4
ETHYL BENZENE	100-41-4	3, 4
GASOLINE	86290-81-5	3, 4
METHYL-TERT-BUTYL ETHER	1634-04-4	4
n-Hexane	110-54-3	4
Naphthalene	91-20-3	3, 4
TOLUENE	108-88-3	4
XYLENES	1330-20-7	4

--REGULATORY LISTS SEARCHED--

1 = IARC 1
 2 = IARC 2A

3 = IARC 2B
 4 = ACGIH ALL

5 = ACGIH A1
 6 = ACGIH A2

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 9 of 13

Material -- Expected to be toxic to aquatic organisms. May cause long-term adverse effects in the aquatic environment.

MOBILITY

More volatile component -- Highly volatile, will partition rapidly to air. Not expected to partition to sediment and wastewater solids.

Less volatile component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Majority of components -- Expected to be inherently biodegradable

Atmospheric Oxidation:

More volatile component -- Expected to degrade rapidly in air

BIOACCUMULATION POTENTIAL

Majority of components -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

SECTION 13	DISPOSAL CONSIDERATIONS
-------------------	--------------------------------

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14	TRANSPORT INFORMATION
-------------------	------------------------------

LAND (TDG)

Proper Shipping Name: GASOLINE

Hazard Class & Division: 3

UN Number: 1203

Packing Group: II

Marine Pollutant: MP: 100 % weight PP: 0 % weight

Special Provisions: 17

LAND (DOT)

Proper Shipping Name: GASOLINE



Product Name: UNLEADED GASOLINE
Revision Date: 30May2007
Page 10 of 13

Hazard Class & Division: 3
ID Number: 1203
Packing Group: II
ERG Number: 128
Label(s): 3
Transport Document Name: UN1203, GASOLINE, 3, PG II

SEA (IMDG)

Proper Shipping Name: MOTOR SPIRIT or GASOLINE or PETROL
Hazard Class & Division: 3
EMS Number: F-E, S-E
UN Number: 1203
Packing Group: II
Label(s): 3
Transport Document Name: UN1203, MOTOR SPIRIT or GASOLINE or PETROL, 3, PG II, (-40°C c.c.)

AIR (IATA)

Proper Shipping Name: GASOLINE
Hazard Class & Division: 3
UN Number: 1203
Packing Group: II
Label(s): 3
Transport Document Name: UN1203, GASOLINE, 3, PG II

SECTION 15**REGULATORY INFORMATION**

WHMIS Classification: Class B, Division 2: Flammable Liquids Class D, Division 2, Subdivision A: Very Toxic Material

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the (M)SDS contains all the information required by the Controlled Products Regulations.

CEPA: All components of this material are either on the Canadian Domestic Substances List (DSL), exempt, or have been notified under CEPA.

NATIONAL CHEMICAL INVENTORY LISTING: AICS, DSL, EINECS, ENCS, KECI, PICCS, TSCA

The Following Ingredients are Cited on the Lists Below:

Chemical Name	CAS Number	List Citations
BENZENE	71-43-2	6
CUMENE	98-82-8	6
Cyclohexane	110-82-7	6
ETHYL BENZENE	100-41-4	6
METHYL-TERT-BUTYL ETHER	1634-04-4	6
n-Hexane	110-54-3	6
Naphthalene	91-20-3	1, 5, 6
TOLUENE	108-88-3	6
XYLENES	1330-20-7	1, 5, 6



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 11 of 13

--REGULATORY LISTS SEARCHED--

1 = TSCA 4
 2 = TSCA 5a2

3 = TSCA 5e
 4 = TSCA 6

5 = TSCA 12b
 6 = NPRI

SECTION 16 OTHER INFORMATION

N/D = Not determined, N/A = Not applicable

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

Revision Changes:

Section 13: Empty Container Warning was modified.

Section 09: Physical State was modified.

Section 08: Hand Protection was modified.

Section 14: Transport Document Name was modified.

Section 14: Transport Document Name was modified.

Section 14: Transport Document Name was modified.

Section 16: Synonyms was modified.

Section 02: Component Table was modified.

Section 08: Exposure Limits Table was modified.

Section 15: Canadian List Citations Table was modified.

Section 11: Tox List Cited Table was modified.

SYNONYMS: GASOLINE PREMIUM UNLEADED PUL91 (DYED) <CO-OP>, GASOLINE PREMIUM UNLEADED PUL91 <CO-OP>, GASOLINE PREMIUM UNLEADED PUL91 DYED <HUSKY>, GASOLINE RBOB BLENDSTOCK P91, GASOLINE RBOB BLENDSTOCK R87, GASOLINE REGULAR UNLEADED, UNLEADED GASOLINE, REGULAR UNLEADED, MIDGRADE UNLEADED, PREMIUM UNLEADED, PREMIUM GASOLINE, ESSO EXTRA MIDGRADE GASOLINE, MIDGRADE GASOLINE, ESSO REGULAR UNLEADED, ESSO MIDGRADE UNLEADED, ESSO EXTRA MIDGRADE UNLEADED, ESSO PREMIUM UNLEADED, EXXON REGULAR UNLEADED, EXXON MIDGRADE UNLEADED, EXXON PREMIUM UNLEADED, ESSO SUPREME UNLEADED, INDOLINE GASOLINE, GASOLINE MIDGRADE UNLEADED MUL89 (DYED OR CLEAR), GASOLINE REGULAR UNLEADED RUL87 (DYED OR CLEAR), GASOLINE PREMIUM UNLEADED PUL91 (DYED OR CLEAR), GASOLINE PREMIUM UNLEADED PUL92 (DYED OR CLEAR), GASOLINE PREMIUM UNLEADED SUL94, SUPERSUPREME 94 PREMIUM UNLEADED GASOLINE-MTBE, GASOLINE MIDGRADE UNLEADED MUL89 (P91/R87), GASOLINE MIDGRADE UNLEADED MUL89 DCA (P92/R87), GASOLINE REGULAR UNLEADED RUL87 (NORTH ATL REF), GASOLINE PREMIUM UNLEADED PUL91 (NORTH ATL REF), GASOLINE REGULAR UNLEADED RUL87 <CO-OP>, GASOLINE MIDGRADE UNLEADED MUL89 WITH 0.5% ETHANOL <95%P91/5%R87E>

Precautionary Label Text:

WHMIS Classification: Class B, Division 2: Flammable Liquids Class D, Division 2, Subdivision A: Very Toxic Material

HEALTH HAZARDS

May cause cancer. Repeated exposure may cause skin dryness or cracking. If swallowed, may be aspirated and cause lung damage. May cause central nervous system depression.

Target Organs: Blood and/or blood-forming organs |

PHYSICAL HAZARDS

FLAMMABLE. Material can accumulate static charges which may cause an incendiary electrical discharge. Material can release vapours that readily form flammable mixtures. Vapour accumulation could flash and/or explode if ignited.



Product Name: UNLEADED GASOLINE
 Revision Date: 30May2007
 Page 12 of 13

PRECAUTIONS

Avoid breathing mists or vapour. Avoid contact with skin. Use non-sparking tools and explosion-proof equipment. Potentially toxic/irritating fumes/vapour may be evolved from heated or agitated material. Do not siphon by mouth. Use only with adequate ventilation. Use proper bonding and/or earthing procedures.

FIRST AID

INHALATION: Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

Eye: Flush thoroughly with water. If irritation occurs, get medical assistance.

Oral: Seek immediate medical attention. Do not induce vomiting.

Skin: Wash contact areas with soap and water. Remove contaminated clothing. Launder contaminated clothing before reuse. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

FIRE FIGHTING MEDIA

Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

SPILL/LEAK

Land Spill: Eliminate all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk. Prevent entry into waterways, sewer, basements or confined areas. A vapour-suppressing foam may be used to reduce vapour. Absorb or cover with dry earth, sand or other non-combustible material and transfer to containers. Recover by pumping or with suitable absorbent.

Water Spill: Eliminate all ignition sources (no smoking, flares, sparks or flames in immediate area). Stop leak if you can do so without risk. Do not confine in area of spill. Advise occupants and shipping in downwind areas of fire and explosion hazard and warn them to stay clear. Allow liquid to evaporate from the surface. Seek the advice of a specialist before using dispersants.

 The information and recommendations contained herein are, to the best of Imperial Oil's knowledge and belief, accurate and reliable as of the date issued. Imperial Oil assumes no responsibility for accuracy of information unless the document is the most current available from an official Imperial Oil distribution system. The information and recommendations are offered for the user's consideration and examination, and it is the user's responsibility to satisfy itself that they are suitable and complete for its particular use. If buyer repackages this product, legal counsel should be consulted to insure proper health, safety and other necessary information is included on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, republication or retransmission of this document, in whole or in part, is not permitted.

 DGN: 5007481 (1006754)

Copyright 2002 Imperial Oil Limited, All rights reserved

Prepared By: Imperial Oil Limited, IH and Product Safety



Product Name: UNLEADED GASOLINE
Revision Date: 30May2007
Page 13 of 13

Material Safety Data Sheet

[Back](#)

Trade Name: ETHYLENE GLYCOL **Manufacturer:** ESSO - IMPERIAL OIL

MSDS Code: **Type of Chemical:** GAS

Notes:

Revision Date: 30/01/2007 ETHYLEN GLYCOL
12145 4.00 GB EN MSDS_GB

SECTION 1 – PRODUCT AND COMPANY IDENTIFICATION

MSDS Code: 12145
Trade Name: Ethylene Glycol
Manufacturer/
Supplier: BP Chemicals Ltd.
Address: European Customer Service Centre
Chertsey Road, Sunbury-on-Thames
Middlesex
TW16 7LL
Phone Number: +44-(0)1932-767300
Fax Number: +44-(0)1932-767801
Emergency Phone #: +44-(0)1482-896251 (BPC Hull)

SECTION 2 – COMPOSITION/INFORMATION ON THE COMPONENTS

Product Trivial Name: MEG; Dihydroxyethane
Product Formal Name: Monoethylene Glycol; Ethanodiol
Product Chemical Family: Glycol
CAS Number: 107-21-1

SECTION 3- HAZARD IDENTIFICATION

Main Hazards:
Harmful if swallowed.

Health Effects – Eyes:
Liquid or vapour may cause slight transient irritation.

Health Effects – Skin:
Material may cause slight irritation on prolonged or repeated contact.

Health Effects – Ingestion:
Swallowing may have the following effects:
Central nervous system depression, loss of coordination, impaired vision, slurring of speech, stupor.

A large dose may have the following effects:
Vomiting, headache, anuria, pulmonary oedema, loss of consciousness, convulsions.

Long term effects may include:
Liver damage, kidney damage.

Health Effects – Inhalation:
Exposure to vapour or mist may have the following effects, irritation of nose, throat and respiratory tract.

SECTION 4 – FIRST AID MEASURES

First Aid – Eyes:

Immediately flood the eye with plenty of water for at least 10 minutes, holding the eye open. Get medical attention if soreness or redness persists.

First Aid – Skin:

Wash skin with water. Contaminated clothing should be washed or dry-cleaned before re-use. Get medical attention if blistering occurs or redness persists.

First Aid – Ingestion:

When medical assistance is available:

Wash out mouth with water.

Do not induce vomiting.

Get medical attention urgently informing the doctor that a product containing ethylene glycol has been ingested and specific treatment may be required (see Advice to physicians).

If arrival of medical team is likely to be delayed by more than 15 minutes, ask emergency services for advice on recommended interim treatment.

If breathing stops or shows signs of failing, apply artificial respiration.

If heartbeat absent, give external cardiac compression.

Specific advice for when no emergency medical service available:

When no emergency medical service is available, and the patient is conscious, induce vomiting, (e.g. by physical stimulation of the back of the throat.)

Administer approximately 100 ml (6-7 Tablespoons) of alcoholic spirit (e.g. Whiskey)

(for children under the age of 12 years, administer a reduced dose at the rate of 1/12 adult dose for each year of age.)

Keep warm and at rest.

Monitor breathing, pulse and level of consciousness.

If breathing stops or shows signs of failing, apply artificial respiration.

If heartbeat absent, give external cardiac compression.

Continue efforts to obtain medical assistance as a matter of urgency.

First Aid – Inhalation:

Remove from exposure. Keep warm and at rest.

If there is difficulty breathing, give oxygen but only under strict medical supervision. If breathing stops or shows signs of failing, give artificial respiration.

If heartbeat absent, give external cardiac compression.

Get medical attention urgently.

Advice to Physicians:

Gastric lavage is indicated if significant quantities have been ingested in the previous 4 hours.

The metabolism of the glycol to oxalic acid may be delayed by the intravenous administration of ethanol (give as a 5% solution in physiological saline to maintain a blood level of 1-2 mg/ml). This has been shown to be an effective antidote provided treatment is started within about 6 hours of exposure.

The glycol may be removed by dialysis by oxalates are not readily removed.

Oxalic acid will cause acidosis and binds circulating calcium, leading to hypocalcaemia with tetany and renal failure from oxalate precipitation. The patient should be biochemically monitored and appropriated corrective (sodium bicarbonate, calcium gluconate) and supportive measures taken,

References to the use of ethanol as antidote include:

- Beasley, V.R. Vet. Hum. Toxicol., 22(4), 225, 1980.
- Joly, J.B. et al, Bull Soc Med Hop Paris, 119, 27, 1968.
- Parry, M.F. and Wallach, R., Jama, 57, 143, 1974.

SECTION 5 – FIRE FIGHTING MEASURES

Extinguishing Media:

Use water spray, alcohol – resistant foam, dry chemical or carbon dioxide.

Keep containers and surroundings cool with water spray.

Water and foam may cause frothing.

Protective Equipment for Fire Fighting:

Wear self contained breathing apparatus.

SECTION 6 – ACCIDENTAL RELEASE MEASURES**Personal Precautions:**

*** Revised ***

Wear: Neoprene gloves, PVC or rubber gloves, Chemical goggles.

Environmental Precautions:

Try to prevent the material from entering drains and water courses.

Advise authorities if spillage has entered water courses or sewer or has contaminated soil or vegetation.

Spillages:

Contain and absorb using earth, sand or other inert material.

Transfer into suitable containers for recovery or disposal.

Finally flush area with plenty of water.

SECTION 7 – HANDLING AND STORAGE**HANDLING:**

Avoid contact with eyes, skin and clothing.

Avoid breathing mist or vapour from heated material.

Exposure to mist and vapour from heated product should be minimized by the provision of efficient local ventilation or extraction systems.

STORAGE:

Do not store in: certain plastics.

Suitable storage materials are: mild steel.

Note that aqueous solutions of ethylene glycol, unless they contain corrosion inhibitors, will corrode most metals.

Where trace iron contamination or slight discoloration is critical, store in: epoxy lined mild steel, stainless steel, aluminum and its alloys.

Heating systems which generate localized hot spots should never be used. Hot water or low-pressure steam are the most desirable heating media but care must be taken with such installations as excessive temperatures can cause degradation of the product.

To avoid moisture contamination, store under a nitrogen blanket or fit a desiccant unit in the tank vent line.

SECTION 8 – EXPOSURE CONTROLS/PERSONAL PROTECTION**OCCUPATIONAL EXPOSURE STANDARDS:**

Occupational exposure standards for significant components are:

Ethane – 1, 2-diol:

UK EH40: OES 10 mg/m³ 8h TWA.

(particulate)

UK EH40: OES 60 mg/m³ 8h TWA.

(vapour)

UK EH40: OES 125 mg/m³ 15 min TWA.
(vapour)

RESPIRATORY PROTECTION:

Air supplied breathing apparatus if exposures above the hygiene standard are likely.

HAND PROTECTION:

PVC or rubber gloves, Neoprene gloves.

EYE PROTECTION:

Chemical goggles.

SECTION 9 – PHYSICAL AND CHEMICAL PROPERTIES

PHYSICAL STATE:

Liquid.

COLOUR:

Colourless.

ODOUR:

Odourless.

pH:

5.5 – 7.5 at 50% w/w in water.

BOILING RANGE/POINT (C):

197.3

MELTING POINT (C):

-13

FLASH POINT (PMCC) (C):

116 (Open cup method)

EXPLOSION LIMITS (%):

3.2 TO 15.3

SOLUBILITY IN WATER (kg/m³):

Completely soluble.

VAPOUR PRESSURE (kPa):

0.08 AT 20 C

DENSITY (Kg/m³):

1.113 AT 20 C

AUTO-FLAMMABILITY (C):

432

VISCOSITY (cSt):

23.3 AT 20 C.

SECTION 10 – STABILITY AND REACTIVITY

STABILITY:

Stable under normal conditions. Hygroscopic.

CONDITIONS TO AVOID:

Exposure to water or moisture. High temperatures.

MATERIALS TO AVOID:

Fuming sulphuric acid, nitric acid, peroxides, strong oxidizing agents, chlorosulphonic acid.

HAZARDOUS DECOMPOSITION PRODUCTS:

Combustion will generate: Carbon monoxide. Carbon dioxide.

SECTION 11 – TOXICOLOGICAL INFORMATION**ACUTE TOXICITY:**

Harmful by ingestion.

Estimated fatal dose for adults is 100 ml.

IRRITANCY – EYES:

Single application to the rabbit eye produced: signs of discomfort.

The degree of irritation was insufficient to warrant labeling as an eye irritant.

IRRITANCY – SKIN:

Available data indicate that this product may cause slight irritation. The degree of irritation was insufficient to warrant labeling as a skin irritant.

GENOTOXICITY:

The product did not exhibit mutagenic activity in the following systems (with and without metabolic activation): salmonella typhimurium. E-coli.

REPRODUCTIVE/DEVELOPMENTAL TOXICITY:

Experimental studies in rats and mice suggest that ethylene glycol may induce birth defects when administered orally. The studies did not indicate any risk of these effects arising from either skin contact or from airborne concentrations below the hygiene standard.

SECTION 12 – ECOLOGICAL INFORMATION**MOBILITY:**

The product is not volatile and is water soluble.

The product will dissolve rapidly in water.

The product will evaporate slowly from soil.

PERSISTENCE/DEGRADABILITY:

The product is readily biodegradable. BOD₂₀ greater than 60% of ThOD.

BIO-ACCUMULATION:

The product is not expected to bioaccumulate.

ECOTOXICITY:

The product is rated as non-hazardous to aquatic species.

Tests on the following species gave a 96h EC₅₀ of > 10,000 mg/liter :

Sunfish.

Tests on the following species gave a 48h EC₅₀ of > 10,000 mg/liter:

Daphnia.

Toxicity threshold concentration (cell multiplication inhibition test) > 1,000 mg/liter:

Algae.

SECTION 13 – DISPOSAL

PRODUCT DISPOSAL:

Dispose of in accordance with all applicable local and national regulations.
Incineration is the recommended method of disposal.

CONTAINER DISPOSAL:

Containers should be cleaned by appropriate methods and then re-used or disposed of by landfill or incineration as appropriate. Labels should not be removed from containers until they have been cleaned.

SECTION 14 – TRANSPORT INFORMATION**UN-Class:**

Not classified.

ADR/RID – Class:

Not classified.

IMDG – Class:

Not classified.

IATA – Class:

Not classified.

SECTION 15 – REGULATORY INFORMATION**LABELLING INFORMATION:**

HARMFUL

R PHRASES:

R22: Harmful if swallowed.

S PHRASES:

S2: Keep out of reach of children.

S46: If swallowed seek medical advice immediately and show this container or label.

EINECS NUMBER:

203-473-3

EC ANNEX I NUMBER:

603-027-00-1

EC ANNEX CLASSIFICATION:

Harmful.

MITI NUMBER:

B42-230

TSCA LISTING:

YES.

AICS/NICNAS LISTING:

YES.

DSL/NDSL (CANADIAN) LISTING:

DSL Listed.

SECTION 16 - OTHER INFORMATION

NOTICE:

This Material Safety Data Sheet is based upon data considered to be accurate as at the time of its preparation. Despite our efforts, it may not be up to date or applicable to the circumstances of any particular case.







We are not responsible for any damage or injury resulting from abnormal use, from any failure to follow appropriate practices or from hazards inherent in the nature of the product.

The letters BP and the BP – in – shield logo are trademarks of BP Amoco p.l.c. the word AMOCO and the Torch and Oval logo are trademarks of Amoco Oil Company.

© 1993 – 2000 BP Chemicals Limited.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	GAS OIL	Code	W335, W338E
Synonym	Straight-Run Gas Oil, Atmospheric Gas Oil (AGO), Hydrocracked Gas Oil, Light Vacuum Gas Oil (LVGO), Heavy Vacuum Gas Oil (HVGO), Virgin Light Gas Oil (VLGO), HVGO/LVGO, vacuum gas oils, light gas oil, heavy gas oil, hydrotreated gas oil	Validated on	7/12/2005.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Gas Oils are complex mixtures of paraffinic crude petroleum process oils, produced in the crude primary distillation tower and the hydrocracker. They are used as feed to other refinery units.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Complex mixture of aliphatic/aromatic hydrocarbons (C10-C52+)	64741-43-1, 64741-57-7, 64741-58-8, 70592-78-8	100	Not established	Not established	Not established
May contain up to 10% Polycyclic Aromatic Hydrocarbons (PAHs).					
Manufacturer Recommendation	If an aerosol or mist, Petro-Canada recommends an allowable exposure for 8 hours time weighted average (TWA) of 0.2 mg/m ³ for Particulate polycyclic aromatic hydrocarbons (PPAH) (Coal tar pitch volatiles, as benzene soluble aerosol).				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. May cause cancer. May cause damage to reproductive organs. May cause teratogenicity/embryotoxicity. May cause heritable genetic effects (mutagenicity). May cause skin sensitization (an allergic reaction). Contact with this product may cause skin and eye irritation. Contact with heated material may cause thermal burns. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately.
Skin Contact	Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 20 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.

GAS OIL		Page Number: 2
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility.	
Note to Physician	Not available	

Section 5. Fire-fighting Measures			
Flammability	Combustible.	Flammable Limits	Not available
Flash Points	CLOSED CUP: >80 °C (176 °F). (Pensky-Martens.)	Auto-Ignition Temperature	355°C (671°F) Edmonton Hydrotreated Gas Oil
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur. May be combustible in presence of open flames, sparks, and heat.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), reactive hydrocarbons, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG2004, GUIDE 151, Substances-toxic (non-combustible). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. SMALL FIRE: dry chemical, CO ₂ or water spray. LARGE FIRE: water spray, fog or foam. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures	
Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Notify appropriate authorities immediately. Extinguish all ignition sources. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Ventilate area. Stop leak if safe to do so. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Collect used absorbent for later disposal. Spilled material may be slippery. Exercise caution. Dike spilled material. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Do not allow spilled materials to come into contact with incompatible materials (see Section 10). Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary.

Section 7. Handling and Storage	
Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Avoid generating mists. Wear proper personal protective equipment (See Section 8). Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Avoid contact with any incompatible or reactive materials. Exercise caution when washing/drying clothing contaminated with flammable materials. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product.
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection	
Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.)
Continued on Next Page	
Internet: www.petro-canada.ca/msds	
Available in French	

Respiratory A minimum of NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. A NIOSH-approved positive-pressure, air-supplied respirator or self-contained breathing apparatus may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.

Hands If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): polyvinyl alcohol (PVA), fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid or waxy solid.	Viscosity	Varies with crude sources.
Colour	Light amber to dark green.	Pour Point	0-50°C (approx.)
Odour	Gasoline like or waxy. (Hydrocarbon)	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	205 to 600°C (401 to 1112°F)	Penetration	Not applicable.
Density	0.88 to 0.94 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Heavier than air.	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Negligible at ambient temperature and pressure.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, SOx, reactive hydrocarbons, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Not available
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at $\geq 1\%$) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Contact with hot material may cause thermal burns.
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
Eye Irritation/Inflammation:	This product contains a component (at $\geq 1\%$) that can cause eye irritation. Therefore, this product is considered to be an eye irritant. Contact with hot material may cause thermal burns.
Immunotoxicity:	Not available
Skin Sensitization:	This product contains a component (at $\geq 1\%$) that can cause skin sensitization. Therefore, this product is considered to be a skin sensitizer. (PAHs)
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.

GAS OIL		Page Number: 4
Mutagenic:	This product contains a component(s) at $\geq 0.1\%$ that has been shown to cause mutagenicity in laboratory tests. Therefore, this product is considered to be a mutagen.(PAHs, Middle distillate fuels)	
Reproductive Toxicity:	This product contains a component(s) at $\geq 0.1\%$ that has been shown to cause reproductive toxicity. Therefore, this product is considered to be a reproductive toxin. (PAHs)	
Teratogenicity/Embryotoxicity:	This product contains a component(s) at $\geq 0.1\%$ that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin.(PAHs)	
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1, A2, or A3 carcinogens by ACGIH.	
Carcinogenicity (IARC):	This product contains the following chemical(s) at $\geq 0.1\%$ that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. (Considered to be carcinogenic to humans (group 2A) by IARC. PAHs)	
Carcinogenicity (NTP):	This product contains the following chemical(s) at $\geq 0.1\%$ that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. (Reasonably anticipated to be a human carcinogen according to NTP. PAHs)	
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	No additional remark.	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			

Section 13. Disposal Considerations	
Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information		
TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada) (CL-TDG)	Special Provisions for Transport Not applicable.

Section 15. Regulatory Information		
Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>	
DSD/DPD (Europe)	Not evaluated.	HCS (U.S.A.) <p>HCS CLASS: DANGEROUS MAY CAUSE CANCER.</p> <p>HCS CLASS: Irritating substance.</p> <p>HCS CLASS: Sensitizing substance.</p> <p>HCS CLASS: Target organ effects.</p> <p>HCS CLASS: Combustible liquid II having a flash point between 37.8°C (100°F) and 60.0°C (140°F).</p>

GAS OIL		Page Number: 5		
ADR (Europe) (Pictograms)	NOT EVALUATED FOR EUROPEAN TRANSPORT	DOT (U.S.A) (Pictograms)	Not evaluated for transport	
	NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		Non évalué pour le transport	
HMIS (U.S.A.)	Health Hazard (2*)	NFPA (U.S.A.) <div><div>Health</div><div><div>2</div><div>2</div><div>0</div></div><div><div>Fire Hazard</div><div>Reactivity</div><div>Specific hazard</div></div></div>	Rating	0 Insignificant
	Fire Hazard (2)		1 Slight	
	Reactivity (0)		2 Moderate	
	Personal Protection (H)		3 High	
			4 Extreme	

Section 16. Other Information

References Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System
ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%
ASTM - American Society for Testing and Materials	LDLo/LCLo - Lowest Published Lethal Dose/Concentration
BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)
CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association
CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health
CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)
CFR - Code of Federal Regulations	NTP - National Toxicology Program
CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration
CNS - Central Nervous System	PEL - Permissible Exposure Limit
COD5 - Chemical Oxygen Demand in 5 days	RCRA - Resource Conservation and Recovery Act
CPR - Controlled Products Regulations	RTECS - Registry of Toxic Effects of Chemical Substances
DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act
DSCL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)	STEL - Short Term Exposure Limit (15 minutes)
DSL - Domestic Substance List	TDG - Transportation Dangerous Goods (Canada)
EEC/EU - European Economic Community/European Union	TDLo/TCLo - Lowest Published Toxic Dose/Concentration
EINECS - European Inventory of Existing Commercial Chemical Substances	TLm - Median Tolerance Limit
EPA - Environmental Protection Agency	TLV-TWA - Threshold Limit Value-Time Weighted Average
EPCRA - Emergency Planning and Community Right to Know Act	TSCA - Toxic Substances Control Act
FDA - Food and Drug Administration	USEPA - United States Environmental Protection Agency
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act	USP - United States Pharmacopoeia
HCS - Hazard Communication Standard	WHMIS - Workplace Hazardous Material Information System
HMIS - Hazardous Material Information System	
IARC - International Agency for Research on Cancer	

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 7/12/2005.

Data entry by Product Safety - DSR.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

**MATERIAL SAFETY DATA SHEET**

Date Prepared: April 06, 2002
Supersedes: January 08, 1999
MSDS Number: 08259

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 32

Application and Use:
Hydraulic fluid

Product Description:

Mixture of paraffinic and naphthenic hydrocarbons (saturated and unsaturated), and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: 32.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: 229 to 512 deg C
 Evaporation rate: <0.1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: -42 deg C ASTM D97
 Odour Threshold: not available
 Vapour Pressure: <1 kPa at 38 deg C
 Density: 0.87 g/cc at 15 deg C
 Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use. In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves. Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Recover by pumping or by using a suitable absorbant. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 165 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

THREE YEAR WHMIS REVIEW.

10. PREPARATION

Date Prepared: April 06, 2002

Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario

M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**MATERIAL SAFETY DATA SHEET**

Date Prepared: April 06, 2002
Supersedes: January 08, 1999
MSDS Number: 08258

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 22

Application and Use:
Hydraulic fluid

Product Description:

Mixture of paraffinic and naphthenic hydrocarbons (saturated and unsaturated), and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: 22.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: 229 to 512 deg C
 Evaporation rate: <0.1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: -48 deg C ASTM D97
 Odour Threshold: not available
 Vapour Pressure: <1 kPa at 38 deg C
 Density: 0.87 g/cc at 15 deg C
 Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. Do not handle or store near an open flame, sources of heat, or sources of ignition. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Recover by pumping or by using a suitable absorbant. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 150 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide under thermal decomposition.

8. REACTIVITY DATA**STABILITY:**

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

THREE YEAR WHMIS REVIEW.

10. PREPARATION

Date Prepared: April 06, 2002

Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division

111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**MATERIAL SAFETY DATA SHEET**

Date Prepared: May 13, 2003
Supersedes: April 12, 2000
MSDS Number: 08265

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 68

Application and Use:
Hydraulic fluid

Product Description:

A lubricating oil consisting of a mixture of saturated and unsaturated hydrocarbons derived from paraffinic distillate, and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: 68.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: not available
 Evaporation rate: <0.1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: -36 deg C ASTM D97
 Odour Threshold: not available
 Vapour Pressure: <0.1 kPa at 20 deg C
 Density: 0.88 g/cc at 15 deg C
 Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products,

the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits

given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Store and load at normal (up to 38 deg C) temperature and at atmospheric pressure. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Recover by pumping or by using a suitable absorbant. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 190 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.
Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel.
Shut off fuel to fire.
Use foam, dry chemical or water spray to extinguish fire.
Respiratory and eye protection required for fire fighting personnel.
A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA**STABILITY:**

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 12 April 2000, this MSDS has been revised in Section(s):
3, 7

10. PREPARATION

Date Prepared: May 13, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL

Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

07/26/2004 13:43 5192200650

CSS INC.

PAGE 01

MATERIAL SAFETY DATA SHEET**SECTION I - PRODUCT IDENTIFICATION AND USE****Product Name** JAVEX LIQUID BLEACH -REGULAR**Product Use** Bleach**Whm's Classification:** NCP**Supplier's Name** Colgate Palmolive-Canada Inc.**Address:** 99 Vanderhoof Avenue, Toronto, Ontario M4G 2H6**Telephone No.:** (416) 421-6000**After Hours**

Check your local Poison Control Centre in your telephone white pages.

Emergency Contacts:**SECTION II - PREPARATION OF MSDS****PREPARED BY:** Technical Services**PHONE:** (416) 421-6000**DATE:** February 1, 2004

N/A = Not Applicable; N/E = Not Established/Available

SECTION III - HAZARDOUS INGREDIENTS

Hazardous Ingredient	Concentration Range %	C.A.S. or U.N. Number	Exposure Limits	LD ₅₀ /LC ₅₀ Specify Species and Route
Sodium Hypochlorite	5 to 10	7681-52-9	N/E	N/E

SECTION IV - PHYSICAL DATA

Physical State	Odour and Appearance	Odour Threshold	Specific Gravity	Vapour Pressure
Liquid	Lime yellow liquid; various scents with a faint chlorine bleach odour	1000 ppm	1.084 (20°/20° C)	25 mm Hg at 20° C
Vapour Density	Evaporation Rate	Boiling Point	Freezing Point	pH
N/E	N/E	102° C	-3° C to -8° C	12.5 Min.
				Coefficient of Water/Oil Distribution
				N/E

SECTION V - FIRE OR EXPLOSION HAZARD**Flammable:** Yes () No (X) If yes, under which conditions:**Means of Extinction:** If involved in fire, use water, dry alcohol type or all purpose foam, dry chemical, carbon dioxide or other Class B extinguishing agents.

Special Procedures Avoid fumes from spilled or exposed liquid, dilute copiously and ventilate. Acid contamination will produce very irritating fumes similar to chlorine gas. Bleach decomposes when heated; decomposition products may cause containers to rupture or explode. Vigorous reaction possible with organic materials or oxidizing agents; may result in a fire. Full protective equipment, including pressure demand self-contained breathing apparatus and turnout equipment should be worn by firefighters and others exposed to combustion by-products.

Flashpoint and Method	Upper Flammable Limit	Lower Flammable Limit	Auto-ignition Temperature
N/A	N/E	N/E	N/E

Hazardous Combustion Products: N/E**Explosion Data Sensitivity To Mechanical Impact** N/E **Explosion Data Sensitivity To Static Charge** N/E**SECTION VI - REACTIVITY DATA**

Chemical Instability:	Yes (X)	No ()	If yes, under which conditions?	The product will lose about 10% of total activity per month at room temperature and pressure. Higher temperatures will accelerate decomposition. Oxygen gas is released.
Incompatibility To Other Substances:	Yes (X)	No ()	If yes, which ones?	Heavy metals, reducing agents, acids, ammonia, glycols, alcohols and most other solvents or materials.
Reactivity:	Yes (X)	No ()	If yes, under which conditions?	Higher temperatures cause faster decomposition and liberation of oxygen gas. Metallic contamination will also cause decomposition and liberation of oxygen. Contamination with organics will result in foul odours and decomposition. Contamination with ammonia will liberate dangerous fumes.

Hazardous Decomposition Products: None under normal storage and use. However chlorine gas shall be released if product is acidified with acids or acidic materials.

MATERIAL SAFETY DATA SHEET**Product Name** JAVEX LIQUID BLEACH - REGULAR, FRESH SCENT AND LEMON**SECTION VII - TOXICOLOGICAL PROPERTIES OF PRODUCT****Routes of Entry:** Skin Contact X Skin Absorption Eye Contact X Inhalation X Ingestion X**Effects of Acute Exposure To Product:**

Skin Contact: Moderate irritant

Skin Absorption: N/E

Ingestion: Slightly toxic. Inflammation of mouth, pharynx, esophagus and stomach, erosion of mucous membranes, hemorrhage and possibly coma may occur.

Inhalation: Inhalation can be irritating to mucous membranes. Inhalation of free chlorine products produces irritation of nose and throat and coughing, corrosive to tissue, may cause pulmonary edema or shock.








Eye Contact: Extremely corrosive

Effects of Chronic Exposure To Product: N/E**LD₅₀ of Product (Specify Species and Route)** 14.9 g/Kg (oral, rat)**LC₅₀ of Product (Specify Species)** N/A**Exposure Limits**
N/E**Irritancy of Product**
N/E**Sensitization of Product**
N/E**Carcinogenicity**
N/E**Reproductive Toxicity**
N/E**Teratogenicity**
N/E**Mutagenicity**
N/E**Synergistic Materials**
N/E**SECTION VIII - PREVENTATIVE MEASURES****Personal Protective Equipment:** Rubber or Plastic Gloves, Goggles or Shield, Plastic apron preferred, rubber boots when handling spills**Engineering Controls:** It is preferred but not mandatory to ventilate storage tanks to outside. Safety Showers and Eyewash Fountains should be available.**Leak and Spill Procedures:** Leaking product must be transferred to another suitable container. Dilute spilled product with water and add sodium bisulphite or sulphite. Flush to sewer. Do NOT use combustible material; e.g., sawdust.**Waste Disposal:** Dispose in accordance with Federal, Provincial and Local regulations.**Handling Procedures and Equipment:** Avoid contact when handling.**Storage Requirements:** Use polyethylene, polypropylene, PVC, or FRP containers. Store at -10° C to 30° C and away from sunlight.**Special Shipping Instruction:** Ensure transportation system is sound. Make sure connection hoses are not worn. Do not drop small containers.**SECTION IX - TRANSPORTATION OF DANGEROUS GOODS****TDG Regulated Product:** Yes () No (X) **Product TDG or CFR 49 Shipping Name** N/A
(If CFR so indicate)**PIN Number:** N/A **Packaging Group** N/A**SECTION X - FIRST AID MEASURES****Skin:** Flush skin with water for 15 minutes. If irritation persists, call a physician.**Eye:** Flush the contaminated eye(s) for at least 15 minutes with lukewarm water, holding the eyelid open. Take care not to rinse contaminated water into the non-affected eye. Always seek medical attention for eye injuries.**Inhalation:** Remove to fresh air. Call a physician.**Ingestion:** If swallowed drink 3 - 4 glasses of water. DO NOT USE BAKING SODA OR ACIDIC ANTIDOTES. Call a physician.
These products are labeled in accordance with the requirements of the Hazardous Products Act and/or the Pest Control Products Act in that the use pattern and exposure in the workplace is generally consistent with that experienced by consumers. In certain respects, the requirements of the Workplace Hazardous Materials Information System applicable to the drafting of this Material Safety Data Sheet may differ from the requirements of those acts and regulations and as a result, this MSDS may contain additional information to that found on the labels.

Because we cannot anticipate or control the many different conditions under which this information and our products may be used, we do not guarantee the applicability of this information or the suitability of our products in any given situation. Users of our products should make their own tests to determine the safety and suitability of each such product for their particular purposes.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B, (D-2A)* (See Section 15)	   	

Section 1. Chemical Product and Company Identification

Product Name	JET A/A-1 AVIATION TURBINE FUEL	Code	W213, SAP: 149
Synonym	Jet A-1; Jet A-1-DI; Aviation Turbine Kerosene (ATK); JP-8; NATO F-34; Jet F-34; Turbine Fuel, Aviation, Kerosene Type (CAN/CGSB-3.32)	Validated on	6/15/2007.
Manufacturer	PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as aviation turbine fuel. May contain a fuel system icing inhibitor. In the arctic, Jet A-1 may also be used as diesel fuel and heating oil.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Complex mixture of petroleum hydrocarbons (C9-C16)**(Kerosene) **Aromatic content is 25% maximum (benzene: nil).	8008-20-6	99.9	200 mg/m ³ (***)	Not established	Not established
Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether	111-77-3	0.1-1	Not established	Not established	Not established
Anti-static, antioxidant and metal deactivator additives. *Please note that Jet A-1-DI, JP-8, Jet F-34 and NATO F-34 all contain Fuel System Icing Inhibitor.	Not applicable	<0.1	Not applicable	Not applicable	Not applicable
Manufacturer Recommendation	***Application of this TLV is restricted to conditions in which there are negligible aerosol exposures.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. May cause teratogenicity/embryotoxicity. Contact with this product may cause skin irritation. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Aspiration of liquid drops into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	Avoid direct contact. Quickly and gently blot or brush chemical off the face. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 15-20 minutes, while holding the eyelid(s) open. If a contact lens is present, DO NOT delay irrigation or attempt to remove the lens. Take care not to rinse contaminated water into the unaffected eye or onto the face. Immediately obtain medical attention.
Skin Contact	As quickly as possible, remove contaminated clothing, shoes and leather goods (e.g., watchbands, belts, etc.). Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Immediately wash with lukewarm, gently flowing water and non-abrasive soap for 15-20 minutes. Immediately obtain medical attention. Completely decontaminate clothing, shoes and leather goods before reuse or discard.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, immediately start cardiopulmonary resuscitation (CPR) or automated external defibrillation (AED). Quickly transport victim to an emergency care facility.

JET A/A-1 AVIATION TURBINE FUEL		Page Number: 2
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT INDUCE VOMITING. Have victim drink 60 to 240 mL (2 to 8 oz.) of water. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Have victim rinse mouth with water again. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, immediately start cardiopulmonary resuscitation (CPR) or automated external defibrillation (AED). Quickly transport victim to an emergency care facility.	
Note to Physician	Not available	

Section 5. Fire-fighting Measures			
Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	Lower: 0.7% Upper: 5%
Flash Points	Closed cup: >38°C (100.4°F). (Tag. Closed Cup)	Auto-Ignition Temperature	210°C (410°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	<p>NAERG2004, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures	
Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Ventilate area. Stop leak if safe to do so. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Ensure clean-up personnel wear appropriate personal protective equipment. Collect used absorbent for later disposal. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Avoid breathing vapours or mists of material. Notify appropriate authorities immediately.

Section 7. Handling and Storage	
Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Wear proper personal protective equipment (See Section 8). Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product.
Storage	Store away from heat and sources of ignition. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - *The selection of personal protective equipment varies, depending upon conditions of use.*

Eyes As a minimum, safety glasses with side shields should be worn when handling this material.

Body If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).

Respiratory A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): polyvinyl alcohol (PVA) and fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	1.0 - 1.9 cSt @ 40°C (104°F)
Colour	Clear and colourless.	Pour Point	<-51°C (<-60°F)
Odour	Kerosene-like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150 to 300°C (302 to 572°F)	Penetration	Not applicable.
Density	0.775 to 0.84 (Water=1)	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not available
Vapour Pressure	0.7 kPa at 20°C (5.25 mm Hg @ 68°C)	Dispersion Properties	Not available
Volatility	Low than gasoline.	Solubility	Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids, alkalis and chlorosulfonic acid.	Decomposition Products	May release COx, NOx, SOx, aldehydes, acids, ketones, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	<p>Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below:</p> <p><u>Kerosene, (8008-20-6):</u> Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >5000 mg/m³/4h (rat).</p> <p><u>Diethylene Glycol Monomethyl Ether, (111-77-3):</u> Acute oral toxicity (LD50): 4000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).</p>		
Chronic or Other Toxic Effects			

JET A/A-1 AVIATION TURBINE FUEL		Page Number: 4
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis.	
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.	
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.	
Immunotoxicity:	Not available	
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.	
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.	
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.	
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.	
Teratogenicity/Embryotoxicity:	This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin. (Diethylene Glycol Monomethyl Ether, CASRN 111-77-3)	
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. Considered to be A3 by the ACGIH. (Kerosene, CASRN 8008-20-6)	
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.	
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.	
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	Chronic exposure to some of the hazardous components of this product may result in damage to the following organs and/or systems: kidney.	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			

Section 13. Disposal Considerations	
Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information			
TDG Classification	FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>The WHMIS classification of Jet A/A-1 is B3, D2B. The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A, D2B.</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>
--------------------------	---

DSD/DPD (Europe) Not evaluated.		HCS (U.S.A.) HCS Class: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F). HCS Class: Irritating substance. HCS Class: Target organ effects.	
ADR (Europe) (Pictograms) NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) Not evaluated for transport Non évalué pour le transport	
HMIS (U.S.A.)	Health Hazard	2*	NFPA (U.S.A.) <div><div><div>2</div><div>2</div><div>0</div></div><div><div>Health</div><div>Fire Hazard</div><div>Reactivity</div><div>Specific hazard</div></div></div> <div><div>Rating</div><div>0 Insignificant</div><div>1 Slight</div><div>2 Moderate</div><div>3 High</div><div>4 Extreme</div></div>
	Fire Hazard	2	
	Reactivity	0	
	Personal Protection	H	







Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
Glossary ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials BOD5 - Biological Oxygen Demand in 5 days CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemical Hazard Information and Packaging Approved Supply List COD - Chemical Oxygen Demand CPR - Controlled Products Regulations DOT - Department of Transportation (U.S.A.) DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substance or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List (Canada) EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning And Community Right-To-Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide, and Rodenticide Act HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLV-TWA - Threshold Limit Value-Time Weighted Average TLm - Median Tolerance Limit TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System	
For Copy of MSDS	Prepared by Product Safety - RS on 6/15/2007.
Internet: www.petro-canada.ca/msds	Data entry by Product Safety - DSR.
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228	
For Product Safety Information: (905) 804-4752	

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	JET B AVIATION TURBINE FUEL	Code	W219 SAP: 150, 151, 152
Synonym	Jet B; Jet B DI; JP-4; Jet F-40; NATO F-40; Turbine Fuel, Aviation, Wide Cut Type (CAN/CGSB-3.22).	Validated on	2/8/2005.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as aviation turbine fuel. May contain a fuel system icing inhibitor.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Complex mixture of petroleum hydrocarbons (C6-C14).	64741-41-9	>99	Not established	Not established	Not established
Benzene	71-43-2	<0.5	0.5 ppm	2.5 ppm	Not established
Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether	111-77-3	≤0.15	Not established	Not established	Not established
Anti-static, antioxidant, corrosion inhibitor and metal deactivator additives. * Please note that Jet B DI, JP-4, Jet F-40 and NATO F-40 all contain Fuel System Icing Inhibitor (FSII).corrosion inhibitor	Not applicable	<0.1	Not applicable	Not applicable	Not applicable
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Flammable liquid. Exercise caution when handling this material. Skin and eye contact can cause irritation. Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. May cause cancer. May cause teratogenicity/embryotoxicity. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately.
Skin Contact	Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 5 minutes or until chemical is removed.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). Remove source of contamination or move victim to fresh air. If breathing is difficult, oxygen may be beneficial if administered by trained personnel, preferably on a doctor's advice. DO NOT allow victim to move about unnecessarily. Immediately transport victim to an emergency care facility.

JET B AVIATION TURBINE FUEL		Page Number: 2
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water.	
Note to Physician	Not available	

Section 5. Fire-fighting Measures			
Flammability	Flammable liquid (NFPA).	Flammable Limits	LOWER: 1.3% UPPER: 8% (NFPA)
Flash Points	CLOSED CUP: -31°C (-24°F) (NFPA)	Auto-Ignition Temperature	240°C (464°F) (NFPA)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures	
Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Ventilate area. Stop leak if safe to do so. Avoid contact with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Ensure clean-up personnel wear appropriate personal protective equipment. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Collect used absorbent for later disposal. Avoid breathing vapours or mists of material. Notify appropriate authorities immediately.

Section 7. Handling and Storage	
Handling	FLAMMABLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Wear proper personal protective equipment (See Section 8). Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product.
Storage	Store away from heat and sources of ignition. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).
Respiratory	A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): neoprene, polyvinyl alcohol (PVA), and fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available (similar to gasoline)
Colour	Clear and colourless.	Pour Point	Freezing Point: <-51°C (<-60°F) for Jet B/Jet B DI; <-58°C (<-72°F) for Jet Fuel F-40.
Odour	Gasoline like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	50 to 270°C (122 to 518°F)	Penetration	Not applicable.
Density	0.75 to 0.80 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3.5 (Air = 1)	Ionicity (in water)	Not available
Vapour Pressure	21 kPa (158 mmHg) @ 37.8°C (100°F).	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Can react with strong oxidizing agents, uranium hexafluoride, diborane. Incompatible with halogens and halogen compounds.	Decomposition Products	May release CO _x , NO _x , SO _x , aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: Based on toxicity of similar product. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >5000 mg/m ³ /4h (rat).

JET B AVIATION TURBINE FUEL		Page Number: 4
<p>Benzene Acute oral toxicity (LD50): 930 mg/kg (rat). Acute dermal toxicity (LD50): >9400 mg/kg (rabbit). Acute inhalation toxicity (LC50): 13200 ppm/4h (rat).</p> <p>Diethylene Glycol Monomethyl Ether Acute oral toxicity (LD50): 4140-5180 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).</p>		
Chronic or Other Toxic Effects		
Dermal Route:	Skin contact can cause irritation. Prolonged or repeated contact may defat and dry skin, and cause dermatitis.	
Inhalation Route:	Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Oral Route:	Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs).	
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.	
Immunotoxicity:	Not available	
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.	
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.	
Mutagenic:	Benzene is tumorigenic by RTECS criteria.	
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.	
Teratogenicity/Embryotoxicity:	This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin [Diethylene Glycol Monomethyl Ether].	
Carcinogenicity (ACGIH):	ACGIH A1: confirmed human carcinogen. [Benzene]	
Carcinogenicity (IARC):	IARC Group 1: carcinogenic to Humans. [Benzene]	
Carcinogenicity (NTP):	NTP Group 1: known to be a carcinogen. [Benzene]	
Carcinogenicity (IRIS):	EPA/IRIS Class A: human carcinogen.	
Carcinogenicity (OSHA):	Benzene is an OSHA known carcinogen.	
Other Considerations	No additional remark.	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations	
Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information		
TDG Classification	FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII (CL-TDG)	Special Provisions for Transport See Transportation of Dangerous Goods Regulations.

Section 15. Regulatory Information**Other Regulations**

This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).

All components of this formulation are listed on the US EPA-TSCA Inventory.

All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

Please contact Product Safety for more information.

DSD/DPD (Europe) Not evaluated.

HCS (U.S.A.)

CLASS: Contains material which may cause cancer.
CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F).
CLASS: Toxic.
CLASS: Irritating substance.
CLASS: Target organ effects.

ADR (Europe) (Pictograms)

NOT EVALUATED FOR EUROPEAN TRANSPORT

NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.

DOT (U.S.A) (Pictograms)



HMIS (U.S.A.)

Health Hazard	(2*)
Fire Hazard	(3)
Reactivity	(0)
Personal Protection	(H)

NFPA (U.S.A.)

Health



Fire Hazard

Reactivity

Specific hazard

Rating	
0	Insignificant
1	Slight
2	Moderate
3	High
4	Extreme

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
CNS - Central Nervous System
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPA - Environmental Protection Agency
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
RTECS - Registry of Toxic Effects of Chemical Substances
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System




For Copy of MSDS

Prepared by Product Safety - JDW on 2/8/2005.

JET B AVIATION TURBINE FUEL		Page Number: 6
Internet: www.petro-canada.ca/msds	Data entry by Product Safety - JDW.	
Fuels & Solvents: Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228 Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385		
For Product Safety Information: (905) 804-4752		
<i>To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.</i>		



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	TOOL JOINT COMPOUND	Code	650-774, TOOL
Synonym	Not available.	DSL	See Section 15
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	TSCA	See Section 15
Material Uses	Tool Joint Compound is used in drilling operations as a thread compound for rotary shouldered pipe connections to prevent galling and to provide a positive seal against drilling mud pressure.	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Proprietary ingredients. 2) Mica	Not available. 12001-26-2	≥90 ≤10	Not available. 3 mg/m ³	Not available. Not established	Not available. Not established

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. High pressure grease gun is capable of injecting grease through the skin. Grease gun injuries require immediate physician assessment. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Lower: 0.9%; Upper: 7%
Flash Points	Mineral Oil Blend: OPEN CUP: 250°C (482°F) (Cleveland)	Auto-Ignition Temperature	>260°C (500°F)
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), hydrocarbons, metal oxides, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

TOOL JOINT COMPOUND**Page Number: 2****Section 6. Accidental Release Measures**

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.
Exposure Limits	Consult local authorities for acceptable exposure limits. This product is not expected to form a mist based on its properties and expected use.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Smooth buttery paste.	Viscosity	Mineral Oil Blend: 103.3 cSt @ 40°C, 11.5 cSt @ 100°C, VI=98
Colour	Grey.	Pour Point	Mineral Oil Blend: -15°C
Odour	Mild petroleum odour.	Softening Point	Not available.
Odour Threshold	Not available.	Dropping Point	196°C
Boiling Point	<316°C (600°F)	Penetration	280 (60 strokes)
Specific Gravity	Mineral Oil Blend: 0.8741 kg/L @ 15°C (59°F).	Oil / Water Dist. Coeff.	Not available.
Vapor Density	Not available.	Ionicity (in water)	Not available.
Vapor Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available.
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release CO _x , NO _x , SO _x , hydrocarbons, metal oxides, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Not available.
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.

Continued on Next Page**Available in French**

TOOL JOINT COMPOUND**Page Number: 3**

Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	Not available.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available.	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		





Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations	This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																	
	All components of this formulation are listed on the US EPA-TSCA Inventory.																	
	This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																	
	Please contact Product Safety for more information.																	
DSD/DPD (Europe)	Not evaluated.																	
DSD/DPD (Europe) (Pictograms)	NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms)																
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>1</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>	Health Hazard	1	Fire Hazard	1	Reactivity	1	Personal Protection	B	NFPA (U.S.A.)	<table><tr><td rowspan="3">Health</td><td></td><td>Fire Hazard</td></tr><tr><td></td><td>Reactivity</td></tr><tr><td></td><td>Specific hazard</td></tr></table>	Health		Fire Hazard		Reactivity		Specific hazard
Health Hazard	1																	
Fire Hazard	1																	
Reactivity	1																	
Personal Protection	B																	
Health		Fire Hazard																
		Reactivity																
		Specific hazard																

Continued on Next Page**Available in French**

TOOL JOINT COMPOUND**Page Number: 4****Section 16. Other Information****References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials ()
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLm - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

Information Contact Internet: www.petro-canada.ca**Lubricants:****Western Canada, telephone: 1-800-661-1199;****fax: (780) 464-9564****Ontario & Central Canada, telephone:****1-800-268-5850 and (905) 822-4222; fax:****1-800-201-6285****Quebec & Eastern Canada, telephone:****1-800-576-1686; fax: 800-201-6285****For Product Safety Information: (905) 804-4752****Prepared by Product Safety - JDW on 12/18/2002.****Data entry by Product Safety - JDW.**

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

KLEEN-FLO TUMBLER INDUSTRIES LIMITED		MATERIAL SAFETY DATA SHEET		PAGE 1
SECTION I-MATERIAL IDENTIFICATION AND USE				
Material Name/Identifier:	Supreme Fuel Injector G.L.A.F. & Conditioner	Stock No.	409/412/414/415/418	
Manufacturer's Name:	Kleen-Flo Tumbler Industries Ltd	Street Address:	75 Advance Blvd.	
City:	Brampton	Province:	Ontario	
Postal Code:	L6T 4N1	Emergency Phone #:	(905) 793-4311	
Chemical Name:	N/A (mixture)	Chemical Family:	Blend of aliphatic alcohol	
Chemical Formula:	N/A	Trade Names & Synonyms:	& aromatic hydrocarbons	
Material Use:	Solvent/Cleaner	Molecular Weight:	N/A	
SECTION II-HAZARDOUS INGREDIENTS OF MATERIAL				
Hazardous Ingredients	C.A.S.	Approximate Concentration	LD50 Species & Route	LC50 Species & Route
2-propanol	67-63-0	60-90%	4.72 g/kg rat-oral	>12000 ppm (8hr) rat-inh.
xylene	1330-20-7	10-30%	4300 mg/kg rabbit-derma	> 6700 ppm (4hr) rat-inh.
ethyl benzene	100-41-4	1-5%	3.5 g/kg rat-oral	N/A
SECTION III-PHYSICAL DATA FOR MATERIAL				
Physical State:	Liquid	Odour/Appearance:	Alcohol odour; clear, red liquid	
Specific Gravity:	0.8 @15°C	Odour Threshold(p.p.m.):	N/A	
Boiling Point:	82-137°C	Evaporation Rate:	N/A	
Freezing Point:	N/A	Solubility in Water:	40%	
% Volatile(by volume):	100%	Vapour Pressure(mm)Hg:	4.4 kPa @ 20°C	
Vapour Density(Air=1):	2.2	Coefficient of Water/Oil Distribut:	N/E	
pH	N.Ap.			
SECTION IV-FIRE AND EXPLOSION HAZARD OF MATERIAL				
Flammability Yes/No	Yes	If yes under which conditions: heat, open flame and sparks		
Auto Ignition Temperature:	N/A	Means of Extinction: carbon dioxide, alcohol foam		
Flashpoint and Method:	11°C TCC	Carbon dioxide or dry chemical for small fires.		
		Hazardous Combustion Products:carbon monoxide and carbon dioxide		
Upper Flammable limit		Lower Flammable Limit(% by volume): 2%		
(% by volume):	12%			
Explosion Data:	Sensitivity ot mechanical impact: Yes	Sensitivity to Static Discharge: Electrical & mechanical		
		equipment should be explosion proof.		
SECTION V-REACTIVITY DATA				
Chemical Stability Yes/No:	Yes	If NO under which conditions? N.Ap.		
Incompatibility to Other Substances Yes/No:	Yes	If so which ones? strong oxidizing compounds. May react		
		with aluminum at high temperature.		
Reactivity and under what conditions?	Normally stable, but can become unstable at elevated temperatures & pressure			
Hazardous Decomposition Products:	Carbon monoxide, carbon dioxide produced upon combustion.			
N/E: not established				
N.Ap.: not applicable				
N/A: not available				

Material Name/Identifier: Supreme Fuel Injector G.L.A.F. & Conditioner		Stock No. 409/412/414/415/418	PAGE 2
SECTION VI-TOXICOLOGICAL PROPERTIES OF PRODUCT			
Route of Entry: ALL Routes	--SKIN CONTACT --SKIN ABSORPTION --EYE CONTACT --INHALATION --INGESTION		
Effects of Acute Exposure:	Slight eye irritation. May cause headache, dizziness, nausea, drowsiness and central nervous system depression.		
Effects of Chronic Exposure:	High exposure to dimethylbenzene in some animal studies have been reported to cause health effects on developing embryo/fetus. Their effects were often at levels toxic to the mother. The significance of these findings to humans has not been determined.		
LD 50 of Product:	5840 mg/kg rat-oral	LC 50 of Product:	> 12000 ppm (8hr) rat
Irritancy of Product:	Skin and eye irritant	Exposure Limits of Product:	400 ppm- I.P.A.
Sensitization of Product:	N/A	2-propanol- 100 ppm, xylene- 100 ppm	
		Toxicologically Synergistic Materials:	N/A
--CARCINOGENICITY --REPRODUCTIVE EFFECTS --TERATOGENICITY --MUTAGENICITY			none known
SECTION VII-PREVENTIVE MEASURES			
Personal Protective Equipment to be used:			
Gloves(specify):	Nitrile, Viton, Polyethylene	Eye(specify):	Chemical safety glasses
Respiratory(specify):	Organic canister mask	Clothing:	Not required
Respiratory Protection:	If used indoors or on a continuous basis, use of cartridge type respirator is recommended		
Engineering Controls:	To maintain TLV; electrical and mechanical equipment should be spark proof.		
Leak and Spill Procedure:	Dry and contain spill. Soak residue with natural absorbent.		
Waste Disposal:	Incinerate or dispose of at an approved waste disposal facility.		
Storage Requirements:	Keep in a cool place.		
Handling Procedures and Equipment:	Handle with care. Keep away from children. Do not inhale or ingest.		
TDG Classification:	#409 & 412: Consumer commodity		
	#414 & 415 & 418: Flammable liquids, N.O.S.(2-propanol solution), Class 3, UN1993,Pkg. Grp. II		
WHMIS Classification:	Consumer Commodity #409/412; Class B2, D2B & D2A for #414, 415 & 418		
Domestic substance list:	All components of this product are either on the DSL or exempt.		
SECTION VIII-FIRST AID MEASURES			
Eye:	Wash with water for at least 15 minutes.		
Skin:	Wash with soap and water.		
Inhalation:	Move patient to fresh air and restore breathing if required. Call a physician.		
Ingestion:	Contains petroleum distillate. Do NOT induce vomiting. Guard against aspiration. Seek medical help.		
SECTION IX-PREPARATION DATE OF M.S.D.S.			
Additional Info/Comments:		Sources Used: NOISH Registry of Toxic Effects of Chemical Substances	
Phone Number:	(905) 793-4311	Prepared By: Quality Control Laboratory	
Date:	March 3, 2003	Kleen-Flo Tumbler Industries Limited	
THIS SHEET SUPERSEDES ANY OTHER M.S.D.S. PREVIOUSLY PREPARED			
N/A: not available		N/E: not established	

**MATERIAL SAFETY DATA SHEET**

Date Prepared: November 14, 2003
Supersedes: May 31, 2000
MSDS Number: 08509

1. PRODUCT INFORMATION

Product Identifier: MARVELUBE WR2 GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic
Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: >20.00 cSt at 40 deg C
 Vapour Density: >5
 Boiling Point: not available
 Evaporation rate: <1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: 182 deg C DROP
 Odour Threshold: not available
 Vapour Pressure: <1 kPa at 38 deg C
 Density: 0.91 g/cc at 15 deg C
 Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.
 High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.
In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.
Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye

contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 204 deg C COC ASTM D92

Autoignition: 227 deg C Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA**STABILITY:**

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 31 May 2000, this MSDS has been revised in Section(s):

3, 7

10. PREPARATION

Date Prepared: November 14, 2003

Prepared by: Lubricants & Specialties

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**MATERIAL SAFETY DATA SHEET**

Date Prepared: November 06, 2002
Supersedes: November 01, 2002
MSDS Number: 00826

1. PRODUCT INFORMATION

Product Identifier: MIDDLE DISTILLATE

- ESSO MARINE GAS OIL (DYED OR CLEAR)
- ESSO RAILROAD DIESEL (DYED OR CLEAR)
- HEATING OIL (DYED OR CLEAR)
- DIESEL (DYED OR CLEAR)
- DIESEL QUALITY FURNACE FUEL (DYED OR CLEAR)
- DIESEL QUALITY HEATING OIL (DYED OR CLEAR)
- ESSO DIESEL (DYED OR CLEAR)
- ESSO DIESEL QUALITY COMMERCIAL FUEL (DYED OR CLEAR)
- ESSO DIESEL QUALITY FURNACE FUEL
- ESSO DIESEL QUALITY HEATING OIL
- ESSO FURNACE FUEL (DYED OR CLEAR)
- ESSO HEATING OIL (DYED OR CLEAR)
- ESSO MARINE DIESEL FUEL (DYED OR CLEAR)
- ESSO RAILROAD DIESEL FUEL #3 (DYED OR CLEAR)
- ESSO TOBACCO CURING OIL
- FUEL OIL 75
- FUEL OIL 76
- DIESEL MARINE (DYED OR CLEAR)
- DIESEL MARINE GAS OIL (DYED OR CLEAR)
- FURNACE (DYED OR CLEAR)
- DIESEL MARINE - POUR DEPRESSED (DYED OR CLEAR)
- NO.2 FUEL OIL
- NAVAL FUEL OIL 3-GP-11M (DYED)
- ESSO DIESEL FUEL LS
- DIESEL LOW SULFUR (DYED OR CLEAR)
- NO.2 FUEL OIL FOR EXPORT
- DIESEL FOR EXPORT (DYED OR CLEAR)
- FURNACE TOBACCO CURING OIL
- DIESEL NAVAL 3GP-11 (DYED OR CLEAR)
- DIESEL NAVAL 3GP-15 (DYED OR CLEAR)
- DIESEL LOW SULFUR RAIL (DYED OR CLEAR)
- DIESEL LOW SULFUR DYED EP
- DIESEL RAIL (DYED OR CLEAR)
- DIESEL RAIL #3 (DYED OR CLEAR)
- DIESEL RAIL #3 (HD) (DYED OR CLEAR)
- DIESEL LOW SULFUR (032) (DYED OR CLEAR)

FURNACE URBAN (DYED OR CLEAR)
 DIESEL (032) (DYED OR CLEAR)
 DIESEL LOW SULFUR (EXP DYED)
 FURNACE FUEL (032) DYED
 DIESEL LOW SULFUR (EXPORT)
 MARINE GAS OIL
 MDO - MARINE DIESEL OIL 3 CST (CLEAR)

Application and Use:
 Multi-purpose fuel

Product Description:

A complex mixture of aliphatic, olefinic, naphthenic and aromatic hydrocarbons.

REGULATORY CLASSIFICATION

WHMIS:

Class B, Division 3: Combustible Liquids.

Class D, Division 2, Subdivision B: Toxic Material

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):

Shipping Name: FUEL OIL

Class: 3

Packing Group: III

PIN Number: UN1202

Marine Pollutant:N

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145

Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
 Products Division
 111 St Clair Avenue West
 Toronto, Ontario
 M5W 1K3
 (416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
------	---	-------

Fuel Oil No.2

>99.9 V/V 68476-30-2

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: 0.820 to 0.900 at 15.5 deg C
Viscosity: 1.30 cSt at 40 deg C
to 11.00 cSt at 40 deg C
Vapour Density: 4
Boiling Point: 150 to 370 deg C
Evaporation rate: <1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -4 deg C -39 (RANGE)
Odour Threshold: not available
Vapour Pressure: 4 kPa at 38 deg C
Appearance/odour: White or pale yellow liquid, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
High vapour concentrations are irritating to the eyes, nose, throat and lungs; may cause headaches and dizziness; may be anesthetic and may cause other central nervous system effects.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Irritating.

INGESTION:

Low toxicity.
Small amounts of this liquid drawn into the lungs from swallowing or vomiting may cause severe health effects (e.g. bronchopneumonia or pulmonary edema).

CHRONIC:

Lifetime skin painting tests indicate that materials of similar composition have produced skin cancer in experimental animals. The relationship of these results to humans has not been fully established.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 2000 mg/kg (Rabbit)
Inhalation : LC50 > 2500 mg/m³ (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

Manufacturer Recommends:
100 ppm based on composition.

Local regulated limits may vary.

5. FIRST AID MEASURES**INHALATION:**

In emergency situations use proper respiratory protection to immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Immediately flush with large amounts of water. Use soap if available. Remove contaminated clothing, including shoes, after flushing has begun. If irritation persists, seek medical attention.

INGESTION:

DO NOT induce vomiting since it is important that no amount of the material should enter the lungs (aspiration). Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES**PERSONAL PROTECTION:**

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety goggles, long sleeves, and chemical-resistant gloves.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Do not handle or store near an open flame, sources of heat, or sources of ignition. Material will accumulate static charges which may cause a spark. Static charge build-up could become an ignition source. Use proper relaxation and grounding procedures. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Do not use combustible materials such as sawdust. Recover by pumping (use an explosion proof motor or hand pump), or by using a suitable absorbent. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: >40 deg C PMCT ASTM D93

Autoignition: NA Flammable Limits: LEL: 0.7% UEL: 6.5%

GENERAL HAZARDS:

Combustible Liquid; may form combustible mixtures at or above the flash point.

Toxic gases will form upon combustion.

Static Discharge; material may accumulate static charges which may cause a fire.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

REVISED.

10. PREPARATION

Date Prepared: November 06, 2002
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**MATERIAL SAFETY DATA SHEET**

Date Prepared: November 14, 2003
Supersedes: September 17, 1998
MSDS Number: 08366

1. PRODUCT INFORMATION

Product Identifier: UNIREX LOTEMP MOLY GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL), exempt, or have been notified under CEPA.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: <20.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: not available
 Evaporation rate: <1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: 245 deg C ASTM D97
 Odour Threshold: not available
 Vapour Pressure: 0.002 kPa at 20 deg C
 Density: 0.92 g/cc at 15 deg C
 Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.
 High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.
 Small amounts of this liquid drawn into the lungs from swallowing or vomiting may cause severe health effects (e.g. bronchopneumonia or pulmonary edema).

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:**ACGIH recommends:**

For insoluble Molybdenum compounds, 10 mg/m3.

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES**INHALATION:**

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

DO NOT induce vomiting since it is important that no amount of the material should enter the lungs (aspiration). Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES**PERSONAL PROTECTION:**

The selection of personal protective equipment varies, depending upon

conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care.

Store in a cool, well ventilated place away from incompatible materials.

In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Store and load at normal (up to 38 deg C) temperature and at atmospheric pressure.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard.

Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth.

Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately.

Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately.

Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: >110 deg C COC ASTM D92 est.baseoil

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Decomposes; flammable/toxic gases will form at elevated temperatures (thermal decomposition).

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

Fumes, smoke, carbon monoxide and sulphur oxides in case of incomplete combustion

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 17 September 1998, this MSDS has been revised in Section(s):
1, 7

10. PREPARATION

Date Prepared: November 14, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**MATERIAL SAFETY DATA SHEET**

Date Prepared: November 14, 2003
Supersedes: April 12, 2001
MSDS Number: 12232

1. PRODUCT INFORMATION

Product Identifier: EPIC EP MOLY GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL), exempt, or have been notified under CEPA.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: 0.930 at 15.6 deg C/15.6 deg C
 Viscosity: >20.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: 249 deg C
 Evaporation rate: 0.1 (1= n-butylacetate)
 Solubility in water: NEGLIGIBLE
 Freezing/Pour Point: 230 deg C DROP
 Odour Threshold: not available
 Vapour Pressure: <0.01 kPa at 20 deg C
 Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.
 High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products,

the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For insoluble Molybdenum compounds, 10 mg/m3.
For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.
In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.
Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye

contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 145 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel.

Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Fumes, smoke, carbon monoxide, sulfur oxides, nitrogen oxides, phosphorus oxides, aldehydes and other decomposition products, in the case of incomplete combustion

Various metal oxides

8. REACTIVITY DATA**STABILITY:**

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 12 April 2001, this MSDS has been revised in Section(s):

1

10. PREPARATION

Date Prepared: November 14, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

Material Safety Data Sheet

PETRO-CANADA SUPREME 5W-30, 10W-30, 10W-40, 20W-50 MOTOR OIL



1. Product and company identification

Common name	: PETRO-CANADA SUPREME 5W-30, 10W-30, 10W-40, 20W-50 MOTOR OIL
Code	: 410-344, MOSP53; 410-341, MOSP13; 410-342, MOSP14; 410-343, MOSP25
Material uses	: Supreme is designed for the lubrication of all gasoline, propane and CNG engines where the manufacturer recommends the use of API SM quality oils. SAE 5W-30 and 10W-30 grades also meet the requirements of ILSAC GF-4.
Manufacturer	: PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3
<u>In case of emergency</u>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2. Hazards identification

Odour	: Mild petroleum oil like.
OSHA/HCS status	: While this material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200), this MSDS contains valuable information critical to the safe handling and proper use of the product. This MSDS should be retained and available for employees and other users of this product.
Emergency overview	: No specific hazard.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
<u>Potential acute health effects</u>	
Eyes	: Slightly irritating to the eyes.
Skin	: Slightly irritating to the skin.
Inhalation	: No known significant effects or critical hazards.
Ingestion	: No known significant effects or critical hazards.
Medical conditions aggravated by over-exposure	: Repeated skin exposure can produce local skin destruction or dermatitis. Repeated or prolonged contact with spray or mist may produce chronic eye irritation and severe skin irritation.
See toxicological information (section 11)	

3. Composition/information on ingredients

<u>Name</u>	<u>CAS number</u>	<u>%</u>
Mixture of severely hydrotreated and hydrocracked base oil (petroleum).	Mixture	-
The base oil may be a mixture of the following CAS#s: 8042-47-5, 64742-46-7, 64742-52-5, 64742-54-7, 72623-84-8, 72623-85-9, 72623-86-0, 72623-87-1, 178603-64-0, 178603-65-1, 178603-66-2, 445411-73-4		

4. First-aid measures

Eye contact	: In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Get medical attention if irritation occurs.
Skin contact	: Wash skin thoroughly with soap and water or use recognised skin cleanser. Get medical attention if irritation occurs. Remove contaminated clothing and shoes. Wash clothing before reuse. Clean shoes thoroughly before reuse.
Inhalation	: If inhaled, remove to fresh air. If breathing is difficult, give oxygen. If not breathing, give artificial respiration. Get medical attention.
Ingestion	: Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If potentially dangerous quantities of this material have been swallowed, call a physician immediately.
Protection of first-aiders	: No action shall be taken involving any personal risk or without suitable training.

5 . Fire-fighting measures

- Flammability of the product** : May be combustible at high temperature.
- Products of combustion** : Carbon oxides (CO, CO₂), nitrogen oxides (NO_x), sulphur oxides (SO_x), phosphorus oxides (PO_x), calcium oxides (CaO_x), zinc oxides (ZnO_x), molybdenum oxides (MoO_x), boron oxides, smoke and irritating vapours as products of incomplete combustion.
- Extinguishing media**
- Suitable** : Use an extinguishing agent suitable for the surrounding fire.
- Not suitable** : None known.
- Special exposure hazards** : No specific hazard.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
- Special remarks on fire hazards** : Low fire hazard. This material must be heated before ignition will occur.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

6 . Accidental release measures

- Personal precautions** : Immediately contact emergency personnel. Keep unnecessary personnel away. Use suitable protective equipment.
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.
- Methods for cleaning up** : If emergency personnel are unavailable, contain spilt material. For small spills, add absorbent (soil may be used in the absence of other suitable materials), scoop up material and place in a sealable, liquid-proof container for disposal. For large spills, dyke spilt material or otherwise contain material to ensure runoff does not reach a waterway. Place spilt material in an appropriate container for disposal.

7 . Handling and storage

- Handling** : Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk. Evaporate the residue under a fume hood. Ground all equipment containing material. Do not ingest. Do not breathe gas/fumes/vapour/spray. Wear suitable protective clothing. If ingested, seek medical advice immediately and show the container or the label. Keep away from incompatibles such as oxidising agents, acids.
- Storage** : Keep container tightly closed. Store away from incompatible materials (see section 10). Keep container in a cool, well-ventilated area.

8 . Exposure controls/personal protection

Product name

Mixture of severely hydrotreated and hydrocracked base oil (petroleum).

Exposure limits

ACGIH TLV (United States). Notes: (oil mist)

TWA: 5 mg/m³ 8 hour/hours.

STEL: 10 mg/m³ 15 minute/minutes.

Consult local authorities for acceptable exposure limits.

- Engineering measures** : No special ventilation requirements. Good general ventilation should be sufficient to control airborne levels. If this product contains ingredients with exposure limits, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure below any recommended or statutory limits.

Personal protection

Eyes

- : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts.

Skin

- : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

8 . Exposure controls/personal protection

Respiratory	: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: organic vapour filter
Hands	: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Recommended: neoprene, nitrile, polyvinyl alcohol (PVA), Viton.
Hygiene measures	: Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

9 . Physical and chemical properties

Physical state	: Viscous liquid.
Flash point	: Open cup: $\geq 227^{\circ}\text{C}$ (440.6°F) (Cleveland.).
Auto-ignition temperature	: Not available.
Flammable limits	: Not available.
Colour	: Light amber.
Odour	: Mild petroleum oil like.
pH	: Not applicable.
Boiling/condensation point	: Not available.
Pour Point	: 5W-30 : -45°C (-49°F) 10W-30 : -36°C (-33°F) 10W-40 : -36°C (-33°F) 20W-50 : -24°C (-11°F)
Melting/freezing point	: Not available.
Relative density	: 0.856 to 0.8784 kg/L @ 15°C (59°F)
Vapour pressure	: Not available.
Vapour density	: Not available.
Volatility	: Not available
Odour threshold	: Not available.
Evaporation rate	: Not available.
Viscosity	: 5W-30 : 61.8 cSt @ 40°C (104°F), 10.4 cSt @ 100°C (212°F), VI=159; 10W-30 : 66.0 cSt @ 40°C (104°F), 10.2 cSt @ 100°C (212°F), VI=141; 10W-40 : 94.9 cSt @ 40°C (104°F), 13.9 cSt @ 100°C (212°F), VI=149; 20W-50 : 170.8 cSt @ 40°C (104°F), 18.9 cSt @ 100°C (212°F), VI=125
Solubility	: Insoluble in water.
LogK_{ow}	: Not available.
Softening Point	: Not available.
Dropping Point	: Not available.
Penetration	: Not available.
Physical/chemical properties comments	: Not available.

10 . Stability and reactivity

Stability and reactivity	: The product is stable.
Conditions of instability	: Not available.
Incompatibility with various substances	: Reactive with oxidising agents and acids.
Hazardous decomposition products	: May release CO _x , H ₂ S, alkyl mercaptans, methacrylate monomers, smoke and irritating vapours when heated to decomposition.
Hazardous polymerisation	: Will not occur.

11 . Toxicological information

Toxicity data

<u>Product/ingredient name</u>	<u>Test</u>	<u>Result</u>	<u>Route</u>	<u>Species</u>
Mixture of severely hydrotreated and hydrocracked base oil (petroleum).	LD50	>5000 mg/kg	Oral	Rat
	LD50	>2000 mg/kg	Dermal	Rabbit
	LC50	>2500 mg/m ³ (4 hour/hours)	Inhalation	Rat

Specific effects

Carcinogenic effects : Not listed as carcinogenic by OSHA, NTP or IARC.

Mutagenic effects : No known significant effects or critical hazards.

Teratogenicity / Reproductive toxicity : No known significant effects or critical hazards.

Sensitisation

Ingestion : No known significant effects or critical hazards.

Inhalation : No known significant effects or critical hazards.

Eyes : Slightly irritating to the eyes.

Skin : Slightly irritating to the skin.

Synergistic products : Not available.

12 . Ecological information

Ecotoxicity data

<u>Product/ingredient name</u>	<u>Species</u>	<u>Period</u>	<u>Result</u>
Environmental precautions	: No known significant effects or critical hazards.		
Bioconcentration factor	Not available.		
BOD and COD	Not available.		
Biodegradable/OECD	Not available.		
Mobility	Not available.		
Special remarks on the products of biodegradation	Not available.		

13 . Disposal considerations

Disposal should be in accordance with applicable regional, national and local laws and regulations. Local regulations may be more stringent than regional or national requirements.

The information presented below only applies to the material as supplied. The identification based on characteristic(s) or listing may not apply if the material has been used or otherwise contaminated. It is the responsibility of the waste generator to determine the toxicity and physical properties of the material generated to determine the proper waste identification and disposal methods in compliance with applicable regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

Waste disposal : The generation of waste should be avoided or minimised wherever possible. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Class	PG*	Label	Additional information
TDG Classification	Not regulated.	-	-	-		-
DOT Classification	Not available.	Not available.	Not available.	-		-

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Not regulated.

U.S. Federal regulations : Not available.

Canada

WHMIS (Canada) : Not controlled under WHMIS (Canada).

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

EU regulations

Risk phrases : This product is not classified according to EU legislation.

International regulations

International lists

CANADA INVENTORY (DSL) : Not determined.

EC INVENTORY (EINECS/ELINCS) : Listed

TSCA 8(b) inventory : Listed

16 . Other information

Hazardous Material
Information System (U.S.A.) :

Health	1
Fire hazard	1
Reactivity	0
Personal protection	B

National Fire Protection
Association (U.S.A.) :



References

: Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Date of printing :

7/28/2006.

Date of issue :

7/24/2006.

Date of previous issue :

No previous validation.

Responsible name :

Product Safety - JDW

Version :

1

For Copy of (M)SDS :

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

16 . Other information

Internet: www.petro-canada.ca/msds

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285

For Product Safety Information: (905) 804-4752

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	OUTBOARD MOTOR OIL	Code	460-201, POM
Synonym	Not available	Validated on	4/8/2005.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Ashless 2-cycle engine oil designed to lubricate water-cooled two-cycle engines. For use where TC-W3® oils are recommended.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	No effects expected. If irritation does occur, flush contaminated eye(s) with lukewarm, gently flowing water for 5 minutes or until the chemical is removed. If irritation persists, obtain medical advice.
Skin Contact	Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with water and non-abrasive soap for 5 minutes or until chemical is removed. Remove contaminated clothing, shoes and leather goods (e.g., watchbands, belts, etc.). If irritation persists, repeat flushing. Obtain medical advice immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard.
Inhalation	Remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice.
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, rinse mouth and repeat administration of water. Obtain medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Combustible at high temperature.	Flammable Limits	Not available
Flash Points	CLOSED CUP: 151°C (303.8°F) (Pensky-Martens)	Auto-Ignition Temperature	Fire Point: 170°C (338°F)
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.

OUTBOARD MOTOR OIL		Page Number: 2
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), acridic smoke, asphyxiants, smoke and irritating vapours as products of incomplete combustion.	
Fire Fighting Media and Instructions	NAERG2004, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.	

Section 6. Accidental Release Measures	
Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Ensure clean-up personnel wear appropriate personal protective equipment. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.

Section 7. Handling and Storage	
Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection	
Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.)
Respiratory	A minimum of NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. A NIOSH-approved positive-pressure, air-supplied respirator or self-contained breathing apparatus may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Nitrile, Polyvinyl alcohol (PVA), Fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties			
Physical State and Appearance	Viscous liquid.	Viscosity	58.6 cSt @ 40°C (104°F), 9.2 cSt @ 100°C (212°F), VI=138.
Colour	Blue-green	Pour Point	-51°C (-60°F).
Odour	Hydrocarbon.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.8624 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available

OUTBOARD MOTOR OIL		Page Number: 3	
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity			
Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents.	Decomposition Products	May release CO _x , NO _x , asphyxiants, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information	
Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Acute toxicity information is not available for the product as a whole, therefore, data for the base oils are provided below: Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2300 mg/m ³ /4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any.
Inhalation Route:	With its relatively low vapour pressure, this product is not expected be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation.
Oral Route:	Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect.
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada)	Special Provisions for Transport	Not applicable.
---------------------------	---	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																									
		All components of this formulation are listed on the US EPA-TSCA Inventory.																									
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																									
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																									
		Please contact Product Safety for more information.																									
DSD/DPD (Europe)		Not classified under the Dangerous Substances or Dangerous Preparations Directives.		HCS (U.S.A.)		Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States)																					
ADR (Europe) (Pictograms)				DOT (U.S.A) (Pictograms)																							
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	NFPA (U.S.A.)		<table><tr><td>Health</td><td>1</td><td>Fire Hazard</td><td>0</td><td>Reactivity</td><td>0</td></tr><tr><td colspan="6">Specific hazard</td></tr></table>		Health	1	Fire Hazard	0	Reactivity	0	Specific hazard					
Health Hazard	1																										
Fire Hazard	1																										
Reactivity	0																										
Personal Protection	B																										
Health	1	Fire Hazard	0	Reactivity	0																						
Specific hazard																											
						<table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr><tr><td></td><td>3 High</td></tr><tr><td></td><td>4 Extreme</td></tr></table>		Rating	0 Insignificant		1 Slight		2 Moderate		3 High		4 Extreme										
Rating	0 Insignificant																										
	1 Slight																										
	2 Moderate																										
	3 High																										
	4 Extreme																										

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
-------------------	---

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 CNS - Central Nervous System
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 RTECS - Registry of Toxic Effects of Chemical Substances
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration

OUTBOARD MOTOR OIL		Page Number: 5
Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPA - Environmental Protection Agency EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazard Communication Standard HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer	TLM - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System	
For Copy of MSDS The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact: Internet: www.petro-canada.ca/msds Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564 Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285 Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285 For Product Safety Information: (905) 804-4752		Prepared by Product Safety - JDW on 4/8/2005. Data entry by Product Safety - RS.
<i>To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.</i>		

MATERIAL SAFETY DATA SHEET

CANPLY EXTERIOR Plywood*

PRODUCT IDENTIFICATION:



SYNONYMS:

None

TRADE NAME:

CANPLY QUALITY and Company-specific

DESCRIPTION

This panel product contains bonded layers of wood veneer.*

POTENTIAL AIRBORNE RELEASES

Manual or mechanical cutting or abrasion processes performed on the product can result in generation of wood dust.

PHYSICAL DATA

Boiling Point	Not applicable
Specific gravity	< 1, variable, depends on species and moisture content.
Vapour Density	Not applicable
% Volatiles By Volume	0
Melting Point	Not applicable
Vapour Pressure	Not applicable
Solubility in H ₂ O (% by wt.)	< 0.1%
Evaporation Rate (Butyl Acetate = 1)	Not applicable
pH	Not applicable
Appearance and odor	Light to dark colour and odor dependant upon wood species.

FIRE AND EXPLOSION DATA

Flash point	Not applicable
Autoignition Temperature	Not available, however, usually accepted that the ignition of wood begins when the temperature of the wood is approximately 273°C. (depends upon duration of exposure to heat source and other variables).
Explosive Limits in Air	See below under "Unusual Fire and Explosion Hazards".
Extinguishing Media	Water, Carbon dioxide, Sand
Special Fire Fighting Procedures	None
Unusual Fire and Explosion Hazards	Sawing, sanding or machining can produce wood dust as a by-product which may present an explosion hazard if a dust cloud contacts an ignition source. An airborne concentration of 40 grams of dust per cubic meter of air is often used as the LEL for wood dust.

REACTIVITY DATA

Conditions Contributing to Instability	Stable under normal conditions
---	--------------------------------

Incompatibility	Avoid contact with oxidizing agents. Avoid open flame. Product may ignite in excess of 273°C.
Hazardous Decomposition Products	Thermal and/or thermal oxidative decomposition can produce irritating and toxic fumes and gases, including carbon monoxide, hydrogen cyanide, aldehydes, organic acids and polynuclear aromatic compounds.
Hazardous Polymerization	Not applicable

HEALTH EFFECTS INFORMATION

Exposure Limits:

Wood Dust (all soft and hard woods except Western Red cedar)	OSHA PEL - TWA 5 mg/m ³ OSHA PEL - STEL 10 mg/m ³ ACGIH TLV - TWA 5 mg/m ³
Wood Dust (Softwood)	Wood dust can cause mechanical irritation.
Eye Contact	Various species of wood dust may evoke allergic contact dermatitis in sensitized individuals.
Skin Contact	Not likely to occur.
Ingestion	

Inhalation:

Wood Dust	May cause nasal dryness, irritation and obstruction. Coughing, wheezing, and sneezing; sinusitis and prolonged colds have also been reported.
	Depending on species, may cause respiratory sensitization and/or irritation. Prolonged exposure to wood dust has been reported by some observers to be associated with nasal cancer. Wood dust is not listed as a carcinogen by IARC, NTP or OSHA.

PRECAUTIONS, SAFE HANDLING

Wood Dust: Avoid dusty conditions and provide good ventilation.

GENERALLY APPLICABLE CONTROL MEASURES

Ventilation: Provide adequate general and local exhaust ventilation to keep airborne contaminant concentration levels below the OSHA PELs when panel product is subjected to manual or mechanical cutting as abrasion processes resulting in generation of wood dust.

Personal Protective Equipment: Wear goggles or safety glasses when manufacturing or machining the product. Wear NIOSH/MSHA approved respirator when the allowable exposure limits may be exceeded. Other protective equipment such as gloves and outer garments may be needed depending on dust conditions.

EMERGENCY AND FIRST AID PROCEDURES

Eyes	Flush eyes with large amounts of water. Remove to fresh air. If irritation persists, get medical attention.
Skin	Wash affected areas with soap and water. Get medical advice if rash or persistent irritation or dermatitis occurs.
Inhalation	Remove to fresh air. Get medical advice if persistent irritation, severe coughing or breathing difficulty occurs.
Ingestion	Not applicable

* This fact sheet is for products that have not been finished (coated, laminated or overlaid) or treated (ie., with preservative or fire retardant).


IMPORTANT: The information and data herein are believe to be accurate and have been compiled from sources believed to be reliable. It is offered for your consideration, investigation and verification. The Canadian Plywood Association (CANPLY) and the makes no warranty of any kind, express or implied, concerning the accuracy of completeness of the information and data herein. CANPLY will not be liable for claims relating to any party's use of or reliance on information and data contained herein regardless of whether it is claimed that the information and data are inaccurate, incomplete or otherwise misleading. It is incumbent upon the user to obtain the

most up-to-date information.

CONTACT : For further information contact the Canadian Plywood Association, Plywood Technical Centre at (604) 981-4190.

DMB/dmb

Dated : July 1995 Updated 00-04-12



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
 Calgary, Alberta, Canada T2W-OA8
 (403) 259-5112 FAX (403) 255-7185
 email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME: **Poly-Drill 133-X**
 PRODUCT DESCRIPTION: LIQUID ANIONIC POLYMER
 CHEMICAL DESCRIPTION: Polymer, Surfactant(s), Water, Hydrocarbon solvent
 UPDATED: March 15, 2006

NFPA704M/HMIS RATING

HEALTH: 0/1	FLAMMABILITY: 1/1	REACTIVITY: 0/0	OTHER:
0=Insignificant	1=Slight 2=Moderate	3=High	4=Extreme

2. COMPOSITION

A liquid polymer: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations. None of the substances in this product are hazardous.

3. PHYSICAL DATA

Flash Point: >100°C (PMCC)
 Specific Gravity (@ 25°C.): 1.08
 Solubility in Water: Emulsifiable
 pH: 8.1 (1.0% solution)
 Freeze Point: -10 °C (14 Degrees F)
 Density (g/ml): 1.08 at 25 °C
 Physical State: Liquid
 Appearance: Blue liquid
 Odor: Hydrocarbon

Note: These physical properties are typical values for this product.

4. FIRE AND EXPLOSION DATA

INCOMPATIBILITY: Avoid contact with strong oxidizers (eg. Chlorine, peroxides, chromates, nitric acid, perchlorates, concentrated oxygen, permanganates) which can generate heat, fires, explosions and the release of toxic fumes.

THERMAL DECOMPOSITION PRODUCTS: In the event of combustion CO, oxides of carbon (CO_x), oxides of nitrogen (NO_x) may be formed. Do not breathe smoke or fumes. Wear suitable protective equipment.

5. FIRE FIGHTING MEASURES

FLASH POINT: >100°C (PMCC)

EXTINGUISHING MEDIA: Based on the NFPA guide, use dry chemical, foam, carbon dioxide or other extinguishing agent suitable for Class B fires. Use water to cool containers exposed to fire. For larger fires, use water spray or fog, thoroughly drenching the burning material.

UNSUITABLE EXTINGUISHING MEDIA:
Do not use water unless flooding amounts are available.

UNUSUAL FIRE AND EXPLOSION HAZARD: May evolve oxides of nitrogen (NO_x) under fire conditions.

6. HEALTH HAZARD DATA

EMERGENCY OVERVIEW:

CAUTION: May cause irritation to skin and eyes. Avoid contact with skin, eyes and clothing. Do not take internally.

Empty containers may contain residual product. Do not reuse container unless properly reconditioned.

PRIMARY ROUTE(S) OF EXPOSURE: Eye & Skin

EYE CONTACT: Can cause mild to moderate irritation

SKIN CONTACT: Can cause mild, short-lasting irritation

SYMPTOMS OF EXPOSURE: A review of available data does not identify any symptoms from exposure not previously mentioned.

AGGRAVATION OF EXISTING CONDITIONS: A review of available data does not identify any worsening of existing conditions.

7. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, if irritation or abnormalities persist, call a physician.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately.

CAUTION: If unconscious, having trouble breathing or in convulsions, do not induce vomiting or give water. Call for medical assistance immediately.

8. ACCIDENTAL RELEASE MEASURES & DISPOSAL

Storage: Keep container tightly closed when not in use.

DISPOSAL:

In Ontario, the waste class under Regulation 347 is: 233L

SMALL SPILLS:

Soak up spill with absorbent material. Place residues in a suitable, covered, properly labeled container. Wash affected area.

LARGE SPILLS:

Contain liquid using absorbent material, by digging trenches or by dyking. Reclaim into recovery or salvage drums or tank truck for proper disposal. Contact approved waste hauler for disposal of contaminated recovered material. Dispose of material in compliance with regulations indicated.

Dispose of wastes in an approved incinerator or waste treatment/disposal site, in accordance with all applicable regulations. Do not dispose of wastes in local sewer or with normal garbage.

ENVIRONMENTAL PRECAUTIONS

This product should NOT be directly discharged into lakes, ponds, streams, waterways or public water supplies.

As a non-hazardous liquid waste, it should be solidified with stabilizing agents (such as sand, fly ash, or cement) so that no free liquid remains before disposal to an industrial waste landfill. A non-hazardous liquid waste can also be incinerated in accordance with local, state, provincial and federal regulations.

9. INDUSTRIAL HYGIENE CONTROL MEASURES

OCCUPATIONAL EXPOSURE LIMITS:

This product does not contain any substance that has an established exposure limit.

Respiratory Protection: None normally required.

For large spills, entry into large tanks, vessels or enclosed small spaces with inadequate ventilation, a positive pressure, self-contained breathing apparatus is recommended.

Ventilation: General ventilation is recommended.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference. Examples of impermeable gloves available on the market are neoprene, nitrile, PVC, natural rubber, viton, and butyl (compatibility studies have not been performed).

If clothing is contaminated, remove clothing and thoroughly wash the affected area. Launder contaminated clothing before reuse.

10. TOXICOLOGICAL PROPERTIES

SENSITIZATION:

This product is not expected to be a sensitizer.

A "LC50-96" Pass/Fail Bioassay test. This test determines the lethality of a fluid on young aquatic organisms. The fluid fails if 50% or more of the animals are dead after 96 hours in the fluid.

96 hour static acute LC50 to Rainbow Trout = Greater than 1,000 mg/L

96 hour no observed effect concentration = 125 mg/L based on no mortality or abnormal effects

96 hour static acute LC50 to Sheepshead Minnow = Greater than 1,000 mg/L

96 hour no observed effect concentration = 1,000 mg/L (highest concentration tested) based on no mortality or abnormal effects.

96 hour static acute LC50 to Mysid Shrimp = 400 mg/L

96 hour no observed effect concentration = 180 mg/L based on no mortality or abnormal effects.

96 hour static acute LC50 to Daphnia Magna = 400 mg/L

96 hour no observed effect concentration = 56 mg/L (lowest concentration tested) based on no mortality or abnormal effects.

Microtoxicity

The Microtox bioassay has been established as the reference test for mud additive toxicity testing.

Test Method: Luminescent Bacteria, IC50@ 15 min

Reference: Appendix 1: Microtox Bioassay Procedure, Drilling Waste Management, Guide G50. 1993. Alberta Energy and Utilities Board, Calgary, AB, Canada.

Sample: Poly Drill 1330, sample #97324-1 for test #970723, 97/05/09 by D. Lintott

Preparation: Sample was diluted to 2 g/L, which formed thick, slightly cloudy liquid. The sample was then centrifuged for 1 hour.

Test Results:

SAMPLE	TREATMENT	%CTL	IC20%	IC50	RESULT
97324-1	None	N/A	14 (9-22)	>91	PASS

The following results are for a 1% aqueous solution of product.

CARCINOGENICITY:

None of the substances in this product are listed as carcinogens by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP) or the American Conference of Government Industrial Hygienists (ACGIH).

HUMAN HAZARD CHARACTERIZATION:

Based on our Hazard Characterization, the potential human hazard is: LOW

ENVIRONMENTAL HAZARD AND EXPOSURE CHARACTERIZATION:

Based on our Hazard Characterization, the potential environmental hazard is: LOW.

11. DEPARTMENT OF TRANSPORTATION INFORMATION

PROPER SHIPPING NAME/HAZARD CLASS MAY VARY BY PACKAGING, PROPERTIES, AND MODE OF TRANSPORTATION. TYPICAL PROPER SHIPPING NAMES FOR THIS PRODUCT ARE:

ALL TRANSPORTATION MODES: PRODUCT IS NOT REGULATED DURING TRANSPORTATION


Shipping Name: Liquid Drilling Additive

Hazard Class: Not hazardous

Cautionary Labeling: None required

14. OTHER INFORMATION

This information contained herein is given in good faith, but no warranty, expressed or implied is made



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
 Calgary, Alberta, Canada T2W-OA8
 (403) 259-5112 FAX (403) 255-7185
 email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME(S): **Poly Drill 1300**

APPLICATION AND USE: FLOCCULANT

DATE ISSUED: April 23, 2007

NFPA 704M/HMIS RATING

Health: 0/1 FLAMMABILITY: 1/1 REACTIVITY: 0/0 OTHER:
 0 = Insignificant 1 = Slight 2 = Moderate 3 = High 4 = Extreme

2. COMPOSITION/INFORMATION ON INGREDIENTS

Based on our hazard evaluation, this product is considered non-hazardous.

3. HAZARDS IDENTIFICATION

CAUTION

May cause irritation with prolonged contact.

Do not get in eyes, on skin, on clothing. Do NOT take internally. Keep container tightly closed. **Water in contact with product will cause slippery floor conditions.** In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. After contact with skin, wash with soap and water.

May evolve oxides of carbon (Cox) under fire conditions. May evolve oxides of nitrogen (NOx) under fire conditions

PRIMARY ROUTES OF EXPOSURE:

Eye, Skin

HUMAN HEALTH HAZARDS – ACUTE

SKIN CONTACT:

May cause irritation with prolonged contact

EYE CONTACT:

May cause irritation with prolonged contact

INGESTION:

Not a likely route of exposure. No adverse effects expected.

INHALATION:

Not a likely route of exposure. Repeated or prolonged exposure may irritate the respiratory tract.

SYSTEMS OF EXPOSURE:**Acute:**

A review of available data does not identify any symptoms from exposure not previously mentioned.

Chronic:

Frequent or prolonged contact with product may defat and dry the skin, leading to discomfort and dermatitis.

AGGRAVATION OF EXISTING CONDITIONS:

A review of available data does not identify any worsening of existing conditions.

HUMAN HEALTH HAZARDS – CHRONIC

No adverse effects expected other than those mentioned above.

4. FIRST AID PROCEDURES

SKIN CONTACT:

Remove contaminated clothing. Wash exposed area with soap and water. If irritation or abnormalities persist, seek medical advice.

EYE CONTACT:

Flush affected area with water. If symptoms develop, seek medical advice

INHALATION:

Remove to fresh air, treat symptomatically. If breathing becomes difficult, give oxygen and seek medical advice.

INGESTION:

Do NOT induce vomiting. If individual is conscious, give milk or water to dilute stomach contents. Keep warm and quiet. Get prompt medical attention. DO NOT attempt to give anything by mouth to an unconscious person.

NOTE TO PHYSICIAN:

Based on the individual reactions of the patient, the physician's judgment should be used to control symptoms and clinical condition.

Flash Point: >100°C

LOWER EXPLOSION LIMIT: Not flammable

UPPER EXPLOSION LIMIT: Not flammable

EXTINGUISHING MEDIA:

Foam, Dry powder, Carbon dioxide, other extinguishing agent suitable for Class B fires

UNSUITABLE EXTINGUISHING MEDIA:

Do not use water unless flooding amounts are available.

FIRE AND EXPLOSION HAZARD:

May evolve oxides of carbon (COx) under fire conditions. May evolve oxides of nitrogen (NOx) under fire conditions.

Water in contact with the product will cause slippery floor conditions.

SPECIAL PROTECTIVE EQUIPMENT FOR FIRE FIGHTING:

In case of fire, wear a full face positive-pressure self contained breathing apparatus and protective suit.

5. FIRE FIGHTING MEASURES

Flash Point: >93 C°
 LOWER EXPLOSION LIMIT: No data available
 UPPER EXPLOSION LIMIT: No data available

AUTOIGNITION TEMPERATURE: No data available

EXTINGUISHING MEDIA:

Foam, Dry powder, Carbon dioxide, Other extinguishing agent suitable for Class B fires.

UNSUITABLE EXTINGUISHING MEDIA:

Do not use water unless flooding amounts are available.

FIRE AND EXPLOSION HAZARD:

In case of fire, wear a full face positive-pressure self contained breathing apparatus and protective suit.

SENSITIVITY TO MECHANICAL IMPACT:

Not expected to be sensitive to mechanical impact.

SENSITIVITY TO STATIC DISCHARGE:

Not expected to be sensitive to static discharge.

6. ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS:

Notify appropriate government, occupational health and safety and environmental authorities. Do not touch spilled material. Stop or reduce any leaks if it is safe to do so. Use personal protective equipment recommended in Section 8 (Exposure Controls/Personal Protection).

METHODS FOR CLEANING UP:

SMALL SPILLS: Soak up spill with absorbent material. Place residues in a suitable, covered, properly labeled container. Wash affected area. **LARGE SPILLS:** Contain liquid using absorbent material by digging trenches or by diking. Reclaim into recovery or salvage drums or tank truck for proper disposal. Dispose of material in compliance with regulations indicated in Section 13 (Disposal Considerations).

ENVIRONMENTAL PRECAUTIONS:

This product should not be directly discharged into lakes, ponds, streams, waterways or public water supplies.

7. HANDLING AND STORAGE

HANDLING:

Do not take internally. Have emergency equipment (for fires, spills, leaks, etc.) readily available. Ensure all containers are labeled. Avoid eye and skin contact.

STORAGE CONDITIONS:

Store separately from oxidizers. Store the containers tightly closed.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

OCCUPATIONAL EXPOSURE LIMITS:

Exposure guidelines have not been established for this product. Available limits for the substance(s) are shown below.

ACGIH/TLV

Substance(s)

Oil Mist

TWA: 5 mg/m³

STEL: 10 mg/m³

OSHA/PEL

Substance(s)

Oil Mist

TWA: 5 mg/m³

STEL: 10 mg/m³

RESPIRATORY PROTECTION:

Due to its low volatility and toxicity, the hazard potential associated with this material is relatively low. Respiratory protection is not normally needed.

ENGINEERING MEASURES:

General ventilation is recommended

EYE PROTECTION:

Wear chemical splash goggles

SKIN PROTECTION:

Wear standard protective clothing.

HAND PROTECTION

Nitrile gloves, PVC gloves.

HYGIENE RECOMMENDATIONS:

Keep an eye wash fountain available. Keep a safety shower available.

HUMAN EXPOSURE CHARACTERIZATION:

Based on our recommended product application and personal protective equipment, the potential human exposure is: Moderate.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State: Liquid

Appearance: Off-white. Opaque.

Odor: Hydrocarbon

Specific Gravity: 1.05 @ 25 °C

Density: 1.05 g/cm³

pH (100%) 8

Viscosity 360 – 900 cps @ 24 °C

Freezing Point: -22 °C

Boiling Point: 96 °C`

Vapor Pressure No data available

Evaporation Rate No data available

Vapor Density	No data available
VOC Content	23.97%

NOTE: These physical properties are typical values for this product and are subject to change.

10. STABILITY AND REACTIVITY

STABILITY:

Stable under normal conditions. Some separation may occur on storage.

HAZARDOUS POLYMERIZATION:

Hazardous polymerization will not occur.

CONDITIONS TO AVOID INSTABILITY:

Protect from freezing.

MATERIALS TO AVOID:

Addition of water results in gelling. Contact with strong oxidizers (e.g. chlorine, peroxides, chromates, nitric acid, perchlorate, concentrated oxygen, permanganate) may generate heat, fires, explosions and/or toxic vapors.

HAZARDOUS DECOMPOSITION PRODUCTS:

Under fire conditions: Oxides of carbon, Oxides of nitrogen

11. TOXICOLOGICAL INFORMATION

The following results are for the product.

ACUTE ORAL TOXICITY:

Species	LD50	Test Descriptor
Rat	>5,000 mg/kg	Product
Rating:	Non-Hazardous	

PRIMARY SKIN IRRITATION:

Draize Score	Test Descriptor
1.5 / 8.0	Product
Rating:	Slightly irritating

PRIMARY EYE IRRITATION:

Draize Score	Test Descriptor
17.3 / 110.0	Product
Rating:	Mildly irritating

SENSITIZATION:

This product is not expected to be a sensitizer.

CARCINOGENICITY:

None of the substances in this product are listed as carcinogens by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP) or the American Conference of Government Industrial Hygienists (ACGIH).

REPRODUCTIVE EFFECTS:

No quantitative data available.

TERTOGENICITY AND EMBROYOTOXICITY:

No quantitative data available.

MUTAGENICITY:

No quantitative data available.

OTHER TOXICITY INFORMATION:

Toxicologically Synergistic Products: None Known.

HUMAN HAZARD CHARACTERIZATION:

Based on our hazard characterization, the potential human hazard is: Low

12. ECOLOGICAL INFORMATION

ECOTOXICOLOGICAL EFFECTS:

The following results are for a 1% aqueous solution of a similar product.

ACUTE FISH RESULTS:

Species	Exposure	LC50	Test Descriptor
Sheepshead Minnow	96.00 hrs	> 1,000 mg/l	1% Aqueous Solution of Product
Rainbow Trout	96.00 hrs	> 1,000 mg/l	1% Aqueous Solution of Product

ACUTE INVERTEBRATE RESULTS:

Species	Exposure	LC50	EC50	Tested Substance
Daphnia magna	48 hours	270 mg/l		1% Aqueous Solution of Product

PERSISTENCY AND DEGRADATION:

Chemical Oxygen Demand (COD): 1,330,000 mg/l

Biological Oxygen Demand (BOD):

Incubation Period	Value	Test Descriptor
5 d	222,000 mg/l	

ENVIRONMENTAL HAZARD AND EXPOSURE CHARACTERIZATION

Based on our hazard characterization, the potential environmental hazard is: Moderate.

Based on our recommended product application and the product's characteristics, the potential environmental exposure is: Low.

13. DISPOSAL CONSIDERATIONS

In Ontario, the waste class under Regulation 347 is: 233L

Dispose of wastes in an approved incinerator or waste treatment/disposal site, in accordance with all applicable regulations. Do not dispose of wastes in local sewer or with normal garbage.

Do not reuse empty containers unless thoroughly cleaned.

14. TRANSPORT INFORMATION

The information in this section is for reference only and should not take the place of a shipping paper (bill of lading) specific to an order. Please note that the proper Shipping Names / Hazard Class may vary by packaging, properties, and mode of Transportation. Typical Proper Shipping Names for this product are as follows:

PRODUCT IS **NOT** REGULATED DURING TRANSPORTATION

15. REGULATORY INFORMATION

NATIONAL REGULATIONS CANADA:

WORKPLACE HAZARDOUS MATERIALS INFORMATION SYSTEM (WHMIS):

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

WHMIS CLASSIFICATION

Not considered a WHMIS controlled product.

CANADIAN ENVIRONMENTAL PROTECTION ACT (CEPA):

The substance(s) in this preparation are included in or exempted from the Domestic Substance List (DSL).

NATIONAL POLLUTANT RELEASE INVENTORY (Npri):

This product does not contain any substances listed in Schedule I of the NPRI at a concentration of one percent or more by weight.

NATIONAL REGULATIONS, USA:

TOXIC SUBSTANCES CONTROL ACT (TSCA):

The substance(s) in this product are included on or exempted from the TSCA 8(b) Inventory (40 CFR 710)

16. DEPARTMENT OF TRANSPORTATION INFORMATION

Shipping Name: Drilling Fluid

Hazard Class: Not hazardous

Hazardous Substances: None

Cautionary Labeling: None required

PRODUCT IS NOT REGULATED DURING TRANSPORTATION


17. OTHER INFORMATION

Based on our recommended use of this product, we have characterized the product's general risk. This information should provide assistance for your own risk management practices. We have evaluated our products risk as follows:

- The human risk is: Low
- The environmental risk is: Low

Any use inconsistent with our recommendations may affect the risk characterization.

The Poly-Drill 1300 material safety data sheet provides health and safety information. The product is to be used in applications consistent with our product literature. Individuals handling this product should be informed of the recommended safety precautions and should have access to this information. For any other uses, exposures should be evaluated so that appropriate handling practices and training programs can be established to insure safe workplace operations.



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
 Calgary, Alberta, Canada T2W-OA8
 (403) 259-5112 FAX (403) 255-7185
 email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME: Poly Drill K-ION
 CHEMICAL DESCRIPTION: Potassium Acetate Solution in water, copolymer of acrylamide with diallyldimethylammonium chloride
 UPDATED: January 17, 2007

2. COMPOSITION/INFORMATION ON INGREDIENTS

Component CAS Reg Number WHMIS

Hazard Percentage:

Copolymer of acrylamide with diallyldimethylammonium chloride is a suspected carcinogen. 26590-05-6 N
 Acrylamide 79-06-1 Y <0.10. This product has a quality assurance of less than 0.1% of the acrylamide monomer.

INGREDIENT	% W/W	TLV	CAS NO
POTASSIUM ACETATE	30-60	N/E	127-08-2

Note: *Recommended

N/E – Not established, N/A-Not applicable

3. PHYSICAL DATA

Boiling Point: >100°C (212 °F) at 760 MMHG
 Specific Gravity (@ 25 Deg.C.): 1.09
 Solubility in Water: Soluble
 pH: 7.0 to 9.0 (1.0% solution)
 Vapor Pressure: <23.5 MMHG at 25°C (77°F)
 Specific Gravity: 1.27 @ 20°C (68°F)
 Freezing Point: -20°C
 Physical State: Viscous liquid
 Appearance and Odor: Red. Characteristic slight odor.

4. FIRE AND EXPLOSION DATA

Flash Point: >93.3°C (200°F)
 Method used: Pensky-Martens Closed Cup
 Conditions of flammability: Will burn after drying
 Hazardous combustion products: Oxides of carbon and nitrogen.
 Upper and Lower flammable limits: No Data
 Extinguishing media: (Small fires): dry chemical, carbon dioxide. Recommended
 (large fire): alcohol foam, universal foam, water spray.

NOT recommended: water jet (frothing possible).

Product will normally not burn unless under severe fire conditions. However, dehydrated residue will burn.

Firefighters should wear NIOSH/MSHA approved self-contained breathing apparatus and full protective clothing.

5. REACTIVITY

Chemical stability: This product is stable under normal handling and storage conditions.

Hazardous Polymerization: Cannot occur.

Incompatible substances: Avoid strong oxidizing and mineral acids.

Hazardous decomposition products: Not applicable.

6. HEALTH HAZARD DATA

These recommendations provide general guidance for handling this product. Because specific work environments and material handling practices vary, safety procedures should be developed for each intended application. While developing safe handling procedures, do not overlook the need to clean equipment.

TOXICITY RATING: Practically non-harmful.

Routes of Exposure and Effects:

SKIN: Slight irritant: prolonged contact may cause skin irritation or dermatitis in some individuals

EYE: Causes moderate irritation, redness, tearing, and swelling.

INHALATION: May cause discomfort or irritation to nasal and respiratory passages.

INGESTION: May cause gastrointestinal irritation, nausea, vomiting and diarrhea.

OTHER: This product contains potassium salts. Ingestion of large amounts (25 or more grams) of potassium salts usually causes a person to vomit. If the person is not suffering from a preexisting kidney and or cardiac conditions, the absorbed potassium salt is excreted in the urine.

This product is slightly irritating to the eyes and could cause prolonged impairment of vision. The degree of injury will depend on the amount of material that gets into the eye and the speed of eye flushing.

Exposure limits: Contains trace acrylamide (SKIN). Exposure limit, TWAEV=0.03 mg/m(ONT. Reg. 654/86).

Contains traces of isopropanol. Exposure limit, TWAEV=400ppm, STEV=500ppm(ONT. Reg. 654/86).

Carcinogenicity: This product contains traces of acrylamide. Acrylamide is listed by IARC(Group 2B) and ACGIH(Group A2) as a possible human carcinogen.

Teratogenicity: Not available.

Mutagenicity: Not available.

7. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. Remove contaminated clothing. Launder contaminated clothing before re-use. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, lifting upper and lower lids occasionally. Get medical attention.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.

8. INDUSTRIAL HYGIENE CONTROL MEASURES

Respiratory Protection: If overexposure has been determined or documented, a NIOSH/MSHA jointly approved air supplied respirator is advised in absence of proper environmental control. OSHA regulations also permit other NIOSH/MSHA respirators under specified conditions. Engineering or administrative controls should be implemented to reduce exposure.

Ventilation: If mist and/or vapors are present, use air purifying respirator or self-contained breathing apparatus, but this is rarely required.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference.

9. HANDLING AND USE PRECTIONS

Storage requirements: keep container closed when no in use. Store in a cool dry location away from oxidizing and reducing agents.

Waste Disposal: product should be disposed of in accordance with applicable local, Provincial and Federal regulations.

Steps must be taken if product is released or spilled: clean spill areas thoroughly to avoid hazardous slippery conditions.

10. TOXICOLOGICAL PROPERTIES

The Microtox bioassay has been established as the reference test for mud additive toxicity testing.

Test Method: Luminescent Bacteria, IC50@ 15 min

Reference: Appendix 1: Microtox Bioassay Procedure, Drilling Waste Management, Guide G50. 1993. Alberta Energy and Utilities Board, Calgary, AB, Canada.

Treatment: pH adjusted to 6.3

Preparation: Sample was diluted to 2 g/L. The sample was then centrifuged for 1 hour.

IC50 Microtox Analysis prepared by HydroQual Laboratories, Calgary, AB--97/07/23 Test#971127, Sample#97556-2

Test Description	IC20	IC50	Pass/Fail
MTX	29 (26 - 32)	>91	PASS

HUMAN HAZARD CHARACTERIZATION:

Based on our Hazard Characterization, the potential human hazard is: LOW

11. DEPARTMENT OF TRANSPORTATION INFORMATION

Shipping Name: Liquid Drilling Fluid

Hazard Class: Not hazardous

Hazardous Substances: None

Cautionary Labeling: None required

12. REGULATORY INFORMATION

Inventory Status:

UNITED STATES (TSCA) Y
 CANADA (DSL) Y
 EUROPE (EINECS/ELINCS) P
 AUSTRALIA (AICS) Y
 JAPAN (MITI) N
 SOUTH KOREA (KECL) Y

Y = All ingredients are on the inventory.

E = All ingredients are on the inventory or exempt from listing.

P = One or more ingredients fall under the polymer exemption or are on the no longer polymer list. All other ingredients are on the inventory or exempt from listing.

N = Not determined or one or more ingredients are not on the inventory and are not exempt from listing.

Inventory Issues: All functional components of this product are listed on the TSCA inventory.

WHMIS Classification: NOT CONTROLLED

This product has been classified in accordance with the hazard criteria of the CPR (Controlled Products Regulations) and the MSDS contains all the information required by the CPR

13. OTHER INFORMATION

National Fire Protection Association Hazard Ratings – NFPA (R):

0	Health Hazard Rating – Minimal
1	Flammability Rating – Slight
0	Instability Rating – Minimal

National Paint & Coating Hazardous Materials Identification System – HMIS (R):

0	Health Hazard Rating – Minimal
1	Flammability Rating – Slight
0	Reactivity Rating – Minimal

Key Legend Information:

ACGIH – American Conference of Governmental Industrial Hygienists

OSHA – Occupational Safety and Health Administration

TLV – Threshold Limit Value

PEL – Permissible Exposure Limit

MTX – Microtox Bioassay Test


TWA – Time Weighted Average

STEL – Short Term Exposure Limit

NTP – National Toxicology Program

IARC – International Agency for Research on Cancer

The information herein is given in good faith but no warranty, expressed or implied, is made.



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
 Calgary, Alberta, Canada T2W-OA8
 (403) 259-5112 FAX (403) 255-7185
 email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME(S): Poly Drill O.B.X.

WHMIS CLASSIFICATION: Non-regulated

TDG Classification: Non dangerous goods

DATE: January 17, 2004

A liquid polymer containing guar gum, mineral oil, vegetable oil, acrylamide copolymer and a surfactant: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations.

2. PHYSICAL DATA

Boiling Point: Not available

Specific Gravity: 0.9 g/cm

Solubility in Water: disperses in water(forms viscous, slippery solution).

pH: 3.8 (1% concentration)

Density (g/ml): Not available

Physical State: Liquid

Appearance and Odor: Brown. Odor slight.

3. FIRE AND EXPLOSION DATA

Flash Point (method used): (PMCC) greater than 100 C.

Conditions of flammability: Very low risk.

Hazardous combustion products: None known.

Upper and Lower flammable limits: Not available.

Extinguishing media: Carbon dioxide, dry chemicals, foam, in preference to water spray

4. REACTIVITY

Chemical stability: Stable under normal conditions.

Hazardous Polymerization: Will not occur.

Incompatible substances: Avoid strong oxidants such as liquid chlorine, concentrated oxygen, sodium or calcium hypo chloride.

Hazardous decomposition products: None known

5. HEALTH HAZARD DATA

TOXICITY RATING: Practically non-harmful.

Routes of Exposure and Effects:

SKIN: Slight irritant: prolonged contact may cause skin irritation or dermatitis in some individuals

EYE: No effects of exposure expected with the exception of possible irritation.

INHALATION: Due to low volatility of mineral distillates a small inhalation hazard exists.

INGESTION: can cause nausea, vomiting, cramps, diarrhea
 Chronic exposure limits: None
 Sensitization of product: Not suspected to be a sensitizer.
 Teratogenicity: Not available.
 Mutagenicity: Not available.
 Carcinogenicity: None of the components of this product are listed as carcinogens by IARC and ACGIH

6. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. Remove contaminated clothing. Launder contaminated clothing before re-use. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, lifting upper and lower lids occasionally. Get medical attention.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.

8. INDUSTRIAL HYGIENE CONTROL MEASURES

Respiratory Protection: None normally required.

Ventilation: If mist and/or vapors are present, use air purifying respirator or self-contained breathing apparatus, but this is rarely required.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference.

7. HANDLING AND USE PRECTIONS

Storage requirements: keep container closed when no in use. Store in a cool dry location away from oxidizing and reducing agents.

Waste Disposal: product should be disposed of in accordance with applicable local, Provincial and Federal regulations.

Steps must be taken if product is released or spilled: clean spill areas thoroughly to avoid hazardous slippery conditions.

8. TOXICOLOGICAL PROPERTIES

G50 Microtox Analysis prepared by HydroQual Laboratories, Calgary, AB--97/6/26 Test#970978:

Test Description	EC20	EC50	Pass/Fail
MTX	>91	>91	PASS

9. DEPARTMENT OF TRANSPORTATION INFORMATION

Shipping Name: Liquid Drilling Additive

Hazard Class: Not hazardous

Hazardous Substances: None

Cautionary Labeling: None required



MATERIAL SAFETY DATA SHEET

SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product Name:	Portland Cement, GU (General use hydraulic cement, formerly Normal Portland Cement), HE (High early-strength hydraulic cement) and HS (High sulphate-resistant hydraulic cement).		
CAS #:	65997-15-1		
Product Use:	Preparation of concrete and mortar.		
MSDS Information:	This MSDS was produced in November, 2002, and replaces any previous versions. This MSDS covers all types of portland cement. Individual composition of constituents will vary within the range shown in Section 2.		
Product Code:	Not Applicable.		
Chemical Family:	Calcium compounds. Calcium silicate compounds and other calcium compounds containing iron and aluminum make up the majority of this product.		
Chemical Name And Synonyms:	Portland cement. Portland cement is also known as hydraulic cement and/or normal portland cement.		
Formula:	This product consists of finely ground portland cement clinker, gypsum and limestone (for some products).		
Supplier/Manufacturer:	Lehigh Inland Cement Limited P.O. Box 3961, Station D, 12640 - 156 Street Edmonton, Alberta, Canada, T5L 4P5		
			Telephone (780) 420 2500
Emergency Contact Information:	Lehigh Inland Cement Limited P.O. Box 3961, Station D, 12640 - 156 Street Edmonton, Alberta, Canada, T5L 4P5		
			Telephone (780) 420 2541

SECTION 2 - COMPOSITION/INFORMATION ON INGREDIENTS

Portland Cement Exposure Limits:	ACGIH TLV-TWA	10 mg total dust/m ³
	OSHA PEL-TWA	15 mg total dust/m ³
	OSHA PEL-TWA	5 mg respirable dust/m ³

Portland Cement Ingredients & Their Exposure Limits:

Ingredient	CAS#	% By Weight	ACGIH TLV-TWA	OSHA PEL-TWA
Calcium Silicates	various	60-80%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Gypsum	7778-18-9	3-7%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Crystalline Silica	14808-60-7	less than 0.1%	0.10 mg respirable quartz/m ³ NIOSH REL (8-hour TWA) = 0.05 mg respirable quartz dust/m ³	(10 mg respirable dust/m ³)/(percent silica+2)
Calcium Carbonate	1317-65-3	0-5%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Magnesium Oxide	1309-48-4	1-4%	10 mg total dust/m ³	10 mg total dust/m ³
Calcium Oxide	1305-78-8	0.5-1.5%	2 mg total dust/m ³	5 mg total dust/m ³

Trace Elements:

Portland cement is made from materials mined from the earth and is processed using energy provided by fuels. Trace amounts of chemicals, some of which may be potentially harmful, might be detected during chemical analysis. For example, in addition to the ingredients listed above, portland cement may contain potassium and sodium sulfate compounds, chromium compounds (including up to 0.003% hexavalent chromium) and nickel compounds.

MATERIAL SAFETY DATA SHEET

SECTION 3 - HAZARDS IDENTIFICATION

Emergency Overview:

Portland cement is a light gray powder that poses little immediate hazard. A single short term exposure to the dry powder is not likely to cause serious harm. However, exposure of sufficient duration to wet portland cement can cause serious, potentially irreversible tissue (skin or eye) destruction in the form of chemical (caustic) burns, including third degree burns. The same type of tissue destruction can occur if wet or moist areas of the body are exposed for sufficient duration to dry portland cement.

Potential Health Effects:

- **Relevant routes of exposure are:**

Eye contact, skin contact, inhalation, and ingestion.

Effects Resulting From EYE CONTACT:

Exposure to airborne dust may cause immediate or delayed irritation or inflammation.

Eye contact by larger amounts of dry powder or splashes of wet portland cement may cause effects ranging from moderate eye irritation to chemical burns and blindness. Such exposures require immediate first aid (see Section 4) and medical attention to prevent significant damage to the eye.

Effects Resulting From SKIN CONTACT:

Discomfort or pain cannot be relied upon to alert a person to a hazardous skin exposure. Consequently, the only effective means of avoiding skin injury or illness involves minimizing skin contact, particularly contact with wet cement. Exposed persons may not feel discomfort until hours after the exposure has ended and significant injury has occurred.

Exposure to dry portland cement may cause drying of the skin with consequent mild irritation or more significant effects attributable to aggravation of other conditions. Dry portland cement contacting wet skin or exposure to moist or wet portland cement may cause more severe skin effects including thickening, cracking, or fissuring of the skin. Prolonged exposure can cause severe skin damage in the form of (caustic) chemical burns.

Some individuals may exhibit an allergic response upon exposure to portland cement, possibly due to trace amounts of chromium. The response may appear in a variety of forms ranging from a mild rash to severe skin ulcers. Persons already sensitized may react to their first contact with the product. Other persons may first experience this effect after years of contact with portland cement products.

Effects Resulting From INHALATION:

Portland cement may contain trace amounts of crystalline silica. Prolonged exposure to respirable free crystalline silica may aggravate other lung conditions. It also may cause delayed lung injury including silicosis, a disabling and potentially fatal lung disease, and/or other diseases. (Also see "Carcinogenic Potential" below.)

Exposure to portland cement may cause irritation to the moist mucous membranes of the nose, throat, and upper respiratory system. It may also leave unpleasant deposits in the nose.

Effects Resulting From INGESTION:

Although small quantities of dust are not known to be harmful, ill effects are possible if larger quantities are consumed. Portland cement should not be eaten.

- **Carcinogenic Potential:**

Portland cement is not listed as a carcinogen by NTP, OSHA, or IARC. It may, however, contain trace amounts of substances listed as carcinogens by these organizations.

Crystalline silica, a potential trace level contaminant in portland cement, is now classified by IARC as a known human carcinogen (Group 1). NTP has characterized respirable silica as "reasonably anticipated to be [a] carcinogen".

- **Medical Conditions That May Be Aggravated By Inhalation Or Dermal Exposure:**

Pre-existing upper respiratory and lung diseases.
Unusual (hyper) sensitivity to hexavalent chromium (chromium⁺⁶) salts.



MATERIAL SAFETY DATA SHEET

SECTION 4 - FIRST-AID MEASURES

Eyes:

Immediately flush eyes thoroughly with water. Continue flushing for at least 15 minutes, including under lids, to remove all particles. Call physician immediately.

Skin:

Wash skin with cool water and pH-neutral soap or a mild detergent intended for use on skin. Seek medical treatment in all cases of prolonged exposure to wet cement, cement mixtures, liquids from fresh cement products, or prolonged wet skin exposure to dry cement.

Inhalation Of Airborne Dust:

Remove to fresh air. Seek medical help if coughing and other symptoms do not subside. ("Inhalation" of gross amounts of portland cement requires immediate medical attention.)

Ingestion:

Do not induce vomiting. If conscious, have the victim drink plenty of water and call a physician immediately.

SECTION 5 - FIRE-FIGHTING MEASURES

Flammability:	Not Flammable.
Flash Point:	Not Applicable.
Lower Explosive Limit:	Not Applicable.
Upper Explosive Limit:	Not Applicable.
Auto ignition Temperature:	Not Applicable.
Sensitivity To Static Discharge:	Not Applicable.
Sensitivity To Impact:	Not Applicable.
Extinguishing Media:	Not Applicable.
Special Fire-Fighting Procedures:	None.
Hazardous Combustion Products:	Not Applicable.
Unusual Fire And Explosion Hazards:	Not Applicable.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Collect dry material using a scoop. Avoid actions that cause dust to become airborne. Avoid inhalation of dust and contact with skin. Wear appropriate personal protective equipment as described in Section 8.

Scrape up wet material and place in an appropriate container. Allow the material to "dry" before disposal. Do not attempt to wash portland cement down drains.

Dispose of waste material according to local, provincial, state and federal regulations.

SECTION 7 - HANDLING AND STORAGE

Keep portland cement dry until used. Normal temperatures and pressures do not affect the material.

Promptly remove dusty clothing or clothing which is wet with cement fluids and launder before reuse. Wash thoroughly after exposure to dust or wet cement mixtures or fluids.



MATERIAL SAFETY DATA SHEET

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

Eye Protection:

When engaged in activities where cement dust or wet cement or concrete could contact the eye, wear safety glasses with side shields or goggles. In extremely dusty environments and unpredictable environments, wear unvented or indirectly vented goggles to avoid eye irritation or injury. Contact lenses should not be worn when working with portland cement or fresh cement products.

Skin Protection:

Prevention is essential to avoiding potentially severe skin injury. Avoid contact with unhardened (wet) portland cement products. If contact occurs, promptly wash affected area with soap and water. Where prolonged exposure to unhardened portland cement products might occur, wear impervious clothing and gloves to eliminate skin contact. Where required, wear boots that are impervious to water to eliminate foot and ankle exposure.

Do not rely on barrier creams; barrier creams should not be used in place of gloves.

Periodically wash areas contacted by dry portland cement or by wet cement or concrete fluids with a pH-neutral soap. Wash again at the end of work. If irritation occurs, immediately wash the affected area and seek treatment. If clothing becomes saturated with wet concrete, it should be removed and replaced with clean dry clothing.

Respiratory Protection:

Avoid actions that cause dust to become airborne. Use local or general ventilation to control exposures below applicable exposure limits.

Use NIOSH/MSHA-approved (under 30 CFR 11) or NIOSH-approved (under 42 CFR 84 after July 10, 1998) respirators in poorly ventilated areas, if an applicable exposure limit is exceeded, or when dust causes discomfort or irritation.

Ventilation:

Use local exhaust or general dilution ventilation to control exposure within applicable limits.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance:	White to gray powder.
Odor:	No distinct odor.
Odor Threshold:	Not applicable.
Physical State:	Solid (powder).
pH (as a solid):	Not applicable.
pH (in water) (ASTM D 1293-95):	12 to 13
Solubility In Water:	Slightly soluble (0.1 to 1.0 %).
Vapor Pressure:	Not applicable.
Vapor Density:	Not applicable.
Boiling Point:	Not applicable (i.e., >1000°C).
Freezing Point:	Not applicable.
Melting Point:	Not applicable.
Specific Gravity (H₂O = 1.0):	3.15
Evaporation Rate:	Not applicable.
Coeff. Water/Oil Dist.:	Not applicable.

SECTION 10 - STABILITY AND REACTIVITY

Stability:	Stable
Conditions to avoid:	Unintentional contact with water.
Incompatibility:	Portland cement reacts with water to produce a caustic solution, pH 12 to pH 13. Wet portland cement is alkaline. As such it is incompatible with acids, ammonium salts and aluminum metal. Aluminum powder and other alkali and alkaline earth elements will react in wet mortar or concrete, liberating hydrogen gas. Portland cement dissolves in hydrofluoric acid producing corrosive silicon tetrafluoride gas. Silicates react with powerful oxidizers such as fluorine, chlorine, trifluoride and oxygen difluoride.



MATERIAL SAFETY DATA SHEET

SECTION 10 - STABILITY AND REACTIVITY (CONTINUED)

Hazardous Decomposition: Will not spontaneously occur. Adding water results in hydration and produces (caustic) calcium hydroxide.

Hazardous Polymerization: Will not occur.

SECTION 11 - TOXICOLOGICAL INFORMATION

Effects Of Acute Exposure:

Portland cement and wet portland cement mixtures can dry the skin, cause alkali burns and irritate the eyes and upper respiratory tract. Ingestion can cause irritation of the throat.

Effects Of Chronic Exposure:

Portland cement dust can cause inflammation of the tissue lining the interior of the nose and the cornea (white) of the eye.

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: No recognized unusual toxicity to plants or animals.
Relevant Physical And Chemical Properties: See Sections 9 and 10.

SECTION 13 - DISPOSAL CONSIDERATIONS

Dispose of waste material according to local, provincial, state and federal regulations. (Since portland cement is stable, uncontaminated material may be saved for future use.)

Dispose of bags in an approved landfill or incinerator.

SECTION 14 - TRANSPORT INFORMATION

Hazardous materials description/proper shipping name: Portland cement is not hazardous under the TDG Act (Canada) or DOT regulations (USA).
Hazard Class: Not applicable.
Identification Number: Not applicable.
Required Label Text: Not applicable.
Hazardous substances/reportable quantities (RO): Not applicable.

SECTION 15 - REGULATORY INFORMATION

Status under USDOL-OSHA Hazard Communication Rule, 29 CFR 1910.1200:

Portland cement is considered a "hazardous chemical" under this regulation, and should be part of any hazard communication program.

Status under CERCLA/Superfund, 40 CFR 117 and 302:

Not listed.

Hazard Category under SARA (Title III), Sections 311 and 312:

Portland cement qualifies as a "hazardous substance" with delayed health effects.

Status under SARA (Title III), Section 313:

Not subject to reporting requirements under Section 313.



MATERIAL SAFETY DATA SHEET

SECTION 15 - REGULATORY INFORMATION (CONTINUED)

Status under TSCA (as of May 1997):

Some substances in portland cement are on the TSCA inventory list.

Status under the Federal Hazardous Substances Act:

Portland cement is a "hazardous substance" subject to statutes promulgated under the subject act.

Status under California Proposition 65:

This product contains chemicals (trace metals) known to the State of California to cause cancer, birth defects or other reproductive harm. California law requires the manufacturer to give the above warning in the absence of definitive testing to prove the defined risks do not exist.

Status under Canadian Environmental Protection Act:

Not listed.

Status under WHMIS:

Portland cement is considered to be a hazardous material under the Hazardous Products Act as defined by the Controlled Products Regulations and is therefore subject to the labeling and MSDS requirements of the Workplace Hazardous Materials Information System (WHMIS).

This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

SECTION 16 - OTHER INFORMATION

Prepared By:	Robin Cowdrey
Approved By:	Bob Rimes
Approval Date or Revision Date:	September 1, 2004
Date Of Previous MSDS:	November 1, 2002
MSDS Number:	Not Applicable

Other Important Information:

Portland cement should only be used by knowledgeable persons. A key to using the product safely requires the user to recognize that portland cement chemically reacts with water, and that some of the intermediate products of this reaction (that is, those present while a portland cement product is "setting") pose a far more severe hazard than does portland cement itself.

While the information provided in this material safety data sheet is believed to provide a useful summary of the hazards of portland cement as it is commonly used, the sheet cannot anticipate and provide all of the information that might be needed in every situation. Inexperienced product users should obtain proper training before using this product.

In particular, the data furnished in this sheet does not address hazards that may be posed by other materials mixed with portland cement to produce portland cement products. Users should review other relevant material safety data sheets before working with this portland cement or working on portland cement products, for example, portland cement concrete.

No representations or warranties with respect to the accuracy or correctness of this information, or of any kind or nature whatsoever are given, made or intended by Lehigh Inland Cement Limited. No legal responsibility whatsoever is assumed for this information, or for any injuries or damages, however caused which may result from the use of this information. This information is offered solely for informational purposes and is subject to your own independent investigation and verification.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	A, B-1		

Section 1. Chemical Product and Company Identification

Product Name	PROPANE	Code	W222 SAP: 169
Synonym	Propane HD-5, Propane commercial, Liquefied Petroleum Gas (LPG), C3H8, CGSB Propane Grade 1, CGSB Propane Grade 2, odourized propane, stench propane, automotive propane.	Validated on	9/28/2006.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Propane is used as a fuel gas, refrigerant, automotive fuel and as a raw material for organic synthesis. The grade determines the propane content. It is supplied as pressurized liquid in tanks.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
HD-5 Propane	74-98-6	>90	1000 ppm	Not established	Not established
Propane	115-07-1	<5	500 ppm	Not established	Not established
Propene					
Commercial Propane	74-98-6	>75	1000 ppm	Not established	Not established
Propane	115-07-1	<20	500 ppm	Not established	Not established
Propene					
Both grades may contain:					
Ethane	74-84-0	<6	1000 ppm	Not established	Not established
Butane +	106-97-8	<5	1000 ppm	Not established	Not established
Manufacturer Recommendation	At high concentrations, can displace oxygen and cause asphyxiation. A minimum requirement of 19.5% of oxygen at sea level (148 torr O ₂ , dry air) is recommended.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	The product is contained under pressure. Do not puncture, incinerate or heat container as contents may explode. Flammable gas. Exercise caution when handling this material. At high concentrations, can displace oxygen and cause asphyxiation. A minimum requirement of 19.5% of oxygen at sea level (148 torr O ₂ , dry air) is recommended. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Contact with gas or liquified gas may cause burns and frostbite. Ingestion is not an applicable route of exposure for gases. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	No effects expected. If irritation does occur, remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice. If frostbite has occurred, quickly remove victim from source of contamination. Immediately and briefly, flush with lukewarm, gently flowing water. DO NOT attempt to rewarm. Cover both eyes with a sterile dressing. DO NOT allow victim to drink alcohol or smoke. Quickly transport victim to an emergency care facility.
Skin Contact	As quickly as possible, remove contaminated clothing, shoes and leather goods (e.g., watchbands, belts, etc.). No health effects expected. If irritation does occur, flush with lukewarm, gently flowing water for 5 minutes. If irritation persists, obtain medical advice. If frostbite has occurred, quickly remove victim from source of contamination and briefly flush with lukewarm, gently flowing water. DO NOT attempt to rewarm the affected area on site. DO NOT rub area or apply direct heat. Gently remove clothing or jewellery that may restrict circulation. Carefully cut around any clothing that sticks to the skin, and remove the rest of the garment. Loosely cover the affected area with a sterile dressing. DO NOT allow victim to drink alcohol or smoke. Quickly transport victim to an emergency care facility.

PROPANE		Page Number: 2
Inhalation	If symptoms are experienced remove source of contamination or move victim to fresh air and obtain medical advice.	
Ingestion	Ingestion is not an applicable route of exposure for gases.	
Note to Physician	Not available	

Section 5. Fire-fighting Measures			
Flammability	Class I - flammable gas (NFPA).	Flammable Limits	Lower: 2.1%; Upper: 9.5%, (NFPA).
Flash Points	CLOSED CUP: -104°C (-155°F).	Auto-Ignition Temperature	450°C (842°F), (NFPA).
Fire Hazards in Presence of Various Substances	Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapours may generate static charge causing ignition. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapour explosion hazard indoors, outdoors or in sewers. Propane may form explosive mixtures with air.
Products of Combustion	Carbon oxides (CO, CO ₂), acrid smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG2004, GUIDE 115, Flammable Gas: CAUTION: This product has a low flash point, use of water spray when fighting fire may be inefficient. SMALL FIRE: Use DRY chemicals, CO ₂ , water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. Self-contained breathing apparatus (SCBA) will be required if approaching the fire from downwind, or to enter enclosed areas or buildings. Handle damaged cylinders with extreme care.		

Section 6. Accidental Release Measures	
Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Notify appropriate authorities immediately. Evacuate non-essential personnel. Stop leak if safe to do so. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment.

Section 7. Handling and Storage	
Handling	EXTREMELY FLAMMABLE GAS. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours. Wear proper personal protective equipment (See Section 8). Rapid escape of vapour may generate static charge causing ignition. Use spark-proof electrical equipment. Do not allow escaping compressed gas or liquid to come in contact with skin or eyes as it can cause frostbite. SPECIAL PRECAUTIONS: Sludges and tank scale from propane storage tanks, trucks and rail cars, and filters/screens may contain naturally occurring radioactive material ("NORM") in the form of lead 210. Similarly, equipment used for the transfer of propane such as product pipelines, pumps and compressors, may have detectable levels of radioactive lead 210 on inner surfaces. Workers involved in cleaning, repair or other maintenance on inner surfaces of such equipment should avoid breathing dust generated from such activities. Suitable codes of practice should be developed for these activities, detailing appropriate occupational hygiene and disposal practices.
Storage	Store away from incompatible and reactive materials (See section 5 and 10). Store away from heat and sources of ignition. Store as flammable material. Compressed gases should be stored in a separate safety storage cabinet or room. Avoid direct sunlight. Keep container tightly closed. Store in dry, cool, well-ventilated area. Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection	
Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.)
Respiratory	Always wear NIOSH-approved self-contained breathing apparatus when handling this material.

Hands Wear appropriate chemically protective gloves. Wear insulated gloves to prevent frostbite.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Gas at room temperature; liquid when stored under pressure.	Viscosity	Not applicable
Colour	Colourless.	Pour Point	Not applicable.
Odour	Propane is an odourless gas. Odourized propane will contain up to 28 g ethyl mercaptan per 1000 L of propane.	Softening Point	Not applicable.
Odour Threshold	Odour is not an adequate warning to prevent overexposure to propane. Prolonged exposure to mercaptans can cause olfactory desensitization.	Dropping Point	Not applicable.
Boiling Point	-42°C (-44°F)	Penetration	Not applicable.
Density	508 kg/m ³ @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available
Vapour Density	1.56 (air=1)	Ionicity (in water)	Not available
Vapour Pressure	10763 mmHg (1435 kPa) @ 38°C (100°F)	Dispersion Properties	Not available
Volatility	Volatile	Solubility	Slightly soluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and halogenated compounds.	Decomposition Products	May release CO _x , acrid smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Inhalation, skin contact and eye contact.
Acute Lethality	Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: <u>Propene (115-07-1):</u> Acute inhalation toxicity (LC50): >50000 ppm/4h (rat). <u>Butane (106-97-8):</u> Acute inhalation toxicity (LC50): 276000 ppm/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Contact with gas or liquefied gas may cause burns and frostbite to the skin.
Inhalation Route:	At high concentrations, can displace oxygen and cause asphyxiation. A minimum requirement of 19.5% of oxygen at sea level (148 torr O ₂ , dry air) is recommended. Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion is not an applicable route of exposure for gases.
Eye Irritation/Inflammation:	Contact with gas or liquefied gas may cause burns and frostbite to the eyes.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.

PROPANE		Page Number: 4
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.	
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.	
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH.	
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.	
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.	
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	No additional remark.	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			

Section 13. Disposal Considerations	
Waste Disposal	Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information			
TDG Classification	PROPANE, 2.1, UN1978 (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.

Section 15. Regulatory Information																																
Other Regulations	This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																															
	All components of this formulation are listed on the US EPA-TSCA Inventory.																															
	All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																															
	This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																															
	Please contact Product Safety for more information.																															
DSD/DPD (Europe)	Not evaluated.	HCS (U.S.A.)	HCS Class: Flammable gas.																													
ADR (Europe) (Pictograms)	NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms)	Not evaluated for transport Non évalué pour le transport																													
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>1*</td></tr><tr><td>Fire Hazard</td><td>4</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>K</td></tr></table>	Health Hazard	1*	Fire Hazard	4	Reactivity	0	Personal Protection	K	NFPA (U.S.A.)	<table><tr><td rowspan="4">Health</td><td>4</td><td>Fire Hazard</td></tr><tr><td>1</td><td>0</td><td>Reactivity</td></tr><tr><td colspan="2">Specific hazard</td></tr><tr><td colspan="2"></td></tr></table>	Health	4	Fire Hazard	1	0	Reactivity	Specific hazard				<table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr><tr><td></td><td>3 High</td></tr><tr><td></td><td>4 Extreme</td></tr></table>	Rating	0 Insignificant		1 Slight		2 Moderate		3 High		4 Extreme
Health Hazard	1*																															
Fire Hazard	4																															
Reactivity	0																															
Personal Protection	K																															
Health	4	Fire Hazard																														
	1	0	Reactivity																													
	Specific hazard																															
Rating	0 Insignificant																															
	1 Slight																															
	2 Moderate																															
	3 High																															
	4 Extreme																															

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemical Hazard Information and Packaging Approved Supply List
 COD - Chemical Oxygen Demand
 CPR - Controlled Products Regulations
 DOT - Department of Transportation (U.S.A.)
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substance or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List (Canada)
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning And Community Right-To-Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide, and Rodenticide Act

HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer
 IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TLm - Median Tolerance Limit
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDSInternet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 9/28/2006.

Data entry by Product Safety - DSR.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	SNOWMOBILE MOTOR OIL	Code	460-401-8, PSNOL
Synonym	Not available	Validated on	5/28/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Low ash engine oil specifically designed to lubricate two-cycle snowmobile engine		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Severely hydrotreated paraffinic oil and additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: 152°C (305.6°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid inhalation and skin contact especially when handling used oil. Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	21.1 cSt @ 40°C, 4.5 cSt @ 100°C, VI=127.
Colour	Blue-green	Pour Point	<-54°C
Odour	Mild petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.88 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, reducing agents and acids.	Decomposition Products	May release COx, NOx, aldehydes, methacrylate monomers, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.




SNOWMOBILE MOTOR OIL		Page Number: 3
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.	
Oral Route:	Low toxicity; has laxative effect.	
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.	
Immunotoxicity:	Not available	
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.	
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.	
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.	
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.	
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.	
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.	
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.	
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.	
Carcinogenicity (IRIS):	Not available	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	No additional remark.	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations	
Waste Disposal	Spent/used/waste oil may meet the requirements of a hazardous waste. Consult your local or regional authorities. Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations.

Section 14. Transport Information			
TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.

Section 15. Regulatory Information			
Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>		
DSD/DPD (Europe)	Not classified under the Dangerous Substances or Dangerous Preparations Directives.	HCS (U.S.A.)	Not controlled under the HCS (United States).

SNOWMOBILE MOTOR OIL				Page Number: 4			
ADR (Europe) (Pictograms)				DOT (U.S.A) (Pictograms)			
HMIS (U.S.A.)	Health Hazard	1	NFPA (U.S.A.)		Fire Hazard Reactivity Specific hazard	Rating	0 Insignificant
	Fire Hazard	1					1 Slight
	Reactivity	0					2 Moderate
	Personal Protection	B					3 High
							4 Extreme

Section 16. Other Information

References

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials ()
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLm - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752








Prepared by Product Safety - TAR on 5/28/2001.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B	   	

Section 1. Chemical Product and Company Identification

Product Name	STOVE OIL	Code	W107; SAP: 154
Synonym	Type 1 Heating Oil, #1 Heating Oil, #1 Furnace Oil, #1 Diesel Fuel, Switch Heater Fuel, Tobacco Curing Oil, Seasonal Furnace Oil, ThermoClean, Economy Diesel, Farm Diesel	Validated on	2/5/2007.
Manufacturer	PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Stove Oils are light distillate fuels suitable for use in liquid fuel burning equipment without preheating.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Distillates (petroleum), hydrodesulfurized middle	64742-80-9	100	Not established	Not established	Not established
Kerosine (petroleum), hydrodesulfurized	64742-81-0		200 mg/m ³	Not established	Not established
Fuels, diesel	68334-30-5		100 mg/m ³	Not established	Not established
Fuel oil no. 2	68476-30-2		100 mg/m ³	Not established	Not established
Manufacturer Recommendation	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 15-20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately.
Skin Contact	Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 15-20 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility.
Note to Physician	Not available.

Section 5. Fire-fighting Measures

Flammability	Combustible liquid.	Flammable Limits	Lower: 0.7% Upper: 6%
Flash Points	Closed cup: $\geq 45^{\circ}\text{C}$ (113°F) [Closed Cup]	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	<p>NAERG2004, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Evacuate non-essential personnel. Ventilate area. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. Ensure clean-up personnel wear appropriate personal protective equipment.
----------------------------------	---

Section 7. Handling and Storage

Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Avoid confined spaces and areas with poor ventilation. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.)

STOVE OIL		Page Number: 3
Respiratory	A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.	
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): nitrile, neoprene, polyvinyl alcohol (PVA), fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.	
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.	

Section 9. Physical and Chemical Properties			
Physical State and Appearance	Bright oily liquid.	Viscosity	1.3 - 4.1 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown (may be dyed for taxation purposes).	Pour Point	Not available.
Odour	Mild petroleum oil like.	Softening Point	Not available.
Odour Threshold	Not available.	Dropping Point	Not available.
Boiling Point	150 to 371°C (302 to 699.8°F)	Penetration	Not available.
Density	0.8 to 0.88 kg/L @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available.
Vapour Density	4.5 [Air = 1]	Ionicity (in water)	Not available.
Vapour Pressure	1 kPa (7.5 mm Hg) @ 20°C (68°F)	Dispersion Properties	Not available.
Volatility	Semivolatile to volatile.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity			
Corrosivity	Not available.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information	
Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<p>Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below:</p> <p><u>Distillates (petroleum), hydrosulfurized middle (64742-80-9):</u> Acute Inhalation toxicity (LC50): 4600 mg/m³/4h (rat)</p> <p><u>Kerosine (petroleum), hydrosulfurized (64742-81-0):</u> Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >2000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >5000 mg/m³/4h (rat)</p> <p><u>Fuels, diesel (68334-30-5):</u> Acute Oral toxicity (LD50): 7500 mg/kg (rat) Acute Dermal toxicity (LD50): 24500 mg/kg (mouse)</p> <p><u>Fuel oil no. 2 (68476-30-2):</u> Acute Oral toxicity (LD50): 12000 mg/kg (rat)</p>
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations)
Continued on Next Page	
Internet: www.petro-canada.ca/msds	
Available in French	

STOVE OIL		Page Number: 4
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.	
Immunotoxicity:	Not available.	
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.	
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.	
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.	
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.	
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.	
Carcinogenicity (ACGIH):	Considered to be A3 by the ACGIH (Kerosine (petroleum), hydrosulfurized; Fuels, diesel; Fuel oil no. 2) (See Other Considerations)	
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.	
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.	
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.	
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.	
Other Considerations	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).	

Section 12. Ecological Information			
Environmental Fate	Not available.	Persistence/Bioaccumulation Potential	Not available.
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks No additional remark.			

Section 13. Disposal Considerations	
Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information			
TDG Classification	FUEL OIL, 3, UN1202, PGIII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																													
		All components of this formulation are listed on the US EPA-TSCA Inventory.																													
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																													
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																													
		Please contact Product Safety for more information.																													
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).																										
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)	Not evaluated for transport Non évalué pour le transport																										
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>2</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>		Health Hazard	2*	Fire Hazard	2	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health		<table><tr><td>2</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr><tr><td>0</td><td>Specific hazard</td></tr></table>	2	Fire Hazard	2	Reactivity	0	Specific hazard	<table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr><tr><td></td><td>3 High</td></tr><tr><td></td><td>4 Extreme</td></tr></table>	Rating	0 Insignificant		1 Slight		2 Moderate		3 High		4 Extreme
Health Hazard	2*																														
Fire Hazard	2																														
Reactivity	0																														
Personal Protection	H																														
2	Fire Hazard																														
2	Reactivity																														
0	Specific hazard																														
Rating	0 Insignificant																														
	1 Slight																														
	2 Moderate																														
	3 High																														
	4 Extreme																														

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark		
Glossary	ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials BOD5 - Biological Oxygen Demand in 5 days CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemical Hazard Information and Packaging Approved Supply List COD - Chemical Oxygen Demand CPR - Controlled Products Regulations DOT - Department of Transportation (U.S.A.) DSCl - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substance or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List (Canada) EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning And Community Right-To-Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide, and Rodenticide Act		
For Copy of MSDS Internet: www.petro-canada.ca/msds Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228 For Product Safety Information: (905) 804-4752		HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLV-TWA - Threshold Limit Value-Time Weighted Average TLm - Median Tolerance Limit TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System	
		Prepared by Product Safety - JDW on 2/5/2007. Data entry by Product Safety - JDW.	

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Data Sheet

5700 Yonge Street, Suite 1210
Toronto, Ontario, Canada
M2M 4K2

SECTION 1 - PRODUCT IDENTIFICATION AND USE

PRODUCT NAME:	TILEX® SOAP SCUM REMOVER - Reg. No. 24797	PRODUCT IDENTIFICATION NUMBER:	Not applicable.
PRODUCT USE:	Spray bathroom cleaner and disinfectant.		
MANUFACTURER		SUPPLIER	
The Clorox Company of Canada, Ltd. 5700 Yonge Street, Suite 1210 Toronto, Ontario M2M 4K2		The Clorox Company of Canada, Ltd. 5700 Yonge Street, Suite 1210 Toronto, Ontario M2M 4K2	
EMERGENCY PHONE NO.: 1-800-446-1014		EMERGENCY PHONE NO.: 1-800-446-1014	

SECTION 2 - HAZARDOUS INGREDIENTS

Hazardous Ingredient	% (w/w)	CAS Number	LD50 of Material (Specify Species & Route)	LC50 of Material (Specify Species)
potassium metadiaminetetraacetate	3-7	5964-35-2	Not available.	Not available.
ethylene glycol monobutyl ether	3-7	112-34-5	5.7 g/kg (rat, oral) 2.7 g/kg (rabbit, dermal)	Not available.
yl (C ₁₂ -C ₁₈) dimethylbenzylammonium chloride	0.1-0.2	68391-01-5	Not available.	Not available.
yl (C ₁₂ -C ₁₈) thylethylbenzylammonium chloride	0.1-0.2	68556-79-6	Not available.	Not available.

SECTION 3 - PHYSICAL DATA

Physical State: Liquid	Odour & Appearance: Clear, thin liquid with lemon odor.	Odour Threshold: Not available.	Specific Gravity: ?1.0
Vapour Pressure: Not available.	Vapour Density: N. Av.	Evaporation Rate: N. Av.	Boiling Point: N. Av.
Volatility (by volume): 85-90	Solubility in Water: Complete.	pH: 12-13	Coeff. of Water/Oil Dist.: Not available.
			Freezing Point: N. Av.

SECTION 4 - FIRE AND EXPLOSION DATA

Flammability: <input type="checkbox"/> No <input checked="" type="checkbox"/> If yes, under which conditions?		
Means of extinction: Not applicable.		
Special Procedures: None known.		
Flashpoint & Method: °C (closed cup)	Upper Flammable Limit (% by volume): Not applicable.	Lower Flammable Limit (% by volume): Not applicable.
Ignition Temperature: N. Ap.	Hazardous Combustion Products: Products of combustion are toxic.	
Explosion Data - Sensitivity to Impact: Not applicable.		Explosion Data - Sensitivity to Static Discharge: Not applicable.

SECTION 5 - REACTIVITY DATA

Chemical Stability: <input checked="" type="checkbox"/> No <input type="checkbox"/> If no, under which conditions?			
Compatibility with other substances: <input checked="" type="checkbox"/> No <input type="checkbox"/> If so, which ones?	Mixing with sodium hypochlorite may release small amounts of formaldehyde.		
Reactivity, if any, and under what conditions?	None known.		
Hazardous decomposition products?	Products of combustion are toxic.		

SECTION 6 - TOXICOLOGICAL PROPERTIES

of Entry? Contact: <u>X</u> Skin Absorption: <u> </u> Eye Contact: <u>X</u> Inhalation Acute: <u>X</u> Inhalation Chronic: <u> </u> Ingestion: <u>X</u>			
ts of Acute Exposure to Material: Direct or prolonged eye contact may result in irritation. Prolonged inhalation of vapors or mist may cause respiratory on.			
ts of Chronic Exposure to Material: None known.			
sure Limits (TLV, ACGIH): plicable.	Irritancy of Material: Moderately irritating to eyes.	Sensitization Property of Material: Not a sensitizer.	Carcinogenicity of Material: Not a carcinogen.
ogenicity/Embryotoxicity: ratogenic or embryotoxic.	Reproductive Toxicity: Not a reproductive toxicant.	Mutagenicity: Not mutagenic.	Synergistic Materials: None known.

SECTION 7 - PREVENTATIVE MEASURES

onal Protective Equipment:		
es (specify): Wear rubber or neoprene gloves re is the potential for repeated or prolonged contact.	Respirator (specify): Not applicable.	Eye (specify): Safety glasses.
wear (specify): Not applicable.	Clothing (specify): Not applicable.	Other (specify): Not applicable.
neering Controls (specify, e.g. ventilation, used process): Use local exhaust to minimize exposure to product mist.		
t and Spill Procedure: Absorb and containerize. Wash residual down to sanitary sewer. Contact the sanitary treatment facility in advance to assure ability to process washed-down material.		
te Disposal: Dispose of in accordance with existing federal, provincial, and municipal environmental regulations.		
dling Procedures & Equipment: Do not get in eyes, on skin, or on clothing. Avoid contact with food.		
age Requirements: None.		
cial Shipping Information: Not restricted under TDG.		

SECTION 8 - FIRST AID MEASURES

Contact: If splashed in eyes, flush thoroughly with water. If irritation persists, call a physician.
Contact: If splashed on skin, flush thoroughly with water. If irritation persists, call a physician.
sition: If swallowed, drink a glassful of water, and call a physician or poison control centre.
ation: Remove to fresh air. If breathing problems develop, call a physician.

SECTION 9 - PREPARATION DATE OF MSDS

pared by (group, department, etc.)	Phone Number:	Date:
ox Services Company	1-925-847-6100	February 4, 2002 V1

information is furnished without warranty, expressed or implied, except that it is accurate to the best knowledge of The Clorox Company of Canada, Ltd. The data
 ese sheets relates only to the specific material designated herein. The Clorox Company of Canada, Ltd. assumes no legal responsibility for use or reliance upon this

CLOROX name and logo are registered trademarks of The Clorox Company.

/. = Not available.

o. = Not applicable.



The Clorox Company of Canada, Ltd.
5700 Yonge Street, Suite 1210
Toronto, Ontario, Canada
M2M 4K2

Material Safety Data Sheet

SECTION 1 - PRODUCT IDENTIFICATION AND USE

PRODUCT NAME: TILEX® MILDEW REMOVER – Reg. No. 25039		PRODUCT IDENTIFICATION NUMBER:
PRODUCT USE: Spray mildew remover		Not applicable.
MANUFACTURER		SUPPLIER
The Clorox Company of Canada, Ltd. 5700 Yonge Street, Suite 1210 Toronto, Ontario M2M 4K2		The Clorox Company of Canada, Ltd. 5700 Yonge Street, Suite 1210 Toronto, Ontario M2M 4K2
EMERGENCY PHONE NO.: 1-800-446-1014		EMERGENCY PHONE NO.: 1-800-446-1014

SECTION 2 - HAZARDOUS INGREDIENTS

Hazardous Ingredient	% (w/w)	CAS Number	LD50 of Material (Specify Species & Route)	LC50 of Material (Specify Species)
Sodium hypochlorite	1-3	7681-52-9	13 g/kg (5.25% NaOCl, rat, oral)	Not Available.
Sodium hydroxide	0.1-1	1310-73-2	Not Available.	Not Available.

SECTION 3 - PHYSICAL DATA

Physical State: Liquid	Odour & Appearance: Clear, faint yellow, thin liquid with characteristic bleach odour.	Odour Threshold: Not Available.	Specific Gravity: ≈1.04 at 21°C
Vapour Pressure: Not Available.	Vapour Density: N. Av.	Evaporation Rate: N. Av.	Boiling Point: N. Av.
% Volatile (by volume): >95%	Solubility in Water: Complete.	pH: 12.4 - 12.8	Coeff. of Water/Oil Dist.: Not Available.

SECTION 4 - FIRE AND EXPLOSION DATA

Flammability: Yes: <u> </u> No: <u> X </u> If yes, under which conditions?		
Means of Extinction: Dry chemical, carbon dioxide (CO ₂), foam, or water spray.		
Special Procedures: None known.		
Flashpoint & Method: > 93°C (closed cup)	Upper Flammable Limit (% by volume): Not Available.	Lower Flammable Limit (% by volume): Not Available.
Autoignition Temperature: N. Av.	Hazardous Combustion Products: Products of combustion are toxic.	
Explosion Data - Sensitivity to Impact: Not Applicable.		Explosion Data - Sensitivity to Static Discharge: Not Applicable.

SECTION 5 - REACTIVITY DATA

Chemical Stability: Yes: <input checked="" type="checkbox"/> No: <input type="checkbox"/> If no, under which conditions?	
Incompatibility with other substances: Yes: <input checked="" type="checkbox"/> No: <input type="checkbox"/> If so, which ones?	Reacts with other household chemicals such as toilet bowl cleaners, rust removers, acids, and ammonia-containing products to produce hazardous gases, such as chlorine and other chlorinated compounds.
Reactivity, if any, and under what conditions?	See above.
Hazardous decomposition products?	Products of decomposition are toxic.

SECTION 6 - TOXICOLOGICAL PROPERTIES

Route of Entry?			
Skin Contact: <u>X</u> Skin Absorption: <u> </u> Eye Contact: <u>X</u> Inhalation Acute: <u>X</u> Inhalation Chronic: <u> </u> Ingestion: <u>X</u>			
Effects of Acute Exposure to Material: Direct or prolonged eye or skin contact may cause irritation. Ingestion may cause nausea and vomiting. Exposure to vapour or mist may irritate eyes, nose, throat or lungs. Exposure to high concentrations of vapour or mist may aggravate the following medical conditions: heart conditions or chronic respiratory problems such as asthma, emphysema, chronic bronchitis, or obstructive lung disease.			
Effects of Chronic Exposure to Material: None known.			
Exposure Limits (TLV, ACGIH): Sodium hydroxide – 2 mg/m ³ – Ceiling limit	Irritancy of Material: Irritating to eyes, skin, nose, lungs, throat and gastrointestinal tract.	Sensitization Property of Material: Some clinical reports suggest a low potential for skin sensitization upon exaggerated exposure to sodium hypochlorite if skin damage occurs during exposure.	Carcinogenicity of Material: Not a carcinogen.
Teratogenicity/Embryotoxicity: Not teratogenic or embryotoxic.	Reproductive Toxicity: Not a reproductive toxicant.	Mutagenicity: Not mutagenic.	Synergistic Materials: None known.

SECTION 7 - PREVENTATIVE MEASURES

Personal Protective Equipment:		
Gloves (specify): Wear neoprene gloves or other protective gloves for sensitive skin or if there is the potential for repeated or prolonged skin contact.	Respirator (specify): In situations where exposure limits may be exceeded, a NIOSH-approved respirator is advised.	Eye (specify): Safety glasses.
Footwear (specify): Not Applicable.	Clothing (specify): Not Applicable.	Other (specify): Not Applicable.
Engineering Controls (specify, e.g. ventilation, enclosed process): Use general ventilation to minimize exposure to product mist.		
Leak and Spill Procedure: Absorb and containerize. Wash residual down to sanitary sewer. Contact the sanitary treatment facility in advance to assure ability to process washed-down material.		
Waste Disposal: Dispose of in accordance with existing federal, provincial and municipal environmental regulations		
Handling Procedures & Equipment: Avoid contact with food.		
Storage Requirements: Store in a cool place.		
Special Shipping Information: Not restricted under TDG.		

SECTION 8 - FIRST AID MEASURES

Eye Contact: If splashed in eyes, flush thoroughly with water for 15 minutes. If irritation persists, call a physician.
Skin Contact: If splashed on skin, flush thoroughly with water. If irritation persists, call a physician.
Ingestion: If swallowed, give a glass of milk or water. Call a physician or poison control centre immediately.
Inhalation: If breathing is affected, get fresh air immediately.

SECTION 9 - PREPARATION DATE OF MSDS

Prepared by (group, department, etc.) Clorox Services Company	Phone Number: 1-925-425-6100	Date: October 16, 2001	V2
---	--	----------------------------------	-----------

This information is furnished without warranty, expressed or implied, except that it is accurate to the best knowledge of The Clorox Company of Canada, Ltd. The data on these sheets relates only to the specific material designated herein. The Clorox Company of Canada, Ltd. assumes no legal responsibility for use or reliance upon this data.

The CLOROX name and logo are registered trademarks of The Clorox Company.








N. Av. = Not Available

N. Ap. = Not Applicable

© 1996 The Clorox Company



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	   	

Section 1. Chemical Product and Company Identification

Product Name	GASOLINE, UNLEADED	Code	W102E
Synonym	Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, Super Premium (94 RO), TQRUL, transitional quality regular unleaded, BOB, Blendstock for Oxygenate Blending	Validated on	7/4/2005.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Gasoline	8006-61-9	85-100	300 ppm	500 ppm	Not established
Methyl tert-butyl ether	1634-04-4	0-15	50 ppm	Not established	Not established
Benzene	71-43-2	<1.5	0.5 ppm	2.5 ppm	Not established
Note: Petro-Canada does not use MTBE in the manufacturing of its gasoline, however MTBE can be introduced from time to time through the use of external gasoline blendstocks.					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Flammable liquid. Exercise caution when handling this material. May cause cancer. May cause heritable genetic effects (mutagenicity). This product contains an ingredient or ingredients, which have been shown to cause chronic toxic effects. Contact with this product may cause skin and eye irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 15-20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately.
Skin Contact	Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 15-20 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard.
Inhalation	Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.

GASOLINE, UNLEADED		Page Number: 2
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility.	
Note to Physician	Not available	

Section 5. Fire-fighting Measures			
Flammability	Flammable liquid (NFPA).	Flammable Limits	Lower: 1.3%; Upper: 7.6% (NFPA).
Flash Points	Closed Cup: -50 to -38°C (-58 to -36°F), ASTM D56 Standard Test Method for Flash Point by Tag Closed Tester.	Auto-Ignition Temperature	257°C (495°F) (NFPA).
Fire Hazards in Presence of Various Substances	Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	NAERG2004 GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient. If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions. SMALL FIRES: Dry chemical, CO ₂ , water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.		

Section 6. Accidental Release Measures	
Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Evacuate non-essential personnel. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Avoid breathing vapours or mists of material. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately.

Section 7. Handling and Storage	
Handling	FLAMMABLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Do not ingest this product.
Storage	Store as flammable material. Store away from incompatible and reactive materials (See section 5 and 10). Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Keep container tightly closed. Ensure the storage containers are grounded/bonded. Avoid direct sunlight.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	- The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	As a minimum, safety glasses with side shields should be worn when handling this material.
Body	If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.)
Respiratory	A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): polyvinyl alcohol (PVA), fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available.
Colour	Clear to slightly yellow, undyed liquid. May be dyed red for taxation purposes.	Pour Point	Not applicable.
Odour	Gasoline. MTBE has a terpene-like odour.	Softening Point	Not applicable.
Odour Threshold	Less than 1 ppm.	Dropping Point	Not applicable.
Boiling Point	25 to 220°C (77 to 428°F) Initial boiling point by ASTM D86 Standard Test Method.	Penetration	Not applicable.
Density	0.685 - 0.80 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3 to 4 (Air = 1) (NFPA).	Ionicity (in water)	Not available
Vapour Pressure	<107 kPa @ 37.8°C (100°F)	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins.

Section 10. Stability and Reactivity

Corrosivity	Non corrosive.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids, interhalogens and uranium hexafluoride.	Decomposition Products	May release COx, NOx, phenols, polynuclear aromatic hydrocarbons, acrid smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	<p><u>Gasoline (8006-61-9):</u> Acute Oral toxicity (LD50): 13600 mg/kg (rat) Acute Dermal toxicity (LD50): >5000 mg/kg (rabbit)</p> <p><u>MTBE (1634-04-4):</u> Acute Oral toxicity (LD50): 2963 mg/kg (rat) Acute Dermal toxicity (LD50): >6800 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 23576 ppm/4h (rat)</p> <p><u>Benzene (71-43-2):</u></p>

GASOLINE, UNLEADED		Page Number: 4
	Acute Oral toxicity (LD50): 930 mg/kg (rat) Acute Dermal toxicity (LD50): >9400 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 13229 ppm/4h (rat)	
Chronic or Other Toxic Effects		
Dermal Route:	Contact may cause skin irritation. Prolonged or repeated contact may defat and dry skin, and cause dermatitis.	
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.	
Eye Irritation/Inflammation:	Contact may cause eye irritation.	
Immunotoxicity:	Not available	
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.	
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.	
Mutagenic:	This product contains a component(s) at >= 0.1% that has been shown to cause mutagenicity in laboratory tests. Therefore, this product is considered to be a mutagen. (Benzene)	
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.	
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.	
Carcinogenicity (ACGIH):	This product contains the following chemical(s) at >=0.1% that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be A1 by the ACGIH. Benzene (71-43-2)] [Considered to be A3 by the ACGIH. Gasoline (8006-61-9), MTBE (1634-04-4)]	
Carcinogenicity (IARC):	This product contains the following chemical(s) at >=0.1% that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be carcinogenic to humans (group 1) by IARC. Benzene (71-43-2)] [Considered to be carcinogenic to humans (group 2B) by IARC. Gasoline (8006-61-9)]	
Carcinogenicity (NTP):	This product contains the following chemical(s) at >=0.1% that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Known to be a human carcinogen according to NTP. Benzene (71-43-2)]	
Carcinogenicity (IRIS):	This product contains the following chemical(s) at >=0.1% that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be carcinogenic by IRIS. Benzene (71-43-2)]	
Carcinogenicity (OSHA):	This product contains the following chemical(s) at >=0.1% that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be carcinogenic by OSHA. Benzene (71-43-2)]	
Other Considerations	Gasoline engine exhaust is possibly carcinogenic to humans (IARC Group 2B).	

Section 12. Ecological Information			
Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			

Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	GASOLINE, 3, UN1203, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	------------------------------------	---	--

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																
		All components of this formulation are listed on the US EPA-TSCA Inventory.																
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																
		Please contact Product Safety for more information.																
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Irritating substance. CLASS: Target organ effects.													
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)	Not evaluated for transport Non évalué pour le transport													
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(3)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table>		Health Hazard	(2*)	Fire Hazard	(3)	Reactivity	(0)	Personal Protection	(H)	NFPA (U.S.A.) Health <table><tr><td>3</td><td>Fire Hazard</td></tr><tr><td>2</td><td>0 Reactivity</td></tr></table> Specific hazard		3	Fire Hazard	2	0 Reactivity	Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	(2*)																	
Fire Hazard	(3)																	
Reactivity	(0)																	
Personal Protection	(H)																	
3	Fire Hazard																	
2	0 Reactivity																	

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
-------------------	--

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists	HCS - Hazardous Communication System
ADR - Agreement on Dangerous goods by Road (Europe)	HMIS - Hazardous Material Information System
ASTM - American Society for Testing and Materials	IARC - International Agency for Research on Cancer
BOD5 - Biological Oxygen Demand in 5 days	IRIS - Integrated Risk Information System
CAS - Chemical Abstract Services	LD50/LC50 - Lethal Dose/Concentration kill 50%
CEPA - Canadian Environmental Protection Act	LDLo/LCLo - Lowest Published Lethal Dose/Concentration
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NFPA - National Fire Prevention Association
CFR - Code of Federal Regulations	NIOSH - National Institute for Occupational Safety & Health
CHIP - Chemical Hazard Information and Packaging Approved Supply List	NPRI - National Pollutant Release Inventory
COD - Chemical Oxygen Demand	NSNR - New Substances Notification Regulations (Canada)
CPR - Controlled Products Regulations	NTP - National Toxicology Program
DOT - Department of Transportation (U.S.A.)	OSHA - Occupational Safety & Health Administration
DSCL - Dangerous Substances Classification and Labeling (Europe)	PEL - Permissible Exposure Limit
DSD/DPD - Dangerous Substance or Dangerous Preparations Directives (Europe)	RCRA - Resource Conservation and Recovery Act
DSL - Domestic Substance List (Canada)	SARA - Superfund Amendments and Reorganization Act
EEC/EU - European Economic Community/European Union	STEL - Short Term Exposure Limit (15 minutes)
EINECS - European Inventory of Existing Commercial Chemical Substances	TDG - Transportation Dangerous Goods (Canada)
EPCRA - Emergency Planning And Community Right-To-Know Act	TDLo/TCLo - Lowest Published Toxic Dose/Concentration
FDA - Food and Drug Administration	TLV-TWA - Threshold Limit Value-Time Weighted Average
FIFRA - Federal Insecticide, Fungicide, and Rodenticide Act	TLM - Median Tolerance Limit
	TSCA - Toxic Substances Control Act
	USEPA - United States Environmental Protection Agency
	USP - United States Pharmacopoeia
	WHMIS - Workplace Hazardous Material Information System


For Copy of MSDS

Prepared by Product Safety - JDW on 7/4/2005.

GASOLINE, UNLEADED	Page Number: 6
Internet: www.petro-canada.ca/msds Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228 For Product Safety Information: (905) 804-4752	Data entry by Product Safety - JDW.
<i>To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.</i>	

Material Safety Data Sheet

WINDEX GLASS CLEANER (RTU)

National Fire Protection Association (NFPA)	Fire Hazard		Hazardous Material Information System (HMIS)	Health	0	
	Health			Reactivity	1	
	Specific Hazard			Reactivity	0	
Protective Clothing	None required.		Emergency Overview	Clear Blue. Liquid. See Section 9.		

Section 1. Chemical Product and Company Identification

Product Name	WINDEX GLASS CLEANER (RTU)	Code	90122 & 90135 & 90139 & 90940 & 94099
Product Use	Industrial/Institutional: Cleaning product.	PMS#	455934
MSDS#	126011002	Validation Date	4/8/2003
U.S. Headquarters Drackett Professional A Division of S.C. Johnson Commercial Markets, Inc. 8310 16th Street Sturtevant, Wisconsin 53177-0902 Phone: (888) 352-2249		Print Date	4/8/2003
		Supersedes	10/21/2002.
		In Case of Emergency	(800) 851-7145

Section 2. Composition and Information on Ingredients

Ingredients	CAS #	% by Weight	Exposure Limits	LC50/LD50
2-Butoxyethanol	111-76-2	0.5-1.5	OSHA (United States). TWA: 120 mg/m ³ ACGIH (United States). TWA: 97 mg/m ³	ORAL (LD50): Acute: 506 mg/kg [Rat]. DERMAL (LD50): Acute: 406 mg/kg [Rabbit]. VAPOR (LC50): Acute: 450 ppm 4 hour(s) [Rat].
Ethylene glycol hexyl ether Isopropyl Alcohol	112-25-4 67-63-0	0.5-1.5 1-5	Not available. OSHA (United States). TWA: 980 mg/m ³ STEL: 1225 mg/m ³ ACGIH (United States). TWA: 983 mg/m ³ STEL: 1230 mg/m ³	Not available. ORAL (LD50): Acute: 5045 mg/kg [Rat]. DERMAL (LD50): Acute: 12800 mg/kg [Rabbit]. VAPOR (LC50): Acute: 16000 ppm 8 hour(s) [Rat].
Water	7732-18-5	60-100	Not available.	Not available.

Section 3. Hazards Identification

Routes of Entry	Inhalation. Skin contact. Eye contact.
Potential Acute Health Effects	
Eyes	None known.
Skin	None known.
Inhalation	None known.
Ingestion	None known.
Medical Conditions Aggravated by Overexposure:	None known.
See Toxicological Information (section 11)	

Material Safety Data Sheet

WINDEX GLASS CLEANER (RTU)

Section 4. First Aid Measures

Eye Contact	Rinse with plenty of running water.
Skin Contact	Rinse with plenty of running water.
Inhalation	No specific first aid measures are required.
Ingestion	No specific first aid measures are required.

Section 5. Fire Fighting Measures

Flammability of the Product	Although this product has a flash point below 200 Deg. F, it is an aqueous solution containing an alcohol and does not sustain combustion.
Flash Points	Closed cup: 51.1°C (124°F).
Products of Combustion	None known.
Fire Fighting Media and Instructions	Extinguish with water spray or carbon dioxide, dry chemical powder or appropriate foam. Normal fire fighting procedure may be used.
Special Remarks on Fire and Explosion Hazards	None known.

Section 6. Accidental Release Measures

Personal Precautions	Put on appropriate personal protective equipment (see Section 8.).
Environmental Precautions and Clean-up Methods	In the event of major spillage: Use appropriate containment to avoid environmental contamination. Sweep or scrape up material. Place in suitable clean, dry containers for disposal by approved methods. Use a water rinse for final clean-up.

Section 7. Handling and Storage

Handling	Avoid contact with eyes. Use appropriate hygiene measures when handling product. FOR INDUSTRIAL USE ONLY
Storage	Store in a dry, cool and well-ventilated area. Protect from freezing. KEEP OUT OF REACH OF CHILDREN.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	No special ventilation requirements. General room ventilation is adequate.
Personal Protection	
<i>Eyes</i>	No special requirements under normal use conditions.
<i>Hands</i>	No special requirements under normal use conditions.
<i>Respiratory</i>	No special requirements under normal use conditions.
<i>Feet</i>	No special requirements under normal use conditions.
<i>Body</i>	No special protective clothing is required.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Liquid.
Odor	Mild. Ammoniacal.
Color	Clear Blue.
pH	10.6 to 11.5 [Basic.]
Specific Gravity	1
Solubility in water	Complete.

Material Safety Data Sheet

WINDEX GLASS CLEANER (RTU)

Section 10. Stability and Reactivity

Stability and Reactivity	The product is stable.
Conditions of Instability	None known.
Incompatibility with Various Substances	Not available.
Hazardous Decomposition Products	When exposed to fire: Produces normal products of combustion.
Hazardous Polymerization	Will not occur.

Section 11. Toxicological Information

Acute toxicity	ORAL (LD50) Estimated to be greater than 5000 mg/kg (rat).
Effects of Chronic Exposure	None known.
Other Toxic Effects	Not available.

Section 12. Ecological Information

Not available.

Section 13. Disposal Considerations

Waste Information	No special precautions. Dispose of according to all federal, state and local regulations.
--------------------------	---

Section 14. Transport Information**DOT Classification**

DOT Proper Shipping Name	- Please refer to the Bill of Lading/receiving documents for up to date shipping information.
---------------------------------	---

TDG Classification

TDG Proper Shipping Name	- Please refer to the Bill of Lading/receiving documents for up to date shipping information.
---------------------------------	---

Section 15. Regulatory Information**Reporting in this section is based on ingredients disclosed in Section 2****US Regulations**

Federal SARA 313 toxic chemical notification and release reporting: Isopropyl Alcohol
CERCLA: Hazardous substances.: Isopropyl Alcohol

State New Jersey spill list: Isopropyl Alcohol
New Jersey: Isopropyl Alcohol
Massachusetts spill list: Isopropyl Alcohol
Massachusetts RTK: Isopropyl Alcohol
Pennsylvania RTK: Isopropyl Alcohol

This product is not subject to the reporting requirements under California's Proposition 65.

Registered Product Information Not applicable.

Canadian Regulations

WHMIS Classification Not controlled under WHMIS (Canada).

WHMIS Icon

Registered Product Information Not applicable.

Chemical Inventory Status	All ingredients of this product are listed or are excluded from listing on the U.S. Toxic Substances Control Act (TSCA) Chemical Substance Inventory
----------------------------------	--

Continued on Next Page

WINDEX GLASS CLEANER (RTU)**Material Safety Data Sheet****Section 16. Other Information**

Other Special Considerations	MSDS Serial Range: 2-3
------------------------------	------------------------

Version	2.1
---------	-----

Notice to Reader

This document has been prepared using data from sources considered technically reliable. It does not constitute a warranty, express or implied, as to the accuracy of the information contained within. Actual conditions of use and handling are beyond seller's control. User is responsible to evaluate all available information when using product for any particular use and to comply with all Federal, State, Provincial and Local laws and regulations.

FEB-20-03 16 09 FROM CONNORS DRILLING LTD

ID 2503745212



WESTCOAST DRILLING SUPPLIES LTD.

#6 - 2351 SIMPSON ROAD
RICHMOND, B.C. V6X 2R2

TEL: (604) 278-4954
FAX (604) 278-4914

Serving the Drilling Industry

EMERGENCY PHONE NO.: (604) 278-4954

MATERIAL SAFETY DATA SHEET

SECTION I: IDENTIFICATION OF PRODUCT

PRODUCT NAME. 550 X POLYMER

CHEMICAL FAMILY: Copolymer of Acrylamide and Sodium Acrylate

PRODUCT USE: Drilling Mud Additive

WHMIS CLASSIFICATION: Not a Controlled Product under WHMIS

WORK PLACE HAZARD: Not Applicable

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION Not Applicable

PACKAGE GROUP Not Applicable

PRODUCT IDENTIFICATION NUMBER (PIN) Not Applicable

SECTION II: HAZARDOUS INGREDIENTS

INGREDIENT	PERCENTAGE	CAS NUMBER	LD ₅₀	LC ₅₀
No Hazardous Ingredients				

SECTION III: TOXICOLOGICAL PROPERTIES

ROUTE OF ENTRY.

[] skin, [] eye contact, [xxx] inhalation, [] ingestion

SKIN CONTACT: Prolonged contact may cause skin irritation or dermatitis in some individuals

EYE CONTACT: May Cause irritation

INHALATION: May cause sneezing, slight irritation of nose and throat

INGESTION: Not available

ACUTE EXPOSURE: Not available

WESTCOAST Drilling Supplies Ltd

550 X POLYMER

p. 2/3

SECTION IV: FIRST AID MEASURES

SKIN CONTACT Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE CONTACT: Immediately flush eyes with water for 15 minutes and call a physician.

INHALATION: Remove to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing is difficult, give oxygen. Call a physician.

INGESTION. Do not induce vomiting. If conscious, dilute by giving two glasses of water. Call a physician immediately.

SECTION V: PHYSICAL DATA

APPEARANCE AND ODOUR	White granular solid, faint odour
DENSITY (SPECIFIC GRAVITY):	0.80
BOILING POINT.	Decomposes
MELTING POINT:	Not Applicable
WATER SOLUBILITY.	Soluble
% VOLATILE BY VOLUME.	Not Applicable
EVAPORATION RATE	Not Applicable
VAPOUR PRESSURE (MM Hg)	Very Low
VAPOUR DENSITY: (Air = 1)	Not Applicable

SECTION VI: FIRE AND EXPLOSION HAZARD DATA

FLASH POINT: Not Applicable

FLAMMABLE LIMIT. Not Applicable

EXTINGUISHING MEDIA Dry chemical, foam, CO₂

SPECIAL FIRE FIGHTING PROCEDURES. Use self-contained respirators for fire fighting personnel.

UNUSUAL FIRE AND EXPLOSION HAZARDS. Oxides of carbon and nitrogen and products of incomplete combustion.

SECTION VII. REACTIVITY DATA

STABLE [XXX] **INSTABLE.** []

INCOMPATIBILITY (CONDITIONS TO AVOID): Strong oxidizing agents and caustic solutions.

HAZARDOUS DECOMPOSITION PRODUCTS: Not Applicable

HAZARDOUS POLYMERIZATION: Will not occur [xxx] May occur []

SECTION VIII: PREVENTATIVE MEASURES

RESPIRATORY PROTECTION. Suggest NIOSH/MESA approved dust mask

VENTILATION. Ten (10) changes per hour suggested

PROTECTIVE GLOVES Suggest plastic or rubber.

EYE PROTECTION: Suggest goggles.

OTHER PROTECTIVE EQUIPMENT. Suggest rubber apron

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE

Avoid prolonged or frequent contact when handling material. Do not inhale dust or breathe vapour. Keep container closed when not in use. Store in a cool and dry location away from oxidizing and reducing agents.

STEPS TO BE TAKEN IN CASE OF SPILL OR LEAK

Ventilate area. Wear rubber boots, gloves and a self-contained breathing apparatus if ventilation is not adequate. Collect into a waste container. Avoid raising dust. Wash spill site after material pick-up. Water solutions are very slippery. May constitute a hazard following a spill.

WASTE DISPOSAL METHOD

Dispose of waste according to federal, provincial and local regulations

SECTION IX: PREPARATION

The information contained herein is given in good faith, but no warranty, expressed or implied is made.

Date issued: January 1, 1991

Date Revised:

By Product Safety Committee

AMENDMENT

HAZARDOUS INGREDIENTS (550 X)

MATERIAL OR COMPONENT	WT%	HAZARD DATA
COPOLYACRYLAMIDE/SODIUM ACRYLATE		NOT CONSIDERED HAZARDOUS

ENVIRONMENTAL

DEGRADABILITY/AQUATIC TOXICITY: N. D.

OCTANOL/WATER PARTITION COEFFICIENT: N. D.

WASTE DISPOSAL METHODS: INCINERATION AND/OR DISPOSAL IN CHEMICAL LANDFILL. DISPOSER MUST COMPLY WITH FEDERAL STATE AND LOCAL DISPOSAL OR DISCHARGE LAWS.

RCRA STATUS OF UNUSED MATERIAL IF DISCARDED: NOT A "HAZARDOUS WASTE"

HAZARDOUS WASTE NUMBER: N. A.

REPORTABLE QUANTITY: EPA 40 CFR (CERCLA 102): N. A.

THRESHOLD PLANNING QUANTITY: EPA 40 CFR 355 (SERA 301-304): N. A.

TOXIC CHEMICAL RELEASE REPORTING: EPA 40 CFR 372 (SERA 311-313): N. A.

EPA HAZARD CLASSIFICATION CODE:	ACUTE - YES	CHRONIC - NO
	FIRE - NO	PRESSURE - NO
		REACTIVE - NO

HMIS AND NFPA RATINGS:	HMIS	NFPA
HEALTH	1	1
FLAMMABILITY	0	0
REACTIVITY	1	1
SPECIAL	N.A.	N.A.



WESTCOAST DRILLING SUPPLIES LTD.

#6 - 2351 SIMPSON ROAD
RICHMOND B.C. V6X 2R2

TEL (604) 278-4954
FAX (604) 278-4914

Serving the Drilling Industry

EMERGENCY PHONE NO. (604) 278-4954

MATERIAL SAFETY DATA SHEET

SECTION I: IDENTIFICATION OF PRODUCT

PRODUCT NAME LINSEED SOAP

CHEMICAL FAMILY Lubricating grease

WHMIS CLASSIFICATION Not Regulated

WORK PLACE HAZARD Not Applicable

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION Not Available

PACKAGE GROUP Not Applicable

PRODUCT IDENTIFICATION NUMBER (PIN) Not Applicable (Petroleum Lubricating Grease)

SECTION II: HAZARDOUS INGREDIENTS

<u>INGREDIENT</u>	<u>PERCENTAGE</u>	<u>CAS NUMBER</u>	<u>LD(50)</u>	<u>LC(50)</u>
Linseed Soap	100%	Mixture		

SECTION III. TOXICOLOGICAL PROPERTIES

ROUTE OF ENTRY Information not available

[] skin, [] eye contact, [xxx] inhalation, [] ingestion

SKIN CONTACT Prolonged and repeated contact with skin can cause detaching and drying of the skin resulting in skin irritation and dermatitis

EYE CONTACT Not available

INHALATION Inhalation of oil mist or vapours from hot grease may cause irritation of the upper respiratory tract
Long term intensive exposure may cause benign lung fibrosis

INGESTION Not Available

CHRONIC OVEREXPOSURE Not Determined

WESTCOAST DRILLING SUPPLIES LTD

LINSEED SOAP

p 2/4

IRRITATION INDEX: SKIN Not Available

SYMPTOMS OF EXPOSURE. Not Available

EXPOSURE INFORMATION Oil mist (particulate) 5 mg/M³ (TLV/TWA) ACGIH 88/89
10 mg/m³ (TLV/STEL) ACGIH 88/89

SECTION IV: FIRST AID MEASURES

SKIN CONTACT Remove contaminated clothing Wash contaminated skin with mild soap and water Wipe excess from skin

EYE CONTACT Flush eyes with water for at least fifteen (15) minutes

INHALATION Remove victim from further exposure Additional first aid treatment is not ordinarily required

INGESTION Do not induce vomiting Obtain medical attention immediately

OTHER INSTRUCTIONS: None.

SECTION V: PHYSICAL DATA

APPEARANCE AND ODOUR	Semi-solid brown coloured grease, slight hydrocarbon odour
DENSITY (SPECIFIC GRAVITY)	1.0
BOILING POINT	100 Degree C
MELTING POINT	Not Available
WATER SOLUBILITY	Miscible
% VOLATILE BY VOLUME	Not Available
EVAPORATION RATE	Not Available
VAPOUR PRESSURE (MM Hg)	Not Available
VAPOUR DENSITY (Air = 1)	Not Available
Ph.	9.5
VISCOSITY	Not Available

SECTION VI: FIRE AND EXPLOSION HAZARD DATA

FLASH POINT 222°C FLAMMABLE LIMIT Not Available

AUTO IGNITION TEMP 343°C

EXTINGUISHING MEDIA Dry Chemical, Carbon Dioxide CO₂, Foam, Water fog

SPECIAL FIRE FIGHTING PROCEDURES No special procedures - Avoid inhalation of smoke Caution, spilled material is slippery Use water to cool fire-exposed containers

UNUSUAL FIRE AND EXPLOSION HAZARDS None currently known

SECTION VII: REACTIVITY DATA

STABLE [yes] INSTABLE []

INCOMPATIBILITY (CONDITIONS TO AVOID) Not Available

HAZARDOUS DECOMPOSITION PRODUCTS Carbon monoxide, carbon dioxide and dense smoke are produced on combustion. Avoid excessive heat, formation of vapours or mists

HAZARDOUS POLYMERIZATION Will not occur [] May occur [] Not Available

SECTION VIII: PREVENTATIVE MEASURES

RESPIRATORY PROTECTION Under conditions of high heat use an air purifying respirator (mechanical filter with accompanying organic vapour cartridge)

VENTILATION. Highly recommended for all indoor situations to control fugitive emissions Concentrations in air should be maintained below the recommended threshold limit value if unprotected personnel are involved.

LOCAL If oil mist is present or if exposure is exceeded

MAKE-UP AIR Should always be supplied to balance air exhausted (either generally or locally)

PROTECTIVE GLOVES Impervious gloves (viton, nitrile, PVC, neoprene) should be worn at all times when handling this product

EYE PROTECTION Chemical safety goggles and/or full face shield to protect eyes and face, if product is handled such that it could be splashed into eyes

OTHER PROTECTIVE EQUIPMENT Impervious clothing (apron, coveralls) should be worn in confined workspaces or where the risk of skin exposure is much higher

PERMISSIBLE CONCENTRATIONS Not Available

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE

Store in a cool, dry, well ventilated area, away from heat and ignition sources, Avoid excessive heat, formation of oil mist, breathing of vapours and mist of hot oil and prolonged or repeated contact with skin Launder contaminated clothing prior to reuse Properly dispose of contaminated leather articles, including shoes, that cannot be decontaminated

STEPS TO BE TAKEN IN CASE OF SPILL OR LEAK

Spilled material is slippery Isolate hazard area and restrict access Wear appropriate breathing apparatus (if applicable) and protective clothing Stop leak only if safe to do so Contain a land spill by diking For large spills remove by mechanical means and place in containers Clean area with appropriate cleaner.

Do not allow product or run off from fire control to enter storm or sanitary sewers, lakes, rivers, streams or public waterways Block off drains and ditches Provincial regulations require and federal regulations may require that environmental and/or other agencies be notified of a spill incident Spill area must be cleaned and restored to original condition or to the satisfaction of authorities



Serving the Drilling Industry

WESTCOAST DRILLING SUPPLIES LTD.

#6 - 2351 SIMPSON ROAD
RICHMOND B.C. V6X 2R2

TEL (604) 278-4954
FAX (604) 278-4914

EMERGENCY PHONE NO. (604) 278-4954

MATERIAL SAFETY DATA SHEET

SECTION I IDENTIFICATION OF PRODUCT

PRODUCT NAME BIG BEAR DIAMOND DRILL ROD GREASE

CHEMICAL FAMILY Hydrocarbon

WHMIS CLASSIFICATION Not Regulated

WORK PLACE HAZARD Not Applicable

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION Not Regulated

PACKAGE GROUP Not Applicable

PRODUCT IDENTIFICATION NUMBER (PIN) Not Applicable

SECTION II. HAZARDOUS INGREDIENTS

<u>INGREDIENT</u>	<u>PERCENTAGE</u>	<u>CAS NUMBER</u>	<u>LD/50</u>	<u>LC50</u>
Severely overdressed sapthenous	< 75.00%	64742-52-5	> 3 g/kg (Dermal Rabbit)	No. Determined
Barium soap	< 35.00%	68201-19-4	> 5 g/kg (Oral Rat)	Not Determined

SECTION III TOXICOLOGICAL PROPERTIES

ROUTE OF ENTRY

[X] skin [] eye contact [] inhalation [] ingestion

SKIN CONTACT Acute exposure is believed to be minimally irritating

EYE CONTACT Acute exposure is believed to be minimally irritating

INHALATION Believed to minimally irritating if not in excess of permissible concentrations: see section VIII

INGESTION Not Available

CHRONIC OVEREXPOSURE Not Determined

WESTCOAST DRILLING SUPPLIES LTD. BIG BEAR DIAMOND DRILL ROD GREASE P.2/3

IRRITATION INDEX: SKIN: Believed to be 1.0 - 2.0/8.0 (rabbit), slightly irritating
EYES: Believed to be < 15/110 (rabbit), no appreciable effect

SYMPTOMS OF EXPOSURE. None expected other than possible minor irritation. Considered practically non-toxic

SECTION IV: FIRST AID MEASURES

SKIN CONTACT None considered necessary

EYE CONTACT As with most foreign materials, should eye contact occur, flush eyes with plenty of water

INHALATION. None considered necessary

INGESTION None considered necessary. Do not induce vomiting

OTHER INSTRUCTIONS. In some cases of ingestion and/or inhalation, medical attention should be obtained

SECTION V: PHYSICAL DATA

APPEARANCE AND ODOUR	Brownish yellow, fibrous grease
DENSITY (SPECIFIC GRAVITY)	> 1.0
BOILING POINT	700°F
MELTING POINT	400°F
WATER SOLUBILITY	Negligible
% VOLATILE BY VOLUME	Not Determined
EVAPORATION RATE	Not Determined
VAPOUR PRESSURE (MM Hg)	Not Determined (low)
VAPOUR DENSITY (Air = 1)	> 1.0
Ph.	Not Applicable
VISCOSITY.	NLGI No 3-4 grease

SECTION VI: FIRE AND EXPLOSION HAZARD DATA

FLASH POINT > 350°F (COC Method) FLAMMABLE LIMIT Not Determined

EXTINGUISHING MEDIA According to the National Fire Protection Association Guide, use water spray, Dry Chemical, Foam, Carbon Dioxide CO₂. Water or foam may cause frothing

SPECIAL FIRE FIGHTING PROCEDURES Use water to cool fire-exposed containers. If a leak or spill has not ignited, use water spray to disperse the vapours and to provide protection for persons attempting to stop the leak. See Hazardous Decomposition Products, Section VII

UNUSUAL FIRE AND EXPLOSION HAZARDS None

WESTCOAST DRILLING SUPPLIES LTD. BIG BEAR DIAMOND DRILL ROD GREASE^{3/3}**SECTION VII: REACTIVITY DATA**

STABLE ☒ INSTABLE ☐ Info not available

INCOMPATIBILITY (CONDITIONS TO AVOID) Strong oxidizers.

HAZARDOUS DECOMPOSITION PRODUCTS This material decomposes at a high temperature to form carbon monoxide, carbon dioxide, aldehydes and ketones combustion products of nitrogen and sulphur

HAZARDOUS POLYMERIZATION Will not occur [xxx] May occur ☐

SECTION VIII: PREVENTATIVE MEASURES

RESPIRATORY PROTECTION None required if exposures are within the permissible concentrations. See below

VENTILATION Natural dilution.

PROTECTIVE GLOVES Neoprene

EYE PROTECTION Chemical type goggles or face shield optional

OTHER PROTECTIVE EQUIPMENT Standard work clothing and work shoes

PERMISSIBLE CONCENTRATIONS AIR: 5 mg/cubic metre of air for mineral oil mist averaged over an 8 hour daily exposure (ACGIH, 1986 - 87)

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE

Exposed persons should exercise reasonable personal cleanliness this includes cleansing exposed skin areas several times daily with soap and water and laundering or dry cleaning soiled work clothing at least weekly. Minimum feasible handling temperatures should be maintained. Periods of exposure to high temperatures should be minimized. Water contamination should be avoided.

STEPS TO BE TAKEN IN CASE OF SPILL OR LEAK

Contain spill if possible. Wipe up or absorb on suitable material and shovel up.

WASTE DISPOSAL METHOD

Re-evaluation of the product may be required by the user at the time of disposal, since the product uses transformations, mixtures and processes may influence waste classification. Disposal should be in accordance with applicable federal, provincial and local regulations.

SECTION IX: PREPARATION

The information contained herein is given in good faith, but no warranty, expressed or implied is made.
Date issued Sept. 17, 1993 By Product Safety Committee
Date Revised: