



December 5, 2006

Phyllis Beaulieu
Manager of Licensing
Nunavut Water Board
P.O. Box 119
Gjoa Haven, NU X0E 1J0

Dear: Ms. Beaulieu

**RE: Water License Renewal Application 2007-2012
NWB License No.: 2BE-IZO0606
Izok and Hood Property Exploration Drilling Programs**

I am enclosing a completed Water License Application form for diamond drilling starting this winter in the vicinity of Izok Lake in the West Kitikmeot. The planned drilling program would be part of renewed mineral exploration activity at the site following Wolfden's acquisition of the property from Inmet Mining Corporation earlier this year.

Along with the application package, we also enclose a cheque in the amount of \$60.00 payable to the Receiver General for Canada, which corresponds to the stipulated application fee and water use fees.

We trust that you find the enclosed application documents complete and in good order. If you have any questions or comments, please call me at 807-346-1668.

Yours truly

For: WOLFDEN RESOURCES INC.

Andrew Mitchell, P.Geol.

AM/
Encl.

(NWB Water License 2007_12 Cover Letter.doc)



P.O. Box 119
 GJOA HAVEN, NU X0E 1J0
 TEL: (867) 360-6338
 FAX: (867) 360-6369
 KATIMAYINGI

KNK5 wmoEp5 vtmpq
 NUNAVUT WATER BOARD
 NUNAVUT IMALIRIYIN

WATER LICENCE APPLICATION FORM

Application for: (check one)

☐ New ☐ Amendment ☒ X Renewal ☐ Assignment

LICENCE NO:

(for NWB use only)

1. NAME AND MAILING ADDRESS OF APPLICANT/LICENSEE

Andrew Mitchell
 401-1113 Jade Court
 Thunder Bay, Ontario
 P7B-6M7
 Phone: 807-346-1668
 Fax: 807-345-0284
 e-mail: andrew.mitchell@wolfdenresources.com

2. ADDRESS OF CORPORATE OFFICE IN CANADA (if applicable)

Wolfden Resources Inc.
 401-1113 Jade Court
 Thunder Bay, Ontario
 P7B 6M7
 Phone: 807-346-1668
 Fax: 807-345-0284
 e-mail: info@wolfdenresources.com

3. LOCATION OF UNDERTAKING (describe and attach a topographical map, indicating the main components of the Undertaking)

Continued use of existing camp, Federal Crown lease number 86H/10-1-7, West Kitikmeot Region, Nunavut.

Latitude: 65 40' N Longitude: 112 50' W NTS Map No. 86H/10 Scale 1:50:000

Drilling to be conducted on Mining lease 3163, West Kitikmeot Region, Nunavut.

Latitude: 65 37" N Longitude: 112 46" W NTS Map No. 86H/10 Scale 1:50:000

Drilling to be conducted on Mining lease 3202 and NTI Lands CO-40 Sub-areas A and B (Hood area), West Kitikmeot Region, Nunavut.

Latitude: 66 8" N Longitude: 99 37" W NTS Map No. 82I/2 Scale 1:50:000

4. DESCRIPTION OF UNDERTAKING (attach plans and drawings)

The main water using components of the undertaking include the operation of up to a 40 person camp and the supply of water to a maximum of 3 diamond drill units. The attached map shows the location of the existing camp and the approximate locations of the proposed regions for surface drilling. Proposed drilling for 2006 will total about 20,000 m on the Izok property and approximately 30,000 m on the Hood property. Plans for 2007 have not been determined. In addition, up to two prospecting teams will map and sample for new targets. Personnel for both of these undertakings, as well as appropriate support staff, will be based from the existing camp at Ham Lake.

Other planned activities for the coming field season include:

- Transport to site and storage of fuel for operations;
- Transport of drill core to camp for logging, sampling, and storage;
- Inspection and reclamation of drill set-ups upon drill hole completion; and
- Camp clean up and seasonal shut down.

5. TYPE OF PRIMARY UNDERTAKING (A supplementary questionnaire must be submitted with the application for undertakings listed in “**bold**”)

- | | |
|---|--|
| <input type="checkbox"/> Industrial | <input type="checkbox"/> Agricultural |
| <input type="checkbox"/> Mining and Milling | <input type="checkbox"/> Conservation |
| <input type="checkbox"/> Municipal (includes camps/lodges) | <input type="checkbox"/> Recreational |
| <input type="checkbox"/> Power | <input checked="" type="checkbox"/> Miscellaneous (includes exploration/drilling) |
| | (describe): <u>exploration drilling and supporting camp</u> |

See Schedule II of *Northwest Territories Waters Regulations* for Description of Undertakings

6. WATER USE

- | | |
|--|--|
| <input checked="" type="checkbox"/> To obtain water | <input type="checkbox"/> To divert a watercourse |
| <input type="checkbox"/> To modify the bed or bank of a watercourse | <input type="checkbox"/> Flood control |
| <input checked="" type="checkbox"/> To alter the flow of , or store, water | <input type="checkbox"/> Other (describe): _____ |
| <input type="checkbox"/> To cross a watercourse | |

Water will be used to supply the drills and camp (showers, kitchen, laundry, rock saw). This may necessitate the temporary storage of water in tanks located at the drills and at the camp and core shack.

7. QUANTITY OF WATER INVOLVED (cubic metres per day including both quantity to be used and quality to be returned to source)

It is estimated that drilling and domestic water consumption will be in the order of 100m³ Per day. Approximately 90 % of water would be returned to local sources after passing through settling sumps and ground filtration. The actual volume of water lost in drilling is estimated at 6m³ per day. This amount is consumed downhole at the bit face for cooling purposes. The remaining water returns back up the hole where it is contained, settled in tanks to remove any particulate matter, and re-cycled in a closed circulation system. For three drills approximately 18-20m³ will be consumed per day.

The camp will use an estimated 5m³ per day. Grey water generated by the kitchen, the showers, and the laundry facilities is collected and settled in a tank before being pumped to a natural sump behind camp. This allows percolation and filtration through the soil to occur.

8. WASTE (for each type of waste describe: composition, quantity (cubic metres per day), methods of treatment and disposal, etc.)

☒ Sewage - Pacto toilets are used containing all human waste in doubled plastic bags which are collected daily and incinerated along with other burnable solid and semi solid wastes.

☒ Greywater – Approximately 5m³ per day is produced from kitchen, shower and laundry facilities.

Grey water is settled in tanks and then pumped to a natural sump behind the camp and approximately 100 m. from the nearest water body. This water is from the kitchen sink, dry sinks, and showers and will contain at times small food particles, animal fats, and soap/shampoo residues.

X Sludges – Approximately 75m³ of water is circulated through the closed systems of the 3 drills during a day of drilling. Cuttings and sludges are settled in tanks and then sludge is bagged for disposal and disposed of in natural sumps located at least 50 m from any water bodies. A long drill hole may produce up to 1m³ of this material for disposal. Salt used occasionally down the hole to prevent freezing is sufficiently diluted by water to be insignificant as a constituent of these sludges.

X Waste oil - waste oil is collected and stored in sealed 45 gallon (205 l) drums clearly marked as to their contents and removed from site by aircraft to be properly disposed of in Yellowknife at an approved facility.

X Bulky Items/Scrap Metal - All scrap metal is collected and stored in 45 gallon drums which are wired shut and then removed from the site by aircraft to be disposed of in Yellowknife at the refuse facility.

X Solid Waste – All burnable solid waste is incinerated in an oil fired forced air furnace located at the Ham Lake camp and capable of incinerating 64 Kg of waste/hour. Solid waste will be incinerated daily. This waste includes kitchen wastes, sewage, paper and cardboard, any fuel or oil-soaked materials and plastics. It is expected that six large garbage bags of waste would be incinerated daily. Ashes and any un-burned material will be removed on a daily basis and placed in the 45 gallon (205 l) drums that contain scrap metal, which will be removed from site.

X Hazardous Materials – Lead-acid batteries and petroleum products are the only hazardous materials used on site. Lead-Acid batteries are removed from the site for disposal at an approved facility in Yellowknife.

9. PERSONS OR PROPERTIES AFFECTED BY THIS UNDERTAKING (give name, mailing address and location; attach if necessary)

Land Use Permit

DIAND X Yes ___ No If no, date expected Land Use Permit #N2006C0027 issued for drilling on Crown Lands mad concurrent with this water license application. Attention: Jeff Holwell, Building 918, P.O. Box 100 Iqaluit NU X0A 0H0.

Regional Inuit Association X Yes ___ No If no, date expected Land Use License # KTCL306C019 issued for drilling on IOL made concurrent with this water license application. Attention: Jack Kaniak, KIA Lands Manager, Kitikmeot Inuit Association, P.O. Box 360, Kugluktuk, NU X0B 0E0

Commissioner ___ Yes ___ No If no, date expected _____

10. PREDICTED ENVIRONMENTAL IMPACTS OF UNDERTAKING AND PROPOSED MITIGATION MEASURES (direct, indirect, cumulative impacts, etc.)

A tabular summary of the potential wildlife and resource impacts and proposed mitigation measures is presented as follows:

Environmental Resources, Impacts and Mitigation

| Resource/Topic | Potential Impact | Mitigation |
|-------------------------------|---|---|
| Terrain / Permafrost | Overburden drilling will cause minor disturbance to immediate drilling areas. Contamination of terrain/permafrost and, surface and ground water due to fuel spills. Accidental fuel spills. | Drill rigs will be heli-portable and will not traverse the ground surface. Site will be left in a stable state. Proper storage of fuel containers and use of drip pans. See Attachment B Spill Contingency Plan. |
| Hydrology | Water removal required from local water bodies for geotechnical drilling. | Chilled brine will be kept in closed circulation by the drill, minimizing the amount of water used. Additional make-up water will be required if downhole circulation is lost. Amounts are expected to be minimal. |
| | Water quality changes to groundwater if artesian well is encountered during drilling. | If an artesian well is encountered, drilling will stop, the hole will be plugged, and the location will be recorded and reported to the Inspector. |
| Surface Water Quality | None – no discharge to receiving water environment, negligible sedimentation. | No mitigation required. |
| Fish and Fish Habitat | Entrainment of fish and other aquatic life from water withdrawal for drilling purposes. | Use of screens over intake pipe to prevent entrainment. |
| Vegetation | Spilled brine during drilling may result in minor damage in immediate vicinity of drill site Minor compaction of vegetation caused by drill. | Implementation of field protocols to ensure there is no brine spillage. Drill-rig will be heli-portable and will not traverse the ground surface. |
| Wildlife and Wildlife Habitat | Wildlife: short-term aircraft and drilling noise, human interaction. Habitat: Minor disturbance to vegetation in drilling areas by compaction. | Personnel training on wildlife-human interaction/encounters. Pre-drilling reconnaissance site visit prior to drilling activities will assist in identifying sensitive wildlife habitat. Site will be left in a stable state, promoting vegetation re-established. Any critical or sensitive wildlife species encountered during the drilling season, such as nesting raptors in the area, will be avoided by a 10 m buffer zone. |
| | Disturbance of wildlife from low-level | Low-level aircraft activity will be |

| | | |
|------------------------------|--|---|
| | aircraft activities. | restricted to flights into and out of the camp for crew changes and supply deliveries. |
| Socio-economics | Positive impacts. Personnel actively employed from local communities. Continued employment opportunities for field personnel from the local communities. | Local employment provides jobs, employment benefits and income to individuals and families. |
| Archaeology / Cultural Sites | Minor disturbance to immediate drilling areas. | Pre-drilling terrain mapping and reconnaissance site visit will assist in identifying potential archaeological sites. Personnel training on archaeological resource identification. Standard notification procedures will be followed in the event that archaeological artifacts are encountered. |
| Archaeology / Cultural Sites | Disturbance, removal and/or destruction of archaeological specimens or sites. | Project activities that encounter or disturb an archaeological site or specimen shall be stopped, and the proper regulatory authorities shall be immediately notified. All persons working on site will be made aware of this mitigation procedure and any permit conditions. Archaeological specimens or sites shall not knowingly be removed, disturbed or displaced. |

NIRB Screening

☒ Yes No If no, date expected ____**11. INUIT WATER RIGHTS**

Will the project or activity substantially affect the quality, quantity, or flow of water flowing through Inuit Owned Lands and the rights of Inuit under Article 20 of the Nunavut Land Claims Agreement?

The nearest community to the project is Kugluktuk at some 265 km distance from the area. The proportional water taking for camp domestic water supply and drilling use is very small when compared to the water volume of the affected water bodies. The manner of water taking will be by a small submersible pump or suction hose extended outward from the shore. There will be no damming of streams, diversions or significant construction work in any water bodies. Operations will be restricted to a minimum of 30 m beyond the ordinary high water line of water bodies. Considering the non-invasive nature of the work and the small footprints of the equipment and facilities as they relate to water use, impacts on the water use areas by the nearby communities is expected to be minimal or non-existent. Similarly, the impact on local

fish and wildlife habitats are expected to be slight and fully mitigated by normal diamond drilling operating procedures and appropriate precautions taken when working near water bodies.

11. (Continued)

If yes, has the applicant entered into an agreement with the Designated Inuit organization to pay compensation for any loss or damage that may be caused by the alteration. If no compensation agreement has been made, how will compensation be determined?

In the unlikely event of some occurrence necessitating compensation, negotiations would proceed to determine the appropriate compensation for the act.

12. CONTRACTORS AND SUB-CONTRACTORS (name, address and functions)

| | |
|--|--|
| Major Drilling 337 Old Airport Rd. PO Box 1377 Yellowknife, NT X1A 2P1 | - contracted to provide all diamond drilling Phone 867 873 3358 |
|--|--|

| | |
|--|---|
| Wardrop Engineering Inc. 330 Bay Street – Suite 610 Toronto ON, M5H 2S8 | – engineering consultant Phone: 416.368.9080 |
|--|---|

| | |
|---|---|
| Gartner Lee Limited 3015 - 5th Avenue NE Suite N195 Calgary AB T2A 6T8 Canada | - contracted to perform environmental base line studies Phone 403 262 4299 |
|---|---|

| | |
|---|---|
| Great Slave Helicopters Bag 7500 Yellowknife, NT X1A 2R3 | - contracted to provide helicopter transportation on site Phone 867 873 2081 |
|---|---|

| | |
|--|---|
| 1984 Enterprises 201 – 750 Denman St. Vancouver, BC V6G 2L5 | - contracted to provide cooking staff and first aid Phone 604 736 8142 |
|--|---|

| | |
|--|---|
| Discovery Mining Services 101 – 487 Range Lake Rd. PO Box 2248 Yellowknife, NT X1A 3R9 | - contracted to provide expediting services Phone 867 920 4600 |
|--|---|

13. STUDIES UNDERTAKEN TO DATE (list and attach copies of studies, reports, research, etc.)

Bibliography of Relevant Documents for the Izok Lake Site.

Metall Mining Corporation, 1993. **Environmental Evaluation Izok Project: Submission to the Regional Environmental Review Committee.** Document prepared by Klohn-Crippen Consultants Ltd., Richmond, BC for Metall Mining Corporation, Edmonton, AB. 1,267 pages.

SRK, 2002. **Review and Assessment of the 1993 Izok Environmental Evaluation.** Document prepared by Steffen Robertson and Kirsten (Canada) Inc., Vancouver, BC for Inmet Mining Corporation, Toronto, ON. 46 pages plus appendices.

Wolfden Resources Inc. **Project Specific Information, Izok.Hood Exploration, 2006/2007, Nunavut Canada.** Prepared for the Nunavut Impact Review Board Screening No. 06EN066, September 18, 2006 (Attached).

14. THE FOLLOWING DOCUMENTS MUST BE INCLUDED WITH THE APPLICATION FOR THE REGULATORY PROCESS TO BEGIN

Supplementary Questionnaire (where applicable: see section 5) ☒ Yes ___ No If no, date expected _____

Inuktitut/English Summary of Project ☒ Yes ___ No If no, date expected _____

Application fee \$30.00 (Payee Receiver General for Canada) ☒ Yes ___ No If no, date expected _____

Water Use fee (see Section 9 of the *NWT Waters Regulations*; Payee Receiver General for Canada)
___ Yes ___ No If no, date expected _____

15. PROPOSED TIME SCHEDULE

___ Annual (or) ☒ Multi Year

Start Date: January 1, 2007

Completion Date: December 31, 2012

Andrew Mitchell
Name (Print)

Project Manager
Title (Print)



Signature

Dec. 5, 2006
Date

For Nunavut Water Board use only

APPLICATION FEE Amount: \$ _____ Pay ID No.: _____

WATER USE DEPOSIT Amount: \$ _____ Pay ID No.: _____

Project Description – Izok and Hood Properties – 2006 Exploration Programs

Wolfden Resources Inc. (Wolfden) is a Canadian exploration and mining development company that has acquired the mineral rights for the Izok property, and portions of the Hood property from Inmet Mining Corporation.

The Hood property contains copper and zinc deposits, and consists of two mineral leases surrounded by Inuit Owned land (surface and subsurface rights; CO-40: Sub-areas A, B, and Open).

The Izok property contains copper and zinc, and consists of three mineral leases and three claims (currently being processed). The leases are located on Crown and Inuit Owned Land (CO-05; surface rights).

Wolfden is proposing a 2006 exploratory drilling program in the vicinity of Izok Lake and on the Hood property, both located in Nunavut (Figure 1). These programs will begin in August 2006 and initially operate for about six months. We anticipate that additional exploration work will take place in 2007 and that the scope of these future programs will be based, in part on the results of the 2006 drilling.

In addition to mineral exploration activities, we anticipate that environmental baseline work and engineering studies will be carried out concurrent with the planned diamond drilling and prospecting.

The planned activities are necessary to increase the technical understanding of the nature of the mineral deposits. The long-term objective of any mineral exploration program is to progress the project towards feasibility studies and eventual development of a producing mine. In addition to the mineral exploration work, environmental baseline studies will be undertaken to obtain the necessary background data and to improve the knowledge of the physical environment of the property. This is in preparation for a future submission of an Environmental Impact Statement in support of permit applications for mine development and operation.

Summary of Operation

Hood Property

The Hood property is Inuit-owned land (CO-40; surface and subsurface rights). The proposed drill locations on the Hood Property are shown in red on Figure 2. A Land Use License application has been submitted to the Kitikmeot Inuit Association (KIA) concurrent with this application.

Izok Property

Figure 3 shows the Izok Property area and the mineral leases owned by Wolfden. The drill locations on the North-East side of the outlet from Izok lake to Itchen Lake are located on IOL land (CO-05; surface rights) and the drill locations on the South-West side are on Crown land.

We propose to drill up to approximately 30,000 m on the Izok property in 2006. Plans for 2007 have not been determined and will depend on budgetary factors and the results of the 2006 drilling. The majority of the drilling is planned for Inuit Owned Land areas; however the borehole locations have not been finalized and it will be necessary to access crown land for drilling setups. For the purposes of this application, general locations of drilling activities have been provided. Land use permits are needed for access to 17.3 hectares of Inuit Owned Land and

3.5 hectares of Land owned by the Crown at Izok. A small field-prospecting program is also planned on both properties.



P.O. Box 119

GJOA HAVEN, NT X0E 1J0

TEL: (867) 360-6338

FAX: (867) 360-6369

kNK5 wmoEp5 vtmpq

NUNAVUT WATER BOARD

NUNAVUT IMALIRIYIN KATIMAYINGI

EXPLORATION/ REMOTE CAMP SUPPLEMENTARY INFORMATION REQUEST

Applicant: WOLFDEN RESOURCES INC.

Licence No: _____

(For NWB Use Only)

ADMINISTRATIVE INFORMATION

1. Environment Manager: Andrew Mitchell Tel: 807-346-1668 Fax: 807-345-0284
E-mail: andrew.mitchell@wolfdenresources.com
2. Project Manager: Andrew Mitchell Tel: 807-346-1668 Fax: 807-345-0284
E-mail: andrew.mitchell@wolfdenresources.com
3. Does the applicant hold the necessary property rights?
Yes.
4. Is the applicant an 'operator' for another company (i.e., the holder of the property rights)?
If so, please provide letter of authorization. No
5. Duration of the Project
[] Annual
[X] Multi Year:
If Multi-Year indicate proposed schedule of on site activities
Start: February 2007 Completion: December 2012

CAMP CLASSIFICATION

6. Type of Camp
[] Mobile (self-propelled)
[] Temporary
[X] Seasonally Occupied: from mid February to mid December
[] Permanent
[] Other: _____
7. What are the design population of the camp and the maximum population expected on site at one time? What will be the fluctuations in personnel?

The planned population of the camp up to as many as 40 people, this may fluctuate as low as 20 and as high as 40 for short periods of time (several days).

8. Provide history of the site if it has been used in the past.

The camp has existed at its present location since the discovery and beginnings of exploration on and around the Izok showing in the 1970's. It has been expanded over time to include more structures in order to accommodate larger field crews. First discovered in the early 1970's, the area has been historically worked through the 1970's, 1990's and early 2000's. Wolfden Resources obtained the property in April 2006 and wishes to begin work this summer.

CAMP LOCATION

9. Please describe proposed camp location in relation to biogeographical and geomorphological features, and water bodies.

The existing camp is located at the southern end of Ham Lake on its southwestern shore. The camp itself is situated on a gravel point adjacent to Ham Lake (see map).

The Wolfden Resources Inc. Izok and Hood Projects are mineral exploration projects focused on base metal exploration in the Point Lake-Itchen Lake volcanic belt and the Takiyuak greenstone belt. The Izok and Hood Projects are located in the Kitikmeot region of Nunavut, approximately 360km north and 425km north Yellowknife, NWT respectively. The closest population center is Kugluktuk, located 265km north of the camp on the Izok property.

The Izok and Hood Projects are contained within the Takijua Lake Upland Ecoregion. This ecoregion takes in the eastern half of the Bear-Slave Upland south of Coronation Gulf. Much of the upland surface is composed of unvegetated rock outcrops that are common on the Canadian Shield. The mean annual temperature is approximately -10.5° C with a summer mean of +6° C and a winter mean of -26.5° C. The mean annual precipitation range is 200-300 mm.

10. How was the location of the camp selected? Was the site previously used? Was assistance from the Regional Inuit Association Land Manager sought? Include maps and/or aerial photographs.

The location of the camp was selected by the previous operator of the mineral exploration project, Inmet Mining Corporation. Presumably the location was chosen based on the needs of the operation for the support of mineral exploration activity on the property. The site has been used for this purpose since the 1970's. Use of the site prior to this time and for other purposes is not documented. The Regional Inuit Association was not in existence at this time and therefore could not have been consulted in its placement.

11. Is the camp or any aspect of the project located on:

☒ Crown Lands

Permit Number (s)/Expiry Date: Lease 86H/10-1-7, April 30, 2008. Land Use Permit # N2006C0027/July 3, 2008

☐ Commissioners Lands

Permit Number (s)/Expiry Date

☒ Inuit Owned Lands

Permit Number(s)/ Expiry Date: KTL306C019, Expires June 30, 2008

12. Closest Communities (distance in km):

Kugluktuk, Nunavut is the closest community and is located approximately 265 km north of the property.

13. Has the proponent notified and consulted the nearby communities and potentially interested parties about the proposed work?

The local Inuit Administration in Kugluktuk has been notified as to intention to commence work at Izok Lake and we plan to employ several individuals from Kugluktuk, Cambridge Bay, and possibly Bathurst Inlet.

14. Will the project have impacts on traditional water use areas used by the nearby communities? Will the project have impacts on local fish and wildlife habitats?

The nearest community to the project is Kugluktuk at some 265 km distance from the area. The proportional water taking for camp domestic water supply and drilling use is very small when compared to the water volume of the affected water bodies. The manner of water taking will be by a small submersible pump or suction hose extended outward from the shore. There will be no damming of streams, diversions or significant construction work in any water bodies.

Considering the non-invasive nature of the work and the small footprints of the equipment and facilities as they relate to water use, impacts on the water use areas by the nearby communities is expected to be minimal or non-existent. Similarly, the impact on local fish and wildlife habitats are expected to be slight and fully mitigated by normal diamond drilling operating procedures and appropriate precautions taken when working near water bodies.

PURPOSE OF THE CAMP

15. ☒ Mining

- ☐ Tourism (hunting, fishing, wildlife observation, adventure/expedition, etc.)

(Omit questions # 16 to 21)

- ☐ Other _____ (Omit questions # 16 to 22)

16.

- ☐ Preliminary site visit
☒ Prospecting
☐ Geological mapping
☐ Geophysical survey
☒ Diamond drilling
☐ Reverse circulation drilling
☐ Evaluation Drilling/Bulk Sampling (also complete separate questionnaire)
☐ Other: _____

17. Type of deposit:

- ☒ Lead Zinc
☐ Diamond
☒ Gold

- Uranium
- ⊗ Other: [Silver and Copper](#)

DRILLING INFORMATION

18. Drilling Activities

- ⊗ Land Based drilling
- ⊗ Drilling on ice

19. Describe what will be done with drill cuttings?

Water used during drilling is conserved with a closed system of circulation. Drill cuttings are collected in a sludge recovery system that allows them to settle out and accompanying water to be returned down the hole. The cuttings are then bagged and transported to natural sumps chosen as to be located more than 50m. from the closest water source and with sufficient opportunity for filtration through local soils.

20. Describe what will be done with drill water?

Water involved in drilling is re-circulated within a closed system. A small amount of water is actually consumed at the bit face but the majority returns to surface where it is passed through settling tanks to remove any particulate matter (cuttings) and then is returned down the hole. When drilling ceases, overflow from the settling tanks will run off and percolate into local soils, providing further filtration before eventually returning naturally to local water courses as ground water. A small amount of surface run off is to be expected during this period and occasionally during the drilling process as well, and this will be contained or channeled so as not to directly enter any water courses and provide some filtration.

21. List the brand names and constituents of the drill additives to be used? Include MSDS sheets and provide confirmation that the additives are non-toxic and biodegradable.

A list of the drill additive types that may be used by Major Drilling are:

| Brand Name | Constituent |
|-----------------------------|------------------------|
| Poly-Drill O.B.X. | Liquid Polymer |
| Poly-Drill 133-X | Liquid Anionic Polymer |
| Poly-Drill 1330 | Liquid Anionic Polymer |
| Westcoast Drilling Supplies | Linseed Soap |
| Peladow | Calcium Chloride salt |

MSDS sheets are contained within the Spill Contingency Plan attached to this application form.

22. Will any core testing be done on site? Describe.

Core will be transported from the drill to the core shack where it is logged by geologists. Geologically significant intersections will be split with a core saw...half the core stored on site and the other half bagged and sent for lab assay.

SPILL CONTINGENCY PLANNING

23. Does the proponent have a spill contingency plan in place? Please include for review.

A copy of the Draft Spill Contingency Plan for the Izok/Hood operations is attached for review.

24. How many spill kits will be on site and where will they be located?

There will be Six (6) emergency spill kits will be deployed during operations. Two will be located in the fuel storage area. Each of the diamond drill rigs will have their own spill kit and one will be maintained in camp near the generator shack.

25. Please describe the types, quantities, and method of storage of fuel and chemicals on site, and provide MSDS sheets.

The fuel types to be used include diesel fuel, gasoline and propane. In addition to petroleum fuels, motor oil and grease and polymer additives will be utilized in the drilling operations. Diesel fuel will be used in the greatest quantity as motor fuel for the drill rigs. Gasoline will be used in engines for small generators, power tools, all-terrain vehicles and light trucks used at the camp site and air strip.

Diesel Fuel - There are seven (7) 12,000 gallon (55,000 litre) storage tanks at the camp site, which is located on leased crown land. Diesel fuel will be flown in by aircraft tanker and transferred to the large storage tanks by a fuel tank pulled on a trailer behind a pickup truck from the air strip to the tank farm. The fuel will be transferred from tank to tank using portable electric or gasoline powered fuel transfer pumps. The fuel will then be transferred to 205 litre drums and flown by helicopter to the drill sites. Fuel at the drill sites will be stored in drums placed on spill containment pallets. Typically the drilling contractor will maintain an inventory of 1 to 2 drums at the drill site. Consumption is expected to be in the order of 4-600 litres per day while operating, extending to approximately 80,000 litres for a 3 month work program, with two drills running. Actual consumption will vary depending on the nature of drilling operations.

Gasoline will be handled in 205 litre drums, which will be flown in by aircraft to the air strip and carried in the box of a pickup truck to the tank farm area at the camp. Gasoline will be transferred from drums to portable containers using hand pumps. In the order of 2 050 litres (10 drums) will be kept in inventory at the camp. For a 90 day operating period, consumption is estimated to be 4-6,000 litres.

Propane will be flown in to the airstrip in 100 lb or 20 lb bottles. They will be manually unloaded from the aircraft and carried in the box of a pickup truck to the general area of the fuel tank farm for storage. As needed, bottles will be carried to the drill sites by helicopter or to the points beside the camp buildings where the supply hoses protrude from the walls of the structures. Empty bottles will be flow out on a regular basis for refilling. An inventory of fifty (50) one hundred pound bottles will be maintained at the camp. Each drill rig will generally have one or two 20 pound capacity bottles on the drill set up site for torch use and one or two 100 lb. bottles for shack heating.

Aviation Fuel (Jet B) will be used for helicopter operations and will be stored at the airstrip site in 205 litre drums. An inventory of approximately 100 drums will be kept at the site during operations. Fuel will be transferred from the drums to the aircraft using hand actuated pumps or using battery powered electric pumps. An inventory of approximately 100 drums (20,500 litres) will be maintained at the strip. Fuel will be flown in by fixed wing aircraft.

Petroleum Lubricants including motor oil, hydraulic fluid, transmission fluid and grease will be consumed during the drilling operations. Motor oil, hydraulic oil and transmission fluid will be contained either in 20 litre pails or 205 litre drums. Machine servicing and oil changes will occur on the drill set ups. Fresh lubricating fluids will be transported to the drill set-up sites by helicopter and used fluids returned to the camp in the same manner. Used oils will be used for incinerator fuel. Heavy lubricants including grease are contained in 20 litre pails or small cartridges and transported with general supplies by helicopter. Empty cartridges will be collected with other refuse and burned in the camp incinerator. Approximately 25 to 50 cases (12-24 cartridges) of cartridge grease may be used in a typical 90 day operating period. Grease for the drill rods is packaged in 20 litre pails. These will be transported by helicopter and grease will be applied to the drill rods as needed during operations. Empty containers will be incinerated.

Polymer Drill Additives are contained in 20 litre pails or in small plastic bags or cardboard box packages. These products will be transported to the drill with general supplies by helicopter. Packaging is disposed of with other refuse by incineration.

WATER SUPPLY AND TREATMENT

26. Describe the location of water sources.

A variety of small water bodies will supply the water for the drilling. Some of these are outlined on the map provided with this application that shows proposed drill hole locations. These are chosen for their proximity to the drill, minimizing the pumping distance and therefore the risk of freezing hose lines. Water supply for the camp will come directly from High Lake.

27. Estimated demand (in L/day * person):

- ⊗ Domestic Use: 100 L/day/person Water Source: Ham Lake
- ⊗ Drilling Units: 180,000 L/day Water Source: Various small Lakes and ponds
- Other: _____ Water Source: _____

28. Describe water intake for camp operations? Is the water intake equipped with a mesh screen to prevent entrapment of fish? Describe:

Water is pumped from the lake with a submersible pump that has a mesh screen attached to the intake. The water then passes through approximately 60 meters of insulated and heat traced hose-line before entering the holding tanks.

29. Will drinking water quality be monitored? What parameters will be analyzed and at what frequency?

Water quality will not be monitored on a regularly scheduled basis.

30. Will drinking water be treated? How?

Based on Inmet's experience, Ham Lake water quality meets potable water quality standards. No chemical treatment of drinking water is contemplated. Disinfection by ultraviolet light may be considered if it becomes necessary.

31. Will water be stored on site?

Camp - No.
Drills - Yes.

WASTE TREATMENT AND DISPOSAL

32. Describe the characteristics, quantities, treatment and disposal methods for:

⊗ Camp Sewage (blackwater)

The sewage system currently in place eliminates waste through incineration, i.e. No blackwater is produced.

⊗ Camp Greywater

Grey water from the kitchen and showers will be diverted to a sump.

⊗ Solid Waste

Burnable solid waste is incinerated in a diesel powered forced air furnace capable of disposing 64Kg of refuse per hour. Non combustible solid waste will be removed from site.

⊗ Bulky Items/Scrap Metal

Scrap metal and any other non-combustible refuse is collected and sealed in 45 Gal drums and then transported to Yellowknife for eventual disposal by the appropriate means.

⊗ Waste Oil/Hazardous Waste

Waste oil is collected and sealed in 45 Gal drums clearly marked for this purpose and then transported to Yellowknife for eventual disposal by the appropriate means. Lead-Acid batteries are also contained in appropriate sealed containers, clearly marked, and returned to the Lupin Mine site or Yellowknife for disposal.

⊗ Empty Barrels/Fuel Drums

Empty drums are collected and transported back to Yellowknife either for disposal or for re-filling

○ Other:

33. Please describe incineration system if used on site. What types of wastes will be incinerated?

All burnable solid and semi-solid wastes will be incinerated, as well as human wastes. This will include sewage, kitchen refuse, plastics, cardboard and paper, and any fuel soaked material (i.e. Rags, absorbent mats etc.)

34. Where and how will non-combustible waste be disposed of? If in a municipality in Nunavut, has authorization been granted?

As stated above, non-combustible waste is sealed into 45 Gal drums and flown back to Yellowknife for appropriate disposal.

35. Describe location (relative to water bodies and camp facilities) dimensions and volume, and freeboard for sumps (if applicable).

Previous sumps have been located in an area of deep sand and gravel soils just east of the camp. The sumps will be constructed as to provide a minimum of 1 m freeboard. Drill water sumps will be at least 30 m from the high water mark of adjacent water bodies. Water holding tanks will be deployed where the use of sumps to settle solids is impractical.

36. Will leachate monitoring be done? What parameters will be sampled and analyzed, and at what frequency?

No leachate is expected to be developed at the site based on the anticipated activities.

OPERATION AND MAINTENANCE

37. Have the water supply and waste treatment and disposal methods been used and proven in cold climate? What known O&M problems may occur? What contingency plans are in place?

All of these water supply and waste treatment and disposal measures have been used in previous years and have proven to be effective even during the coldest of temperature extremes. Possible problems which may arise are freezing hose-lines. Water intake lines are heat traced and insulated to ensure flow in cold temperatures. Grey water disposal hose-lines are self draining and need not be heat traced. Water moves through them fast enough when being pumped that no freezing can occur. In the event that greywater lines were to freeze, sufficient hose line is on hand to run a new line until the original can be dismantled and thawed.

ABANDONMENT AND RESTORATION

38. Provide a detailed description of progressive and final abandonment and restoration activities at the site.

A comprehensive Abandonment and Restoration Plan is attached for reference. The following is a brief description of the procedures that apply to borehole abandonment and restoration.

After each drill hole is completed any trash and litter is gathered up and transported back to camp for either burning or flying out to Yellowknife. Capped casing pipes are expected to be used to mark hole locations where significant mineralization was intersected. Natural re-vegetation is expected to eventually reclaim drill sites. At the close of the field season rented equipment would be removed and flown back to Yellowknife for storage. The camp would be left in a clean and tidy state and the remaining camp structures would be secured for the winter as consistent with their use.

BASELINE DATA

39. Has or will any baseline information be collected as part of this project? Provide bibliography.
- ☒ Physical Environment (Landscape and Terrain, Air, Water, etc.)
 - ☒ Biological Environment (Vegetation, Wildlife, Birds, Fish and Other Aquatic Organisms, etc.)
 - ☐ Socio-Economic Environment (Archaeology, Land and Resources Use, Demographics, Social and Culture Patterns, etc.)
 - ☐ Other:

Bibliography of Relevant Documents for the Izok Lake Site.

Metall Mining Corporation, 1993. **Environmental Evaluation Izok Project: Submission to the Regional Environmental Review Committee.** Document prepared by Klohn-Crippen Consultants Ltd., Richmond, BC for Metall Mining Corporation, Edmonton, AB. 1,267 pages.

SRK, 2002. **Review and Assessment of the 1993 Izok Environmental Evaluation.** Document prepared by Steffen Robertson and Kirsten (Canada) Inc., Vancouver, BC for Inmet Mining Corporation, Toronto, ON. 46 pages plus appendices.

Wolfdan Resources Inc. **Project Specific Information, Izok Hood Exploration, 2006/2007, Nunavut Canada.** Prepared for the Nunavut Impact Review Board Screening No. 06EN066, September 18, 2006 (Attached).


Work will be resuming on environmental baseline studies in 2006. The scope of work for these studies is being prepared by Wolfdan's environmental consultant, Gartner Lee Limited. Work plans will be disclosed once they have been finalized.

REGULATORY INFORMATION






40. Do you have a copy of:

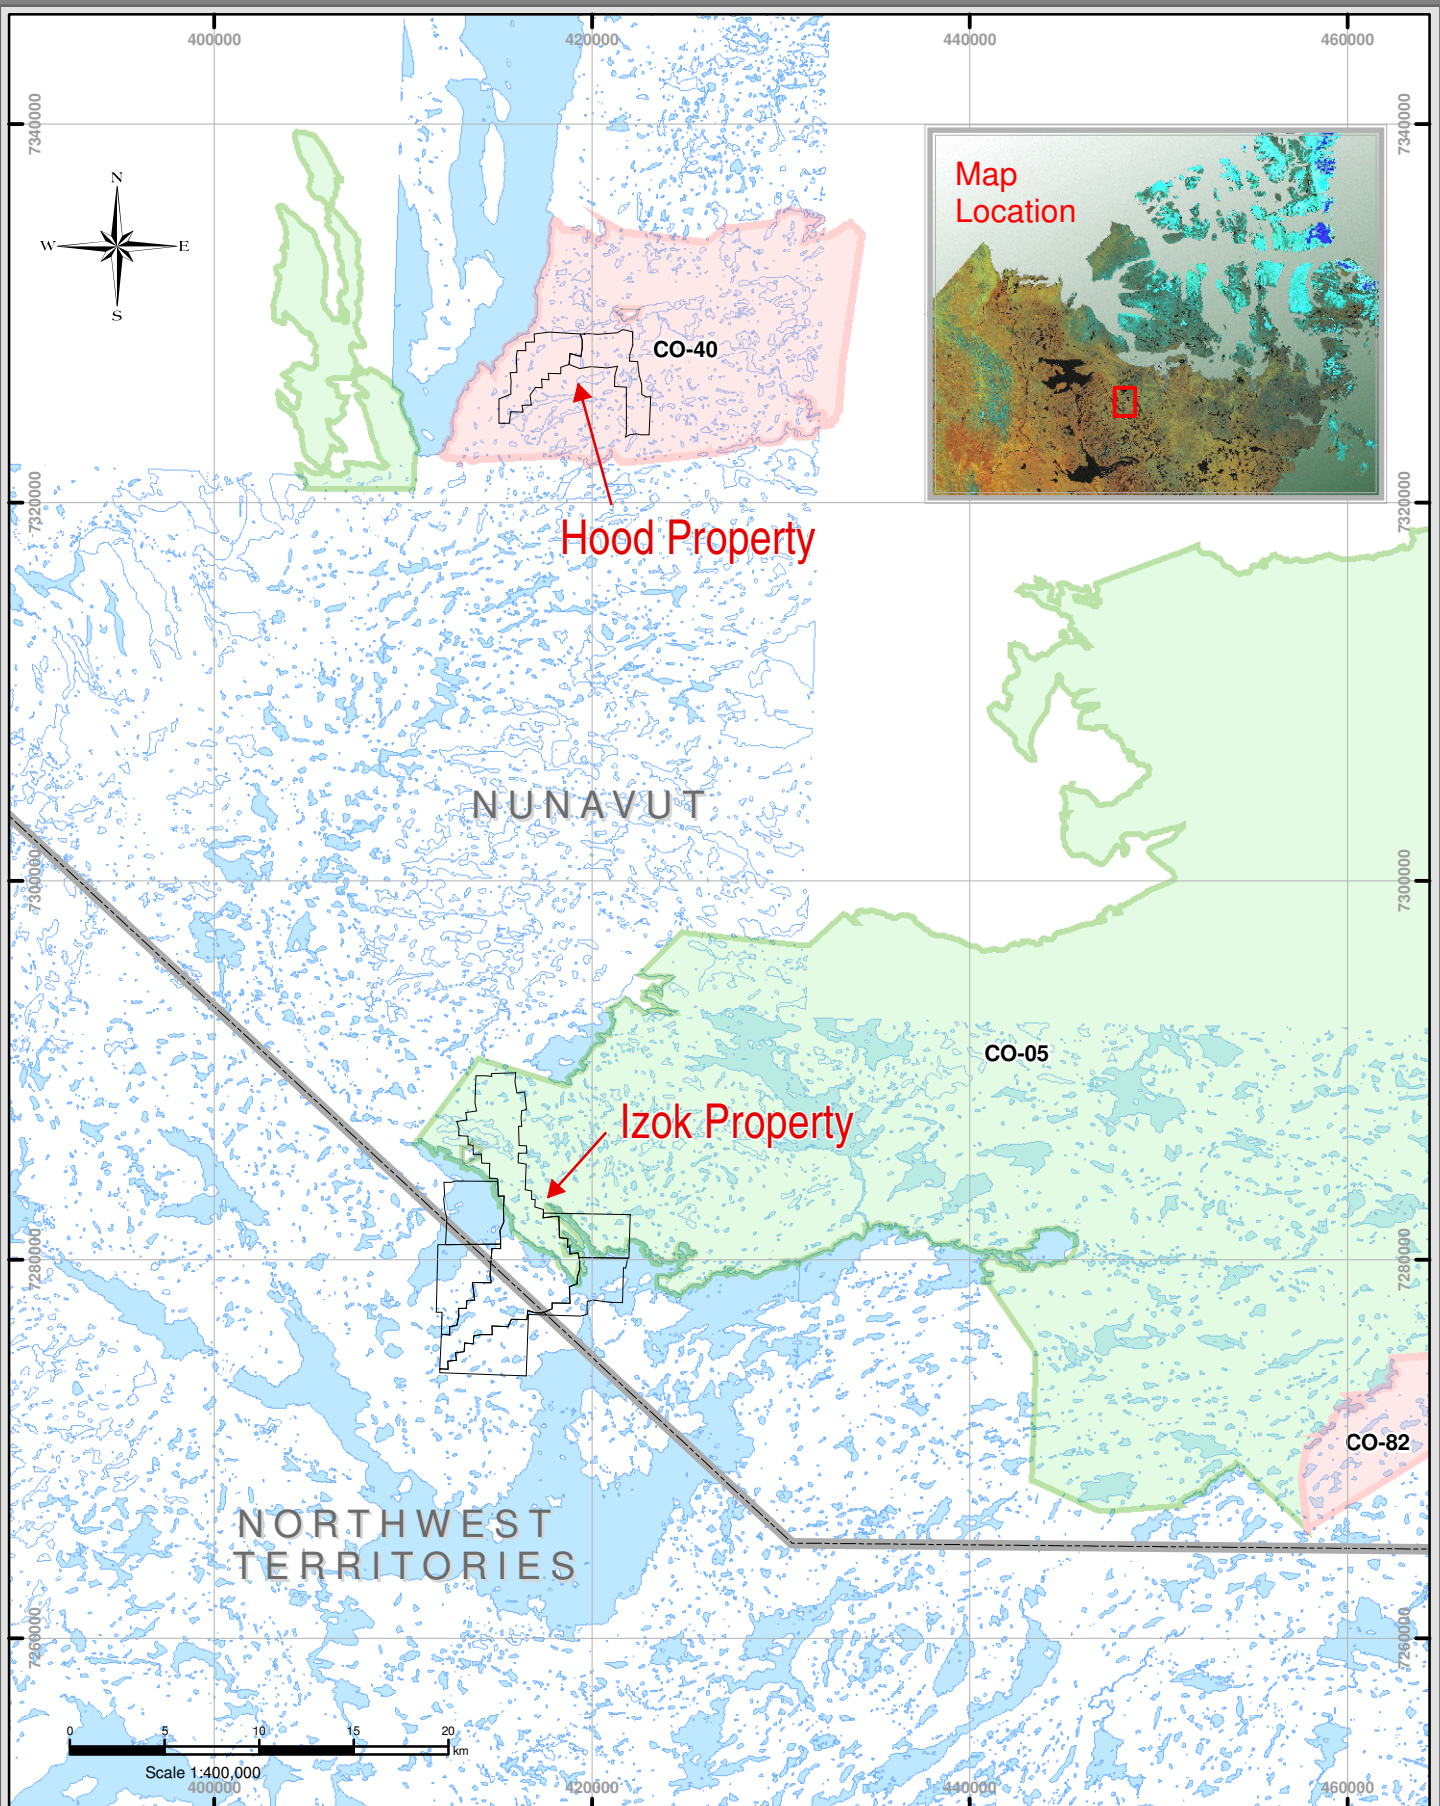- Article 13 - Nunavut Land Claims Agreement
- NWB - Water Licensing in Nunavut - Interim Procedures and Information Guide for Applicants
- NWB - Interim Rules of Practice and Procedure for Public Hearings
- NWTWB - Guidelines for the Discharge of Treated Municipal Wastewater in the NWT
- NWTWB - Guidelines for Contingency Planning
- DFO - Freshwater Intake End of Pipe Fish Screen Guideline
- Fisheries Act - s.35
- RWED - Environment Protection- Spill Contingency Regulations
- Canadian Drinking Water Quality Guidelines
- Public Health Act Camp Sanitation Regulations
- Public Health Act Water Supply Regulations
- Territorial Land Use Act and Regulations

You should consult the above document, guidelines, and legislation for compliance with existing regulatory requirements.



Legend

- | | | | |
|---|--------------------------------|---|-------------|
|  | Lease Area |  | Watercourse |
|  | Surface Rights Only |  | Waterbody |
|  | Surface and Sub-Surface Rights | | |



Regional Overview Map

References:


National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCan) at 1:50,000.
 Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
 Lease areas provided by Wolf Den Resources Inc.
 Government of Canada, Natural Resources Canada, Earth Science Sector, Data Management and Dissemination Branch
 Projection: UTM Zone 12 NAD83
 Revision: 0
 Date: May 31, 2006



Gartner Lee

Map:

1

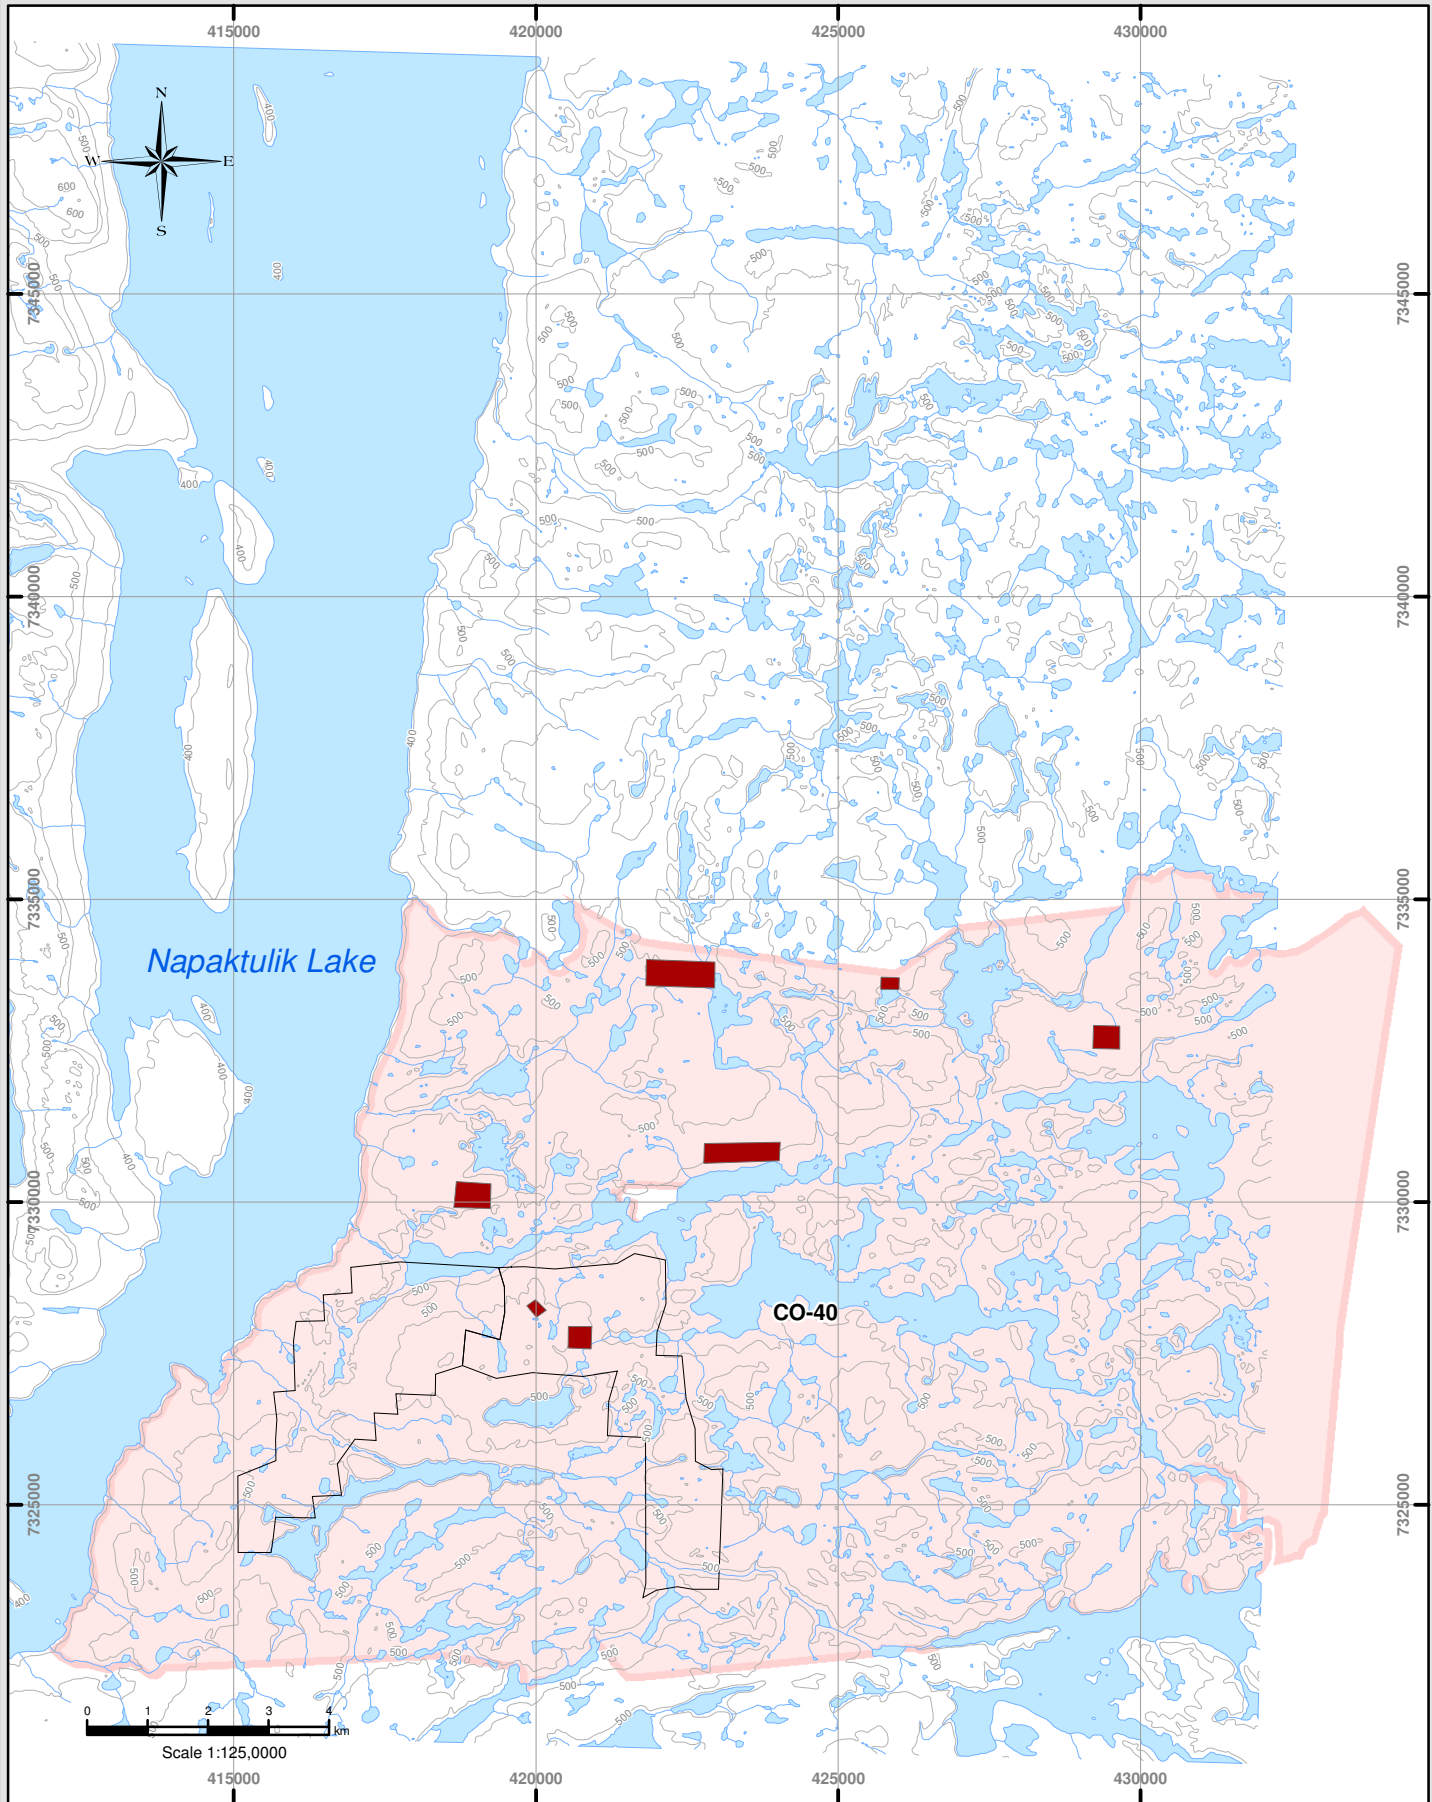

- Legend**
- Planned Drill Areas
 - Lease Area
 - Inuit Owned Lands
 - Surface and Sub-Surface Rights
 - Contour (50m)
 - Watercourse
 - Waterbody



Hood Property Exploration Locations

References:
 National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCan) at 1:50,000.
 Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
 Lease areas and planned drill areas provided by Wolfden Resources Inc.

Projection: UTM Zone 12 NAD 83
 Revision: 0
 Date: May 31, 2006










Map: **2**

File: P601013_C1_Fig3IzokExplor_29May2006.mxd



Legend

- | | | | |
|---|---------------------|---|---------------|
|  | Camp |  | Contour (20m) |
|  | Planned Drill Areas |  | Watercourse |
|  | Inuit Owned Lands |  | Waterbody |
|  | Surface Rights Only | | |



Izok Property Exploration Locations



References:

National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCan) at 1:50,000.
Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
Camp location and planned drill areas provided by Wolf Den Resources Inc.

Projection: UTM Zone 12 NAD 83
Revision: 0
Date: May 31, 2006



Map: **3**

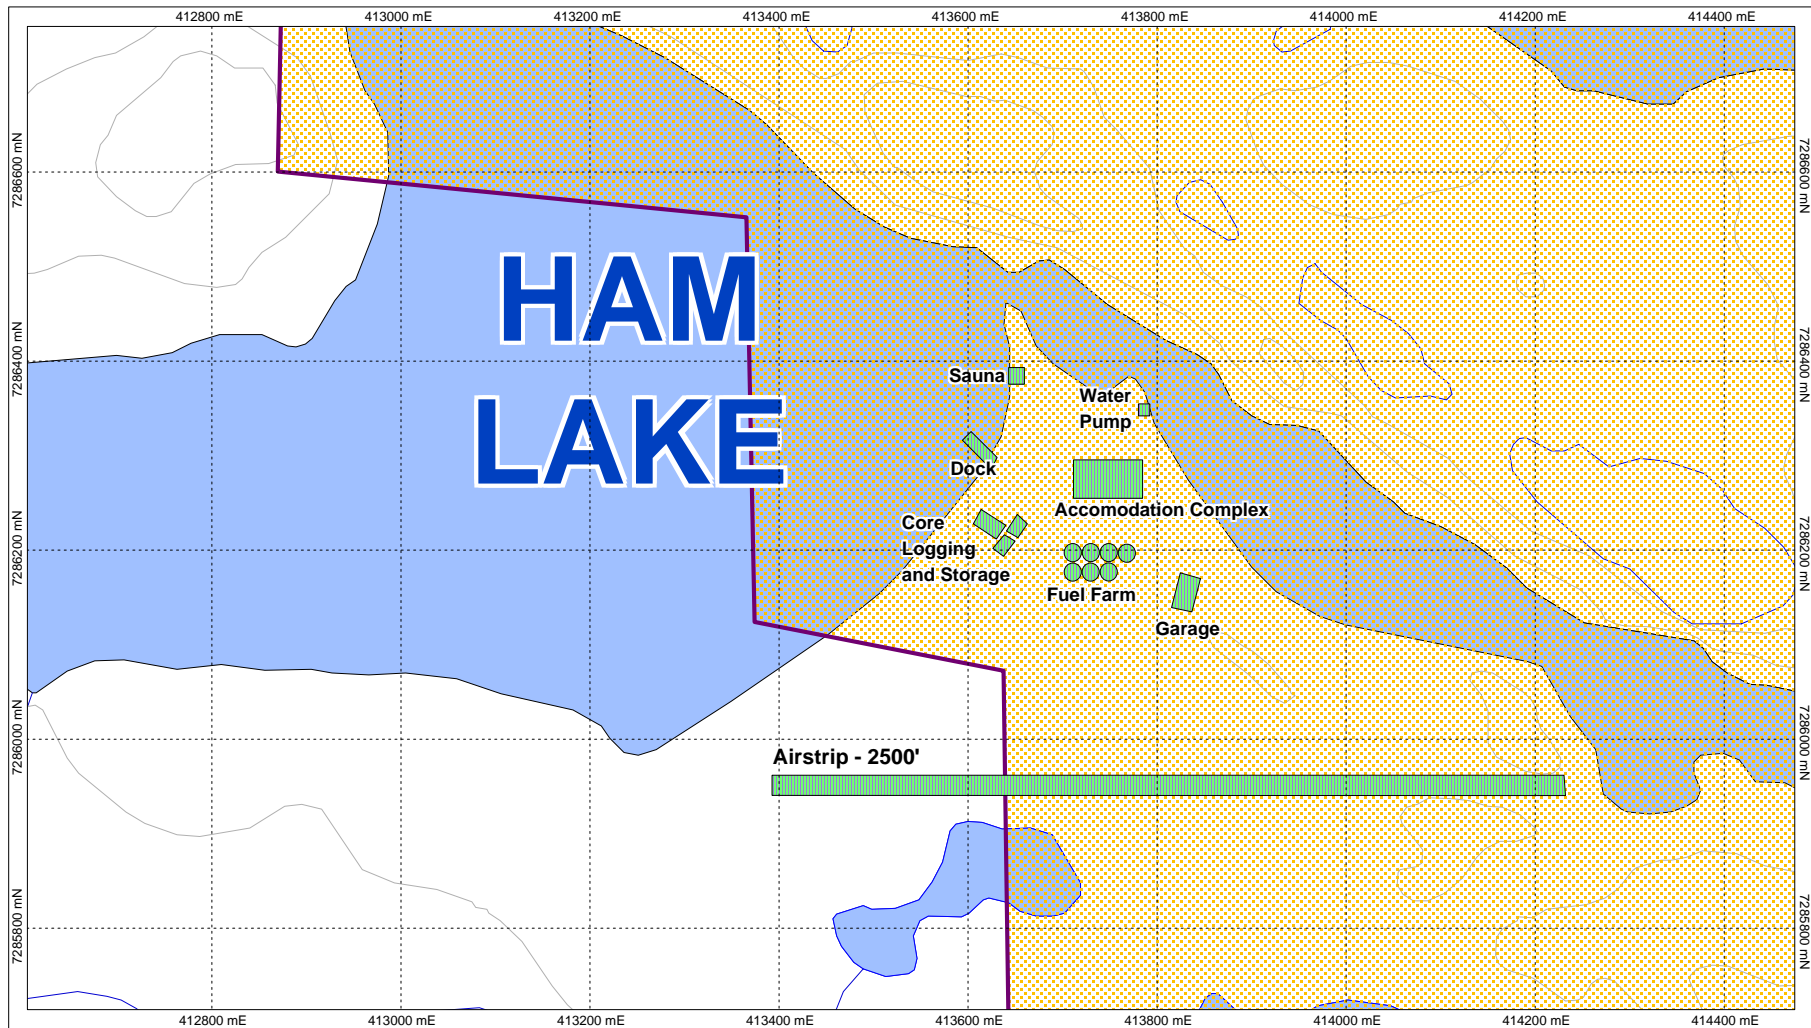

WOLFDEN RESOURCES INC.

Date: 25/5/2006

Author: S. Rickard

Office: Thunder Bay

Drawing: IN/SR

Scale: 1:8,000

Projection: UTM: NAD 83, Zone 12

IZOK/HOOD PROJECTS Water Licence Application Nunavut Water Board Camp layout

PROJECT SUMMARY - ENGLISH

WOLFDEN RESOURCES INC.
IZOK AND HOOD PROJECTS SUMMARY

The Wolfden Resources Inc.'s ("Wolfden") Izok and Hood Projects are located in the Kitikmeot region of Nunavut. The 2006 mineral exploration projects will focus on base metal exploration within the Point Lake-Itchen Lake volcanic belt and the Takiyuak greenstone belt. The projects are located approximately 400 km north of Yellowknife, NWT. The closest population center is Kugluktuk, located 265km north of the Izok property. The Lupin Mine is found approximately 70km east of the Izok property and approximately 80km SE of the Hood property..

IZOK PROPERTY

The Izok property was first explored for base metals in 1971 by Texasgulf Inc. and by 1974 massive base metal sulphide mineralization was discovered. Historically, the property was explored through the 70's, 90's and early 2000's. Wolfden obtained the properties in April 2006 from Inmet Mining Corporation and is planning to begin work this summer to further identify and define resources.

HOOD PROPERTY

The Hood property was first explored by Texasgulf Inc./Kidd Creek Mines Ltd. for volcanogenic massive sulphide ("VMS") deposits between 1971 and 1983. During this work, six new zones of VMS mineralization were discovered. Exploration was not continued until 1990, when Falconbridge Ltd. conducted a limited program of mapping, re-logging of drill core, pulse EM, and whole rock chemistry over selected parts of the property.

EXPLORATION 2006

A limited amount of field work is planned during 2006, which will involve 2 drill programs. One will be situated on the Izok property to further define the resource and to test the down plunge extension. The second will be on the Hood property where new targets have been identified. A small field exploration program is also planned to take place on both the Izok and Hood properties, which is hoped to generate several new targets in the area.

To facilitate this work, Wolfden plans to reopen the existing exploration camp (Ham camp) located on surface lease # 3055 at Ham Lake, 6 km north west of Izok Lake. The camp will likely be open from August to November to accommodate the geologists, drill crews and support staff. The airstrip adjacent to the camp will be used to support and Supply these programs.

The campsite, which is located on the Shore of Ham Lake, consists of 13 Travco trailer units designed to accommodate approximately 40 people. This site is convenient due to its proximity to the main Izok deposit and its historic use as a camp. No further expansion of the camp is planned for this season. Camp

occupancy is not expected to exceed 35 persons, and will average 25 – 30 for the majority of the season, at times dropping below 25.

Wolfden actively employs from local communities wherever possible, and have hired employees from Cambridge Bay, Bathurst Inlet and Kugluktuk. Wolfden hopes to continue this good relationship with the local communities with continued employment opportunities for field personnel in the 2006 season.

PROJECT SUMMARY – INUKTITUK

Dd^aL^aL^c IZOK ΔL⊃ HOOD ΛCΔ^bΔ^c D^bL^b ΔΔ^bL^c

IZOK-Γ Λ⁹δΠΡ⁹ζ⁹

▷ℓσ H00D-Γ Λ⁵dΠℓ⁵b

ᄃᄆᄆᄆᄆᄆᄆ ᄆᄆᄆᄆᄆᄆᄆᄆᄆ 2006-ᄆ



HAVAAKHAP TITIRAUHIA - INUINNAQTUN

WOLF DEN RESOURCES INC.

IZOK UNALU HOOD HAVAAKHAP TITIRAUHIA

Ukuat Wolfden Resources Inc.-kut (“Wolfden”) Izok unalu Hood Havaariyauyukhat nayugaqaqtut Kitikmeoni nunaanni Nunavunmi. Ukuat 2006-mi uyarakhiuqtuni nalvaaqhiuqtit havaariyakhait qiniqhialluarniaqtut havilingnik iluani Point Lake-Itchen Lake-kunni nunap iluani puriqhimanianni uvanilu Takiyuak uyaraqarvingani. Ukuat havaakhat nayugaqaqtut ahu 400 km-kunni pingannaani Yellowknife, NWT. Qanitqiyaaq inuqarniqarluaqtuq Kugluktuk, nayugalik 265km pingannaani Izok-kut nanminiriyaanni. Ukuat Lupin Mine Uyarakhiurviat talvaniittuq 70km-kunni kivalliani Izok-kut nanminiriyaanni talvalu ahu 80km-kunni SE Pingannaani Kivalliani Hood-kut nanminiriyaanni.

IZOK NANMINIRIYAAT

Ukuat Izok-kut nanminiriyaat hivulliqaami nalvaaqhiurvigiyauihimayuq havikhanik 1971-mi ukunatigut Texasgulf Inc. talvalu uvanngat 1974-mi amigaattumik havingmik haffuminnga uyaqqanik nalvaarvigiyauihimayuq. Taimani, una nanminiriyauiyuq nuna nalvaaqhiurvigiyauiyaktuq ukunani 1970-kunni, 1990-kunni talvalu atulihaaqtillugu 2000-kunni. Wolfden-kut nanminiriliqtaat nuna April 2006-mi ukunanngat Inmet Mining Corporation Uyarakhiuqtut Kuaparisaannin talvalu parnaiyaliqtut havaakhatigut uvani auyakhami talva ilaa ilitturiffaattiarumablugillu naunaiyaqpaallirumablugillu havauhikhait.

HOOD NANMINIRIYAAT

Ukuat Hood-kut nanminiriyaat hivulliqaami nalvaaqhiurvigiyauihimayuq ukunatigut Texasgulf Inc./Kidd Creek Mines Ltd. Qiniqhiablutik nunap iluani puriqhimanianni (“VMS-kunni taiyauvaktut”) nauvaktuni akunianni 1971 unalu 1983. Uvani havaariyaubluni, siksiuyut nalaumaniit VMS-kutigut uyaraqangnianni nalvaarviuihimayuq. Nalvaaqhiuliffaanngittut atuqtinngau 1990, ukuat Falconbridge Ltd.-kut nunauiyaliqihutik, ikuutarvikhamingniglu naunaiyaqhutik, tiglikturniallu EM, talvalu uyaqqat tamainni uuktuqpakhugit ilanganni nanminiriyaanni.

NALVAAQHIURNIQ 2006

Kigliqaqtumi maniqqami havaakhatigut parnaiyaqtut uvani 2006-mi, havauhiqarlutik malrunnik (2) ikuutarnikkut havauhiannik. Atauhiq uvaniinniaqtuq Izok-kut nanminiriyaanni naunaiyaqpaallirutiginahuarlugu havauhikhait talvalu uuktuutigilugu atadjutikhaitigut havauhiannik. Una aippaa uvaniinniaqtuq Hood-kut nanminiriyaanni ilaa nutaanik ilitturihimaliqtamingnik. Mikitqiyamiktauq nalvaaqhiurnikhakkut havaaqarniaqtut ukunangni Izok uvanilu Hood nanminiriyaanni, ilaa niriugiyauyuk tahapkuak nutaamik nalvaaqhiurvigiyauiyukhangni.

Ikayuutikhaqattarnikkuttauq haffumani havaakhami, Wolfden-kut angmaiffaarumangmiyut tadjia huli nalvaaqhiurnikkut tupiqarvianni (Ham tupiqarviat)

nayugaqaqtuq qaangani aturutainni # 3055 uvani Ham Lake-kunni, 6 km-kut kanangnaani uataani Izok Lake-kut Tahiani. Una tupiqarvik angmaumaniaqtuq ahu August-min August November-mun ilaa nayugakhait ukuat uyarakhiurnikkut havaktiit, ikuutaqtiillu ukuallu havaktivaluit. Una milvik atahimayuq tupiqarvingmi atuqtauvangniaqtuq Tamayaqarviulunilu ukunannga havauhirnik.

Una tupiqarvik, nayugalik uvani Hinaanni Ham Lake-kut, piutiqaqtut 13-nguyunik Travco tupiqpangnik ilaa inuqarniqarungnaqtut 40-nguyunik. Una nayugauyuq ihuaqtuq ungahikpallaanginnami Izok-kunni nalvaaqhiurningannik ilaa talvalu taimaniraaluk initurliuhimavakkami. Uvani tupiqarvingmi ilavaallirungnaitaat uvani auyami. Tupiqarvingmiittukhani ilaa avatqulimailruuqtut 35-nik inungnik, talvalu inuqaqpangniarungnaqhivuq 25-nin 30-nun talvani havangnaqtumi for the majority, ilaani ikitqiyauvangniaqtut atpani 25-nguyunik.

Wolfden-kut tadjja havaktiqaqtut nunalingmiutauyunin ilaa ayurnaitpat, talvalu havaktiqaqpakhutik Iqaluktuuttiamin, Qingaungmin Kugluktuminlu. Wolfden-kut niriuktut havaqatigittiarumablunigit ukuat nunalingmiuyut ilaa havaktiqattarlugillu uvani 2006-mi havauhikhaanni.

**ATTACHMENT 1 – SPILL CONTINGENCY PLAN
INCLUDING RELEVANT MSDS DOCUMENTS**



SPILL CONTINGENCY PLAN EXPLORATION OPERATIONS IZOK AND HOOD PROJECTS NUNAVUT, CANADA

Wolfden Resources Inc.

401-1113 Jade Court, Thunder Bay ON P7B 6M7 • Tel: 807-346-1668 • Fax: 807-345-0284
E-mail: info@wolfdenresources.com • Web: www.wolfdenresources.com

SPILL CONTINGENCY PLAN EXPLORATION OPERATIONS IZOK AND HOOD PROJECTS NUNAVUT, CANADA

December 5, 2006



Prepared By:

Sandra Rickard – Geologist
Wolfden Resources Inc.

Date: December 5, 2006

Reviewed By:

Andrew Mitchell - Project Manager
Wolfden Resources Inc.

Date: December 5, 2006

Authorized By:

John Begeman - Chief Operating Officer
Wolfden Resources Inc.

Date: December 5, 2006

Wolfden Resources Inc.

401-1113 Jade Court, Thunder Bay ON P7B 6M7 • Tel: 807-346-1668 • Fax: 807-345-0284
E-mail: info@wolfdenresources.com • Web: www.wolfdenresources.com

TABLE OF CONTENTS

| | | |
|---------|--|----|
| 1.0 | PREAMBLE | 1 |
| 2.0 | INTRODUCTION..... | 2 |
| 3.0 | SITE DESCRIPTION..... | 3 |
| 4.0 | CONTACTS | 4 |
| 5.0 | RESPONSE ORGANIZATION..... | 5 |
| 6.0 | SPILL RESPONSE TEAM..... | 6 |
| 7.0 | INITIAL ACTION..... | 7 |
| 8.0 | REPORTING..... | 8 |
| 9.0 | RESOURCE INVENTORY | 9 |
| 10.0 | HAZARDOUS MATERIAL INVENTORY | 10 |
| 10.1. | DIESEL FUEL, JET-B, GASOLINE | 10 |
| 10.1.1. | GENERAL PRECAUTIONS..... | 10 |
| 10.1.2. | SPILL ON LAND..... | 10 |
| 10.1.3. | SPILL ON WATER..... | 11 |
| 10.1.4. | SPILL ON RIVERS AND STREAMS..... | 11 |
| 10.1.5. | SPILL ON ICE AND SNOW | 11 |
| 10.1.6. | SPILL DISPOSAL | 11 |
| 10.2. | PROPANE | 11 |
| 10.2.1. | GENERAL PRECAUTIONS..... | 11 |
| 10.2.2. | SPILL ON LAND, WATER, ICE AND SNOW | 12 |
| 10.2.3. | SPILL DISPOSAL | 12 |
| 10.3. | MOTOR OIL, HYDRAULIC OIL, TRANSMISSION FLUID | 12 |
| 10.3.1. | GENERAL PRECAUTIONS..... | 12 |
| 10.3.2. | SPILL ACTION..... | 12 |
| 10.4. | ANTIFREEZE..... | 13 |
| 10.4.1. | GENERAL PRECAUTIONS..... | 13 |
| 10.4.2. | SPILL ON LAND..... | 13 |
| 10.4.3. | SPILL ON RIVERS AND STREAMS..... | 13 |
| 10.4.4. | SPILL ON ICE AND SNOW | 13 |
| 10.4.5. | SPILL DISPOSAL | 13 |
| 10.5. | BATTERY ACID | 13 |
| 10.5.1. | GENERAL PRECAUTIONS..... | 13 |
| 10.5.2. | SPILL ACTION..... | 13 |
| 10.6. | POLY-DRILL DR-133..... | 14 |
| 10.6.1. | GENERAL PRECAUTIONS..... | 14 |

TABLE OF CONTENTS

| | | |
|---------|--------------------------|----|
| 10.6.2. | SPILL ACTION..... | 14 |
| 10.7. | 550-X POLYMER..... | 14 |
| 10.7.1. | GENERAL PRECAUTIONS..... | 14 |
| 10.7.2. | SPILL ACTION..... | 14 |

LIST OF FIGURES

FIGURE 1 – REGIONAL OVERVIEW MAP

FIGURE 2 – HOOK DRILLING OPERATIONS AREA MAP

FIGURE 3 – IZOK DRILLING OPERATIONS AREA MAP

FIGURE 4 – HAM CAMP LAYOUT MAP

1.0 PREAMBLE

The Spill Contingency Plan is effective from June 30, 2006 to December 31, 2007 and applies to the Izok, Hood and Gondor Projects – Ham camp operated by Wolf Den Resources in the Kitikmeot District of Nunavut, north latitude 65° 40' and west longitude 112° 50'. The project is under agreement with Nunavut Tunngavik Incorporated (NTI). Land Use permits with the Kitikmeot Inuit Association (KIA) and Nunavut Water Board (NWB) are currently in place.

The locations of the Izok and Hood drilling areas are shown on Figures 1 to 3. The Ham Camp layout is shown on Figure 4.

The following formal distribution has been made of this plan: KIA, NWB, Ian Neill (Camp Manager, Wolf Den Resources), John Begeman (Chief Operating Officer, Wolf Den Resources Inc.) Ewan Downie (President and Chief Executive Officer – Wolf Den Resources Inc.).

3.0 SITE DESCRIPTION

The camp is located on the South and East Shores of Ham Lake. The camp was established by the previous operator of the exploration project, Inmet Mining Corporation (Inmet). The camp includes an accommodation complex, diamond drill core logging and storage facilities, garage, fuel storage facilities. The camp is served by a 2500 foot long gravel air strip. The layout of the camp is shown on Figure 4.

From an inventory provided by Inmet, following is a list of the major components of the camp and ancillary facilities.

Major Camp Equipment/Facilities

- 13 – Travco trailer units
- 8 – 4' x 44' camp matting
- 1 – Oil fired incinerator (serial no. 18162)
- 1 – 10' x 44' Generator Building
- 2 – Cummins 150 kW diesel generators (serial no's. 44670421 and 4460441)
- 1 – Steel garage – 20' x 24'
- 2 – Wood frame, steel clad core storage warehouses
- 1 – Wood frame, aluminum clad 12' x 36' skidded core shack

Fuel Tanks

- 7 – 12,000 gal fuel skid mounted fuel tanks

Mobile Equipment

- 1 – Caterpillar D-6 Bulldozer
- 1 – Champion Motor Grader
- 1 – Fuel Trailer
- 1- 1992 Ford Supercab F-350 trucks (diesel)

A map showing the regional setting of the project areas is provided on Figure 1. This plan can be extended to drilling operations that will be carried out at some distance from the camp. The outlines of these areas are shown on Figures 2 and 3. A map showing the layout of the camp and airstrip is provided on Figure 4.

2.0 INTRODUCTION

This Spill Contingency Plan is to provides a plan of action for reasonably foreseeable spill events at the Izok, Hood and Gondor Projects – Ham camp considering the nature of the fuels and other hazardous materials that will be handled during the Company's operations. The plan defines the responsibilities of key response personnel and outlines the procedures for responding to spill in a way that will act to minimize potential health and safety hazards, environmental damage and remediation costs. The plan has been prepared to provide ready access to all the information needed in dealing with a spill.

It is Wolfden Resources policy to comply with all existing laws and regulations to help ensure the protection of the environment, to provide such protection of the environment as is technically feasible, to cooperate with other groups working on protection of the environment and to keep employees, government officials and the public informed.

Personnel will be instructed on the plan upon arrival in camp. Instruction will also be given on how to properly manipulate and store fuel and other hazardous substances and on the location of emergency equipment. A more graphical representation of this plan will be posted in common camp areas.


4.0 CONTACTS

People and organizations that can be contacted in the event of a spill:

| | | |
|-----------------------------|------------------|--|
| Camp Manager | Ian Neill | 416-987-7167 |
| Field Supervisor | Ian Neill | 416-987-7176 |
| Project Manager | Andrew Mitchell | (807)-346-1668 |
| Wolfden Head Office | Ewan Downie | (807)-346-1668 |
| Kitikmeot Inuit Association | Jack Kaniak | (867)-982-3310 |
| Nunavut Water Board | Phyllis Beaulieu | (867)-360-6338 (867)-360-6369 (fax) |
| Spill Report Line (24 hr) | | (867)-873-6924 |
| Environment Canada | | (867)-669-4644 |
| WCB 24 Hour Accidents | | (867)-873-7468 |
| WCB Inspector | Peter Bengts | (867)-920-3888 |
| Kugluktuk Health Center | Janet Carstairs | (867)-982-4531 |
| Kugluktuk RCMP | Franco Radescho | (867)-982-1111 (867)-920-8130 (fax) |

5.0 RESPONSE ORGANIZATION

The following is a flow chart to illustrate the sequence of events if a hazardous material spill occurs at the Izok, Hood or Gondor Projects.

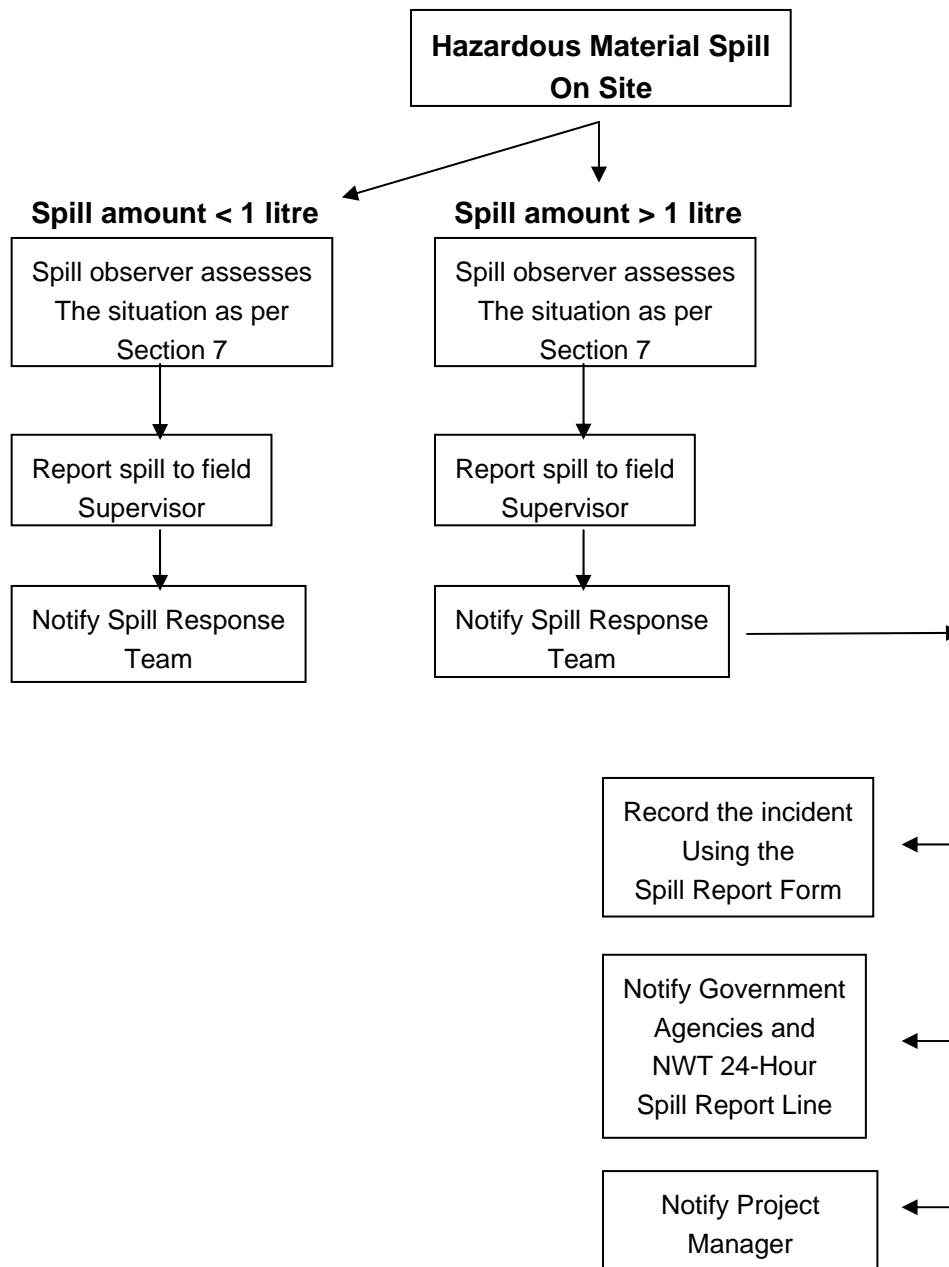

6.0 SPILL RESPONSE TEAM

All personnel will be informed of the contents of the Spill Contingency Plan and trained in the safe use of relevant spill prevention and clean up equipment. The Field Supervisor will appoint and train two persons to be the Spill Response Team. They will also be responsible to carry out the daily inspections of the fuel storage areas and equipment. Personnel on site will be limited, so for any large spill more people will be brought in to help, primarily from Wolfden's Lupin Mine located 75km east of Izok and secondly from Yellowknife.

Spill Response Team Responsibilities

- Perform daily inspections at the Camp fuel and chemical storage areas and fuel hoses.
- Report any spill to Field Supervisor
- Containment of the spill and site remediation.

Field Supervisor Responsibilities

- Assume complete authority over the spill scene and coordinate all personnel involved.
- Evaluate spill situation and develop overall plan of action.
- Activate the spill contingency plan
- Immediately report the spill to the NWT 24-Hour Spill Report Line and regulatory agencies. (For spill greater than 1 litre)
- Fill out the Spill Report Form (for spill greater than 1 litre)
- Report the spill to the Project Manager. (For spill greater than 1 litre)
- If required, obtain additional manpower, equipment, and material if not available on site for spill response.

Project Manager Responsibilities

- Provide regulatory agencies and Wolfden Resources management with information regarding the status of the clean up activities.
- Prepare and submit a report on the spill incident to regulatory agencies within 30 days of the event.

7.0 INITIAL ACTION

These instructions are to be followed by the first person on the spill scene.

1. Always be alert and consider your safety first.
2. Wear personal protective equipment
3. Do not smoke and eliminate all source of ignition
4. Assess the hazard to people in the vicinity of the spill.
5. If possible control danger to human life
6. Do not touch, smell, taste or get close to unknown substance.
7. If substance has been identified and if possible and safe to do so, try to stop the flow of material.
 - If filling is in progress, stop at once
 - If seeping through a small hole, use a patch kit if practical to do so.
 - If necessary and practical, pump the fuel from the leaking container into a refuge container
8. Immediately report the spill to the Field Supervisor and Spill Response Team by radio, satellite phone or in person.
9. Resume any effective action to contain, mitigate, or terminate the flow of the spilled material.
10. If in doubt about cleaning procedures or for a very large spill, regulatory agencies can help.

8.0 REPORTING

The person who notices the spill must immediately notify the Field Supervisor. As soon as possible the Field Supervisor will report the spill to:

- The 24-Hour Spill Report Line Phone (867) 920-8130, Fax (867) 873-6924
- Fill out the NWT Spill Report Form NWT1752/0202
- Notify the Project Manager for a spill greater than 1 litre.
- Notify permitting authorities (Nunavut Water Board, Kitikmeot Inuit Association)

9.0 RESOURCE INVENTORY

A spill kit with a capacity of 240 litres will be located at the fuel tank area and will contain:

- 1 – 360 litre/79 gallon polyethylene drum
- 4 – oil absorbent booms (5" X 10')
- 100 – oil absorbent sheets (16.5" X 20" X 3/8")
- 1 – drain cover (36" X 36" X 1/16")
- 1 – Caution tape (3" X 500')
- 1 – 1 lb plugging compound
- 2 – pair Nitrile gloves
- 2 – pair Safety goggles
- 2 – pair Tyvek coveralls
- 1 – instruction booklet
- 10 – printed disposable bags (24" X 48")
- 1- shovel (in remote spill kit only)
- 1- plastic tarp

Shovels, water pump, plastic pails, garbage bags, extra absorbent pad, drip pans will be placed on the side of the wall at the main office and the kitchen. Fire extinguishers are available throughout the camp facility.

Drill Spill Kits with a capacity of 25 L will contain the following:

- 10- Pads (17"x19"x2/8")
- 3 - Socks (3"x4')
- 1 - Pair of Gloves
- 1 - Disposal Bags
- 1 - Warning Sign
- 1 - Literature (Inventory List, MSDS, Instructions)

10.0 HAZARDOUS MATERIAL INVENTORY

This following section lists for each hazardous substance present on the project area, health hazards, spill procedure and disposal procedures. For more detailed information, refer to the MSDS sheets.

10.1. DIESEL FUEL, JET-B, GASOLINE

DIESEL, JET-B AND GASOLINE ARE HIGHLY FLAMMABLE

10.1.1. GENERAL PRECAUTIONS

- Do not smoke
- Will be easily ignited by heat, sparks or flames
- Gasoline and Jet-B are more volatile than diesel
- Explosion hazard indoors, in confined spaces and outdoors
- Vapours may form explosive mixtures with air
- Vapours may travel to source of ignition and flash back
- Most vapours are heavier than air. They will spread along ground and collect in low or confined areas.
- Keep pump or electrical equipment far away, be very careful with metallic tools that could sparks on rocks, wait for vapours to dissipate
- Inhalation may cause central nervous effects
- Aspiration into lungs may cause pneumonitis which can be fatal
- Eye and skin irritation
- Prolonged exposure has caused cancers in laboratory animals

10.1.2. SPILL ON LAND

- Build a containment berm, downslope, using, peat, moss, and soil material, bags filled with sand or rocks and place a plastic tarp at the foot of the berm to pool the spill. Spill can be pumped if in a large amount
- Soak up spilled substance by using absorbent pads
- Excavate the surface soil if necessary. If large excavation is needed, first contact regulatory agencies for approval.
- Remove spill substance splashed on vegetation by applying a thin dusting of Spag-zorb or other ultra-dry absorbent.
- Dispose hydrocarbons, absorbent pad, contaminated soil and cleaning material in an empty drum, seal it and label it.
- On marshy zones, don't destroy vegetal cover, limit personnel and equipment. Remove pooled oil with absorbent pads and/or skimmer.

10.1.3. SPILL ON WATER

- Contain spill as close to release point as possible
- On small spill, deploy hydrophobic absorbent pads
- On larger spill and weather conditions permitting, use containment boom to limit fuel dispersion. Use a skimmer, pump or hydrophobic absorbent pads to remove fuel inside the boom.
- Dispose hydrocarbons, absorbent pad, contaminated soil and cleaning material in an empty drum, seal it and label it.

10.1.4. SPILL ON RIVERS AND STREAMS

- Prevent entry into water, if possible, by building a berm or trench.
- Intercept moving slicks in quiet areas using (absorbent) booms.
- Do not use absorbent booms/pads in fast currents and turbulent water.

10.1.5. SPILL ON ICE AND SNOW

- Build a containment berm of compacted snow around spill.
- If hydrocarbons are pooling on ice, pump large amount or use hydrophobic absorbent pads.
- Don't delay removing the spill as hydrocarbons could seep through cracks into the water.
- Scrape ice, shovel all contaminated snow in plastic buckets with lids or in drums. Dispose absorbent pads and other contaminated equipment in separated containers. Label and seal the containers.

10.1.6. SPILL DISPOSAL

- Contact Federal and Territorial regulatory agencies to identify appropriate disposal methods before disposing of contaminated material.

10.2. PROPANE

EXTREMELY FLAMMABLE*10.2.1. GENERAL PRECAUTIONS*

- Do not smoke
- Cylinders may explode when heated
- Cylinders may rocket if ruptured
- Will be easily ignited by heat, sparks or flames
- Explosion hazard indoors, in confined spaces and outdoors
- Vapours may form explosive mixtures with air
- Vapours may travel to source of ignition and flash back

- Vapours from liquefied gas are initially heavier than air and spread along ground.
- Contact with gas or liquefied gas may cause burns, severe injuries and/or frostbite
- Keep pump or electrical equipment far away, be very careful with metallic tools that could sparks on rocks, wait for vapours to dissipate
- Liquid may cause frostbites and blisters
- Blurred vision if goes in the eyes
- Narcotic aphyxiant
- Dizziness, disorientation, excitation, headache, vomiting, unconsciousness if inhaled

10.2.2. SPILL ON LAND, WATER, ICE AND SNOW

- Eliminate all source of ignition
- Do not attempt to contain the propane release if not absolutely sure on what to do.
- Do not touch or walk through spilled material
- Stop leak if can be done without risk
- If possible, turn container so that gas escapes rather than liquid.
- Water spray can be used to knock down vapours but don't direct water at spill or source of leak
- Prevent spreading of vapours in confined areas
- If or when possible, confine spill with confinement berm. Throw absorbent pads into spill, retrieved them with gaffs or pitchforks.
- Small fire can be extinguished with dry chemical or CO₂.
- Dispose contaminated materials in a labeled drum.

10.2.3. SPILL DISPOSAL

- Contact Federal and Territorial regulatory agencies to identify appropriate disposal methods for detective equipment that resulted in the release.

10.3. MOTOR OIL, HYDRAULIC OIL, TRANSMISSION FLUID

10.3.1. GENERAL PRECAUTIONS

- Avoid breathing mists, may cause lung irritation
- On skin may cause mild irritation

10.3.2. SPILL ACTION

Soak up with absorbent material

- Disposed contaminated soil and material in sealed and labeled container
- Small amount can be incinerated
- Large amount to be disposed as hazardous waste.

10.4. ANTIFREEZE

10.4.1. GENERAL PRECAUTIONS

- Respiratory irritation with prolonged exposure.
- Kidney, liver and bladder problems reported in animals

10.4.2. SPILL ON LAND

- Soak up by using absorbent pads
- Dispose antifreeze, absorbent pad, contaminated soil and cleaning material in an empty drum, seal it and label it.
- On marshy zones, don't destroy vegetal cover, limit personnel and equipment. If possible remove pooled antifreeze with absorbent pads.

10.4.3. SPILL ON RIVERS AND STREAMS

- Prevent entry into water, if possible, by building a berm or trench.

10.4.4. SPILL ON ICE AND SNOW

- Build a containment berm of compacted snow around spill.
- If pooling on ice, pump large amount or use absorbent pads.
- Don't delay removing the spill as it can seep through cracks into the water.
- Scrape ice, shovel all contaminated snow into plastic buckets with lids or in drums.
- Dispose absorbent pads and other contaminated equipment in separated containers. Label and seal the containers.

10.4.5. SPILL DISPOSAL

- Contact Federal and Territorial regulatory agencies to identify appropriate disposal methods before disposing of contaminated material.

10.5. BATTERY ACID

10.5.1. GENERAL PRECAUTIONS

- Fire and explosion hazard
- Can be extinguished with dry chemical fire extinguisher.
- Ventilate area
- Remove combustible materials
- Mist inhalation hazard when being charged or spilled
- Acid burns to skin and eyes irritation

10.5.2. SPILL ACTION

- Neutralize with soda or lime

- Dispose battery and neutralized contaminated material in a sealed and labeled container
- Dispose as an hazardous waste

10.6. POLY-DRILL DR-133

10.6.1. GENERAL PRECAUTIONS

- May cause skin and eye irritation

10.6.2. SPILL ACTION

- Soak up with absorbent pad
- Dispose residue, contaminated soil and material in labeled containers. Solidify with sand.
- Small amount can be incinerated, otherwise dispose as hazardous waste.

10.7. 550-X POLYMER


10.7.1. GENERAL PRECAUTIONS

- Prolonged skin contact may cause irritation
- Possible eye irritation
- Ingestion may cause nausea, vomiting, cramps, diarrhea

10.7.2. SPILL ACTION

- Clean up spill with gloves. Scrape soil or surface and disposed in labeled containers
- Dispose as hazardous waste

FIGURES

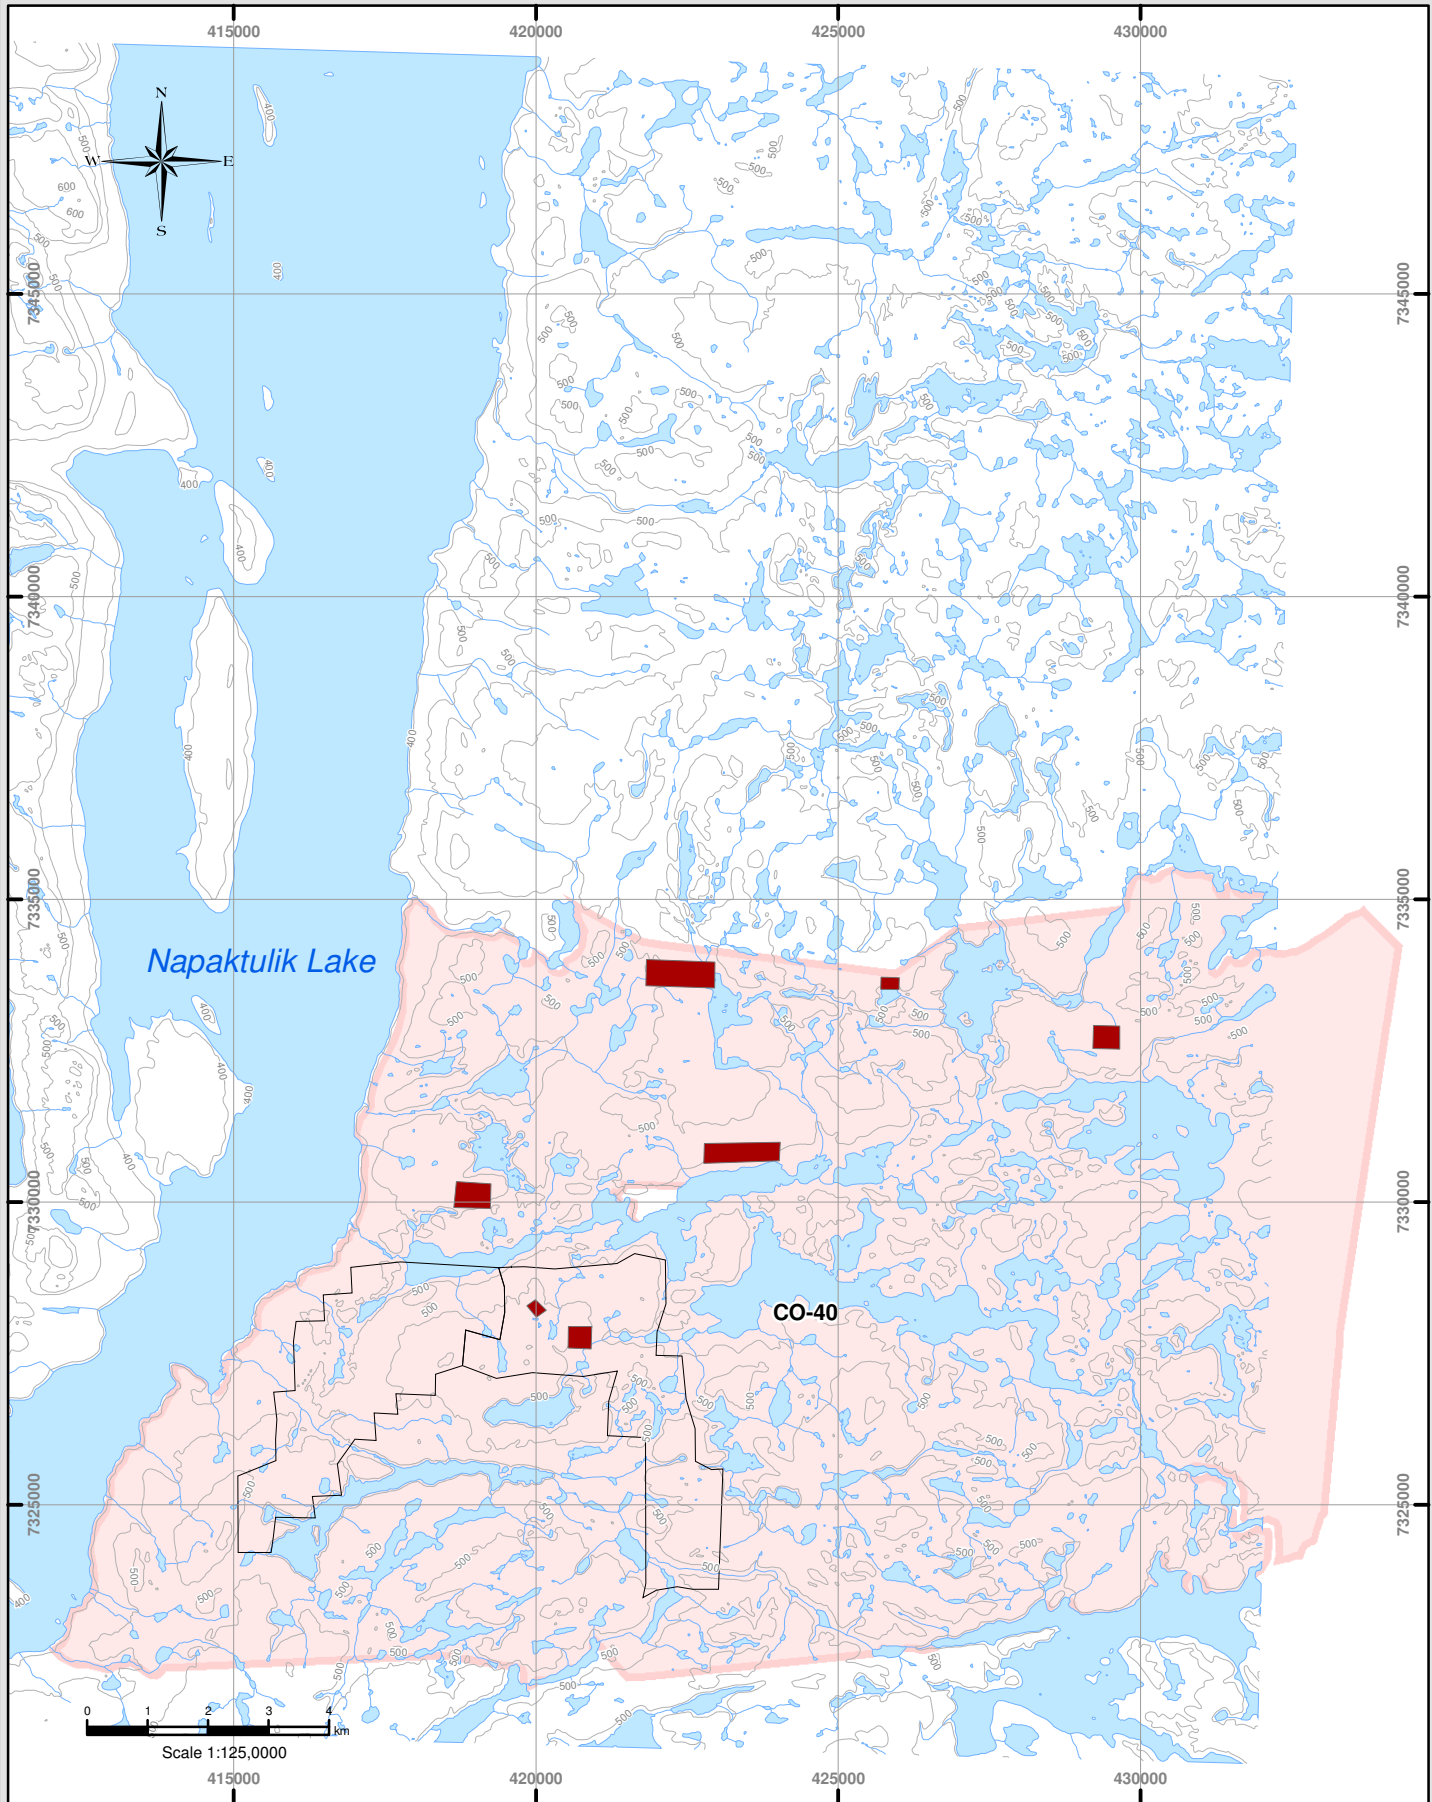

- Legend**
- Planned Drill Areas
 - Lease Area
 - Inuit Owned Lands
 - Surface and Sub-Surface Rights
 - Contour (50m)
 - Watercourse
 - Waterbody




Hood Property Exploration Locations

References:
 National Topographic Database (NTDB) compiled by the Government of Canada,
 Natural Resources Canada (NRCan) at 1:50,000.
 Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
 Lease areas and planned drill areas provided by Wolfden Resources Inc.







Projection: UTM Zone 12 NAD 83
 Revision: 0
 Date: May 31, 2006

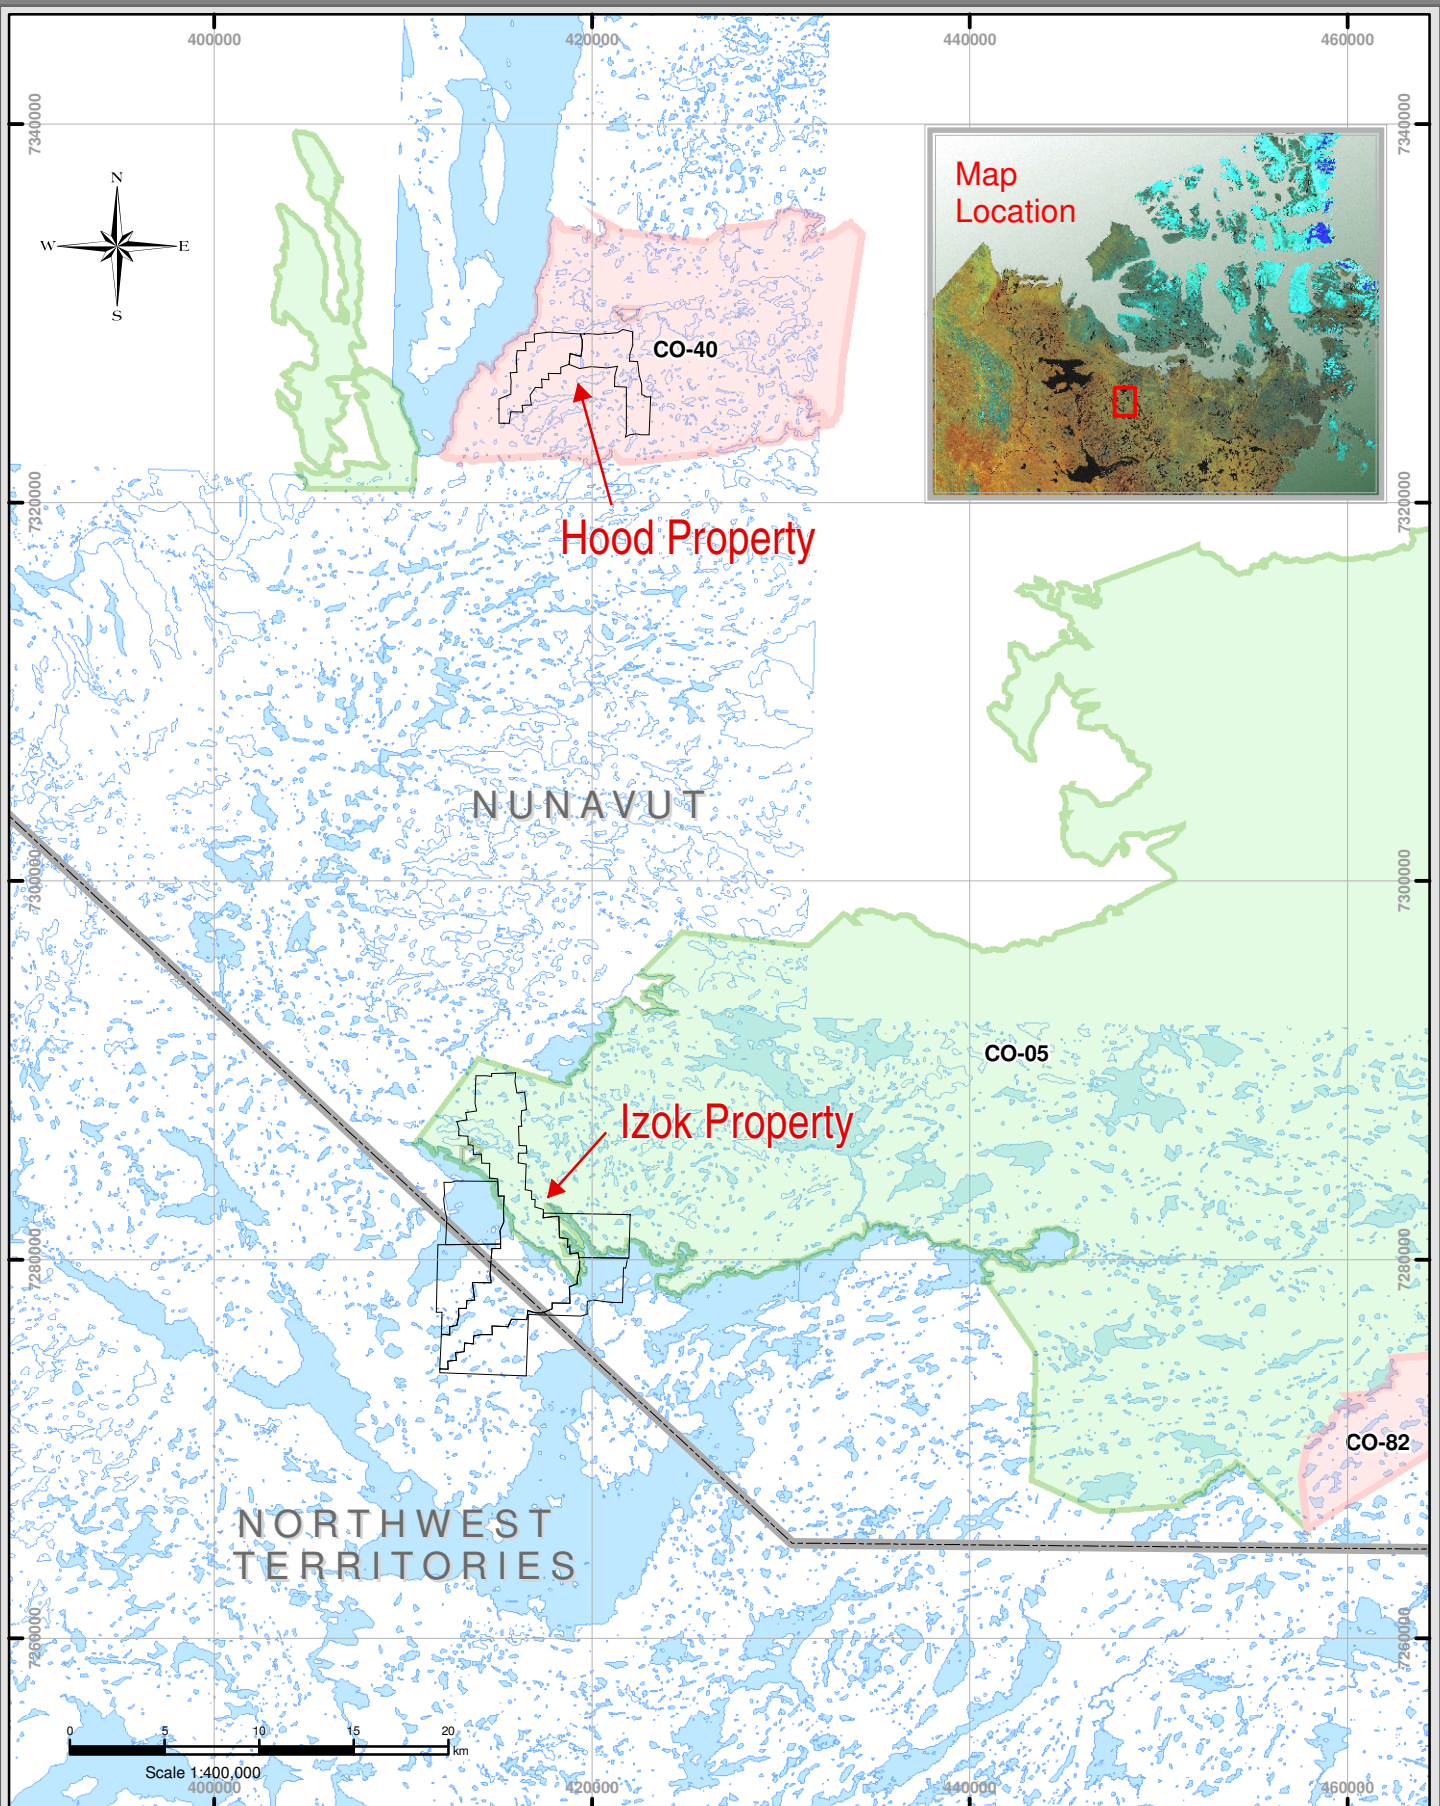

Map: **2**



Legend

- | | | | |
|---|--------------------------------|---|-------------|
|  | Lease Area |  | Watercourse |
|  | Inuit Owned Lands |  | Waterbody |
|  | Surface Rights Only | | |
|  | Surface and Sub-Surface Rights | | |



Regional Overview Map

References:

National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCan) at 1:50,000.
 Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
 Lease areas provided by Wolf Den Resources Inc.
 Government of Canada, Natural Resources Canada, Earth Science Sector, Data Management and Dissemination Branch
 Projection: UTM Zone 12 NAD83
 Revision: 0
 Date: May 31, 2006




Gartner Lee








Map:

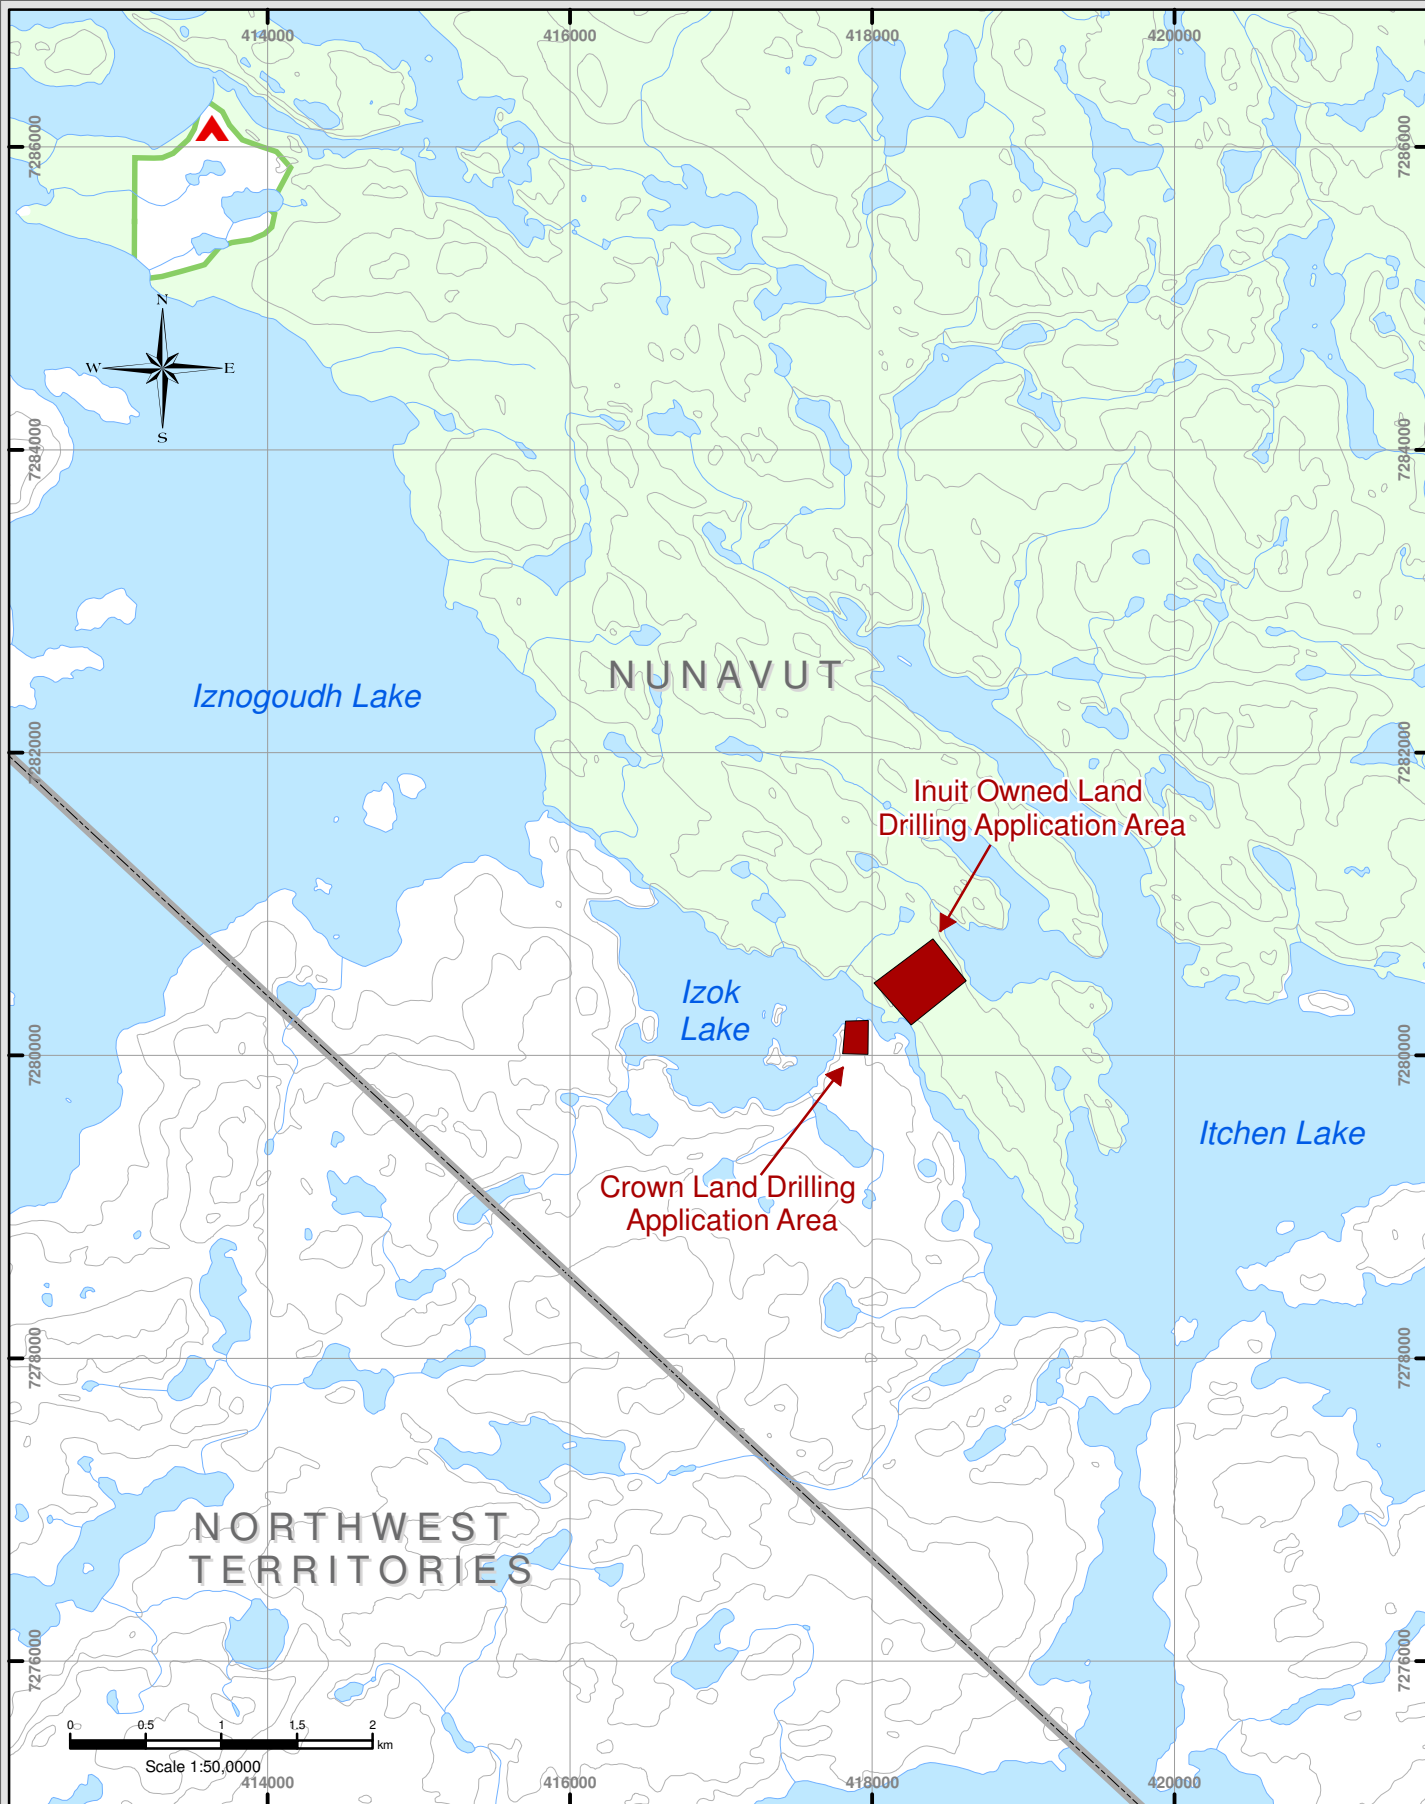1

File: P61013_C1_Fig3IzokExplor_29May2006.mxd



Legend

- | | | | |
|---|---------------------|---|---------------|
|  | Camp |  | Contour (20m) |
|  | Planned Drill Areas |  | Watercourse |
|  | Inuit Owned Lands |  | Waterbody |
|  | Surface Rights Only | | |



Izok Property Exploration Locations



References:

National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCAN) at 1:50,000.
Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
Camp location and planned drill areas provided by Wolf Den Resources Inc.

Projection: UTM Zone 12 NAD 83
Revision: 0
Date: May 31, 2006

 Gartner Lee

Map: **3**

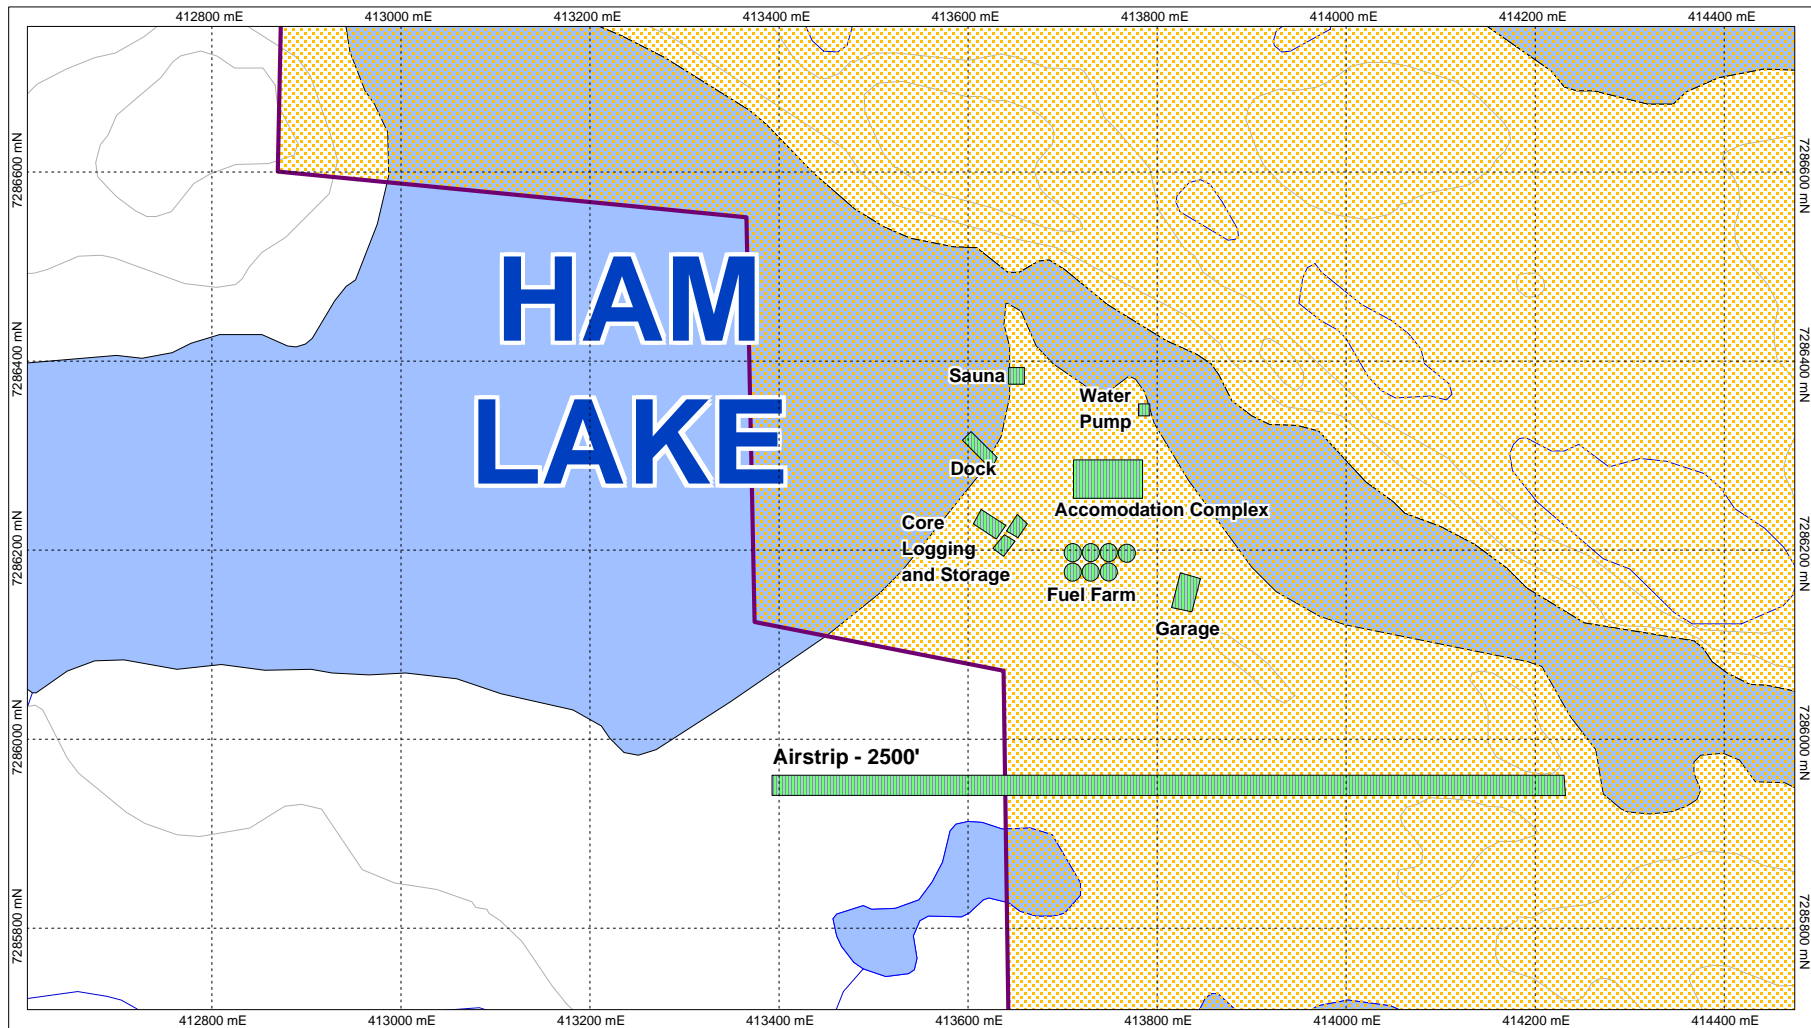

WOLFDEN RESOURCES INC.

Date: 25/5/2006

Author: S. Rickard

Office: Thunder Bay

Drawing: IN/SR

Scale: 1:8,000








Projection: UTM: NAD 83, Zone 12

IZOK/HOOD PROJECTS Water Licence Application Nunavut Water Board Camp layout

MSDS SHEETS



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|   | B-3, D-2B |     |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|-----------------------------|---|
| Product Name | STOVE OIL | Code | W107 SAP: 154 |
| Synonym | Stove Oil 55, Switch Heater Fuel, Tobacco Curing Oil, No.1 Diesel, No.1 Furnace Oil, #1 Furnace Oil, ThermaClean. | Validated on | 2/24/2004. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Stove Oils are light distillate fuels suitable for use in liquid fuel burning equipment without preheating. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|--|---|---------|-------------------------|-----------------|-----------------|
| Name | CAS # | % (V/V) | TLV-TWA(8 h) | STEL | CEILING |
| Complex mixture of petroleum hydrocarbons (C9-C18) | 64742-81-0 | >99.9 | Not established | Not established | Not established |
| Trace of functional additives. | 64742-80-9 Not applicable | <0.1 | Not established | Not established | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|--|
| Potential Health Effects | Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS. |
|---------------------------------|--|

Section 4. First Aid Measures

| | |
|--------------------------|---|
| Eye Contact | IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention. |
| Skin Contact | Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention. |
| Inhalation | Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention. |
| Ingestion | DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|--|--|---|
| Flammability | Class II - combustible liquid (NFPA). | Flammable Limits | Lower: 0.7%, Upper: 6% |
| Flash Points | CLOSED CUP: >40°C (104°F). (Closed Cup) | Auto-Ignition Temperature | 225°C (437°F) |
| Fire Hazards in Presence of Various Substances | Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. | Explosion Hazards in Presence of Various Substances | Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Runoff to sewer may create fire or explosion hazard. |

| | |
|---|---|
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), smoke and irritating vapours as products of incomplete combustion. |
| Fire Fighting Media and Instructions | <p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p> |

Section 6. Accidental Release Measures

| | |
|----------------------------------|---|
| Material Release or Spill | Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Evacuate non-essential personnel. Ventilate area. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. |
|----------------------------------|---|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Avoid confined spaces and areas with poor ventilation. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. |
| Storage | Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. |

Section 8. Exposure Controls/Personal Protection

| | |
|---|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered. |
| Body | Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn. |
| Respiratory | Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation. |
| Hands | Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|--|--------------------------------------|---|
| Physical State and Appearance | Bright oily liquid. | Viscosity | 1.3 - 4.1 cSt @ 40°C (104°F). |
| Colour | Clear to yellow / brown (may be dyed for taxation purposes). | Pour Point | Variable, -50°C to 0°C (-58°F to 32°F) |
| Odour | Mild petroleum oil like. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | 150 - 315°C (302 - 599°F) | Penetration | Not applicable. |
| Density | 0.80 - 0.85 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | 4.5 (Air = 1) | Ionicity (in water) | Not available |
| Vapour Pressure | 1.0 kPa @ 20°C (7.5 mmHg @ 68°F). | Dispersion Properties | Not available |
| Volatility | <0.1 (Butyl acetate = 1), less than gasoline. | Solubility | Insoluble in cold water, soluble in non-polar hydrocarbon solvents. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|--|
| Corrosivity | Not available | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents. | Decomposition Products | May release COx, NOx, SOx, H2S, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|---------------------------------------|--|
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. |
| Acute Lethality | <p>Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below:</p> <p><u>Kerosine (petroleum), hydrosulfurized (64742-81-0):</u> Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >2000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >5000 mg/m³/4h (rat)</p> <p><u>Distillates (petroleum), hydrodesulfurized middle (64742-80-9):</u> Acute Inhalation toxicity (LC50): 4600 mg/m³/4h (rat)</p> |
| Chronic or Other Toxic Effects | |
| Dermal Route: | This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. |
| Inhalation Route: | Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Oral Route: | Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Eye Irritation/Inflammation: | This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |

| | |
|--------------------------------|---|
| Reproductive Toxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. (Considered to be A3 by the ACGIH. Kerosine (petroleum), hydrosulfurized, 64742-81-0). |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---|---------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks No additional remark. | | | |


Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|-------------------------------------|---|--|
| TDG Classification | FUEL OIL, 3, UN1202, PGIII (CL-TDG) | Special Provisions for Transport | See Transportation of Dangerous Goods Regulations. |
|---------------------------|-------------------------------------|---|--|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|------|---|---|---------------------------------|------|---|-----|------------|-----|---------------------|-----|----------------------|--|---|--|--------|---|-------------|---|--|---|------------|---|---------------|--|
| Other Regulations | | <p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p> | | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | | Not evaluated. | | HCS (U.S.A.) | | CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F). | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN | | DOT (U.S.A) (Pictograms) | |  | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | | <table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(2)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table> | | Health Hazard | (2*) | Fire Hazard | (2) | Reactivity | (0) | Personal Protection | (H) | NFPA (U.S.A.) | | <table><tr><td>Health</td><td>2</td><td>Fire Hazard</td><td>2</td></tr><tr><td></td><td>2</td><td>Reactivity</td><td>0</td></tr></table> <p>Specific hazard</p> | | Health | 2 | Fire Hazard | 2 | | 2 | Reactivity | 0 | Rating | 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme |
| Health Hazard | (2*) | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | (2) | | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | (0) | | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | (H) | | | | | | | | | | | | | | | | | | | | | | | | |
| Health | 2 | Fire Hazard | 2 | | | | | | | | | | | | | | | | | | | | | | |
| | 2 | Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

References Available upon request.
 * Marque de commerce de Petro-Canada - Trademark

Glossary

| | |
|---|--|
| ACGIH - American Conference of Governmental Industrial Hygienists | IRIS - Integrated Risk Information System |
| ADR - Agreement on Dangerous goods by Road (Europe) | LD50/LC50 - Lethal Dose/Concentration kill 50% |
| ASTM - American Society for Testing and Materials | LDLo/LCLo - Lowest Published Lethal Dose/Concentration |
| BOD5 - Biological Oxygen Demand in 5 days | NAERG'96 - North American Emergency Response Guide Book (1996) |
| CAN/CGA B149.2 Propane Installation Code | NFPA - National Fire Prevention Association |
| CAS - Chemical Abstract Services | NIOSH - National Institute for Occupational Safety & Health |
| CEPA - Canadian Environmental Protection Act | NPRI - National Pollutant Release Inventory |
| CERCLA - Comprehensive Environmental Response, Compensation and Liability Act | NSNR - New Substances Notification Regulations (Canada) |
| CFR - Code of Federal Regulations | NTP - National Toxicology Program |
| CHIP - Chemicals Hazard Information and Packaging Approved Supply List | OSHA - Occupational Safety & Health Administration |
| CNS - Central Nervous System | PEL - Permissible Exposure Limit |
| COD5 - Chemical Oxygen Demand in 5 days | RCRA - Resource Conservation and Recovery Act |
| CPR - Controlled Products Regulations | RTECS - Registry of Toxic Effects of Chemical Substances |
| DOT - Department of Transport | SARA - Superfund Amendments and Reorganization Act |
| DSCL - Dangerous Substances Classification and Labeling (Europe) | SD - Single Dose |
| DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) | STEL - Short Term Exposure Limit (15 minutes) |
| DSL - Domestic Substance List | TDG - Transportation Dangerous Goods (Canada) |
| EEC/EU - European Economic Community/European Union | TDLo/TCLo - Lowest Published Toxic Dose/Concentration |
| EINECS - European Inventory of Existing Commercial Chemical Substances | TLm - Median Tolerance Limit |
| EPA - Environmental Protection Agency | TLV-TWA - Threshold Limit Value-Time Weighted Average |
| EPCRA - Emergency Planning and Community Right to Know Act | TSCA - Toxic Substances Control Act |
| FDA - Food and Drug Administration | USEPA - United States Environmental Protection Agency |
| FIFRA - Federal Insecticide, Fungicide and Rodenticide Act | USP - United States Pharmacopoeia |
| HCS - Hazard Communication Standard | WHMIS - Workplace Hazardous Material Information System |
| HMIS - Hazardous Material Information System | |
| IARC - International Agency for Research on Cancer | |

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 2/24/2004.

Data entry by Product Safety - DSR.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|  | A, B-1 |  |  |

| Section 1. Chemical Product and Company Identification | | | |
|--|--|--|--|
| Product Name PROPANE | | Code W222 SAP: 169 | |
| Synonym Propane HD-5, Propane commercial, Liquefied Petroleum Gas (LPG), C3H8, CGSB Propane Grade 1, CGSB Propane Grade 2, odourized propane, stenched propane, automotive propane. | | Validated on 3/17/2004. | |
| Manufacturer PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | | <u>In case of Emergency</u> Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). | |
| Material Uses Propane is used as a fuel gas, refrigerant, automotive fuel and as a raw material for organic synthesis. The grade determines the propane content. It is supplied as pressurized liquid in tanks. | | | |

| Section 2. Composition and Information on Ingredients | | | | | |
|---|---|---------|-------------------------|-----------------|-----------------|
| | | | Exposure Limits (ACGIH) | | |
| Name | CAS # | % (V/V) | TLV-TWA(8 h) | STEL | CEILING |
| HD-5 Propane | 74-98-6 | >90 | 1000 ppm | Not established | Not established |
| Propane | 115-07-1 | <5 | Simple Asphyxiant | Not established | Not established |
| Propene | | | | | |
| Commercial Propane | 74-98-6 | >75 | 1000 ppm | Not established | Not established |
| Propane | 115-07-1 | <20 | Simple Asphyxiant | Not established | Not established |
| Propene | | | | | |
| Both grades may contain: | | | | | |
| Ethane | 74-84-0 | <6 | 1000 ppm | Not established | Not established |
| Butane + | 106-97-8 | <5 | 1000 ppm | Not established | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

| Section 3. Hazards Identification. | |
|------------------------------------|---|
| Potential Health Effects | The product is contained under pressure. Do not puncture, incinerate or heat container as contents may explode. Flammable gas. Exercise caution when handling this material. Propane may displace oxygen and cause asphyxiation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Contact with gas or liquified gas may cause burns and frostbite to eyes and skin. Ingestion is not an expected route of exposure. For more information, refer to Section 11. |

| Section 4. First Aid Measures | |
|-------------------------------|---|
| Eye Contact | IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention. |
| Skin Contact | Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention. |
| Inhalation | Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention. |
| Ingestion | Ingestion is not an applicable route of exposure for gases. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|---|--|--|
| Flammability | Class I - flammable gas (NFPA). | Flammable Limits | Lower: 2.1%; Upper: 9.5%, (NFPA). |
| Flash Points | CLOSED CUP: -104°C (-155°F). | Auto-Ignition Temperature | 450°C (842°F), (NFPA). |
| Fire Hazards in Presence of Various Substances | Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapours may generate static charge causing ignition. May accumulate in confined spaces. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapour explosion hazard indoors, outdoors or in sewers. Propane may form explosive mixtures with air. |
| Products of Combustion | Carbon oxides (CO, CO ₂), acrid smoke and irritating vapours as products of incomplete combustion. | | |
| Fire Fighting Media and Instructions | NAERG2000, GUIDE 115, Flammable Gas: CAUTION: This product has a low flash point, use of water spray when fighting fire may be inefficient. SMALL FIRE: Use DRY chemicals, CO ₂ , water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. Self-contained breathing apparatus (SCBA) will be required if approaching the fire from downwind, or to enter enclosed areas or buildings. Handle damaged cylinders with extreme care. | | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|--|
| Material Release or Spill | IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid breathing vapours of material. Notify appropriate authorities immediately. |
|----------------------------------|--|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | EXTREMELY FLAMMABLE GAS. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours. Wear proper personal protective equipment (See Section 8). Rapid escape of vapour may generate static charge causing ignition. Use spark-proof electrical equipment. Do not allow escaping compressed gas or liquid to come in contact with skin or eyes as it can cause frostbite. SPECIAL PRECAUTIONS: Sludges and tank scale from propane storage tanks, trucks and rail cars, and filters/screens may contain naturally occurring radioactive material ('NORM') in the form of lead 210. Similarly, equipment used for the transfer of propane such as product pipelines, pumps and compressors, may have detectable levels of radioactive lead 210 on inner surfaces. Workers involved in cleaning, repair or other maintenance on inner surfaces of such equipment should avoid breathing dust generated from such activities. Suitable codes of practice should be developed for these activities, detailing appropriate occupational hygiene and disposal practices. |
| Storage | Store away from incompatible and reactive materials (See section 5 and 10). Store away from heat and sources of ignition. Store as flammable material. Compressed gases should be stored in a separate safety storage cabinet or room. Avoid direct sunlight. Keep container tightly closed. Store in dry, cool, well-ventilated area. |

Section 8. Exposure Controls/Personal Protection

| | |
|---|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | Eye protection (i.e. safety glasses, safety goggles, and/or face shield) should be based on the condition of use. As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn. |
| Respiratory | Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation. |
| Hands | Wear appropriate chemically protective gloves. Wear insulated gloves to prevent from frostbite. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|--|--------------------------------------|----------------------------|
| Physical State and Appearance | Gas at room temperature; liquid when stored under pressure. | Viscosity | Not applicable. |
| Colour | Colourless. | Pour Point | Not applicable. |
| Odour | Propane is an odourless gas. Odourized propane will contain up to 28 g ethyl mercaptan per 1000 L of propane. | Softening Point | Not applicable. |
| Odour Threshold | Odour is not an adequate warning to prevent overexposure to propane. Prolonged exposure to mercaptans can cause olfactory desensitization. | Dropping Point | Not applicable. |
| Boiling Point | -42°C (-44°F) | Penetration | Not applicable. |
| Density | 508 kg/m ³ @ 15°C (59°F) | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | 1.56 (air=1) | Ionicity (in water) | Not available |
| Vapour Pressure | 10763 mmHg (1435 kPa) @ 38°C (100°F) | Dispersion Properties | Not available |
| Volatility | Volatile | Solubility | Slightly soluble in water. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|--|
| Corrosivity | Not available | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents. | Decomposition Products | May release CO _x , acrid smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|---------------------------------------|---|
| Routes of Entry | Inhalation, skin contact and eye contact. |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: <u>Propene (115-07-1):</u> Acute inhalation toxicity (LC50): >50000 ppm/4h (rat). <u>Butane (106-97-8):</u> Acute inhalation toxicity (LC50): 202000 ppm/4h (mouse). |
| Chronic or Other Toxic Effects | |
| Dermal Route: | Contact with gas or liquefied gas may cause burns and frostbite to the skin. |
| Inhalation Route: | Propane may displace oxygen and cause asphyxiation. Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Oral Route: | Ingestion is not an applicable route of exposure for gases. |
| Eye Irritation/Inflammation: | Contact with gas or liquefied gas may cause burns and frostbite to the eyes. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |
| Reproductive Toxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |

| | |
|--------------------------------|---|
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---|---------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks No additional remark. | | | |





Section 13. Disposal Considerations

| | |
|-----------------------|---|
| Waste Disposal | Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|---|

Section 14. Transport Information

| | | | |
|---------------------------|-------------------------------|---|--|
| TDG Classification | PROPANE, 2.1, UN1978 (CL-TDG) | Special Provisions for Transport | See Transportation of Dangerous Goods Regulations. |
|---------------------------|-------------------------------|---|--|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|---|---|---|-----------------|-------------|---|------------|---|---------------------|---|---|----------------------|---|--------------------|---------------|-----------------|--------|---|-------------------|--|----------|--|--|------------------------|--|------------|--|--|--|--|--------|--|--|--|--|-----------|
| Other Regulations | | <p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | | Not evaluated. | HCS (U.S.A.) CLASS: Flammable gas. CLASS: Compressed gas. CLASS: Target organ effects. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | DOT (U.S.A) (Pictograms)  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | | <table><tr><td>Health Hazard</td><td>1*</td></tr><tr><td>Fire Hazard</td><td>4</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table> | Health Hazard | 1* | Fire Hazard | 4 | Reactivity | 0 | Personal Protection | H | <table><tr><td>NFPA (U.S.A.)</td><td></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>Health</td><td>1</td><td>Reactivity</td><td></td><td>1 Slight</td></tr><tr><td></td><td></td><td>Specific hazard</td><td></td><td>2 Moderate</td></tr><tr><td></td><td></td><td></td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table> | NFPA (U.S.A.) |  | Fire Hazard | Rating | 0 Insignificant | Health | 1 | Reactivity | | 1 Slight | | | Specific hazard | | 2 Moderate | | | | | 3 High | | | | | 4 Extreme |
| Health Hazard | 1* | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | 4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | H | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| NFPA (U.S.A.) |  | Fire Hazard | Rating | 0 Insignificant | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Health | 1 | Reactivity | | 1 Slight | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Specific hazard | | 2 Moderate | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 3 High | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 4 Extreme | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

References Available upon request.
 * Marque de commerce de Petro-Canada - Trademark

Glossary

| | |
|---|--|
| ACGIH - American Conference of Governmental Industrial Hygienists | IRIS - Integrated Risk Information System |
| ADR - Agreement on Dangerous goods by Road (Europe) | LD50/LC50 - Lethal Dose/Concentration kill 50% |
| ASTM - American Society for Testing and Materials | LDLo/LCLo - Lowest Published Lethal Dose/Concentration |
| BOD5 - Biological Oxygen Demand in 5 days | NAERG'96 - North American Emergency Response Guide Book (1996) |
| CAN/CGA B149.2 Propane Installation Code | NFPA - National Fire Prevention Association |
| CAS - Chemical Abstract Services | NIOSH - National Institute for Occupational Safety & Health |
| CEPA - Canadian Environmental Protection Act | NPRI - National Pollutant Release Inventory |
| CERCLA - Comprehensive Environmental Response, Compensation and Liability Act | NSNR - New Substances Notification Regulations (Canada) |
| CFR - Code of Federal Regulations | NTP - National Toxicology Program |
| CHIP - Chemicals Hazard Information and Packaging Approved Supply List | OSHA - Occupational Safety & Health Administration |
| CNS - Central Nervous System | PEL - Permissible Exposure Limit |
| COD5 - Chemical Oxygen Demand in 5 days | RCRA - Resource Conservation and Recovery Act |
| CPR - Controlled Products Regulations | RTECS - Registry of Toxic Effects of Chemical Substances |
| DOT - Department of Transport | SARA - Superfund Amendments and Reorganization Act |
| DSCL - Dangerous Substances Classification and Labeling (Europe) | SD - Single Dose |
| DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) | STEL - Short Term Exposure Limit (15 minutes) |
| DSL - Domestic Substance List | TDG - Transportation Dangerous Goods (Canada) |
| EEC/EU - European Economic Community/European Union | TDLo/TCLo - Lowest Published Toxic Dose/Concentration |
| EINECS - European Inventory of Existing Commercial Chemical Substances | TLm - Median Tolerance Limit |
| EPA - Environmental Protection Agency | TLV-TWA - Threshold Limit Value-Time Weighted Average |
| EPCRA - Emergency Planning and Community Right to Know Act | TSCA - Toxic Substances Control Act |
| FDA - Food and Drug Administration | USEPA - United States Environmental Protection Agency |
| FIFRA - Federal Insecticide, Fungicide and Rodenticide Act | USP - United States Pharmacopoeia |
| HCS - Hazard Communication Standard | WHMIS - Workplace Hazardous Material Information System |
| HMIS - Hazardous Material Information System | |
| IARC - International Agency for Research on Cancer | |

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Fuels & Solvents:


Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228
 Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 3/17/2004.

Data entry by Product Safety - DSR.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-OA8
(403) 259-5112 FAX (403) 255-7185
email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME(S): Poly Drill O.B.X.

WHMIS CLASSIFICATION: Non-regulated

TDG Classification: Non dangerous goods

DATE: November 17, 2004

A liquid polymer containing guar gum, mineral oil, vegetable oil, acrylamide copolymer and a surfactant: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations.

2. PHYSICAL DATA

Boiling Point: Not available

Specific Gravity: 0.9 g/cm

Solubility in Water: disperses in water(forms viscous, slippery solution).

pH: 3.8 (1% concentration)

Density (g/ml): Not available

Physical State: Liquid

Appearance and Odor: Brown. Odor slight.

3. FIRE AND EXPLOSION DATA

Flash Point (method used): (PMCC) greater than 100 C.

Conditions of flammability: Very low risk.

Hazardous combustion products: None known.

Upper and Lower flammable limits: Not available.

Extinguishing media: Carbon dioxide, dry chemicals, foam, in preference to water spray

4. REACTIVITY

Chemical stability: Stable under normal conditions.

Hazardous Polymerization: Will not occur.

Incompatible substances: Avoid strong oxidants such as liquid chlorine, concentrated oxygen, sodium or calcium hypo chloride.

Hazardous decomposition products: None known

5. HEALTH HAZARD DATA

TOXICITY RATING: Practically non-harmful.

Routes of Exposure and Effects:

SKIN: Slight irritant: prolonged contact may cause skin irritation or dermatitis in some individuals

EYE: No effects of exposure expected with the exception of possible irritation.

INHALATION: Due to low volatility of mineral distillates a small inhalation hazard exists.

INGESTION: can cause nausea, vomiting, cramps, diarrhea
Chronic exposure limits: None
Sensitization of product: Not suspected to be a sensitizer.
Teratogenicity: Not available.
Mutagenicity: Not available.
Carcinogenicity: None of the components of this product are listed as carcinogens by IARC and ACGIH

6. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. Remove contaminated clothing. Launder contaminated clothing before re-use. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, lifting upper and lower lids occasionally. Get medical attention.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.

8. INDUSTRIAL HYGIENE CONTROL MEASURES

Respiratory Protection: None normally required.

Ventilation: If mist and/or vapors are present, use air purifying respirator or self-contained breathing apparatus, but this is rarely required.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference.

7. HANDLING AND USE PRECTIONS

Storage requirements: keep container closed when no in use. Store in a cool dry location away from oxidizing and reducing agents.

Waste Disposal: product should be disposed of in accordance with applicable local, Provincial and Federal regulations.

Steps must be taken if product is released or spilled: clean spill areas thoroughly to avoid hazardous slippery conditions.

8. TOXICOLOGICAL PROPERTIES

G50 Microtox Analysis prepared by HydroQual Laboratories, Calgary, AB--97/6/26 Test#970978:

| Test Description | EC20 | EC50 | Pass/Fail |
|------------------|------|------|-----------|
| MTX | >91 | >91 | PASS |

9. DEPARTMENT OF TRANSPORTATION INFORMATION

PROPER SHIPPING NAME/HAZARD CLASS MAY VARY BY PACKAGING, PROPERTIES, AND MODE OF TRANSPORTATION. TYPICAL PROPER SHIPPING NAMES FOR THIS PRODUCT ARE:

ALL TRANSPORTATION MODES: PRODUCT IS NOT REGULATED DURING TRANSPORTATION


Shipping Name: Liquid Drilling Additive

Hazard Class: Not hazardous

Hazardous Substances: None
Cautionary Labeling: None required

10. OTHER INFORMATION

This information contained herein is given in good faith, but no warranty, expressed or implied is made



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-OA8
(403) 259-5112 FAX (403) 255-7185
email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME: Poly-Drill 1330-W
PRODUCT DESCRIPTION: LIQUID ANIONIC POLYMER
CHEMICAL DESCRIPTION: Polymer, Surfactant(s), Water, Hydrocarbon solvent
UPDATED: March 15, 2004

NFPA704M/HMIS RATING

| | | | |
|-----------------|------------------------|-----------------|-----------|
| HEALTH: 0/1 | FLAMMABILITY: 1/1 | REACTIVITY: 0/0 | OTHER: |
| 0=Insignificant | 1=Slight 2=Moderate | 3=High | 4=Extreme |

2. COMPOSITION

A liquid polymer: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations. None of the substances in this product are hazardous.

3. PHYSICAL DATA

Flash Point: >100°C (PMCC)
Specific Gravity (@ 25°C.): 1.08
Solubility in Water: Emulsifiable
pH: 8.1 (1.0% solution)
Freeze Point: -10 °C (14 Degrees F)
Density (g/ml): 1.08 at 25 °C
Physical State: Liquid
Appearance: Blue liquid
Odor: Hydrocarbon

Note: These physical properties are typical values for this product.

4. FIRE AND EXPLOSION DATA

INCOMPATIBILITY: Avoid contact with strong oxidizers (eg. Chlorine, peroxides, chromates, nitric acid, perchlorates, concentrated oxygen, permanganates) which can generate heat, fires, explosions and the release of toxic fumes.

THERMAL DECOMPOSITION PRODUCTS: In the event of combustion CO, oxides of carbon (COx), oxides of nitrogen (NOx) may be formed. Do not breathe smoke or fumes. Wear suitable protective equipment.

5. FIRE FIGHTING MEASURES

FLASH POINT: >100°C (PMCC)

EXTINGUISHING MEDIA: Based on the NFPA guide, use dry chemical, foam, carbon dioxide or other extinguishing agent suitable for Class B fires. Use water to cool containers exposed to fire. For larger fires, use water spray or fog, thoroughly drenching the burning material.

UNSUITABLE EXTINGUISHING MEDIA:
Do not use water unless flooding amounts are available.

UNUSUAL FIRE AND EXPLOSION HAZARD: May evolve oxides of nitrogen (NOx) under fire conditions.

6. HEALTH HAZARD DATA

EMERGENCY OVERVIEW:

CAUTION: May cause irritation to skin and eyes. Avoid contact with skin, eyes and clothing. Do not take internally.

Empty containers may contain residual product. Do not reuse container unless properly reconditioned.

PRIMARY ROUTE(S) OF EXPOSURE: Eye & Skin

EYE CONTACT: Can cause mild to moderate irritation

SKIN CONTACT: Can cause mild, short-lasting irritation

SYMPTOMS OF EXPOSURE: A review of available data does not identify any symptoms from exposure not previously mentioned.

AGGRAVATION OF EXISTING CONDITIONS: A review of available data does not identify any worsening of existing conditions.

7. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, if irritation or abnormalities persist, call a physician.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately.

CAUTION: If unconscious, having trouble breathing or in convulsions, do not induce vomiting or give water. Call for medical assistance immediately.

8. HANDLING, ACCIDENTAL RELEASE MEASURES & DISPOSAL CONSIDERATIONS

Storage: Keep container tightly closed when not in use.

DISPOSAL:

In Ontario, the waste class under Regulation 347 is: 233L

SMALL SPILLS:

Soak up spill with absorbent material. Place residues in a suitable, covered, properly labeled container. Wash affected area.

LARGE SPILLS:

Contain liquid using absorbent material, by digging trenches or by dyking. Reclaim into recovery or salvage drums or tank truck for proper disposal. Contact approved waste hauler for disposal of contaminated recovered material. Dispose of material in compliance with regulations indicated.

Dispose of wastes in an approved incinerator or waste treatment/disposal site, in accordance with all applicable regulations. Do not dispose of wastes in local sewer or with normal garbage.

ENVIRONMENTAL PRECAUTIONS

This product should NOT be directly discharged into lakes, ponds, streams, waterways or public water supplies.

As a non-hazardous liquid waste, it should be solidified with stabilizing agents (such as sand, fly ash, or cement) so that no free liquid remains before disposal to an industrial waste landfill. A non-hazardous liquid waste can also be incinerated in accordance with local, state, provincial and federal regulations.

9. INDUSTRIAL HYGIENE CONTROL MEASURES

OCCUPATIONAL EXPOSURE LIMITS:

This product does not contain any substance that has an established exposure limit.

Respiratory Protection: None normally required.

For large spills, entry into large tanks, vessels or enclosed small spaces with inadequate ventilation, a positive pressure, self-contained breathing apparatus is recommended.

Ventilation: General ventilation is recommended.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference. Examples of impermeable gloves available on the market are neoprene, nitrile, PVC, natural rubber, viton, and butyl (compatibility studies have not been performed).

If clothing is contaminated, remove clothing and thoroughly wash the affected area. Launder contaminated clothing before reuse.

10. TOXICOLOGICAL PROPERTIES

SENSITIZATION:

This product is not expected to be a sensitizer.

A "LC50-96" Pass/Fail Bioassay test. This test determines the lethality of a fluid on young aquatic organisms. The fluid fails if 50% or more of the animals are dead after 96 hours in the fluid.

96 hour static acute LC50 to Rainbow Trout = Greater than 1,000 mg/L

96 hour no observed effect concentration = 125 mg/L based on no mortality or abnormal effects

96 hour static acute LC50 to Sheepshead Minnow = Greater than 1,000 mg/L

96 hour no observed effect concentration = 1,000 mg/L (highest concentration tested) based on no mortality or abnormal effects.

96 hour static acute LC50 to Mysid Shrimp = 400 mg/L

96 hour no observed effect concentration = 180 mg/L based on no mortality or abnormal effects.

96 hour static acute LC50 to Daphnia Magna - 400 mg/L

96 hour no observed effect concentration = 56 mg/L (lowest concentration tested) based on no mortality or abnormal effects.

Microtoxicity

The Microtox bioassay has been established as the reference test for mud additive toxicity testing.

Test Method: Luminescent Bacteria, IC50@ 15 min

Reference: Appendix 1: Microtox Bioassay Procedure, Drilling Waste Management, Guide G50. 1993. Alberta Energy and Utilities Board, Calgary, AB, Canada.

Sample: Poly Drill 1330, sample #97324-1 for test #970723, 97/05/09 by D. Lintott

Preparation: Sample was diluted to 2 g/L, which formed thick, slightly cloudy liquid. The sample was then centrifuged for 1 hour.

Test Results:

| SAMPLE | TREATMENT | %CTL | IC20% | IC50 | RESULT |
|---------|-----------|------|-----------|------|--------|
| 97324-1 | None | N/A | 14 (9-22) | >91 | PASS |

The following results are for a 1% aqueous solution of product.

CARCINOGENICITY:

None of the substances in this product are listed as carcinogens by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP) or the American Conference of Government Industrial Hygienists (ACGIH).

HUMAN HAZARD CHARACTERIZATION:

Based on our Hazard Characterization, the potential human hazard is: LOW

ENVIRONMENTAL HAZARD AND EXPOSURE CHARACTERIZATION:

Based on our Hazard Characterization, the potential environmental hazard is: LOW.

11. DEPARTMENT OF TRANSPORTATION INFORMATION

PROPER SHIPPING NAME/HAZARD CLASS MAY VARY BY PACKAGING, PROPERTIES, AND MODE OF TRANSPORTATION. TYPICAL PROPER SHIPPING NAMES FOR THIS PRODUCT ARE:

ALL TRANSPORTATION MODES: PRODUCT IS NOT REGULATED DURING TRANSPORTATION


Shipping Name: Drilling Mud

Hazard Class: Not hazardous

Cautionary Labeling: None required

12. OTHER INFORMATION

This information contained herein is given in good faith, but no warranty, expressed or implied, is made.



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-OA8
(403) 259-5112 FAX (403) 255-7185
email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME: Poly-Drill 133-X
PRODUCT DESCRIPTION: LIQUID ANIONIC POLYMER
CHEMICAL DESCRIPTION: Polymer, Surfactant(s), Water, Hydrocarbon solvent
UPDATED: March 15, 2004

NFPA704M/HMIS RATING

| | | | | |
|-----------------|-------------------|-----------------|--------|-----------|
| HEALTH: 0/1 | FLAMMABILITY: 1/1 | REACTIVITY: 0/0 | OTHER: | |
| 0=Insignificant | 1=Slight | 2=Moderate | 3=High | 4=Extreme |

2. COMPOSITION

A liquid polymer: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations. None of the substances in this product are hazardous.

3. PHYSICAL DATA

Flash Point: >100°C (PMCC)
Specific Gravity (@ 25°C.): 1.08
Solubility in Water: Emulsifiable
pH: 8.1 (1.0% solution)
Freeze Point: -10 °C (14 Degrees F)
Density (g/ml): 1.08 at 25 °C
Physical State: Liquid
Appearance: Blue liquid
Odor: Hydrocarbon

Note: These physical properties are typical values for this product.

4. FIRE AND EXPLOSION DATA

INCOMPATIBILITY: Avoid contact with strong oxidizers (eg. Chlorine, peroxides, chromates, nitric acid, perchlorates, concentrated oxygen, permanganates) which can generate heat, fires, explosions and the release of toxic fumes.

THERMAL DECOMPOSITION PRODUCTS: In the event of combustion CO, oxides of carbon (COx), oxides of nitrogen (NOx) may be formed. Do not breathe smoke or fumes. Wear suitable protective equipment.

5. FIRE FIGHTING MEASURES

FLASH POINT: >100°C (PMCC)

EXTINGUISHING MEDIA: Based on the NFPA guide, use dry chemical, foam, carbon dioxide or other extinguishing agent suitable for Class B fires. Use water to cool containers exposed to fire. For larger fires, use water spray or fog, thoroughly drenching the burning material.

UNSUITABLE EXTINGUISHING MEDIA:
Do not use water unless flooding amounts are available.

UNUSUAL FIRE AND EXPLOSION HAZARD: May evolve oxides of nitrogen (NO_x) under fire conditions.

6. HEALTH HAZARD DATA

EMERGENCY OVERVIEW:

CAUTION: May cause irritation to skin and eyes. Avoid contact with skin, eyes and clothing. Do not take internally.

Empty containers may contain residual product. Do not reuse container unless properly reconditioned.

PRIMARY ROUTE(S) OF EXPOSURE: Eye & Skin

EYE CONTACT: Can cause mild to moderate irritation

SKIN CONTACT: Can cause mild, short-lasting irritation

SYMPTOMS OF EXPOSURE: A review of available data does not identify any symptoms from exposure not previously mentioned.

AGGRAVATION OF EXISTING CONDITIONS: A review of available data does not identify any worsening of existing conditions.

7. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, if irritation or abnormalities persist, call a physician.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately.

CAUTION: If unconscious, having trouble breathing or in convulsions, do not induce vomiting or give water. Call for medical assistance immediately.

8. HANDLING, ACCIDENTAL RELEASE MEASURES & DISPOSAL CONSIDERATIONS

Storage: Keep container tightly closed when not in use.

DISPOSAL:

In Ontario, the waste class under Regulation 347 is: 233L

SMALL SPILLS:

Soak up spill with absorbent material. Place residues in a suitable, covered, properly labeled container. Wash affected area.

LARGE SPILLS:

Contain liquid using absorbent material, by digging trenches or by dyking. Reclaim into recovery or salvage drums or tank truck for proper disposal. Contact approved waste hauler for disposal of contaminated recovered material. Dispose of material in compliance with regulations indicated.

Dispose of wastes in an approved incinerator or waste treatment/disposal site, in accordance with all applicable regulations. Do not dispose of wastes in local sewer or with normal garbage.

ENVIRONMENTAL PRECAUTIONS

This product should NOT be directly discharged into lakes, ponds, streams, waterways or public water supplies.

As a non-hazardous liquid waste, it should be solidified with stabilizing agents (such as sand, fly ash, or cement) so that no free liquid remains before disposal to an industrial waste landfill. A non-hazardous liquid waste can also be incinerated in accordance with local, state, provincial and federal regulations.

9. INDUSTRIAL HYGIENE CONTROL MEASURES

OCCUPATIONAL EXPOSURE LIMITS:

This product does not contain any substance that has an established exposure limit.

Respiratory Protection: None normally required.

For large spills, entry into large tanks, vessels or enclosed small spaces with inadequate ventilation, a positive pressure, self-contained breathing apparatus is recommended.

Ventilation: General ventilation is recommended.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference. Examples of impermeable gloves available on the market are neoprene, nitrile, PVC, natural rubber, viton, and butyl (compatibility studies have not been performed).

If clothing is contaminated, remove clothing and thoroughly wash the affected area. Launder contaminated clothing before reuse.

10. TOXICOLOGICAL PROPERTIES

SENSITIZATION:

This product is not expected to be a sensitizer.

A "LC50-96" Pass/Fail Bioassay test. This test determines the lethality of a fluid on young aquatic organisms. The fluid fails if 50% or more of the animals are dead after 96 hours in the fluid.

96 hour static acute LC50 to Rainbow Trout = Greater than 1,000 mg/L

96 hour no observed effect concentration = 125 mg/L based on no mortality or abnormal effects

96 hour static acute LC50 to Sheepshead Minnow = Greater than 1,000 mg/L

96 hour no observed effect concentration = 1,000 mg/L (highest concentration tested) based on no mortality or abnormal effects.

96 hour static acute LC50 to Mysid Shrimp = 400 mg/L

96 hour no observed effect concentration = 180 mg/L based on no mortality or abnormal effects.

96 hour static acute LC50 to Daphnia Magna - 400 mg/L

96 hour no observed effect concentration = 56 mg/L (lowest concentration tested) based on no mortality or abnormal effects.

Microtoxicity

The Microtox bioassay has been established as the reference test for mud additive toxicity testing.

Test Method: Luminescent Bacteria, IC50@ 15 min

Reference: Appendix 1: Microtox Bioassay Procedure, Drilling Waste Management, Guide G50. 1993. Alberta Energy and Utilities Board, Calgary, AB, Canada.

Sample: Poly Drill 1330, sample #97324-1 for test #970723, 97/05/09 by D. Lintott

Preparation: Sample was diluted to 2 g/L, which formed thick, slightly cloudy liquid. The sample was then centrifuged for 1 hour.

Test Results:

| SAMPLE | TREATMENT | %CTL | IC20% | IC50 | RESULT |
|---------|-----------|------|-----------|------|--------|
| 97324-1 | None | N/A | 14 (9-22) | >91 | PASS |

The following results are for a 1% aqueous solution of product.

CARCINOGENICITY:

None of the substances in this product are listed as carcinogens by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP) or the American Conference of Government Industrial Hygienists (ACGIH).

HUMAN HAZARD CHARACTERIZATION:

Based on our Hazard Characterization, the potential human hazard is: LOW

ENVIRONMENTAL HAZARD AND EXPOSURE CHARACTERIZATION:

Based on our Hazard Characterization, the potential environmental hazard is: LOW.

11. DEPARTMENT OF TRANSPORTATION INFORMATION

PROPER SHIPPING NAME/HAZARD CLASS MAY VARY BY PACKAGING, PROPERTIES, AND MODE OF TRANSPORTATION. TYPICAL PROPER SHIPPING NAMES FOR THIS PRODUCT ARE:

ALL TRANSPORTATION MODES: PRODUCT IS NOT REGULATED DURING TRANSPORTATION

Shipping Name: Liquid Drilling Additive

Hazard Class: Not hazardous

Cautionary Labeling: None required

14. OTHER INFORMATION

This information contained herein is given in good faith, but no warranty, expressed or implied is made



Material Safety Data Sheet

Dow Chemical Canada, Inc

Product Name: PELADOW* DG Calcium Chloride

Issue Date: 2005.09.29

Print Date: 29 Sep 2005

Dow Chemical Canada, Inc encourages and expects you to read and understand the entire (M)SDS, as there is important information throughout the document. We expect you to follow the precautions identified in this document unless your use conditions would necessitate other appropriate methods or actions.

1. Product and Company Identification

Product Name

PELADOW* DG Calcium Chloride

COMPANY IDENTIFICATION

Dow Chemical Canada, Inc
A Subsidiary of The Dow Chemical Company
PO Box 3030
1425 Vidal Street South
Sarnia, ON N7T 8C6
Canada

Prepared By:

Prepared for use in Canada by EH&S, Product Regulatory
Management Department.
450-652-1029

Revision

2005.09.29

Print Date:

9/29/2005

Customer Information Number:

800-331-6451

EMERGENCY TELEPHONE NUMBER

24-Hour Emergency Contact:

519-339-3711

2. Hazards Identification

Emergency Overview

Color: White

Physical State: Solid

Odor: Odorless

Hazards of product:

WARNING! Causes eye irritation. May cause skin irritation. May be harmful if swallowed.
Isolate area.

* Indicates a Trademark

Potential Health Effects

Eye Contact: For dust: May cause severe eye irritation. May cause corneal injury. Effects may be slow to heal.

Skin Contact: Brief contact is essentially nonirritating to skin. Prolonged contact may cause skin irritation, even a burn. Not classified as corrosive to the skin according to DOT guidelines. May cause more severe response if skin is damp. May cause more severe response if skin is abraded (scratched or cut). May cause more severe response on covered skin (under clothing, gloves).

Skin Absorption: Prolonged skin contact is unlikely to result in absorption of harmful amounts.

Inhalation: Dust may cause irritation to upper respiratory tract (nose and throat). Vapors are unlikely due to physical properties.

Ingestion: Low toxicity if swallowed. Small amounts swallowed incidentally as a result of normal handling operations are not likely to cause injury; however, swallowing larger amounts may cause injury. Swallowing may result in gastrointestinal irritation or ulceration.

Effects of Repeated Exposure: The data presented are for the following material: Potassium chloride. In animals, effects have been reported on the following organs after ingestion: Gastrointestinal tract. Heart. Kidney. Dose levels producing these effects were many times higher than any dose levels expected from exposure due to use.

3. Composition/information on ingredients

| Component | CAS # | Amount W/W |
|--------------------|------------|-------------------|
| Calcium chloride | 10043-52-4 | > 91.0 - < 93.0 % |
| Sodium chloride | 7647-14-5 | > 1.0 - < 2.0 % |
| Potassium chloride | 7447-40-7 | > 2.0 - < 3.0 % |
| Water | 7732-18-5 | > 1.0 - < 4.0 % |

Amounts are presented as percentages by weight.

4. First-aid measures

Eye Contact: Immediately flush eyes with water; remove contact lenses, if present, after the first 5 minutes, then continue flushing eyes for at least 15 minutes. Obtain medical attention without delay, preferably from an ophthalmologist.

Skin Contact: Wash skin with plenty of water.

Inhalation: Move person to fresh air; if effects occur, consult a physician.

Ingestion: Do not induce vomiting. Give one cup (8 ounces or 240 ml) of water or milk if available and transport to a medical facility. Do not give anything by mouth to an unconscious person.

Notes to Physician: Due to irritant properties, swallowing may result in burns/ulceration of mouth, stomach and lower gastrointestinal tract with subsequent stricture. Aspiration of vomitus may cause lung injury. Suggest endotracheal/esophageal control if lavage is done. If burn is present, treat as any thermal burn, after decontamination. No specific antidote. Treatment of exposure should be directed at the control of symptoms and the clinical condition of the patient.

5. Fire Fighting Measures

Extinguishing Media: This material does not burn. If exposed to fire from another source, use suitable extinguishing agent for that fire.

Fire Fighting Procedures: Keep people away. Isolate fire and deny unnecessary entry. This material does not burn. Fight fire for other material that is burning. Water should be applied in large quantities as fine spray.

Special Protective Equipment for Firefighters: Wear positive-pressure self-contained breathing apparatus (SCBA) and protective fire fighting clothing (includes fire fighting helmet, coat, trousers,

boots, and gloves). Avoid contact with this material during fire fighting operations. If contact is likely, change to full chemical resistant fire fighting clothing with self-contained breathing apparatus. If this is not available, wear full chemical resistant clothing with self-contained breathing apparatus and fight fire from a remote location. For protective equipment in post-fire or non-fire clean-up situations, refer to the relevant sections.

Unusual Fire and Explosion Hazards: Heat is generated when product mixes with water.

Hazardous Combustion Products: Not applicable.

See Section 9 for related Physical Properties

6. Accidental Release Measures

Steps to be Taken if Material is Released or Spilled: Small and large spills: Contain spilled material if possible. Collect in suitable and properly labeled containers. Flush residue with plenty of water.

See Section 13, Disposal Considerations, for additional information.

Personal Precautions: Isolate area. Keep unnecessary and unprotected personnel from entering the area. Use appropriate safety equipment. For additional information, refer to Section 8, Exposure Controls and Personal Protection.

Environmental Precautions: Prevent from entering into soil, ditches, sewers, waterways and/or groundwater. See Section 12, Ecological Information.

7. Handling and Storage

Handling

General Handling: Avoid contact with eyes, skin, and clothing. Wash thoroughly after handling. Do not swallow. Heat developed during diluting or dissolving is very high. Use cool water when diluting or dissolving (temperature less than 80°F, 27°C). See Section 8, EXPOSURE CONTROLS AND PERSONAL PROTECTION.

Storage

Keep container closed. Store in a dry place. Protect from atmospheric moisture.

8. Exposure Controls / Personal Protection

Exposure Limits

| Component | List | Type | Value |
|------------------|------------|------|----------|
| Calcium chloride | DOW IHG | TWA | 10 mg/m3 |
| | CAD ON OEL | TWA | 5 mg/m3 |

Consult local authorities for recommended exposure limits.

Personal Protection

Eye/Face Protection: Use safety glasses. For dusty operations or when handling solutions of the material, wear chemical goggles.

Skin Protection: Wear clean, body-covering clothing.

Hand protection: Use gloves chemically resistant to this material. If hands are cut or scratched, use gloves chemically resistant to this material even for brief exposures. Examples of preferred glove barrier materials include: Neoprene. Polyvinyl chloride ("PVC" or "vinyl"). Nitrile/butadiene rubber ("nitrile" or "NBR"). NOTICE: The selection of a specific glove for a particular application and duration of use in a workplace should also take into account all relevant workplace factors such as, but not limited to: Other chemicals which may be handled, physical requirements (cut/puncture protection, dexterity, thermal protection), potential body reactions to glove materials, as well as the instructions/specifications provided by the glove supplier.

Respiratory Protection: Atmospheric levels should be maintained below the exposure guideline. When respiratory protection is required for certain operations, use an approved air-purifying respirator. In dusty or misty atmospheres, use an approved particulate respirator. The following should be effective types of air-purifying respirators: Particulate filter.

Ingestion: Use good personal hygiene. Do not consume or store food in the work area. Wash hands before smoking or eating.

Engineering Controls

Ventilation: Provide general and/or local exhaust ventilation to control airborne levels below the exposure guidelines.

9. Physical and Chemical Properties

| | |
|---------------------------------|--|
| Physical State | Solid |
| Color | White |
| Odor | Odorless |
| Flash Point - Closed Cup | Not applicable |
| Flammable Limits In Air | Lower: <i>Literature</i> Not applicable Upper: <i>Literature</i> Not applicable |
| Autoignition Temperature | Not applicable |
| Vapor Pressure | 0.009 mmHg @ 20 °C <i>Literature</i> |
| Boiling Point (760 mmHg) | >= 204 °C <i>Literature</i> |
| Vapor Density (air = 1) | <i>Not applicable</i> |
| Specific Gravity (H2O = 1) | Not applicable |
| Freezing Point | Not applicable |
| Melting Point | 772 °C <i>Literature</i> (Approx.) |
| Solubility in Water (by weight) | soluble in water |
| pH | Not applicable |

10. Stability and Reactivity

Stability/Instability

Stable. Hygroscopic.

Conditions to Avoid: None known. Avoid moisture.

Incompatible Materials: Heat is generated when mixed with water. Spattering and boiling can occur. Avoid contact with: Sulfuric acid. Corrosive when wet. Flammable hydrogen may be generated from contact with metals such as: Zinc. Sodium.

Hazardous Polymerization

Will not occur.

Thermal Decomposition

Does not decompose.

11. Toxicological Information

Acute Toxicity

Ingestion

For the major component(s): LD50, Rat 900 - 2,100 mg/kg

Skin Absorption

For the major component(s): LD50, Rabbit > 5,000 mg/kg

Repeated Dose Toxicity

The data presented are for the following material: Potassium chloride. In animals, effects have been reported on the following organs after ingestion: Gastrointestinal tract. Heart. Kidney. Dose levels producing these effects were many times higher than any dose levels expected from exposure due to use.

Developmental Toxicity

For the major component(s): Did not cause birth defects or any other fetal effects in laboratory animals.

Genetic Toxicology

The data presented are for the following material: Calcium chloride or CaCl₂. In vitro genetic toxicity studies were negative. The data presented are for the following material: Potassium chloride. In vitro genetic toxicity studies were positive. However, the relevance of this to humans is unknown.

12. Ecological Information

CHEMICAL FATE

Data for Component: **Calcium chloride**

Movement & Partitioning

No bioconcentration is expected because of the relatively high water solubility. Partitioning from water to n-octanol is not applicable.

Persistence and Degradability

Biodegradation is not applicable.

Data for Component: **Sodium chloride**

Movement & Partitioning

No bioconcentration is expected because of the relatively high water solubility. Potential for mobility in soil is very high (K_{oc} between 0 and 50). Partitioning from water to n-octanol is not applicable.

Persistence and Degradability

Biodegradation is not applicable.

Data for Component: **Potassium chloride**

Movement & Partitioning

Partitioning from water to n-octanol is not applicable.

Persistence and Degradability

Biodegradation is not applicable.

ECOTOXICITY

Data for Component: **Calcium chloride**

Material is practically non-toxic to aquatic organisms on an acute basis (LC₅₀/EC₅₀ >100 mg/L in the most sensitive species tested).

Fish Acute & Prolonged Toxicity

LC₅₀, bluegill (*Lepomis macrochirus*): 8,350 - 10,650 mg/l

Aquatic Invertebrate Acute Toxicity

LC₅₀, water flea *Daphnia magna*: 759 - 3,005 mg/l

Toxicity to Micro-organisms

EC₅₀; activated sludge, respiration inhibition: > 1,000 mg/l

Data for Component: **Sodium chloride**

Material is practically non-toxic to aquatic organisms on an acute basis (LC₅₀/EC₅₀ >100 mg/L in the most sensitive species tested).

Fish Acute & Prolonged Toxicity

LC50, fathead minnow (Pimephales promelas): 10,610 mg/l

Aquatic Invertebrate Acute Toxicity

LC50, water flea Daphnia magna: 4,571 mg/l

Toxicity to Micro-organisms

IC50, OECD 209 Test; activated sludge, respiration inhibition: > 1,000 mg/l

Data for Component: **Potassium chloride**

Material is practically non-toxic to aquatic organisms on an acute basis (LC50/EC50 >100 mg/L in the most sensitive species tested).

Fish Acute & Prolonged Toxicity

LC50, rainbow trout (Oncorhynchus mykiss): 4,236 mg/l

Aquatic Invertebrate Acute Toxicity

EC50, water flea Daphnia magna, 24 h, immobilization: 590 mg/l

13. Disposal Considerations

All disposal practices must be in compliance with all Federal, State/Provincial and local laws and regulations. Regulations may vary in different locations. Waste characterizations and compliance with applicable laws are the responsibility solely of the waste generator. DOW HAS NO CONTROL OVER THE MANAGEMENT PRACTICES OR MANUFACTURING PROCESSES OF PARTIES HANDLING OR USING THIS MATERIAL. THE INFORMATION PRESENTED HERE PERTAINS ONLY TO THE PRODUCT AS SHIPPED IN ITS INTENDED CONDITION AS DESCRIBED IN MSDS SECTION:

Composition Information. FOR UNUSED & UNCONTAMINATED PRODUCT, the preferred options include sending to a licensed, permitted: Reclaimer. Landfill. Waste water treatment system. As a service to its customers, Dow can provide names of information resources to help identify waste management companies and other facilities which recycle, reprocess or manage chemicals or plastics, and that manage used drums. Telephone Dow's Customer Information Group at 1-800-258-2436 or 1-989-832-1556 (U.S.), or 1-800-331-6451 (Canada) for further details. All disposal practices must be in compliance with all Federal, State/Provincial and local laws and regulations. Waste characterizations and compliance with applicable laws are the responsibility solely of the waste generator. FOR UNUSED & UNCONTAMINATED PRODUCT, the preferred options include sending to a licensed, permitted: Reclaimer. Landfill. Waste water treatment system.

Treatment and disposal methods of used packaging: Offer empty container to licensed reconditioner or crush and dispose of in compliance with all federal, state/provincial and local laws and regulations.

14. Transport Information**TDG Small container**

NOT REGULATED

TDG Large container

NOT REGULATED

IMDG

NOT REGULATED

ICAO/IATA

NOT REGULATED

15. Regulatory Information**US. Toxic Substances Control Act**

All components of this product are on the TSCA Inventory or are exempt from TSCA Inventory requirements under 40 CFR 720.30

CEPA - Domestic Substances List (DSL)

All substances contained in this product are listed on the Canadian Domestic Substances List (DSL) or are not required to be listed.

Hazardous Products Act Information: CPR Compliance

This product has been classified in accordance with the hazard criteria of the Canadian Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

Hazardous Products Act Information: WHMIS Classification

| | |
|------------|----------------------|
| D2B | Eye or Skin Irritant |
|------------|----------------------|

Hazardous Products Act Information: Hazardous Ingredients

This product contains the following ingredients which are Controlled Products and/or are on the Ingredient Disclosure List (Canadian HPA Section 13 and 14).

| Component | CAS # | Amount W/W |
|------------------|------------|---------------|
| Calcium chloride | 10043-52-4 | 91.0 - 93.0 % |

16. Other Information**Recommended Uses and Restrictions**

Gas and liquid hydrocarbon dehydrating.

Revision

Identification Number: 50015 / 1002 / Issue Date 2005.09.29 / Version: 2.1

Most recent revision(s) are noted by the bold, double bars in left-hand margin throughout this document.

Legend

| | |
|---------|---|
| N/A | Not available |
| W/W | Weight/Weight |
| OEL | Occupational Exposure Limit |
| STEL | Short Term Exposure Limit |
| TWA | Time Weighted Average |
| ACGIH | American Conference of Governmental Industrial Hygienists, Inc. |
| DOW IHG | Dow Industrial Hygiene Guideline |
| WEEL | Workplace Environmental Exposure Level |
| HAZ_DES | Hazard Designation |
| VOL/VOL | Volume/Volume |

Dow Chemical Canada, Inc. urges each customer or recipient of this (M)SDS to study it carefully and consult appropriate expertise, as necessary or appropriate, to become aware of and understand the data contained in this (M)SDS and any hazards associated with the product. The information herein is provided in good faith and believed to be accurate as of the effective date shown above. However, no warranty, express or implied, is given. Regulatory requirements are subject to change and may differ between various locations. It is the buyer's/user's responsibility to ensure that its activities comply with all federal, state, provincial or local laws. The information presented here pertains only to the product as shipped. Since conditions for use of the product are not under the control of the manufacturer, it is the buyer's/user's duty to determine the conditions necessary for the safe use of this product. Due to the proliferation of sources for information such as manufacturer-specific (M)SDSs, we are not and cannot be responsible for (M)SDSs obtained from any source other than ourselves. If you have

obtained an (M)SDS from another source or if you are not sure that the (M)SDS you have is current, please contact us for the most current version.



Shell Canada Limited

Material Safety Data Sheet

Effective Date: 2006-04-21

Supersedes: 2003-03-05

1. PRODUCT AND COMPANY IDENTIFICATION

PRODUCT: **LINSEED SOAP**
SYNONYMS: Lubricating Grease
PRODUCT USE: Lubricating Grease

MANUFACTURER
Shell Canada Limited
P.O. Box 100, Station M
400-4th Ave. S.W.
Calgary, AB Canada
T2P 2H5

TELEPHONE NUMBERS
Shell Emergency Number
CANUTEC 24 HOUR EMERGENCY NUMBER
For general information:
For MSDS information:
(From 7:30 to 4:30 Mountain Time)

1-800-661-7378
613-996-6666
1-800-661-1600
403-691-3982
403-691-2220

This MSDS was prepared by the Toxicology and Product Stewardship Section of Shell Canada Limited.

*An asterisk in the product name designates a trade-mark(s) of Shell Canada Limited, used under license by Shell Canada Products.

2. COMPOSITION / INFORMATION ON INGREDIENTS

THIS PRODUCT IS NOT A WHMIS CONTROLLED SUBSTANCE.
See Section 8 for Occupational Exposure Guidelines.

3. HAZARDS IDENTIFICATION

Physical Description: Semi-Solid Paste Brown Colour Slight Hydrocarbon Odour
Routes of Exposure: Exposure will most likely occur through skin or eye contact. Inhalation is only possible if the product is heated or mists are generated.

Hazards:

This product is not expected to be irritating and has a low level of toxicity under normal use.
Inhalation of oil mist or vapours from hot oil may cause irritation of the upper respiratory tract.

For further information on health effects, see Section 11.

4. FIRST AID

Eyes: Flush eyes with water for at least 15 minutes while holding eyelids open. If irritation occurs and persists, obtain medical attention.

Skin: Wipe excess from skin. Wash contaminated skin with mild soap and water for 15 minutes. If irritation occurs and persists, obtain medical attention. If material is injected under the skin, get medical attention promptly to prevent serious damage; do not wait for symptoms to develop.

- Ingestion:** Not normally required; obtain medical attention if large amounts have been ingested. Do not induce vomiting. If vomiting occurs spontaneously keep head below hips to prevent aspiration of liquid into the lungs.
- Inhalation:** Remove victim from further exposure. Additional first aid treatment is not ordinarily required.
- Notes to Physician:** In general, lubricating oils have low oral toxicity. High pressure injection under the skin may have serious consequences and may require urgent treatment.

5. FIRE FIGHTING MEASURES

- Extinguishing Media:** Dry Chemical
Carbon Dioxide
Foam
Water Fog
- Firefighting Instructions:** Material will not burn unless preheated. Caution, spilled material is slippery. Product will float and can be reignited on surface of water. Do not use a direct stream of water as it may spread fire. Use water to cool fire exposed containers. Water may be used to flush spills away from exposure. Do not enter confined fire space without adequate protective clothing and an approved positive pressure self-contained breathing apparatus.
- Hazardous Combustion Products:** Carbon monoxide, carbon dioxide and dense smoke are produced on combustion.

6. ACCIDENTAL RELEASE MEASURES

Eliminate all ignition sources. Isolate hazard area and restrict access. Wear appropriate breathing apparatus (if applicable) and protective clothing. Stop leak only if safe to do so. Spilled material is slippery. Dike and contain land spills; contain water spills by booming. For large spills remove by mechanical means and place in containers. Absorb residue or small spills with absorbent material and remove to non-leaking containers for disposal. Clean area with appropriate cleaner. Dispose of recovered material as noted under Disposal Considerations. Notify appropriate environmental agency(ies).

7. HANDLING AND STORAGE

- Handling:** Avoid excessive heat, formation of oil mist, breathing of vapours and mist of hot oil and prolonged or repeated contact with skin. Launder contaminated clothing prior to reuse. Wash with soap and water prior to eating, drinking, smoking, applying cosmetics or using toilet facilities. Use good personal hygiene.
- Storage:** Store in a cool, dry, well ventilated area, away from heat and ignition sources.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

The following information, while appropriate for this product, is general in nature. The selection of personal protective equipment will vary depending on the conditions of use.

OCCUPATIONAL EXPOSURE LIMITS (Current ACGIH TLV/TWA unless otherwise noted):

Oil mist (mineral): 5 mg/m³ (STEL: 10 mg/m³)

- Mechanical Ventilation:** Not normally required. Local ventilation is recommended if oil mist is present or if exposure limit is exceeded. Make up air should always be supplied to balance air exhausted (either generally or locally).

PERSONAL PROTECTIVE EQUIPMENT:

- Eye Protection:** No special eye protection is routinely necessary. Wear safety glasses as appropriate.

Skin Protection: Not normally needed. Chemically-resistant gloves should be worn for frequent or prolonged contact with this product.

Respiratory Protection: Not normally required under intended conditions of use. If vaporization of oil component is occurring (i.e. under conditions of high heat), use a NIOSH-approved chemical cartridge respirator with organic vapour cartridges in combination with a P95 particulate filter.

9. PHYSICAL DATA

| | | | |
|---------------------------------------|------------------|--|--------------------------|
| Physical State: | Semi-Solid Paste | Odour: | Slight Hydrocarbon Odour |
| Appearance: | Brown Colour | Odour Threshold: | Not available |
| Pour Point, °C : | 0 °C | Boiling Point, °C : | 100 °C |
| Vapour Pressure (absolute): | Not available | Vapour Density (air = 1): | Not available |
| Density: | Not available | Flash Point, °C : | Not applicable |
| Specific Gravity (Water = 1): | | Lower Explosion Limit: | Not applicable |
| pH: | 9.5 - 11 | Upper Explosion Limit: | Not applicable |
| Viscosity: | Not available | Autoignition Temperature, °C: | Not applicable |
| Evaporation Rate (n-BuAc = 1): | Not available | Partition Coefficient (K_{ow}): | Not available |
| Water Solubility: | Soluble | Molecular Weight: | |
| Other Solvents: | None Identified | Formula: | |

10. STABILITY AND REACTIVITY

| | | | |
|--|--|---------------------------------------|----|
| Chemically Stable: | Yes | Hazardous Polymerization: | No |
| Sensitive to Mechanical Impact: | No | Sensitive to Static Discharge: | No |
| Incompatible Materials: | Avoid strong oxidizing agents. | | |
| Conditions of Reactivity: | Avoid excessive heat, formation of vapours or mists. | | |

11. TOXICOLOGICAL INFORMATION

Routes of Exposure: Exposure will most likely occur through skin or eye contact. Inhalation is only possible if the product is heated or mists are generated.

Irritancy: This product is not a primary skin irritant after exposure of short duration, is not a skin sensitizer and is not irritating to the eyes.

Acute Toxicity: This product is not expected to be irritating and has a low level of toxicity under normal use.

Chronic Effects: Long term intensive exposure to oil mist may cause benign lung fibrosis. Prolonged and repeated contact with skin can cause defatting and drying of the skin resulting in skin irritation and dermatitis.

12. ECOLOGICAL INFORMATION

Environmental Effects: Do not allow product or runoff from fire control to enter storm or sanitary sewers, lakes, rivers, streams, or public waterways. Block off drains and ditches. Provincial regulations require and federal regulations may require that environmental and/or other agencies be notified of a spill incident. Spill area must be cleaned and restored to original condition or to the satisfaction of authorities.

Biodegradability: Not readily biodegradable.

13. DISPOSAL CONSIDERATIONS

Waste management priorities (depending on volumes and concentration of waste) are: 1. recycle (reprocess), 2. energy recovery (cement kilns, thermal power generation), 3. incineration, 4. disposal at a licenced waste disposal facility. Do not attempt to combust waste on-site.

14. TRANSPORTATION INFORMATION**Canadian Road and Rail Shipping Classification:**

This product is not regulated under the Canadian Transportation of Dangerous Goods Regulations for transport by road and rail.

15. REGULATORY INFORMATION

This product has been classified in accordance with the hazard criteria of the *Controlled Products Regulations* (CPR) and the MSDS contains all the information required by the CPR.







| | |
|---------------------------------|--|
| DSL/NDL Status: | THIS PRODUCT IS NOT A WHMIS CONTROLLED SUBSTANCE. This product, or all components, are listed on the Domestic Substances List, as required under the Canadian Environmental Protection Act. This product and/or all components are listed on the U.S. EPA TSCA Inventory. |
| Other Regulatory Status: | No Canadian federal standard; however, for general discharge guidance, federal installations limited to 15 mg/L for total oil and grease. Provincial criteria are likely and should be requested when notifying provincial authorities. |

16. ADDITIONAL INFORMATION

| | |
|-------------------|---|
| Revisions: | This MSDS has been reviewed and updated. Changes have been made to: Section 3 Section 4 Section 6 |
|-------------------|---|



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|---|---|
|   | B-3, D-2B |    |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|---------------------------------|--|
| Product Name | KEROSENE | Code | W106 SAP: 100 |
| Synonym | Kerosene 1-K, Low Sulphur Kerosene, Kerosine | Validated on | 7/12/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Kerosene is a refined petroleum distillate suitable for burning in wick lamps and non-vented space heaters. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|---|---|---------|-------------------------|-----------------|-----------------|
| Name | CAS # | % (V/V) | TLV-TWA(8 h) | STEL | CEILING |
| Complex mixture of petroleum hydrocarbons (C9-C16) ** Aromatic content is 10-25% typical (benzene: nil). | 8008-20-6 | >99.9 | 200 mg/m ³ | Not established | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|--|
| Potential Health Effects | Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin irritation. Not expected to cause more than slight eye irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS. |
|---------------------------------|--|

Section 4. First Aid Measures

| | |
|--------------------------|---|
| Eye Contact | IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention. |
| Skin Contact | Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention. |
| Inhalation | Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention. |
| Ingestion | DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|--|--|--|
| Flammability | Class II - combustible liquid (NFPA). | Flammable Limits | LOWER: 0.7% UPPER: 5% |
| Flash Points | CLOSED CUP: >38°C (100°F) Tag (ASTM D56) | Auto-Ignition Temperature | 210°C (410°F) |
| Fire Hazards in Presence of Various Substances | Flammable in presence of open flames, sparks, or heat. May accumulate in confined spaces. This product can accumulate static charge and ignite. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. |

| | |
|---|--|
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion. |
| Fire Fighting Media and Instructions | <p>NAERG2000, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p> |

Section 6. Accidental Release Measures

| | |
|----------------------------------|---|
| Material Release or Spill | IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. Do not allow spilled materials to come into contact with incompatible materials (see Section 10). Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately. |
|----------------------------------|---|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Wear proper personal protective equipment (See Section 8). Avoid contact with any incompatible or reactive materials. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. |
| Storage | Store away from incompatible and reactive materials (See section 5 and 10). Store away from heat and sources of ignition. Avoid direct sunlight. Keep container tightly closed. Store in dry, cool, well-ventilated area. Ensure the storage containers are grounded/bonded. |

Section 8. Exposure Controls/Personal Protection

| | |
|---|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered. |
| Body | Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn. |
| Respiratory | Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation. |
| Hands | Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|--|--------------------------------------|--|
| Physical State and Appearance | Clear liquid. | Viscosity | 1.0-1.9 cSt @ 40°C (104°F). |
| Colour | Clear and bright. | Pour Point | <-51°C (-60°F) |
| Odour | Hydrocarbon solvent. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | 150 to 300°C (302 to 572°F) | Penetration | Not applicable. |
| Density | 0.8 to 0.82 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | 4.5 (Air = 1) | Ionicity (in water) | Not available |
| Vapour Pressure | 0.70 kPa @ 20°C (5.25 mmHg @ 68°F). | Dispersion Properties | Not available |
| Volatility | <1 (water = 1). Low volatility at ambient temperature and pressure, and much lower than gasoline. | Solubility | Insoluble in water. Partially miscible in some alcohols. Miscible with other petroleum solvents. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|--|
| Corrosivity | Not available | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents. | Decomposition Products | May release COx, NOx, SOx, acrid smoke, and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|---------------------------------------|---|
| Routes of Entry | Skin contact, eye contact, inhalation, and ingestion. |
| Acute Lethality | Acute toxicity of the product based on actual testing: <u>Kerosene (8008-20-6):</u> Acute oral toxicity (LD50): 2835 mg/kg (rabbit). |
| Chronic or Other Toxic Effects | |
| Dermal Route: | Contact may cause skin irritation based on laboratory test results. |
| Inhalation Route: | Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Oral Route: | Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |
| Reproductive Toxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | Considered to be A3 by the ACGIH. (Kerosene, 8008-20-6) |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. |

| | |
|-----------------------------|---|
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | Chronic exposure to some of the hazardous components of this product may result in damage to the following organs and/or systems: kidney. |

Section 12. Ecological Information

| | | | |
|---|---------------|---|---------------|
| Environmental Fate | Not available | Persistence/ Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks No additional remark. | | | |


Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|-------------------------------------|---|--|
| TDG Classification | KEROSENE, 3, UN1223, PGIII (CL-TDG) | Special Provisions for Transport | See Transportation of Dangerous Goods Regulations. |
|---------------------------|-------------------------------------|---|--|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | | |
|--------------------------------------|---|-----------------|-------------------------------------|---|-------------|-----|------------|-----|---------------------|-----|----------------------|---|--|--------|---|-------------|---|---|------------|---|--|--|-----------------|--|
| Other Regulations | This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). | | | | | | | | | | | | | | | | | | | | | | | |
| | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | | | | | | | | | | | | | | |
| | All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS). | | | | | | | | | | | | | | | | | | | | | | | |
| | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | | | | | | | | | | | | | | |
| | Please contact Product Safety for more information. | | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | Not evaluated. | | HCS (U.S.A.) | CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F). | | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | | DOT (U.S.A) (Pictograms) |  | | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | <table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(2)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table> | | Health Hazard | (2*) | Fire Hazard | (2) | Reactivity | (0) | Personal Protection | (H) | NFPA (U.S.A.) | <table><tr><td rowspan="2">Health</td><td>2</td><td>Fire Hazard</td><td>2</td></tr><tr><td>2</td><td>Reactivity</td><td>0</td></tr><tr><td colspan="2"></td><td colspan="2">Specific hazard</td></tr></table> | | Health | 2 | Fire Hazard | 2 | 2 | Reactivity | 0 | | | Specific hazard | |
| Health Hazard | (2*) | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | (2) | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | (0) | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | (H) | | | | | | | | | | | | | | | | | | | | | | | |
| Health | 2 | Fire Hazard | 2 | | | | | | | | | | | | | | | | | | | | | |
| | 2 | Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | |
| | | Specific hazard | | | | | | | | | | | | | | | | | | | | | | |
| | | | Rating | 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

| | |
|-------------------|--|
| References | <p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p> |
| Glossary | |

| | |
|---|---|
| ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List CNS - Central Nervous System COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPA - Environmental Protection Agency EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazard Communication Standard HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer | IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act RTECS - Registry of Toxic Effects of Chemical Substances SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLm - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System |
|---|---|

For Copy of MSDSInternet: www.petro-canada.ca/msds**Fuels & Solvents:**

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752








Prepared by Product Safety - JDW on 7/12/2005.

Data entry by Product Safety - DSR.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|   | B-2, D-2A, D-2B |     |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|--|-----------------------------|--|
| Product Name | JET B AVIATION TURBINE FUEL | Code | W219 SAP: 150, 151, 152 |
| Synonym | Jet B; Jet B DI; JP-4; Jet F-40; NATO F-40; Turbine Fuel, Aviation, Wide Cut Type (CAN/CGSB-3.22). | Validated on | 2/8/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Used as aviation turbine fuel. May contain a fuel system icing inhibitor. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|--|---|---------|-------------------------|-----------------|-----------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| Complex mixture of petroleum hydrocarbons (C6-C14). | 64741-41-9 | >99 | Not established | Not established | Not established |
| Benzene | 71-43-2 | <0.5 | 0.5 ppm | 2.5 ppm | Not established |
| Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether | 111-77-3 | ≤0.15 | Not established | Not established | Not established |
| Anti-static, antioxidant, corrosion inhibitor and metal deactivator additives. * Please note that Jet B DI, JP-4, Jet F-40 and NATO F-40 all contain Fuel System Icing Inhibitor (FSII).corrosion inhibitor | Not applicable | <0.1 | Not applicable | Not applicable | Not applicable |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|--|
| Potential Health Effects | Flammable liquid. Exercise caution when handling this material. Skin and eye contact can cause irritation. Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. May cause cancer. May cause teratogenicity/embryotoxicity. For more information refer to Section 11 of this MSDS. |
|---------------------------------|--|

Section 4. First Aid Measures

| | |
|---------------------|---|
| Eye Contact | Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately. |
| Skin Contact | Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 5 minutes or until chemical is removed. |
| Inhalation | Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). Remove source of contamination or move victim to fresh air. If breathing is difficult, oxygen may be beneficial if administered by trained personnel, preferably on a doctor's advice. DO NOT allow victim to move about unnecessarily. Immediately transport victim to an emergency care facility. |

| | |
|------------------|---|
| Ingestion | NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. |
|------------------|---|

Note to Physician Not available

Section 5. Fire-fighting Measures

| | | | |
|---|--|--|--|
| Flammability | Flammable liquid (NFPA). | Flammable Limits | LOWER: 1.3% UPPER: 8% (NFPA) |
| Flash Points | CLOSED CUP: -31°C (-24°F) (NFPA) | Auto-Ignition Temperature | 240°C (464°F) (NFPA) |
| Fire Hazards in Presence of Various Substances | Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. |
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion. | | |
| Fire Fighting Media and Instructions | <p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p> | | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|---|
| Material Release or Spill | IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Evacuate non-essential personnel. Extinguish all ignition sources. Ventilate area. Stop leak if safe to do so. Avoid contact with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Ensure clean-up personnel wear appropriate personal protective equipment. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Collect used absorbent for later disposal. Avoid breathing vapours or mists of material. Notify appropriate authorities immediately. |
|----------------------------------|---|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | FLAMMABLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Wear proper personal protective equipment (See Section 8). Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. |
| Storage | Store away from heat and sources of ignition. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. Keep container tightly closed. Store in dry, cool, well-ventilated area. |

Section 8. Exposure Controls/Personal Protection

| | |
|--|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i> | |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information). |
| Respiratory | A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection. |
| Hands | If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): neoprene, polyvinyl alcohol (PVA), and fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|-------------------------------------|--------------------------------------|--|
| Physical State and Appearance | Clear liquid. | Viscosity | Not available (similar to gasoline) |
| Colour | Clear and colourless. | Pour Point | Freezing Point: <-51°C (<-60°F) for Jet B/Jet B DI; <-58°C (<-72°F) for Jet Fuel F-40. |
| Odour | Gasoline like. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | 50 to 270°C (122 to 518°F) | Penetration | Not applicable. |
| Density | 0.75 to 0.80 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | 3.5 (Air = 1) | Ionicity (in water) | Not available |
| Vapour Pressure | 21 kPa (158 mmHg) @ 37.8°C (100°F). | Dispersion Properties | Not available |
| Volatility | Volatile. | Solubility | Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|--|
| Corrosivity | Not available | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Can react with strong oxidizing agents, uranium hexafluoride, diborane. Incompatible with halogens and halogen compounds. | Decomposition Products | May release CO _x , NO _x , SO _x , aldehydes, ketones, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|------------------------|---|
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: Based on toxicity of similar product. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >5000 mg/m ³ /4h (rat). |

Benzene

Acute oral toxicity (LD50): 930 mg/kg (rat).
 Acute dermal toxicity (LD50): >9400 mg/kg (rabbit).
 Acute inhalation toxicity (LC50): 13200 ppm/4h (rat).

Diethylene Glycol Monomethyl Ether

Acute oral toxicity (LD50): 4140-5180 mg/kg (rat).
 Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).
 Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).

Chronic or Other Toxic Effects

| | |
|----------------------------------|--|
| Dermal Route: | Skin contact can cause irritation. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. |
| Inhalation Route: | Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Oral Route: | Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | Benzene is tumorigenic by RTECS criteria. |
| Reproductive Toxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin [Diethylene Glycol Monomethyl Ether]. |
| Carcinogenicity (ACGIH): | ACGIH A1: confirmed human carcinogen. [Benzene] |
| Carcinogenicity (IARC): | IARC Group 1: carcinogenic to Humans. [Benzene] |
| Carcinogenicity (NTP): | NTP Group 1: known to be a carcinogen. [Benzene] |
| Carcinogenicity (IRIS): | EPA/IRIS Class A: human carcinogen. |
| Carcinogenicity (OSHA): | Benzene is an OSHA known carcinogen. |

Other Considerations No additional remark.

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks | No additional remark. | | |

Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|--|---|--|
| TDG Classification | FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII (CL-TDG) | Special Provisions for Transport | See Transportation of Dangerous Goods Regulations. |
|---------------------------|--|---|--|

Section 15. Regulatory Information**Other Regulations**

This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).

All components of this formulation are listed on the US EPA-TSCA Inventory.

All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

Please contact Product Safety for more information.

DSD/DPD (Europe) Not evaluated.

HCS (U.S.A.)

CLASS: Contains material which may cause cancer.
CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F).
CLASS: Toxic.
CLASS: Irritating substance.
CLASS: Target organ effects.

ADR (Europe) (Pictograms)

NOT EVALUATED FOR EUROPEAN TRANSPORT

NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.

DOT (U.S.A) (Pictograms)



HMIS (U.S.A.)

| | |
|----------------------------|------|
| Health Hazard | (2*) |
| Fire Hazard | (3) |
| Reactivity | (0) |
| Personal Protection | (H) |

NFPA (U.S.A.)

Health



Fire Hazard

Reactivity

Specific hazard

| Rating | |
|--------|---------------|
| 0 | Insignificant |
| 1 | Slight |
| 2 | Moderate |
| 3 | High |
| 4 | Extreme |

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
CNS - Central Nervous System
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPA - Environmental Protection Agency
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
RTECS - Registry of Toxic Effects of Chemical Substances
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Prepared by Product Safety - JDW on 2/8/2005.

Internet: www.petro-canada.ca/msds

Data entry by Product Safety - JDW.

Fuels & Solvents:

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228








Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|   | B-3, D-2B |     |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|-----------------------------|--|
| Product Name | FUEL OIL | Code | W105 SAP: 132, 156, 286, 300 |
| Synonym | #1 Furnace Oil, Furnace Oil 50, Seasonal Furnace Oil, Seasonal Furnace Oil Special, Economy Diesel, Stove Oil, ThermaClean. | Validated on | 2/5/2004. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Fuel Oils are distillate fuels suitable for use in liquid fuel burning equipment without preheating. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|---|---|---------|---|-----------------|-----------------|
| Name | CAS # | % (V/V) | TLV-TWA(8 h) | STEL | CEILING |
| 1) Mixture of petroleum distillates. Aromatic content is 50% maximum (benzene: nil). | 68476-30-2, 64742-81-0 | 100 | 100 mg/m ³ (as total hydrocarbons) * | Not established | Not established |
| Manufacturer Recommendation | * Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|--|
| Potential Health Effects | Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS. |
|---------------------------------|--|

Section 4. First Aid Measures

| | |
|--------------------------|---|
| Eye Contact | IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention. |
| Skin Contact | Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention. |
| Inhalation | Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention. |
| Ingestion | DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|---|--|---|
| Flammability | Class II - combustible liquid (NFPA). | Flammable Limits | Lower: 0.7%, Upper: 6% |
| Flash Points | Open Cup: >40°C (>104°F), Cleveland. | Auto-Ignition Temperature | 225°C (437°F) |
| Fire Hazards in Presence of Various Substances | Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. | Explosion Hazards in Presence of Various Substances | Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Runoff to sewer may create fire or explosion hazard. |
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), smoke and irritating vapours as products of incomplete combustion. | | |

**Fire Fighting
Media and
Instructions**

NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible).

CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.

If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.

SMALL FIRES: Dry chemical, CO₂, water spray or regular foam.

LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk.

Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.

Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.

Section 6. Accidental Release Measures**Material Release
or Spill**

Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Evacuate non-essential personnel. Ventilate area. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.

Section 7. Handling and Storage**Handling**

COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Avoid confined spaces and areas with poor ventilation. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.

Storage

Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection**Engineering Controls**

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - *The selection of personal protective equipment varies, depending upon conditions of use.*

Eyes Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|--|--------------------------------------|---|
| Physical State and Appearance | Bright oily liquid. | Viscosity | 1.2 - 4.1 cSt @ 40°C (104°F) |
| Colour | Clear to yellow / brown (may be dyed for taxation purposes). | Pour Point | Not available |
| Odour | Mild petroleum oil like. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | 150 - 371°C (302 - 700°F) | Penetration | Not applicable. |
| Density | 0.80 - 0.88 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | 4.5 (Air = 1) | Ionicity (in water) | Not available |
| Vapour Pressure | 1.0 kPa @ 20°C (7.5 mmHg @ 68°F). | Dispersion Properties | Not available |
| Volatility | <0.1 (Butyl acetate = 1), less than gasoline. | Solubility | Insoluble in cold water, soluble in non-polar hydrocarbon solvents. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|--|
| Corrosivity | Not available | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents and acids. | Decomposition Products | May release COx, NOx, SOx, H2S, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | | | |
|---------------------------------------|--|--|--|
| Routes of Entry | Skin contact, eye contact, inhalation, and ingestion. | | |
| Acute Lethality | <p>Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below:</p> <p><u>Fuel Oil No. 2 (68476-30-2):</u> Acute Oral toxicity (LD50): 12000 mg/kg (rat)</p> <p><u>Kerosine (petroleum), hydrosulfurized (64742-81-0):</u> Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >2000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >5000 mg/m³/4h (rat)</p> | | |
| Chronic or Other Toxic Effects | | | |
| Dermal Route: | This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. | | |
| Inhalation Route: | Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. | | |
| Oral Route: | Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. | | |
| Eye Irritation/Inflammation: | This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant. | | |
| Immunotoxicity: | Not available | | |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. | | |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. | | |
| Mutagenic: | This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. | | |
| Reproductive Toxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. | | |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. | | |
| Carcinogenicity (ACGIH): | ACGIH A3: animal carcinogen. [Diesel fuel] (See Other Considerations) | | |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC. | | |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. | | |
| Carcinogenicity (IRIS): | Not available | | |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. | | |
| Other Considerations | * Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. | | |

Section 12. Ecological Information

| | | | |
|---|---------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks No additional remark. | | | |



Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|-------------------------------------|---|--|
| TDG Classification | FUEL OIL, 3, UN1202, PGIII (CL-TDG) | Special Provisions for Transport | See Transportation of Dangerous Goods Regulations. |
|---------------------------|-------------------------------------|---|--|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | |
|----------------------------------|----|--|--|--|----|-------------|---|------------|---|---------------------|---|--|--|---|
| Other Regulations | | This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). | | | | | | | | | | | | |
| | | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | | | |
| | | All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS). | | | | | | | | | | | | |
| | | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | | | |
| | | Please contact Product Safety for more information. | | | | | | | | | | | | |
| DSD/DPD (Europe) | | Not evaluated. | | HCS (U.S.A.) CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F). | | | | | | | | | | |
| ADR (Europe) (Pictograms) | | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | | DOT (U.S.A) (Pictograms)  | | | | | | | | | | |
| HMIS (U.S.A.) | | <table><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>2</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table> | | Health Hazard | 2* | Fire Hazard | 2 | Reactivity | 0 | Personal Protection | H | NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard | | Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme |
| Health Hazard | 2* | | | | | | | | | | | | | |
| Fire Hazard | 2 | | | | | | | | | | | | | |
| Reactivity | 0 | | | | | | | | | | | | | |
| Personal Protection | H | | | | | | | | | | | | | |

Section 16. Other Information

| | |
|---|---|
| References | Available upon request. * Marque de commerce de Petro-Canada - Trademark |
| Glossary ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials () BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazardous Communication System IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLM - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System | |

HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax:
1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 2/5/2004.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|  | Not controlled |  |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|---------------------------------|---|
| Product Name | DURON* SINGLE GRADE ENGINE OILS SAE VISCOSITY GRADES 10W, 20, 30, 40, 50 | Code | 420-054, DUR1 420-055, DUR2 420-056, DUR3 420-057, DUR4 420-058, DUR5 |
| Synonym | Not available | Validated on | 10/7/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | DURON* single grade oils are intended for use in diesel and spark ignition engines according to the specific viscosity grade and performance level for each grade of product. They may also be used for wet clutch and gear type transmissions and hydraulic systems in line with equipment builder specifications. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|---|---|---------|--------------------------------|---------------------------------|-----------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives. | Mixture | 100 | 5 mg/m ³ (oil mist) | 10 mg/m ³ (oil mist) | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|--------------------------|--|
| Eye Contact | No effects expected. If irritation does occur, flush contaminated eye(s) with lukewarm, gently flowing water for 5 minutes or until the chemical is removed. If irritation persists, obtain medical advice. |
| Skin Contact | Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with water and non-abrasive soap for 5 minutes or until chemical is removed. Remove contaminated clothing, shoes and leather goods (e.g., watchbands, belts, etc.). If irritation persists, repeat flushing. Obtain medical advice immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard. |
| Inhalation | Remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice. |
| Ingestion | NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT induce vomiting because of danger of aspirating liquid into lungs. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, rinse mouth and repeat administration of water. Obtain medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|---|--|--|
| Flammability | May be combustible at high temperature. | Flammable Limits | Not available. |
| Flash Points | CLOSED CUP: $\geq 194^{\circ}\text{C}$ (381.2°F) (Pensky-Martens) OPEN CUP: $\geq 205^{\circ}\text{C}$ (401°F) (Cleveland) | Auto-Ignition Temperature | Fire Point: $\geq 231^{\circ}\text{C}$ (447.8°F) |
| Fire Hazards in Presence of Various Substances | Low fire hazard. This material must be heated before ignition will occur. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. |
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), CaO _x , ZnO _x , PO _x , smoke and irritating vapours as products of incomplete combustion. | | |
| Fire Fighting Media and Instructions | NAERG2004, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel. | | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|--|
| Material Release or Spill | Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Ensure clean-up personnel wear appropriate personal protective equipment. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. |
|----------------------------------|--|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. |
| Storage | Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10). |

Section 8. Exposure Controls/Personal Protection

| | |
|---|---|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.) |
| Respiratory | A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume of mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. A NIOSH-approved positive-pressure, air-supplied respirator or self-contained breathing apparatus may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. |
| Hands | If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): neoprene, nitrile, polyvinyl alcohol (PVA), fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|---|--------------------------------------|---|
| Physical State and Appearance | Viscous liquid. | Viscosity | 10W: 41.51 cSt @ 40°C (104°F) 20: 64.9 cSt @ 40°C (104°F) 30: 83.2 cSt @ 40°C (104°F) 40: 133.5 cSt @ 40°C (104°F) 50: 209 cSt @ 40°C (104°F) |
| Colour | Amber. | Pour Point | 10W: -42°C (-43.6°F) 20: -39°C (-38.2°F) 30: -36°C (-32.8°F) 40: -30°C (-22°F) 50: -21°C (-5.8°F) |
| Odour | Mild petroleum oil like. | Softening Point | Not applicable. |
| Odour Threshold | Not available. | Dropping Point | Not applicable. |
| Boiling Point | Not available. | Penetration | Not applicable. |
| Density | 0.8667 to 0.8881 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | Not available. | Ionicity (in water) | Not available |
| Vapour Pressure | Negligible at ambient temperature and pressure. | Dispersion Properties | Not available |
| Volatility | Not available | Solubility | Insoluble in water. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|---|
| Corrosivity | 10W, 30, 40: Copper corrosion, 3h, 100°C (ASTM D0130): 1b. 20, 50: Copper corrosion, 3h, 100°C (ASTM D0130): 1a. | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents, acids, halogens and halogen compounds. | Decomposition Products | May release COx, NOx, SOx, POx, ZnOx, H2S, alkyl mercaptans, sulfides, aldehydes, methacrylate monomers, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | | | |
|---------------------------------------|--|--|--|
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. | | |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for the base oils are provided below: Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >2000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >2500 mg/m³/4h (rat) | | |
| Chronic or Other Toxic Effects | | | |
| Dermal Route: | Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any. | | |
| Inhalation Route: | With its relatively low vapour pressure, this product is not expected be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. | | |
| Oral Route: | Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect. | | |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. | | |
| Immunotoxicity: | Not available. | | |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. | | |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. | | |
| Mutagenic: | This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. | | |
| Reproductive Toxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. | | |

| | |
|--------------------------------|---|
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available. | Products of Biodegradation | Not available |
| Additional Remarks | No additional remark. | | |




Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|---|---|-----------------|
| TDG Classification | Not a hazardous material for transport according to the TDG Regulations. (Canada) | Special Provisions for Transport | Not applicable. |
|---------------------------|---|---|-----------------|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|---|-----------------|---------------------------------|---|-------------|---|------------|---|---------------------|---|----------------------|--|--|--------|---|-------------|--------|-----------------|------------|--|----------|-----------------|--|------------|--|--|--|--|--------|--|--|--|--|-----------|
| Other Regulations | <p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | Not classified under the Dangerous Substances or Dangerous Preparations Directives. | | HCS (U.S.A.) | Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | | DOT (U.S.A) (Pictograms) | Not evaluated for transport Non évalué pour le transport | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | <table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table> | | Health Hazard | 1 | Fire Hazard | 1 | Reactivity | 0 | Personal Protection | B | NFPA (U.S.A.) | <table><tr><td rowspan="3">Health</td><td rowspan="3"></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>Reactivity</td><td></td><td>1 Slight</td></tr><tr><td>Specific hazard</td><td></td><td>2 Moderate</td></tr><tr><td></td><td></td><td></td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table> | | Health |  | Fire Hazard | Rating | 0 Insignificant | Reactivity | | 1 Slight | Specific hazard | | 2 Moderate | | | | | 3 High | | | | | 4 Extreme |
| Health Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Health |  | Fire Hazard | Rating | 0 Insignificant | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Reactivity | | 1 Slight | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Specific hazard | | 2 Moderate | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 3 High | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 4 Extreme | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

References Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Glossary

| | |
|---|--|
| ACGIH - American Conference of Governmental Industrial Hygienists | IRIS - Integrated Risk Information System |
| ADR - Agreement on Dangerous goods by Road (Europe) | LD50/LC50 - Lethal Dose/Concentration kill 50% |
| ASTM - American Society for Testing and Materials | LDLo/LCLo - Lowest Published Lethal Dose/Concentration |
| BOD5 - Biological Oxygen Demand in 5 days | NAERG'96 - North American Emergency Response Guide Book (1996) |
| CAN/CGA B149.2 Propane Installation Code | NFPA - National Fire Prevention Association |
| CAS - Chemical Abstract Services | NIOSH - National Institute for Occupational Safety & Health |
| CEPA - Canadian Environmental Protection Act | NPRI - National Pollutant Release Inventory |
| CERCLA - Comprehensive Environmental Response, Compensation and Liability Act | NSNR - New Substances Notification Regulations (Canada) |
| CFR - Code of Federal Regulations | NTP - National Toxicology Program |
| CHIP - Chemicals Hazard Information and Packaging Approved Supply List | OSHA - Occupational Safety & Health Administration |
| CNS - Central Nervous System | PEL - Permissible Exposure Limit |
| COD5 - Chemical Oxygen Demand in 5 days | RCRA - Resource Conservation and Recovery Act |
| CPR - Controlled Products Regulations | RTECS - Registry of Toxic Effects of Chemical Substances |
| DOT - Department of Transport | SARA - Superfund Amendments and Reorganization Act |
| DSDL - Dangerous Substances Classification and Labeling (Europe) | SD - Single Dose |
| DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) | STEL - Short Term Exposure Limit (15 minutes) |
| DSL - Domestic Substance List | TDG - Transportation Dangerous Goods (Canada) |
| EEC/EU - European Economic Community/European Union | TDLo/TCLo - Lowest Published Toxic Dose/Concentration |
| EINECS - European Inventory of Existing Commercial Chemical Substances | TLm - Median Tolerance Limit |
| EPA - Environmental Protection Agency | TLV-TWA - Threshold Limit Value-Time Weighted Average |
| EPCRA - Emergency Planning and Community Right to Know Act | TSCA - Toxic Substances Control Act |
| FDA - Food and Drug Administration | USEPA - United States Environmental Protection Agency |
| FIFRA - Federal Insecticide, Fungicide and Rodenticide Act | USP - United States Pharmacopoeia |
| HCS - Hazard Communication Standard | WHMIS - Workplace Hazardous Material Information System |
| HMIS - Hazardous Material Information System | |
| IARC - International Agency for Research on Cancer | |

For Copy of MSDS

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca/msds

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 10/7/2005.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|  | Not controlled |  |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|-----------------------------|---|
| Product Name | DURATRAN* XL | Code | DTRANXL, 460-644-0 |
| Synonym | Not available | Validated on | 10/23/2003. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | A synthetic blend, extended season transmission / hydraulic fluid for use in a wide range of ambient conditions with exceptional low temperature performance. Suitable for transmission, hydraulic, wet brake, PTO, final drive and power steering units in mobile equipment. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|--|---|---------|--------------------------------|---------------------------------|-----------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| Mixture of severely hydrotreated and hydrocracked base oil (petroleum), synthetic hydrocarbons and other proprietary, non-hazardous additives. | Mixture | 100 | 5 mg/m ³ (oil mist) | 10 mg/m ³ (oil mist) | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|--------------------------|---|
| Eye Contact | IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention. |
| Skin Contact | Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention. |
| Inhalation | Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention. |
| Ingestion | DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|--|--|--|
| Flammability | May be combustible at high temperature. | Flammable Limits | Not available |
| Flash Points | OPEN CUP: 219°C (426.2°F) (Cleveland) | Auto-Ignition Temperature | Fire Point: 239°C (462.2°F) |
| Fire Hazards in Presence of Various Substances | Low fire hazard. This material must be heated before ignition will occur. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. |
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), CaO _x , ZnO _x , phosphorus compounds (PO _x), smoke and irritating vapours as products of incomplete combustion. | | |

Fire Fighting Media and Instructions

NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. **SMALL FIRE:** use DRY chemicals, foam, water spray or CO₂. **LARGE FIRE:** use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.

Section 6. Accidental Release Measures**Material Release or Spill**

Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.

Section 7. Handling and Storage**Handling**

Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid eye contact. Avoid skin contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.

Storage

Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection**Engineering Controls**

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.

Eyes Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|---|--------------------------------------|--|
| Physical State and Appearance | Viscous liquid. | Viscosity | 39.21 cSt @ 40°C (104°F), 8.34 cSt @ 100°C (212°F), VI=196 |
| Colour | Yellow/amber. | Pour Point | -49.8°(-57.6°F) |
| Odour | No odour or slight petroleum oil like. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | Not available | Penetration | Not applicable. |
| Density | 0.8503 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | Not available | Ionicity (in water) | Not available |
| Vapour Pressure | Negligible at ambient temperature and pressure. | Dispersion Properties | Not available |
| Volatility | Non-volatile. | Solubility | Insoluble in water. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|--|
| Corrosivity | Copper corrosion, 3h, 149°C (ASTM D0130M): 1b. | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents and acids. | Decomposition Products | May release COx, SOx, POx, H2S, CaOx, ZnOx, SiOx, aldehydes, alkyl mercaptans, sulfides, methacrylate monomers, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|---------------------------------------|---|
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >2000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >2500 mg/m³/4h (rat) |
| Chronic or Other Toxic Effects | |
| Dermal Route: | Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any. |
| Inhalation Route: | With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. |
| Oral Route: | Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect. |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |
| Reproductive Toxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks | No additional remark. | | |





Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|---|---|-----------------|
| TDG Classification | Not a hazardous material for transport according to the TDG Regulations. (Canada) | Special Provisions for Transport | Not applicable. |
|---------------------------|---|---|-----------------|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|--|-------------|---------------------------------|---|-------------|---|------------|---|---------------------|---|----------------------|---|--|--------|---|-------------|--------|-----------------|------------|--|----------|--|--|--|--|------------|--|--|--|--|--------|--|--|--|--|-----------|
| Other Regulations | This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Please contact Product Safety for more information. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | Not classified under the Dangerous Substances or Dangerous Preparations Directives. | | HCS (U.S.A.) | Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | | DOT (U.S.A) (Pictograms) |  | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | <table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table> | | Health Hazard | 1 | Fire Hazard | 1 | Reactivity | 0 | Personal Protection | B | NFPA (U.S.A.) | <table><tr><td rowspan="2">Health</td><td rowspan="2"></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>Reactivity</td><td></td><td>1 Slight</td></tr><tr><td></td><td></td><td></td><td></td><td>2 Moderate</td></tr><tr><td></td><td></td><td></td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table> | | Health |  | Fire Hazard | Rating | 0 Insignificant | Reactivity | | 1 Slight | | | | | 2 Moderate | | | | | 3 High | | | | | 4 Extreme |
| Health Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Health |  | Fire Hazard | Rating | 0 Insignificant | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Reactivity | | 1 Slight | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 2 Moderate | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 3 High | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 4 Extreme | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | Specific hazard | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

| | |
|-------------------|---|
| References | Available upon request. * Marque de commerce de Petro-Canada - Trademark |
|-------------------|---|

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 CNS - Central Nervous System
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 RTECS - Registry of Toxic Effects of Chemical Substances
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration

Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPA - Environmental Protection Agency
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca/msds

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 10/23/2003.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|--------------------|------------------------|---------------------|------------------|
| | Not controlled | | |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|--|-----------------------------|---|
| Product Name | DRILL ROD HEAVY GREASE | Code | 650-265, DRODH |
| Synonym | Not available | DSL | See Section 15 |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | TSCA | See Section 15 |
| Material Uses | This product is recommended for the lubrication of diamond drill rods. | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |

Section 2. Composition and Information on Ingredients

| | | | <i>Exposure Limits (ACGIH)</i> | | |
|---|---------|---------|--------------------------------|---------------------------------|-----------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives. | Mixture | 100 | 5 mg/m ³ (oil mist) | 10 mg/m ³ (oil mist) | Not established |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|--------------------------|--|
| Eye Contact | No effects expected. If irritation does occur, flush contaminated eye(s) with lukewarm, gently flowing water for 5 minutes or until the chemical is removed. If irritation persists, obtain medical advice. |
| Skin Contact | Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with water and non-abrasive soap for 5 minutes or until chemical is removed. Remove contaminated clothing, shoes and leather goods (e.g., watchbands, belts, etc.). If irritation persists, repeat flushing. Obtain medical advice immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard. |
| Inhalation | Remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice. |
| Ingestion | NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, rinse mouth and repeat administration of water. Obtain medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|--|--|--|
| Flammability | May be combustible at high temperature. | Flammable Limits | Not available |
| Flash Points | Mineral Oil Blend: OPEN CUP: 252°C (485.6°F). (Cleveland). | Auto-Ignition Temperature | Not available |
| Fire Hazards in Presence of Various Substances | Low fire hazard. This material must be heated before ignition will occur. | Explosion Hazards in Presence of Various Substances | Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. |
| Products of Combustion | Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion. | | |

| | |
|---|--|
| Fire Fighting Media and Instructions | NAERG2004, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO2. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel. |
|---|--|

Section 6. Accidental Release Measures

| | |
|----------------------------------|--|
| Material Release or Spill | Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. |
|----------------------------------|--|

Section 7. Handling and Storage

| | |
|-----------------|---|
| Handling | Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. |
| Storage | Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area. |

Section 8. Exposure Controls/Personal Protection

| | |
|-----------------------------|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection | <i>The selection of personal protective equipment varies, depending upon conditions of use.</i> |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.) |
| Respiratory | A minimum of NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume of mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. A NIOSH-approved positive-pressure, air-supplied respirator or self-contained breathing apparatus may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. |
| Hands | If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Nitrile, Polyvinyl alcohol (PVA), Fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |
| Exposure Limits | This product is not expected to form a mist based on its properties and expected use. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|--|---------------------------------|--|
| Physical State and Appearance | Paste of long fibred texture. | Viscosity | Mineral Oil Blend: 155.5 cSt @ 40°C (104°F), 14.42 cSt @ 100°C (212°F), VI=89 |
| Colour | Dark greenish-brown | Pour Point | Mineral Oil Blend: -15°C (5°F) |
| Odour | Mild grease like. | Softening Point | Not available |
| Odour Threshold | Not available | Dropping Point | 201°C (394°F) |
| Boiling Point | Not available | Penetration | 234 (60 strokes) |
| Specific Gravity | Mineral Oil Blend: 0.8898 kg/L @ 15°C (59°F). | Oil / Water Dist. Coeff. | Not available |
| Vapor Density | Not available | Ionicity (in water) | Not available |
| Vapor Pressure | Negligible at ambient temperature and pressure. | Dispersion Properties | Not available |
| Volatility | Non-volatile. | Solubility | Insoluble in water. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|---|
| Corrosivity | Not corrosive to copper. | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents, acids and alkalis. | Decomposition Products | May release COx, NOx, SOx, diphenylamine, alkenes, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | | | |
|---------------------------------------|---|--|--|
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. | | |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for the base oils are provided below: Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >2000 mg/kg (rabbit) | | |
| Chronic or Other Toxic Effects | | | |
| Dermal Route: | Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any. | | |
| Inhalation Route: | With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. | | |
| Oral Route: | Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect. | | |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. | | |
| Immunotoxicity: | Not available | | |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. | | |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. | | |
| Mutagenic: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. | | |
| Reproductive Toxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. | | |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. | | |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. | | |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. | | |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. | | |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. | | |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. | | |
| Other Considerations | No additional remark. | | |

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|--|---------------|
| Environmental Fate | Not available. | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks | No additional remark. | | |


Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|------------------------------------|---|-----------------|
| TDG Classification | Not controlled under TDG (Canada). | Special Provisions for Transport | Not applicable. |
|---------------------------|------------------------------------|---|-----------------|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | |
|--------------------------------------|--|---------------------------------|---|-------------|---|------------|---|---------------------|---|----------------------|--|--------|---|-------------|---|------------|--|--|--|-----------------|
| Other Regulations | This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). | | | | | | | | | | | | | | | | | | | |
| | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | | | | | | | | | | |
| | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | | | | | | | | | | |
| | Please contact Product Safety for more information. | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | Not evaluated. | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) (Pictograms) | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | DOT (U.S.A) (Pictograms) |  | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | <table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table> | Health Hazard | 1 | Fire Hazard | 1 | Reactivity | 0 | Personal Protection | B | NFPA (U.S.A.) | <table><tr><td rowspan="4">Health</td><td>1</td><td>Fire Hazard</td></tr><tr><td>1</td><td>Reactivity</td></tr><tr><td></td><td></td></tr><tr><td></td><td>Specific hazard</td></tr></table> | Health | 1 | Fire Hazard | 1 | Reactivity | | | | Specific hazard |
| Health Hazard | 1 | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | 1 | | | | | | | | | | | | | | | | | | | |
| Reactivity | 0 | | | | | | | | | | | | | | | | | | | |
| Personal Protection | B | | | | | | | | | | | | | | | | | | | |
| Health | 1 | Fire Hazard | | | | | | | | | | | | | | | | | | |
| | 1 | Reactivity | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | |
| | | Specific hazard | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

| | |
|-------------------|---|
| References | Available upon request. * Marque de commerce de Petro-Canada - Trademark |
|-------------------|---|

Glossary

| | |
|--|---|
| ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials BOD5 - Biological Oxygen Demand in 5 days CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemical Hazard Information and Packaging Approved Supply List COD - Chemical Oxygen Demand CPR - Controlled Products Regulations DOT - Department of Transportation (U.S.A.) DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substance or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List (Canada) EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning And Community Right-To-Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide, and Rodenticide Act | HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLV-TWA - Threshold Limit Value-Time Weighted Average TLM - Median Tolerance Limit TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System |
|--|---|

| | |
|----------------------------|---|
| Information Contact | Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564 Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285 Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285 |
|----------------------------|---|

Prepared by Product Safety - JDW on 2/26/2005.








Data entry by Product Safety - JDW.

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|   | B-3, D-2B |     |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|-----------------------------|--|
| Product Name | DIESEL FUEL | Code | W104, W293 SAP: 120, 121, 122, 287 |
| Synonym | Diesel 50, Diesel 50 LS, #1 Diesel, #1 Diesel LS, Diesel LC, Seasonal Diesel, Seasonal Diesel LS, Diesel AA, Domestic Marine Diesel, International marine Diesel, Seasonal Diesel Locomotive, Domestic Marine diesel LS, diesel -20°C (LS), LSD, Low Sulphur Diesel, dyed diesel, marked diesel, coloured diesel, Naval Distillate, Ultra Low Sulphur Diesel, ULS Diesel, Mining Diesel, Mining Diesel Special, Mining Diesel Special LS, High Flash Mining Diesel, Furnace Oil, Stove Oil. | Validated on | 8/17/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|--|---|---------|---|-----------------|-----------------|
| Name | CAS # | % (V/V) | TLV-TWA(8 h) | STEL | CEILING |
| Diesel oil. | 68334-30-5 | >99.9 | 100 mg/m ³ (as total hydrocarbons) * | Not established | Not established |
| Proprietary additives. | Not available | <0.1 | Not established | Not established | Not established |
| Aromatic content is 50% maximum (benzene: nil). Sulphur content is 0-0.50%. | | | | | |
| Manufacturer Recommendation | * Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|--|
| Potential Health Effects | Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS. |
|---------------------------------|--|

Section 4. First Aid Measures

| | |
|---------------------|--|
| Eye Contact | Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 15 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately. |
| Skin Contact | Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 15 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard. |
| Inhalation | Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility. |

Ingestion NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility.

Note to Physician Not available

Section 5. Fire-fighting Measures

| | | |
|---|---|--|
| Flammability | Class II - combustible liquid (NFPA). | Flammable Limits LOWER: 0.7%, UPPER: 6% (NFPA) |
| Flash Points | Diesel Fuel: Closed Cup: >40°C (>104°F) Marine Diesel Fuel: Closed Cup: >60°C (>140°F) Mining Diesel: Closed Cup: 52°C (126°F) | Auto-Ignition Temperature 225°C (437°F) |
| Fire Hazards in Presence of Various Substances | Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces. | Explosion Hazards in Presence of Various Substances Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Vapour explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard. |
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), water vapour (H ₂ O), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products. | |
| Fire Fighting Media and Instructions | <p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p> | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|---|
| Material Release or Spill | Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately. |
|----------------------------------|---|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Wear proper personal protective equipment (See Section 8). |
| Storage | Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. |

Section 8. Exposure Controls/Personal Protection

| | |
|--|---|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i> | |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered. |
| Body | If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.) |
| Respiratory | A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection. |
| Hands | If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): nitrile, neoprene, polyvinyl alcohol (PVA), fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|--|--------------------------------------|---|
| Physical State and Appearance | Bright oily liquid. | Viscosity | 1.3 - 4.1 cSt @ 40°C (104°F) |
| Colour | Clear to yellow / brown (may be dyed for taxation purposes). | Pour Point | Variable, -50°C to 0°C (-58°F to -32°F) |
| Odour | Petroleum oil like. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | 150 - 371°C (302-700°F) | Penetration | Not applicable. |
| Density | 0.80 - 0.85 kg/L @ 15°C (59°F) | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | 4.5 (Air = 1) | Ionicity (in water) | Not applicable. |
| Vapour Pressure | Not available | Dispersion Properties | Not available |
| Volatility | Semivolatile to volatile. | Solubility | Insoluble in cold water, soluble in non-polar hydrocarbon solvents. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|---|
| Corrosivity | Not available | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents and acids. | Decomposition Products | May release COx, NOx, SOx, H2S, H2O, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|---------------------------------------|---|
| Routes of Entry | Skin contact, eye contact, inhalation, and ingestion. |
| Acute Lethality | Acute oral toxicity (LD50): 7500 mg/kg (rat). |
| Chronic or Other Toxic Effects | |
| Dermal Route: | This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations) |
| Inhalation Route: | Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |

| | |
|----------------------------------|---|
| Oral Route: | Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Eye Irritation/Inflammation: | This product contains a component (at $\geq 1\%$) that can cause eye irritation. Therefore, this product is considered to be an eye irritant. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |
| Reproductive Toxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | ACGIH A3: animal carcinogen. [Diesel oil] (See Other Considerations) |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A). |

Section 12. Ecological Information

| | | | |
|---|---------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks No additional remark. | | | |

Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|--|---|--|
| TDG Classification | DIESEL FUEL, 3, UN1202, PGIII (CL-TDG) | Special Provisions for Transport | See Transportation of Dangerous Goods Regulations. |
|---------------------------|--|---|--|

Section 15. Regulatory Information

| | |
|--------------------------|--|
| Other Regulations | <p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> |
|--------------------------|--|

Please contact Product Safety for more information.

DSD/DPD (Europe) Not evaluated.

HCS (U.S.A.)

CLASS: Irritating substance.
CLASS: Target organ effects.
CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).

**ADR (Europe)
(Pictograms)**

NOT EVALUATED FOR
EUROPEAN TRANSPORT

NON ÉVALUÉ POUR LE
TRANSPORT EUROPÉEN.

**DOT (U.S.A)
(Pictograms)**

Not evaluated for transport


Non évalué pour le transport

HMIS (U.S.A.)

| | |
|---------------------|----|
| Health Hazard | 2* |
| Fire Hazard | 2 |
| Reactivity | 0 |
| Personal Protection | H |

NFPA (U.S.A.)

Health



Fire Hazard

Rating 0 Insignificant

1 Slight

2 Moderate

3 High

4 Extreme

Specific hazard

Section 16. Other Information

References

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
CNS - Central Nervous System
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPA - Environmental Protection Agency
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
RTECS - Registry of Toxic Effects of Chemical Substances
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 8/17/2005.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|--------------------|------------------------|---------------------|------------------|
| | Not controlled | | |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|-----------------------------|--|
| Product Name | DEXRON® III/MERCON® AUTOMATIC TRANSMISSION FLUID | Code | 460-601, DEXRON |
| Synonym | Not available | Validated on | 11/22/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Automatic transmission fluid for most North American automobiles and for off-highway torque converters requiring C-4 type transmission fluid. It is also suitable as a hydraulic fluid and as a top-up in power steering systems. Not to be used in conditions where aerosols could be generated. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|--|---|---------|--------------------------------|---------------------------------|-----------------|
| Name | CAS # | % (V/V) | TLV-TWA(8 h) | STEL | CEILING |
| Mixture of severely hydrotreated and hydrocracked base oil (petroleum) and other proprietary, non-hazardous additives. | Mixture | 100 | 5 mg/m ³ (oil mist) | 10 mg/m ³ (oil mist) | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|--------------------------|--|
| Eye Contact | No effects expected. If irritation does occur, flush contaminated eye(s) with lukewarm, gently flowing water for 5 minutes or until the chemical is removed. If irritation persists, obtain medical advice. |
| Skin Contact | Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with water and non-abrasive soap for 5 minutes or until chemical is removed. Remove contaminated clothing, shoes and leather goods (e.g., watchbands, belts, etc.). If irritation persists, repeat flushing. Obtain medical advice immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard. |
| Inhalation | Remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice. |
| Ingestion | NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, rinse mouth and repeat administration of water. Obtain medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---------------------|---|----------------------------------|---------------------------|
| Flammability | May be combustible at high temperature. | Flammable Limits | Not available |
| Flash Points | OPEN CUP: ≥180°C (356°F) (Cleveland) | Auto-Ignition Temperature | Fire Point: 205°C (401°F) |
| | | | |

| | | | |
|---|---|--|--|
| Fire Hazards in Presence of Various Substances | Low fire hazard. This material must be heated before ignition will occur. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. |
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), smoke and irritating vapours as products of incomplete combustion. | | |
| Fire Fighting Media and Instructions | NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel. | | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|--|
| Material Release or Spill | Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. |
|----------------------------------|--|

Section 7. Handling and Storage

| | |
|-----------------|---|
| Handling | Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid eye contact. Avoid skin contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. |
| Storage | Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area. |

Section 8. Exposure Controls/Personal Protection

| | |
|---|---|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.) |
| Respiratory | A minimum of NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. A NIOSH-approved positive-pressure, air-supplied respirator or self-contained breathing apparatus may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. |
| Hands | If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Nitrile, Polyvinyl alcohol (PVA), Fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|---|--------------------------------------|--|
| Physical State and Appearance | Viscous liquid. | Viscosity | 34.26 cSt @ 40°C (104°F), 7.7 cSt @ 100°C (212°F), VI=210. |
| Colour | Dark red. | Pour Point | -51°C (-59.8°F). |
| Odour | Mild petroleum oil like. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | Not available | Penetration | Not applicable. |
| Density | 0.855 kg/L @ 15°C(59°F) 7.14 lbs/US gal @ 15°C(59°F) | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | Not available | Ionicity (in water) | Not available |
| Vapour Pressure | Negligible at ambient temperature and pressure. | Dispersion Properties | Not available |
| Volatility | Non-volatile | Solubility | Insoluble in water. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|---|
| Corrosivity | Copper corrosion, 3h, 149°C (ASTM D0130): 1b. | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents, reducing agents and acids. | Decomposition Products | May release COx, NOx, metallic oxides, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | | | |
|---------------------------------------|---|--|--|
| Routes of Entry | Skin contact, eye contact, inhalation, and ingestion. | | |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for the base oils are provided below: Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat). | | |
| Chronic or Other Toxic Effects | | | |
| Dermal Route: | Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any. | | |
| Inhalation Route: | With its relatively low vapour pressure, this product is not expected be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. | | |
| Oral Route: | Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect. | | |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. | | |
| Immunotoxicity: | Not available | | |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. | | |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. | | |
| Mutagenic: | This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. | | |
| Reproductive Toxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. | | |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. | | |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. | | |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. | | |

| | |
|-----------------------------|---|
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---|---------------|---|---------------|
| Environmental Fate | Not available | Persistence/ Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks No additional remark. | | | |

Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|---|---|-----------------|
| TDG Classification | Not a hazardous material for transport according to the TDG Regulations. (Canada) | Special Provisions for Transport | Not applicable. |
|---------------------------|---|---|-----------------|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|--|-----------------|----------------------------------|---|-------------|---|------------|---|---------------------|---|----------------------|--|--------|---|-------------|--------|-----------------|---|---|----------|--|--|------------|--|------------|--|--|-----------------|--|--------|--|--|--|--|-----------|--|
| Other Regulations | This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | German Water Hazard Classification (Verwaltungsvorschrift wassergefährdende Stoffe - VwVwS) WGK=2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Please contact Product Safety for more information. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | Not classified under the Dangerous Substances or Dangerous Preparations Directives. | | HCS (U.S.A.) | Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | | DOT (U.S.A.) (Pictograms) | Not evaluated for transport Non évalué pour le transport | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | <table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table> | | Health Hazard | 1 | Fire Hazard | 1 | Reactivity | 0 | Personal Protection | B | NFPA (U.S.A.) | <table><tr><td rowspan="2">Health</td><td>1</td><td rowspan="2">Fire Hazard</td><td rowspan="2">Rating</td><td>0 Insignificant</td></tr><tr><td>1</td><td>0</td><td>1 Slight</td></tr><tr><td></td><td></td><td>Reactivity</td><td></td><td>2 Moderate</td></tr><tr><td></td><td></td><td>Specific hazard</td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table> | Health | 1 | Fire Hazard | Rating | 0 Insignificant | 1 | 0 | 1 Slight | | | Reactivity | | 2 Moderate | | | Specific hazard | | 3 High | | | | | 4 Extreme | |
| Health Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Health | 1 | Fire Hazard | Rating | 0 Insignificant | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 | | | 0 | 1 Slight | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Reactivity | | 2 Moderate | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Specific hazard | | 3 High | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | 4 Extreme | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

| | |
|-------------------|---|
| References | Available upon request. * Marque de commerce de Petro-Canada - Trademark |
| Glossary | |

| | |
|---|--|
| ACGIH - American Conference of Governmental Industrial Hygienists | IRIS - Integrated Risk Information System |
| ADR - Agreement on Dangerous goods by Road (Europe) | LD50/LC50 - Lethal Dose/Concentration kill 50% |
| ASTM - American Society for Testing and Materials | LDLo/LCLo - Lowest Published Lethal Dose/Concentration |
| BOD5 - Biological Oxygen Demand in 5 days | NAERG'96 - North American Emergency Response Guide Book (1996) |
| CAN/CGA B149.2 Propane Installation Code | NFPA - National Fire Prevention Association |
| CAS - Chemical Abstract Services | NIOSH - National Institute for Occupational Safety & Health |
| CEPA - Canadian Environmental Protection Act | NPRI - National Pollutant Release Inventory |
| CERCLA - Comprehensive Environmental Response, Compensation and Liability Act | NSNR - New Substances Notification Regulations (Canada) |
| CFR - Code of Federal Regulations | NTP - National Toxicology Program |
| CHIP - Chemicals Hazard Information and Packaging Approved Supply List | OSHA - Occupational Safety & Health Administration |
| CNS - Central Nervous System | PEL - Permissible Exposure Limit |
| COD5 - Chemical Oxygen Demand in 5 days | RCRA - Resource Conservation and Recovery Act |
| CPR - Controlled Products Regulations | RTECS - Registry of Toxic Effects of Chemical Substances |
| DOT - Department of Transport | SARA - Superfund Amendments and Reorganization Act |
| DSCL - Dangerous Substances Classification and Labeling (Europe) | SD - Single Dose |
| DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) | STEL - Short Term Exposure Limit (15 minutes) |
| DSL - Domestic Substance List | TDG - Transportation Dangerous Goods (Canada) |
| EEC/EU - European Economic Community/European Union | TDLo/TCLo - Lowest Published Toxic Dose/Concentration |
| EINECS - European Inventory of Existing Commercial Chemical Substances | TLm - Median Tolerance Limit |
| EPA - Environmental Protection Agency | TLV-TWA - Threshold Limit Value-Time Weighted Average |
| EPCRA - Emergency Planning and Community Right to Know Act | TSCA - Toxic Substances Control Act |
| FDA - Food and Drug Administration | USEPA - United States Environmental Protection Agency |
| FIFRA - Federal Insecticide, Fungicide and Rodenticide Act | USP - United States Pharmacopoeia |
| HCS - Hazard Communication Standard | WHMIS - Workplace Hazardous Material Information System |
| HMIS - Hazardous Material Information System | |
| IARC - International Agency for Research on Cancer | |

For Copy of MSDS

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca/msds

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 11/22/2005.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|  | Not controlled |  |  |

Section 1. Chemical Product and Company Identification

| | | | |
|---------------|--|----------------------|--|
| Product Name | BARIMOL HEAVY GREASE | Code | 650-119, BARH |
| Synonym | Not available. | DSL | See Section 15 |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | TSCA | See Section 15 |
| Material Uses | This product is a multi-purpose, barium soap based grease with a wide range of automotive and industrial lubricant applications. | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|--|---------|---------|--------------------------------|---------------------------------|-----------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| 1) Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives. | Mixture | 100 | 5 mg/m ³ (oil mist) | 10 mg/m ³ (oil mist) | Not established |

Section 3. Hazards Identification.

| | |
|--------------------------|--|
| Potential Health Effects | Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11. |
|--------------------------|--|

Section 4. First Aid Measures

| | |
|-------------------|---|
| Eye Contact | IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention. |
| Skin Contact | Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. High pressure grease gun is capable of injecting grease through the skin. Grease gun injuries require immediate physician assessment. Seek medical attention. |
| Inhalation | Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention. |
| Ingestion | DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|--|---|---|--|
| Flammability | May be combustible at high temperature. | Flammable Limits | Not available. |
| Flash Points | Mineral Oil Blend: OPEN CUP: 230°C (446°F) (Cleveland) | Auto-Ignition Temperature | Not available. |
| Fire Hazards in Presence of Various Substances | Low fire hazard. This material must be heated before ignition will occur. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. |
| Products of Combustion | Carbon oxides (CO, CO ₂), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion. | | |
| Fire Fighting Media and Instructions | NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel. | | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|--|
| Material Release or Spill | Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. |
|----------------------------------|--|

Section 7. Handling and Storage

| | |
|-----------------|---|
| Handling | Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. |
| Storage | Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10). |

Section 8. Exposure Controls/Personal Protection

| | |
|---|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered. |
| Body | Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn. |
| Respiratory | Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation. |
| Hands | Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |
| Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. This product is not expected to form a mist based on its properties and expected use. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|---|---------------------------------|---|
| Physical State and Appearance | Paste of long fibred texture. | Viscosity | Mineral Oil Blend: 101.36 cSt @ 40°C (104°F), 10.71 cSt @ 100°C (212°F), VI=89 |
| Colour | Dark grey. | Pour Point | Mineral Oil Blend: -18°C (0°F) |
| Odour | Mild grease like. | Softening Point | Not available. |
| Odour Threshold | Not available. | Dropping Point | 239°C (462°F) |
| Boiling Point | Not available. | Penetration | 299 (60 strokes) |
| Specific Gravity | Mineral Oil Blend: 0.8896 kg/L @ 15°C (59°F) | Oil / Water Dist. Coeff. | Not available |
| Vapor Density | Not available. | Ionicity (in water) | Not available |
| Vapor Pressure | Negligible at ambient temperature and pressure. | Dispersion Properties | Not available |
| Volatility | Non to semivolatile. | Solubility | Insoluble in water. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|---|
| Corrosivity | Not corrosive to copper. | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents, acids, alkalis, metals and peroxides. | Decomposition Products | May release COx, NOx, SOx, diphenylamine, alkenes, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|---------------------------------------|---|
| Routes of Entry | Skin contact, eye contact, inhalation, ingestion. |
| Acute Lethality | Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m ³ /4h (rat). |
| Chronic or Other Toxic Effects | |
| Dermal Route: | Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne. |
| Inhalation Route: | Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract. |
| Oral Route: | Low toxicity; has laxative effect. |
| Eye Irritation/Inflammation: | Repeated or prolonged contact may cause transient irritation, but no permanent damage. |
| Immunotoxicity: | Not available. |
| Skin Sensitization: | This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components. |
| Mutagenic: | Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells. |
| Reproductive Toxicity: | This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components. |
| Teratogenicity/Embryotoxicity: | This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components. |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH. |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|---|----------------|
| Environmental Fate | Not available | Persistence/ Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available. | Products of Biodegradation | Not available. |
| Additional Remarks | No additional remark. | | |

Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|------------------------------------|---|-----------------|
| TDG Classification | Not controlled under TDG (Canada). | Special Provisions for Transport | Not applicable. |
|---------------------------|------------------------------------|---|-----------------|

Section 15. Regulatory Information**Other Regulations**

This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).

All components of this formulation are listed on the US EPA-TSCA Inventory.

All components of this product are on the European Inventory of Existing Commercial Chemical Substances.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

Please contact Product Safety for more information.

DSD/DPD (Europe) Not classified under the Dangerous Substances or Dangerous Preparations Directives.

DSD/DPD (Europe) (Pictograms)**DOT (U.S.A) (Pictograms)****HMIS (U.S.A.)**

| | |
|---------------------|---|
| Health Hazard | 1 |
| Fire Hazard | 1 |
| Reactivity | 0 |
| Personal Protection | B |

NFPA (U.S.A.)

Health  Fire Hazard
1 1 0 Reactivity
Specific hazard

Section 16. Other Information**References**

Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
Tm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

Information Contact Internet: www.petro-canada.ca

Lubricants:
Western Canada, telephone: 1-800-661-1199;
fax: (780) 464-9564
Ontario & Central Canada, telephone:
1-800-268-5850 and (905) 822-4222; fax:
1-800-201-6285
Quebec & Eastern Canada, telephone:
1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752








Prepared by Product Safety - JDW on 5/2/2003.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|   | B-2, D-2B |     |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|--|-----------------------------|--|
| Product Name | AVIATION GASOLINE 100LL | Code | 060-100LL, W118 |
| Synonym | AVGAS 100LL | Validated on | 5/30/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | This product is used as fuel for internal combustion aircraft engines. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|--|---|---------|-------------------------|-----------------|-----------------|
| Name | CAS # | % (V/V) | TLV-TWA(8 h) | STEL | CEILING |
| Complex mixture of aliphatic and aromatic hydrocarbons (C4-C12). | 68527-27-5 | 85-95 | Not established | Not established | Not established |
| Toluene | 108-88-3 | 5-15 | 50 ppm | Not established | Not established |
| Contains 0-0.56g/L of lead [from Tetraethyl Lead]. | | | | | |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Flammable liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|--------------------------|---|
| Eye Contact | Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately. |
| Skin Contact | Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 20 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard. |
| Inhalation | Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility. |
| Ingestion | NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|--|--|---|
| Flammability | Flammable liquid (NFPA). | Flammable Limits | LOWER: 1.4%, UPPER: 7.6% |
| Flash Points | Closed Cup: -50°C (-58°F), Tag, ASTM D56. | Auto-Ignition Temperature | 257°C (494.6°F) |
| Fire Hazards in Presence of Various Substances | Easily ignites under almost all normal temperature conditions. Flammable in presence of open flames, sparks, shocks, heat, oxidizing materials. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. May accumulate in confined spaces. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air. Runoff to sewer may create fire or explosion hazard. |
| Products of Combustion | Carbon oxides (CO, CO ₂), reactive hydrocarbons, aldehydes, smoke and irritating vapours as products of incomplete combustion. | | |
| Fire Fighting Media and Instructions | NAERG2004, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient. If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions. SMALL FIRES: Dry chemical, CO ₂ , water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection. | | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|--|
| Material Release or Spill | IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Notify appropriate authorities immediately. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Extinguish all ignition sources. Ventilate area. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Do not allow spilled materials to come into contact with incompatible materials (see Section 10). Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. |
|----------------------------------|--|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | FLAMMABLE MATERIAL. Handle with care. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid contact with any incompatible or reactive materials. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Ensure container is securely closed when not in use. Wear proper personal protective equipment (See Section 8). Exercise caution when washing/drying clothing contaminated with flammable materials. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. |
| Storage | Store as flammable material. Store away from heat and sources of ignition. Store away from incompatible and reactive materials (See section 5 and 10). Store in a dry, cool and well-ventilated area. |

Section 8. Exposure Controls/Personal Protection

| | |
|---|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.) |
| Respiratory | A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection. |

Hands If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): polyvinyl alcohol (PVA) and fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|----------------------------------|--------------------------------------|---|
| Physical State and Appearance | Clear liquid. | Viscosity | Not available |
| Colour | Bright Blue. | Pour Point | Not applicable. |
| Odour | Gasoline. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | 30 to 170°C (86 to 338°F) | Penetration | Not applicable. |
| Density | 0.69 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not measurable. The product is more soluble in oil. |
| Vapour Density | Heavier than air. | Ionicity (in water) | Insoluble in water. |
| Vapour Pressure | 38 kPa @ 20°C (285 mmHg @ 68°F). | Dispersion Properties | Not available |
| Volatility | Volatile. | Solubility | Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins. |

Section 10. Stability and Reactivity

| | | | |
|--|---|---------------------------------|--|
| Corrosivity | Non corrosive. | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Can react with strong oxidizing agents, acids, tetranitromethane, uranium hexafluoride and sulfur dichloride. | Decomposition Products | May release COx, aldehydes, smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|---------------------------------------|--|
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below: <u>Toluene (108-88-3):</u> Acute Oral toxicity (LD50): 636 mg/kg (rat) Acute Dermal toxicity (LD50): 12225 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 8800 ppm/4h (rat) |
| Chronic or Other Toxic Effects | |
| Dermal Route: | This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. |
| Inhalation Route: | Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Oral Route: | Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |

| | |
|--------------------------------|---|
| Mutagenic: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |
| Reproductive Toxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | There is a wealth of information about the teratogenic hazards of Toluene in the literature; however, based upon professional judgement regarding the body of evidence, WHMIS classification as a teratogen is not warranted. |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as A1, A2 or A3 carcinogens by ACGIH. |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---|---------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks No additional remark. | | | |


Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|------------------------------------|---|--|
| TDG Classification | GASOLINE, 3, UN1203, PGII (CL-TDG) | Special Provisions for Transport | See Transportation of Dangerous Goods Regulations. |
|---------------------------|------------------------------------|---|--|

Section 15. Regulatory Information

| | | | | | | | | | | | | |
|----------------------------------|------|---|--|------|-------------|-----|------------|-----|---------------------|-----|---|---|
| Other Regulations | | This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). | | | | | | | | | | |
| | | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | |
| | | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | |
| | | Please contact Product Safety for more information. | | | | | | | | | | |
| DSD/DPD (Europe) | | Not evaluated. | HCS (U.S.A.) CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Irritating substance. CLASS: Target organ effects. | | | | | | | | | |
| ADR (Europe) (Pictograms) | | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | DOT (U.S.A) (Pictograms) Not evaluated for transport Non évalué pour le transport | | | | | | | | | |
| HMIS (U.S.A.) | | <table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(4)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table> | Health Hazard | (2*) | Fire Hazard | (4) | Reactivity | (0) | Personal Protection | (H) | NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard | Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme |
| Health Hazard | (2*) | | | | | | | | | | | |
| Fire Hazard | (4) | | | | | | | | | | | |
| Reactivity | (0) | | | | | | | | | | | |
| Personal Protection | (H) | | | | | | | | | | | |

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 CNS - Central Nervous System
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPA - Environmental Protection Agency
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazard Communication Standard
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 RTECS - Registry of Toxic Effects of Chemical Substances
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDSInternet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 5/30/2005.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|--------------------|------------------------|---------------------|------------------|
| | D-2A, D-2B | | |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|---|-----------------------------|---|
| Product Name | PETRO-CANADA ANTIFREEZE | Code | W269 |
| Synonym | Universal Antifreeze, Radiator Antifreeze, Diesel Antifreeze, Petro-Canada Antifreeze-Coolant, Petro-Canada Heavy Duty Antifreeze-Coolant, Pre-Mix Antifreeze, Petro-Canada Premium Radiator Antifreeze, Diesel Engine Coolant, Pre-Mixed Radiator Antifreeze/Coolant Petro-Canada. | Validated on | 5/11/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Used as an engine antifreeze coolant. | | |

Section 2. Composition and Information on Ingredients

| | | | <i>Exposure Limits (ACGIH)</i> | | |
|--|---|---------|--------------------------------|-----------------|---------------------------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| Ethylene glycol | 107-21-1 | ≥45 | Not established | Not established | 100 mg/m ³ (aerosol) |
| Sodium tetraborate pentahydrate (Diesel Engine Coolant only) | 12179-04-3 | ≤5 | 1 mg/m ³ | Not established | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Contact with this product may cause eye irritation. Not expected to cause more than slight skin irritation. Inhalation of this product may cause respiratory tract irritation. Ingestion may be extremely hazardous. May cause teratogenicity/embryotoxicity. May cause damage to reproductive organs. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|--------------------------|---|
| Eye Contact | IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention. |
| Skin Contact | Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention. |
| Inhalation | Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention. |
| Ingestion | DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|--|--|--|
| Flammability | May be combustible at high temperature. | Flammable Limits | Lower: 3.2%, Upper: 15.3% |
| Flash Points | Closed Cup: 116°C (241°F) (Tagliabue) Open Cup: 116°C (241°F) (Cleveland) | Auto-Ignition Temperature | 413°C (775°F) |
| Fire Hazards in Presence of Various Substances | Low fire hazard. This material must be heated before ignition will occur. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. |

Products of Combustion

Carbon oxides (CO, CO₂), smoke and irritating vapours as products of incomplete combustion.

Fire Fighting Media and Instructions

NAERG2004, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO₂. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.

Section 6. Accidental Release Measures
Material Release or Spill

IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.

Section 7. Handling and Storage
Handling

Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.

Storage

Store in dry, cool, well-ventilated area. Store away from heat and sources of ignition. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection
Engineering Controls

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.

Eyes Chemical splash goggles should be worn when handling this material.

Body If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).

Respiratory A minimum of NIOSH-approved air-purifying respirator with a organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Polyvinyl chloride (PVC). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|-----------------------------|--------------------------------------|-----------------|
| Physical State and Appearance | Clear viscous liquid. | Viscosity | Not available |
| Colour | Green. | Pour Point | Not available |
| Odour | Odourless. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | 129 to 197°C (264 to 387°F) | Penetration | Not applicable. |
| Density | 1.07 to 1.145 (Water = 1) | Oil / Water Dist. Coefficient | Not available |

| | | | |
|-------------------------|--------------------------|------------------------------|---|
| PETRO-CANADA ANTIFREEZE | | Page Number: 3 | |
| Vapour Density | 2.1 (Air=1). | Ionicity (in water) | Not available |
| Vapour Pressure | 0.06 mmHg @ 20°C (68°F). | Dispersion Properties | Not available |
| Volatility | 0% (w/w) | Solubility | Soluble in water, methanol and diethyl ether. |

| | | | |
|--|--|---------------------------------|---|
| Section 10. Stability and Reactivity | | | |
| Corrosivity | Not available | | |
| Stability | The product is stable. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents, acids, alkalis, perchloric acid, phosphorus and silvered copper wires carrying DC current. | Decomposition Products | May release COx, acrid smoke and irritating vapours when heated to decomposition. |

| | |
|--|---|
| Section 11. Toxicological Information | |
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. |
| Acute Lethality | <p><u>Ethylene glycol (107-21-1):</u> LD50: 4700 mg/kg (oral/rat). LD50: 9530 mg/kg (dermal/rabbit).</p> <p><u>Sodium tetraborate pentahydrate (12179-04-3):</u> LD50: 3200-3500 mg/kg (oral/rat) (Boric acid). [Sodium tetraborate pentahydrate]</p> |
| Chronic or Other Toxic Effects | |
| Dermal Route: | Short-term exposure is expected to cause only slight irritation, if any. |
| Inhalation Route: | Inhalation of this product may cause respiratory tract irritation. |
| Oral Route: | Extremely dangerous in case of ingestion. |
| Eye Irritation/Inflammation: | This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |
| Reproductive Toxicity: | Borates are possible reproductive toxins based upon available animal ingestion studies in several species. These studies usually involved high doses, over prolonged periods of time. A human study following occupational exposure to borate by inhalation concluded that, no adverse effects to reproduction were found in this population, under the conditions of this study. |
| Teratogenicity/Embryotoxicity: | This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin (Ethylene glycol). |
| Carcinogenicity (ACGIH): | ACGIH A4: not classifiable as a human carcinogen (Ethylene glycol). This product is not known to contain any chemicals at reportable quantities that are listed as Group A1, A2, or A3 carcinogens by ACGIH. |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | The substance may be toxic to kidneys and liver. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs. |

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks | No additional remark. | | |





Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|---|---|-----------------|
| TDG Classification | Not a hazardous material for transport according to the TDG Regulations. (Canada) | Special Provisions for Transport | Not applicable. |
|---------------------------|---|---|-----------------|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|---|-------------|---------------------------------|--|-------------|-----|------------|-----|---------------------|-----|----------------------|--|--|--------|---|-------------|---|------------|---|-----------------|--|--|--|
| Other Regulations | All of the components of this product are on the Domestic Substances List (DSL), are considered to be on the DSL, or are exempt from the New Substance Notification (NSN) requirements. | | | | | | | | | | | | | | | | | | | | | | |
| | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | | | | | | | | | | | | | |
| | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | | | | | | | | | | | | | |
| | Please contact Product Safety for more information. | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | Not evaluated. | | HCS (U.S.A.) | CLASS: Target organ effects. CLASS: Irritating substance. | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | | DOT (U.S.A) (Pictograms) |  | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | <table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(1)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table> | | Health Hazard | (2*) | Fire Hazard | (1) | Reactivity | (0) | Personal Protection | (H) | NFPA (U.S.A.) | <table><tr><td rowspan="2">Health</td><td rowspan="2"></td><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td colspan="4">Specific hazard</td></tr></table> | | Health |  | Fire Hazard | 1 | Reactivity | 0 | Specific hazard | | | |
| Health Hazard | (2*) | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | (1) | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | (0) | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | (H) | | | | | | | | | | | | | | | | | | | | | | |
| Health |  | Fire Hazard | 1 | | | | | | | | | | | | | | | | | | | | |
| | | Reactivity | 0 | | | | | | | | | | | | | | | | | | | | |
| Specific hazard | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Rating | 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

| | |
|-------------------|--|
| References | Available upon request. * Marque de commerce de Petro-Canada - Trademark |
| Glossary | <div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>CNS - Central Nervous System</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCl - Dangerous Substances Classification and Labeling (Europe)</p> <p>DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)</p> <p>DSL - Domestic Substance List</p> <p>EEC/EU - European Economic Community/European Union</p> <p>EINECS - European Inventory of Existing Commercial Chemical Substances</p> </div> <div style="width: 48%;"> <p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>RTECS - Registry of Toxic Effects of Chemical Substances</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> <p>TDG - Transportation Dangerous Goods (Canada)</p> <p>TDLo/TCLo - Lowest Published Toxic Dose/Concentration</p> <p>Tlm - Median Tolerance Limit</p> <p>TLV-TWA - Threshold Limit Value-Time Weighted Average</p> <p>TSCA - Toxic Substances Control Act</p> <p>USEPA - United States Environmental Protection Agency</p> <p>USP - United States Pharmacopoeia</p> </div> </div> |

EPA - Environmental Protection Agency
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazard Communication Standard
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 5/11/2005.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|  | Not controlled |  |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|--|---------------------------------|--|
| Product Name | 2-CYCLE MOTOR OIL | Code | 460-401, TWOCYC |
| Synonym | Not available | Validated on | 4/9/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | A low ash 2-cycle engine oil designed to lubricate conventional pre-mixed fuel/oil as well as oil injection lubricated engines powering air-cooled two-stroke cycle engines. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|---|---|---------|--------------------------------|---------------------------------|-----------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives. | Mixture | 100 | 5 mg/m ³ (oil mist) | 10 mg/m ³ (oil mist) | Not established |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|--------------------------|--|
| Eye Contact | No effects expected. If irritation does occur, flush contaminated eye(s) with lukewarm, gently flowing water for 5 minutes or until the chemical is removed. If irritation persists, obtain medical advice. |
| Skin Contact | Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with water and non-abrasive soap for 5 minutes or until chemical is removed. Remove contaminated clothing, shoes and leather goods (e.g., watchbands, belts, etc.). If irritation persists, repeat flushing. Obtain medical advice immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard. |
| Inhalation | Remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice. |
| Ingestion | NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, rinse mouth and repeat administration of water. Obtain medical attention. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|---|--|--|
| Flammability | Combustible at high temperature. | Flammable Limits | Not available |
| Flash Points | OPEN CUP: $\geq 130^{\circ}\text{C}$ (266°F) (Cleveland) | Auto-Ignition Temperature | Not available |
| Fire Hazards in Presence of Various Substances | Low fire hazard. This material must be heated before ignition will occur. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. |

| | |
|---|---|
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), acrid fumes, smoke and irritating vapours as products of incomplete combustion. |
| Fire Fighting Media and Instructions | NAERG2004, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel. |

Section 6. Accidental Release Measures

| | |
|----------------------------------|--|
| Material Release or Spill | Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Ensure clean-up personnel wear appropriate personal protective equipment. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately. |
|----------------------------------|--|

Section 7. Handling and Storage

| | |
|-----------------|--|
| Handling | Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid eye contact. Avoid skin contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. |
| Storage | Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area. |

Section 8. Exposure Controls/Personal Protection

| | |
|---|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use. | |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.) |
| Respiratory | A minimum of NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with a dust, fume or mist filter (R, or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. A NIOSH-approved positive-pressure, air-supplied respirator or self-contained breathing apparatus may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. |
| Hands | If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Nitrile, Polyvinyl alcohol (PVA), Fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|--------------------------|--------------------------------------|--|
| Physical State and Appearance | Viscous liquid. | Viscosity | 21.1 cSt @ 40°C (104°F), 4.5 cSt @ 100°C (212°F), VI=127 |
| Colour | Blue-green | Pour Point | <-54°C |
| Odour | Hydrocarbon. | Softening Point | Not applicable. |
| Odour Threshold | Not available | Dropping Point | Not applicable. |
| Boiling Point | Not available | Penetration | Not applicable. |
| Density | 0.88 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | Not available | Ionicity (in water) | Not available |

| | | | |
|--------------------------|---|------------------------------|---------------------|
| 2-CYCLE MOTOR OIL | | Page Number: 3 | |
| Vapour Pressure | Negligible at ambient temperature and pressure. | Dispersion Properties | Not available |
| Volatility | Non-volatile. | Solubility | Insoluble in water. |

| | | | |
|--|---|---------------------------------|--|
| Section 10. Stability and Reactivity | | | |
| Corrosivity | Not available | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents. | Decomposition Products | May release CO _x , NO _x , methacrylate monomers, aldehydes, smoke and irritating vapours when heated to decomposition. |

| | |
|--|--|
| Section 11. Toxicological Information | |
| Routes of Entry | Skin contact, eye contact, inhalation and ingestion. |
| Acute Lethality | Acute toxicity information is not available for the product as a whole, therefore, data for the base oils are provided below: Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2300 mg/m ³ /4h (rat). |
| Chronic or Other Toxic Effects | |
| Dermal Route: | Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any. |
| Inhalation Route: | With its relatively low vapour pressure, this product is not expected be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. |
| Oral Route: | Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect. |
| Eye Irritation/Inflammation: | Short-term exposure is expected to cause only slight irritation, if any. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen. |
| Reproductive Toxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH. |
| Carcinogenicity (IARC): | This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC. |
| Carcinogenicity (NTP): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP. |
| Carcinogenicity (IRIS): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS. |
| Carcinogenicity (OSHA): | This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA. |
| Other Considerations | No additional remark. |

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks | No additional remark. | | |



Section 13. Disposal Considerations

| | |
|-----------------------|--|
| Waste Disposal | Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations. |
|-----------------------|--|

Section 14. Transport Information

| | | | |
|---------------------------|---|---|-----------------|
| TDG Classification | Not a hazardous material for transport according to the TDG Regulations. (Canada) | Special Provisions for Transport | Not applicable. |
|---------------------------|---|---|-----------------|

Section 15. Regulatory Information

| | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------------------|-----------------|--|---|---------------------------------|---|--|---|------------|-----------------|---------------------|----------|----------------------|------------|---|--------|--------|-----------|-------------|---|------------|---|-----------------|--|--|--|--|--|
| Other Regulations | | This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | All components of this formulation are listed on the US EPA-TSCA Inventory. | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS). | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Please contact Product Safety for more information. | | | | | | | | | | | | | | | | | | | | | | | | | |
| DSD/DPD (Europe) | | Not classified under the Dangerous Substances or Dangerous Preparations Directives. | | HCS (U.S.A.) | | Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States) | | | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) | |  | | DOT (U.S.A) (Pictograms) | |  | | | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | | <table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table> | | Health Hazard | 1 | Fire Hazard | 1 | Reactivity | 0 | Personal Protection | B | NFPA (U.S.A.) | | <table><tr><td>Health</td><td>1</td><td>Fire Hazard</td><td>0</td><td>Reactivity</td><td>0</td></tr><tr><td colspan="6">Specific hazard</td></tr></table> | | Health | 1 | Fire Hazard | 0 | Reactivity | 0 | Specific hazard | | | | | |
| Health Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | 1 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | B | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Health | 1 | Fire Hazard | 0 | Reactivity | 0 | | | | | | | | | | | | | | | | | | | | | | |
| Specific hazard | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | <table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr><tr><td></td><td>3 High</td></tr><tr><td></td><td>4 Extreme</td></tr></table> | | Rating | 0 Insignificant | | 1 Slight | | 2 Moderate | | 3 High | | 4 Extreme | | | | | | | | | | |
| Rating | 0 Insignificant | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 Slight | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 Moderate | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3 High | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4 Extreme | | | | | | | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

| | |
|-------------------|---|
| References | Available upon request. * Marque de commerce de Petro-Canada - Trademark |
|-------------------|---|

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 CNS - Central Nervous System
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 RTECS - Registry of Toxic Effects of Chemical Substances
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration

Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPA - Environmental Protection Agency
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TLM - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca/msds

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752








Prepared by Product Safety - RS on 4/9/2005.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

| WHMIS (Pictograms) | WHMIS (Classification) | Protective Clothing | TDG (pictograms) |
|---|------------------------|--|---|
|   | B-2, D-2A, D-2B |     |  |

Section 1. Chemical Product and Company Identification

| | | | |
|----------------------|--|-----------------------------|--|
| Product Name | GASOLINE, UNLEADED | Code | W102E |
| Synonym | Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, Super Premium (94 RO) | Validated on | 7/4/2005. |
| Manufacturer | PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3 | In case of Emergency | Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s). |
| Material Uses | Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles. | | |

Section 2. Composition and Information on Ingredients

| | | | Exposure Limits (ACGIH) | | |
|---|---|---------|-------------------------|-----------------|-----------------|
| Name | CAS # | % (W/W) | TLV-TWA(8 h) | STEL | CEILING |
| Gasoline | 8006-61-9 | 85-100 | 300 ppm | 500 ppm | Not established |
| Methyl tert-butyl ether | 1634-04-4 | 0-15 | 50 ppm | Not established | Not established |
| Benzene | 71-43-2 | <1.5 | 0.5 ppm | 2.5 ppm | Not established |
| Note: Petro-Canada does not use MTBE in the manufacturing of its gasoline, however MTBE can be introduced from time to time through the use of external gasoline blendstocks. | | | | | |
| Manufacturer Recommendation | Not applicable | | | | |
| Other Exposure Limits | Consult local, state, provincial or territory authorities for acceptable exposure limits. | | | | |

Section 3. Hazards Identification.

| | |
|---------------------------------|---|
| Potential Health Effects | Flammable liquid. Exercise caution when handling this material. May cause cancer. May cause heritable genetic effects (mutagenicity). This product contains an ingredient or ingredients, which have been shown to cause chronic toxic effects. Contact with this product may cause skin and eye irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS. |
|---------------------------------|---|

Section 4. First Aid Measures

| | |
|---------------------|--|
| Eye Contact | Avoid direct contact. Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 20 minutes or until the chemical is removed, while holding the eyelid(s) open. Take care not to rinse contaminated water into the unaffected eye or onto the face. Obtain medical attention immediately. |
| Skin Contact | Avoid direct contact. Wear chemical resistant protective clothing if necessary. Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 20 minutes or until chemical is removed. Under running water, remove contaminated clothing, shoes and leather goods (e.g., watch bands, belts, etc.). Obtain medical attention immediately. Completely decontaminate clothing, shoes and leather goods before reuse or discard. |

| | |
|--------------------------|---|
| Inhalation | Take proper precautions to ensure your own safety before attempting rescue (e.g. wear appropriate protective equipment). If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility. |
| Ingestion | NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. Repeat administration of water. If breathing has stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Quickly transport victim to an emergency care facility. |
| Note to Physician | Not available |

Section 5. Fire-fighting Measures

| | | | |
|---|---|--|--|
| Flammability | Flammable liquid (NFPA). | Flammable Limits | Lower: 1.3%; Upper: 7.6% (NFPA). |
| Flash Points | Closed Cup: -50 to -38°C (-58 to -36°F), ASTM D56 Standard Test Method for Flash Point by Tag Closed Tester. | Auto-Ignition Temperature | 257°C (495°F) (NFPA). |
| Fire Hazards in Presence of Various Substances | Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces. | Explosion Hazards in Presence of Various Substances | Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air. |
| Products of Combustion | Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products. | | |
| Fire Fighting Media and Instructions | NAERG2004 GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient. If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions. SMALL FIRES: Dry chemical, CO ₂ , water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection. | | |

Section 6. Accidental Release Measures

| | |
|----------------------------------|---|
| Material Release or Spill | IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Evacuate non-essential personnel. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Avoid breathing vapours or mists of material. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately. |
|----------------------------------|---|

Section 7. Handling and Storage

| | |
|-----------------|---|
| Handling | FLAMMABLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Ensure all equipment is grounded/bonded. Avoid confined spaces and areas with poor ventilation. Do not ingest this product. |
| Storage | Store as flammable material. Store away from incompatible and reactive materials (See section 5 and 10). Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Keep container tightly closed. Ensure the storage containers are grounded/bonded. Avoid direct sunlight. |

Section 8. Exposure Controls/Personal Protection

| | |
|--|--|
| Engineering Controls | For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station. |
| Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i> | |
| Eyes | As a minimum, safety glasses with side shields should be worn when handling this material. |
| Body | If this material may come in contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information.) |
| Respiratory | A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection. |
| Hands | If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): polyvinyl alcohol (PVA), fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. |
| Feet | Wear appropriate footwear to prevent product from coming in contact with feet and skin. |

Section 9. Physical and Chemical Properties

| | | | |
|--------------------------------------|---|--------------------------------------|---|
| Physical State and Appearance | Clear liquid. | Viscosity | Not available |
| Colour | Clear to slightly yellow, undyed liquid. May be dyed red for taxation purposes. | Pour Point | Not applicable. |
| Odour | Gasoline. MTBE has a terpene-like odour. | Softening Point | Not applicable. |
| Odour Threshold | Less than 1 ppm. | Dropping Point | Not applicable. |
| Boiling Point | 25 to 220°C (77 to 428°F) Initial boiling point by ASTM D86 Standard Test Method. | Penetration | Not applicable. |
| Density | 0.685 - 0.80 kg/L @ 15°C (59°F). | Oil / Water Dist. Coefficient | Not available |
| Vapour Density | 3 to 4 (Air = 1) (NFPA). | Ionicity (in water) | Not available |
| Vapour Pressure | <107 kPa @ 37.8°C (100°F) | Dispersion Properties | Not available |
| Volatility | Volatile. | Solubility | Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins. |

Section 10. Stability and Reactivity

| | | | |
|--|--|---------------------------------|--|
| Corrosivity | Non corrosive. | | |
| Stability | The product is stable under normal handling and storage conditions. | Hazardous Polymerization | Will not occur under normal working conditions. |
| Incompatible Substances / Conditions to Avoid | Reactive with oxidizing agents, acids, interhalogens and uranium hexafluoride. | Decomposition Products | May release COx, NOx, phenols, polynuclear aromatic hydrocarbons, acrid smoke and irritating vapours when heated to decomposition. |

Section 11. Toxicological Information

| | |
|------------------------|--|
| Routes of Entry | Skin contact, eye contact, inhalation, and ingestion. |
| Acute Lethality | <p><u>Gasoline (8006-61-9):</u> Acute Oral toxicity (LD50): 13600 mg/kg (rat) Acute Dermal toxicity (LD50): >5000 mg/kg (rabbit)</p> <p><u>MTBE (1634-04-4):</u> Acute Oral toxicity (LD50): 2963 mg/kg (rat) Acute Dermal toxicity (LD50): >6800 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 23576 ppm/4h (rat)</p> |

Benzene (71-43-2):

Acute Oral toxicity (LD50): 930 mg/kg (rat)

Acute Dermal toxicity (LD50): >9400 mg/kg (rabbit)

Acute Inhalation toxicity (LC50): 13229 ppm/4h (rat)

Chronic or Other Toxic Effects

| | |
|----------------------------------|---|
| Dermal Route: | Contact may cause skin irritation. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. |
| Inhalation Route: | Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Oral Route: | Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. |
| Eye Irritation/Inflammation: | Contact may cause eye irritation. |
| Immunotoxicity: | Not available |
| Skin Sensitization: | Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components. |
| Respiratory Tract Sensitization: | Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components. |
| Mutagenic: | This product contains a component(s) at $\geq 0.1\%$ that has been shown to cause mutagenicity in laboratory tests. Therefore, this product is considered to be a mutagen. (Benzene) |
| Reproductive Toxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin. |
| Teratogenicity/Embryotoxicity: | This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin. |
| Carcinogenicity (ACGIH): | This product contains the following chemical(s) at $\geq 0.1\%$ that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be A1 by the ACGIH. Benzene (71-43-2)] [Considered to be A3 by the ACGIH. Gasoline (8006-61-9), MTBE (1634-04-4)] |
| Carcinogenicity (IARC): | This product contains the following chemical(s) at $\geq 0.1\%$ that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be carcinogenic to humans (group 1) by IARC. Benzene (71-43-2)] [Considered to be carcinogenic to humans (group 2B) by IARC. Gasoline (8006-61-9)] |
| Carcinogenicity (NTP): | This product contains the following chemical(s) at $\geq 0.1\%$ that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Known to be a human carcinogen according to NTP. Benzene (71-43-2)] |
| Carcinogenicity (IRIS): | This product contains the following chemical(s) at $\geq 0.1\%$ that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be carcinogenic by IRIS. Benzene (71-43-2)] |
| Carcinogenicity (OSHA): | This product contains the following chemical(s) at $\geq 0.1\%$ that are listed as carcinogenic compounds. Therefore this product is considered to be carcinogenic. [Considered to be carcinogenic by OSHA. Benzene (71-43-2)] |
| Other Considerations | Gasoline engine exhaust is possibly carcinogenic to humans (IARC Group 2B). |

Section 12. Ecological Information

| | | | |
|---------------------------|-----------------------|--|---------------|
| Environmental Fate | Not available | Persistence/Bioaccumulation Potential | Not available |
| BOD5 and COD | Not available | Products of Biodegradation | Not available |
| Additional Remarks | No additional remark. | | |

Section 13. Disposal Considerations

Waste Disposal Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.

Section 14. Transport Information

| | |
|--|--|
| TDG Classification GASOLINE, 3, UN1203, PGII (CL-TDG) | Special Provisions for Transport See Transportation of Dangerous Goods Regulations. |
|--|--|

Section 15. Regulatory Information

Other Regulations This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).

All components of this formulation are listed on the US EPA-TSCA Inventory.

All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

Please contact Product Safety for more information.

| | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|--|------|-------------|-----|------------|-----|---------------------|-----|---|--|---|-------------|---|---|--------|-----------------|--|----------|--|------------|--|--------|--|-----------|
| DSD/DPD (Europe) Not evaluated. | | HCS (U.S.A.) CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Irritating substance. CLASS: Target organ effects. | | | | | | | | | | | | | | | | | | | | | | | |
| ADR (Europe) (Pictograms) NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN. | | DOT (U.S.A) (Pictograms) Not evaluated for transport Non évalué pour le transport | | | | | | | | | | | | | | | | | | | | | | | |
| HMIS (U.S.A.) | <table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(3)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table> | Health Hazard | (2*) | Fire Hazard | (3) | Reactivity | (0) | Personal Protection | (H) | NFPA (U.S.A.) Health <table><tr><td>3</td><td>Fire Hazard</td></tr><tr><td>2</td><td>0</td></tr></table> Reactivity Specific hazard <table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr><tr><td></td><td>3 High</td></tr><tr><td></td><td>4 Extreme</td></tr></table> | | 3 | Fire Hazard | 2 | 0 | Rating | 0 Insignificant | | 1 Slight | | 2 Moderate | | 3 High | | 4 Extreme |
| Health Hazard | (2*) | | | | | | | | | | | | | | | | | | | | | | | | |
| Fire Hazard | (3) | | | | | | | | | | | | | | | | | | | | | | | | |
| Reactivity | (0) | | | | | | | | | | | | | | | | | | | | | | | | |
| Personal Protection | (H) | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | Fire Hazard | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | 0 | | | | | | | | | | | | | | | | | | | | | | | | |
| Rating | 0 Insignificant | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1 Slight | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 Moderate | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3 High | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4 Extreme | | | | | | | | | | | | | | | | | | | | | | | | |

Section 16. Other Information

References Available upon request.
* Marque de commerce de Petro-Canada - Trademark

Glossary

| | |
|---|--|
| ACGIH - American Conference of Governmental Industrial Hygienists | IRIS - Integrated Risk Information System |
| ADR - Agreement on Dangerous goods by Road (Europe) | LD50/LC50 - Lethal Dose/Concentration kill 50% |
| ASTM - American Society for Testing and Materials | LDLo/LCLo - Lowest Published Lethal Dose/Concentration |
| BOD5 - Biological Oxygen Demand in 5 days | NAERG'96 - North American Emergency Response Guide Book (1996) |
| CAN/CGA B149.2 Propane Installation Code | NFPA - National Fire Prevention Association |
| CAS - Chemical Abstract Services | NIOSH - National Institute for Occupational Safety & Health |
| CEPA - Canadian Environmental Protection Act | NPRI - National Pollutant Release Inventory |
| CERCLA - Comprehensive Environmental Response, Compensation and Liability Act | NSNR - New Substances Notification Regulations (Canada) |
| CFR - Code of Federal Regulations | NTP - National Toxicology Program |
| CHIP - Chemicals Hazard Information and Packaging Approved Supply List | OSHA - Occupational Safety & Health Administration |
| CNS - Central Nervous System | PEL - Permissible Exposure Limit |
| COD5 - Chemical Oxygen Demand in 5 days | RCRA - Resource Conservation and Recovery Act |
| CPR - Controlled Products Regulations | RTECS - Registry of Toxic Effects of Chemical Substances |
| DOT - Department of Transport | SARA - Superfund Amendments and Reorganization Act |
| DSCCL - Dangerous Substances Classification and Labeling (Europe) | SD - Single Dose |
| DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) | STEL - Short Term Exposure Limit (15 minutes) |
| DSL - Domestic Substance List | TDG - Transportation Dangerous Goods (Canada) |
| EEC/EU - European Economic Community/European Union | TDLo/TCLo - Lowest Published Toxic Dose/Concentration |
| EINECS - European Inventory of Existing Commercial Chemical Substances | TLm - Median Tolerance Limit |
| EPA - Environmental Protection Agency | TLV-TWA - Threshold Limit Value-Time Weighted Average |
| EPCRA - Emergency Planning and Community Right to Know Act | TSCA - Toxic Substances Control Act |
| FDA - Food and Drug Administration | USEPA - United States Environmental Protection Agency |
| FIFRA - Federal Insecticide, Fungicide and Rodenticide Act | USP - United States Pharmacopoeia |
| HCS - Hazard Communication Standard | WHMIS - Workplace Hazardous Material Information System |
| HMIS - Hazardous Material Information System | |

IARC - International Agency for Research on Cancer

For Copy of MSDSInternet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 7/4/2005.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

ATTACHMENT 2 – ABANDONMENT AND RESTORATION PLAN



**SITE ABANDONMENT AND
RESTORATION PLAN
EXPLORATION OPERATIONS
IZOK AND HOOD PROJECTS
NUNAVUT, CANADA**

Wolfden Resources Inc.

401-1113 Jade Court, Thunder Bay ON P7B 6M7 • Tel: 807-346-1668 • Fax: 807-345-0284
E-mail: info@wolfdenresources.com • Web: www.wolfdenresources.com

ABANDONMENT AND RESTORATION PLAN EXPLORATION OPERATIONS IZOK, HOOD AND GONDOR PROJECTS NUNAVUT, CANADA

December 5, 2006



Prepared By: _____
Sandra Rickard – Geologist
Wolfden Resources Inc.

Date: December 5, 2006

Reviewed By: _____
Andrew Mitchell - Project Manager
Wolfden Resources Inc.

Date: December 5, 2006

Authorized By: _____
John Begeman - Chief Operating Officer
Wolfden Resources Inc.

Date: December 5, 2006

Wolfden Resources Inc.

401-1113 Jade Court, Thunder Bay ON P7B 6M7 • Tel: 807-346-1668 • Fax: 807-345-0284
E-mail: info@wolfdenresources.com • Web: www.wolfdenresources.com

TABLE OF CONTENTS

| | | |
|-------|---|---|
| 1.0 | PREAMBLE | 1 |
| 2.0 | INTRODUCTION..... | 2 |
| 3.0 | SCHEDULE | 3 |
| 4.0 | SITE INFRASTRUCTURE | 4 |
| 5.0 | FINAL ABANDONMENT AND RESTORATION PLANS | 5 |
| 5.1. | BUILDINGS AND CONTENTS..... | 5 |
| 5.2. | WATER SYSTEM..... | 5 |
| 5.3. | ELECTRICAL SYSTEM | 5 |
| 5.4. | FUEL AND CHEMICAL STORAGE FACILITIES..... | 5 |
| 5.5. | WASTE FACILITY AND INCINERATOR | 6 |
| 5.6. | GREYWATER SUMP | 6 |
| 5.7. | BLACKWATER SUMP | 6 |
| 5.8. | HELICOPTER PAD..... | 6 |
| 5.9. | CAMP SITE..... | 6 |
| 5.10. | DRILLING AREA RESTORATION..... | 6 |
| 5.11. | DOCUMENTATION AND INSPECTION | 7 |
| 6.0 | SEASONAL SHUTDOWN AND RESTORATION PLAN..... | 8 |
| 6.1. | BUILDINGS AND CONTENT | 8 |
| 6.2. | WATER SYSTEM..... | 8 |
| 6.3. | ELECTRICAL SYSTEM | 8 |
| 6.4. | FUEL AND CHEMICAL STORAGE FACILITIES..... | 8 |
| 6.5. | WASTE FACILITY AND INCINERATOR | 8 |
| 6.6. | GREYWATER SUMP | 8 |
| 6.7. | BLACKWATER SUMP | 9 |
| 6.8. | HELICOPTER PAD..... | 9 |
| 6.9. | CAMP SITE..... | 9 |
| 6.10. | DRILLING AREA RESTORATION..... | 9 |
| 6.11. | DOCUMENTATION | 9 |

LIST OF FIGURES

FIGURE 1 – REGIONAL OVERVIEW MAP

FIGURE 2 – HOOD DRILLING OPERATIONS AREA MAP

FIGURE 3 – IZOK DRILLING OPERATIONS AREA MAP

FIGURE 4 – HAM CAMP LAYOUT MAP

1.0 PREAMBLE

The Abandonment and Restoration Plan is effective from July 29, 2006 to July 29, 2008 and applies to the Izok/Hood Projects – Ham Lake Camp operated by Wolfden Resources in the Kitikmeot District of Nunavut, north latitude 65° 40' and west longitude 112° 50'. The project is under agreement with Nunavut Tunngavik Incorporated (NTI). Land Use permits with the Kitikmeot Inuit Association (KIA), Indian and Northern Affairs Canada (INAC) and Nunavut Water Board (NWB) have been submitted concurrent with the submission of this document.

The locations of the Izok and Hood drilling program areas are shown on Figures 1 to 3. The Ham Camp layout is shown on Figure 4.

The following formal distribution has been made of this plan: KIA, NWB, Ian Neill (Camp Manager, Wolfden Resources), John Begeman (Chief Operating Officer, Wolfden Resources Inc.) Ewan Downie (President and Chief Executive Officer – Wolfden Resources Inc.).

2.0 INTRODUCTION

This abandonment and restoration plan has been prepared as a document for the Ham Lake Camp, and for the drilling program to be carried within the Point Lake-Itchen Lake volcanic belt and the Takiyuak greenstone belt. The fly-in camp is located 265 km south of Kugluktuk and 360 km north of Yellowknife. The camp will support a population of up to 40 people and is open seasonably between mid February and mid December.

3.0 SCHEDULE

The seasonal shutdown of the camp site should take 5 days to complete and will take place after the drilling activities have ceased. The plan will be applied by the Izok/Hood projects personnel under the supervision of the field supervisor.

4.0 SITE INFRASTRUCTURE

The camp is located on the South and East Shores of Ham Lake. The camp was established by the previous operator of the exploration project, Inmet Mining Corporation (Inmet). The camp includes an accommodation complex, diamond drill core logging and storage facilities, garages, fuel storage facilities and is served by a 2,500 foot long gravel air strip. The layout of the camp is shown on Figure 4.

From an inventory provided by Inmet, following is a list of the major components of the camp and ancillary facilities.

Major Camp Equipment/Facilities

- 13 – Travco trailer units
- 8 – 4' x 44' camp matting
- 1 – Oil fired incinerator (serial no. 18162)
- 1 – 10' x 44' Generator Building
- 2 – Cummins 150 kW diesel generators (serial no's. 44670421 and 4460441)
- 1 – Steel garage – 20' x 24'
- 2 – Wood frame, steel clad core storage warehouses
- 1 – Wood frame, aluminum clad 12' x 36' skidded core shack

Fuel Tanks

- 7 – 12,000 gal fuel skid mounted fuel tanks

Mobile Equipment

- 1 – Caterpillar D-6 Bulldozer
- 1 – Champion Motor Grader
- 1 – Fuel Trailer
- 1- 1992 Ford Supercab F-350 trucks (diesel)

A map showing the regional setting of the project areas is provided on Figure 1. This Abandonment and Restoration Plan can be extended to drilling operations that will be carried out at some distance from the camp. The outlines of these areas are shown on Figures 2 and 3. A map showing the layout of the camp and airstrip is provided on Figure 4.

5.0 FINAL ABANDONMENT AND RESTORATION PLANS

5.1. BUILDINGS AND CONTENTS

Reusable equipment including tents, tent metal frames, stoves, foam rubber mats, the kitchen stoves, refrigerators and other appliances and equipment, showers, hot water tank, and other portable components will be packaged and flown out from project site to Yellowknife. The Travco trailers will be disposed of by burning and/or removed from site for use elsewhere or disposal. The wood framed buildings will be burned and the non-combustible hardware will be removed from site.

5.2. WATER SYSTEM

Pump, tanks and hoses will be drained, dismantled, packaged and flown out to Yellowknife. The wooden pump shack built to protect the pump will be burned as for the other wood structures.

5.3. ELECTRICAL SYSTEM

The generator shed will be inspected for residual hazardous waste (oil, grease) and will be drained of its fuel. Remaining waste fuel and oil will be collected in the containers labeled for that use and used through the summer. The shed will be dismantled and burned. The soil will be inspected for contamination. Electrical wires, sockets, etc...will be taken down and either returned with camp material to Yellowknife, or flown out to an approved municipal discharge.

5.4. FUEL AND CHEMICAL STORAGE FACILITIES

Fuel inventory will be managed so as to retain only a minimum quantity of fuel on site to permit closure activities to take place. On full abandonment of the site, remaining fuel will be pumped from the large tank(s) in to drums and removed from site. The large fuel tanks and smaller containers such as drums and day tanks will be scrapped and removed from site or removed from site and sold. Propane cylinders will be flown out as well to source.

Chemical stored on site will consist of drill additives, oil, grease and household cleaners. All drill additives will be stored in or by the drill foreman shed. Household cleaners will mainly be stored in the kitchen. Upon camp closure, any unused drilling additive, oil or grease will be returned to the drilling company warehouse. Half empty containers will be taken off site to be properly disposed in an approved discharge. Empty containers will be disposed with regular garbage.

5.5. WASTE FACILITY AND INCINERATOR

Once the camp is entirely dismantled, all remaining combustible waste stored at this site will be burned. The incinerator will be dismantled, reusable parts will be returned to Yellowknife and the barrel will be discarded in an approved municipal discharge.

5.6. GREYWATER SUMP

The kitchen-dry greywater sump will be filled back and leveled.

5.7. BLACKWATER SUMP

Not applicable. The outhouses consist of “pacto” style toilets where waste is collected in a plastic bag lined container and content burned on a daily basis.

5.8. HELICOPTER PAD

The helicopter pad consists of a wooden platform built of a 2x4 base with plywood cover. Soil around the helicopter pad will be inspected for contamination. The wood will be burned as per other wooden structures on site.

5.9. CAMP SITE

The camp site will have a final inspection. Areas showing too much wearing evidences will be covered with a layer of peat moss and lightly fertilized to promote natural growth. Drill core to be left on site will be properly stored and secured.

5.10. DRILLING AREA RESTORATION

The drill will be dismantled into its main components as per the drilling contractor procedure, packaged and secured along with its ancillary equipment and rods. The drill will be flown out to another project or to a storage site designated by the drilling contractor. All drill sites will be inspected for soil contamination. Any remaining waste will be taken to camp to be burned if possible or to be flown out to an approved municipal discharge. Greywater and sludge sumps will be filled and leveled. A layer of peat moss will be spread on top and slightly fertilized to promote natural growth. As much as possible, drill sites will be restored immediately after the drill has been moved to the next site and sumps have drained enough to be leveled.

5.11. DOCUMENTATION AND INSPECTION

Photos of camp and drill sites prior to building of drilling will be taken. Monitoring will be done during occupancy and photos taken. Once the site restored, it will again be documented with photos. Soil contaminated by hydrocarbons and unnoticed before abandonment will be treated as per the spill contingency plan. A final site inspection visit with community representatives, Land Use Inspector and in collaboration with NWB staff will be organized by the permit holder.

6.0 SEASONAL SHUTDOWN AND RESTORATION PLAN

6.1. BUILDINGS AND CONTENT

All equipment will be stored inside the wooden buildings to ensure they will withstand the winter season. Canvas tents will be secured and braced internally to ensure they will withstand snow and wind loads. Wood structures will be secured with nailed plywood over windows and doors to prevent inadvertent opening. Snowmachines, argo's and quads will be stored inside the core shacks and shop building.

6.2. WATER SYSTEM

Pump, tanks and hoses will be drained and dismantled. Rented equipment will be flown out to owner. Hoses will be rolled and stored in the kitchen.

6.3. ELECTRICAL SYSTEM

The generator shed will be inspected for remaining hazardous waste (oil, grease) and will be drained of its fuel. Remaining waste fuel and oil will be collected in the containers labeled for that usage and used through the summer. The generator will be winterized and prepared for startup in spring. The soil surrounding the generator shed will be inspected for impact. Electrical wires, plugs and sockets will be stored in the kitchen.

6.4. FUEL AND CHEMICAL STORAGE FACILITIES

An inventory of remaining fuel will be made and full drums will be inspected and secured for the winter. Empty drums will be flown out to source. Empty propane cylinders will be flown out to source. Chemical stored on site will consist of drill additives, oil, grease and household cleaners. All drill additives will be stored in or by the drill foreman shed and secured for the winter. Empty containers will be disposed with regular garbage. The soil of the areas will be inspected for contamination.

6.5. WASTE FACILITY AND INCINERATOR

Once the camp has been dismantled and remaining buildings secured, all remaining combustible waste stored at this site will be burned. The incinerator will be dismantled and stored in the kitchen. The soil will be inspected for contamination.

6.6. GREYWATER SUMP

The greywater sump wood cover will be secured for winter.

6.7. BLACKWATER SUMP

Not applicable. The outhouses consist of “pacto” style toilets where waste is collected in a plastic bag lined container and content burned on a daily basis.

6.8. HELICOPTER PAD

The helicopter pad consists of a wooden platform built of a 2x4 base with plywood cover. Soil around the helicopter pad will be inspected for contamination.

6.9. CAMP SITE

Areas showing too much wearing evidences will be covered with a layer of peat moss and lightly fertilized to promote natural growth. Soil contaminated by hydrocarbons and unnoticed before abandonment will be treated as per the spill contingency plan. Drill core to be left on site will be properly stored and secured in cross stacked piles or wooden cores racks.


6.10. DRILLING AREA RESTORATION

The drill will be dismantled into its main components as per the drilling contractor procedure, packaged and secured along with its ancillary equipment and rods. The drill will be left on solid ground until next season. All drill sites will be inspected for soil contamination. Any remaining waste will be taken to camp to be burned if possible to be flown out to an approved municipal discharge. Greywater and sludge sumps will be filled and leveled. A layer of peat moss will be spread on top and slightly fertilized to promote natural growth. As much as practical, drill sites will be restored immediately after the drill has been moved to the next site and sumps have drained enough to be leveled.

6.11. DOCUMENTATION

Equipment and buildings left on site will be inventoried. Photos of camp and drill sites prior to drilling will be taken. Monitoring will be done during occupancy and photos taken. Once the site secured for the winter, it will again be documented with photos.

FIGURES

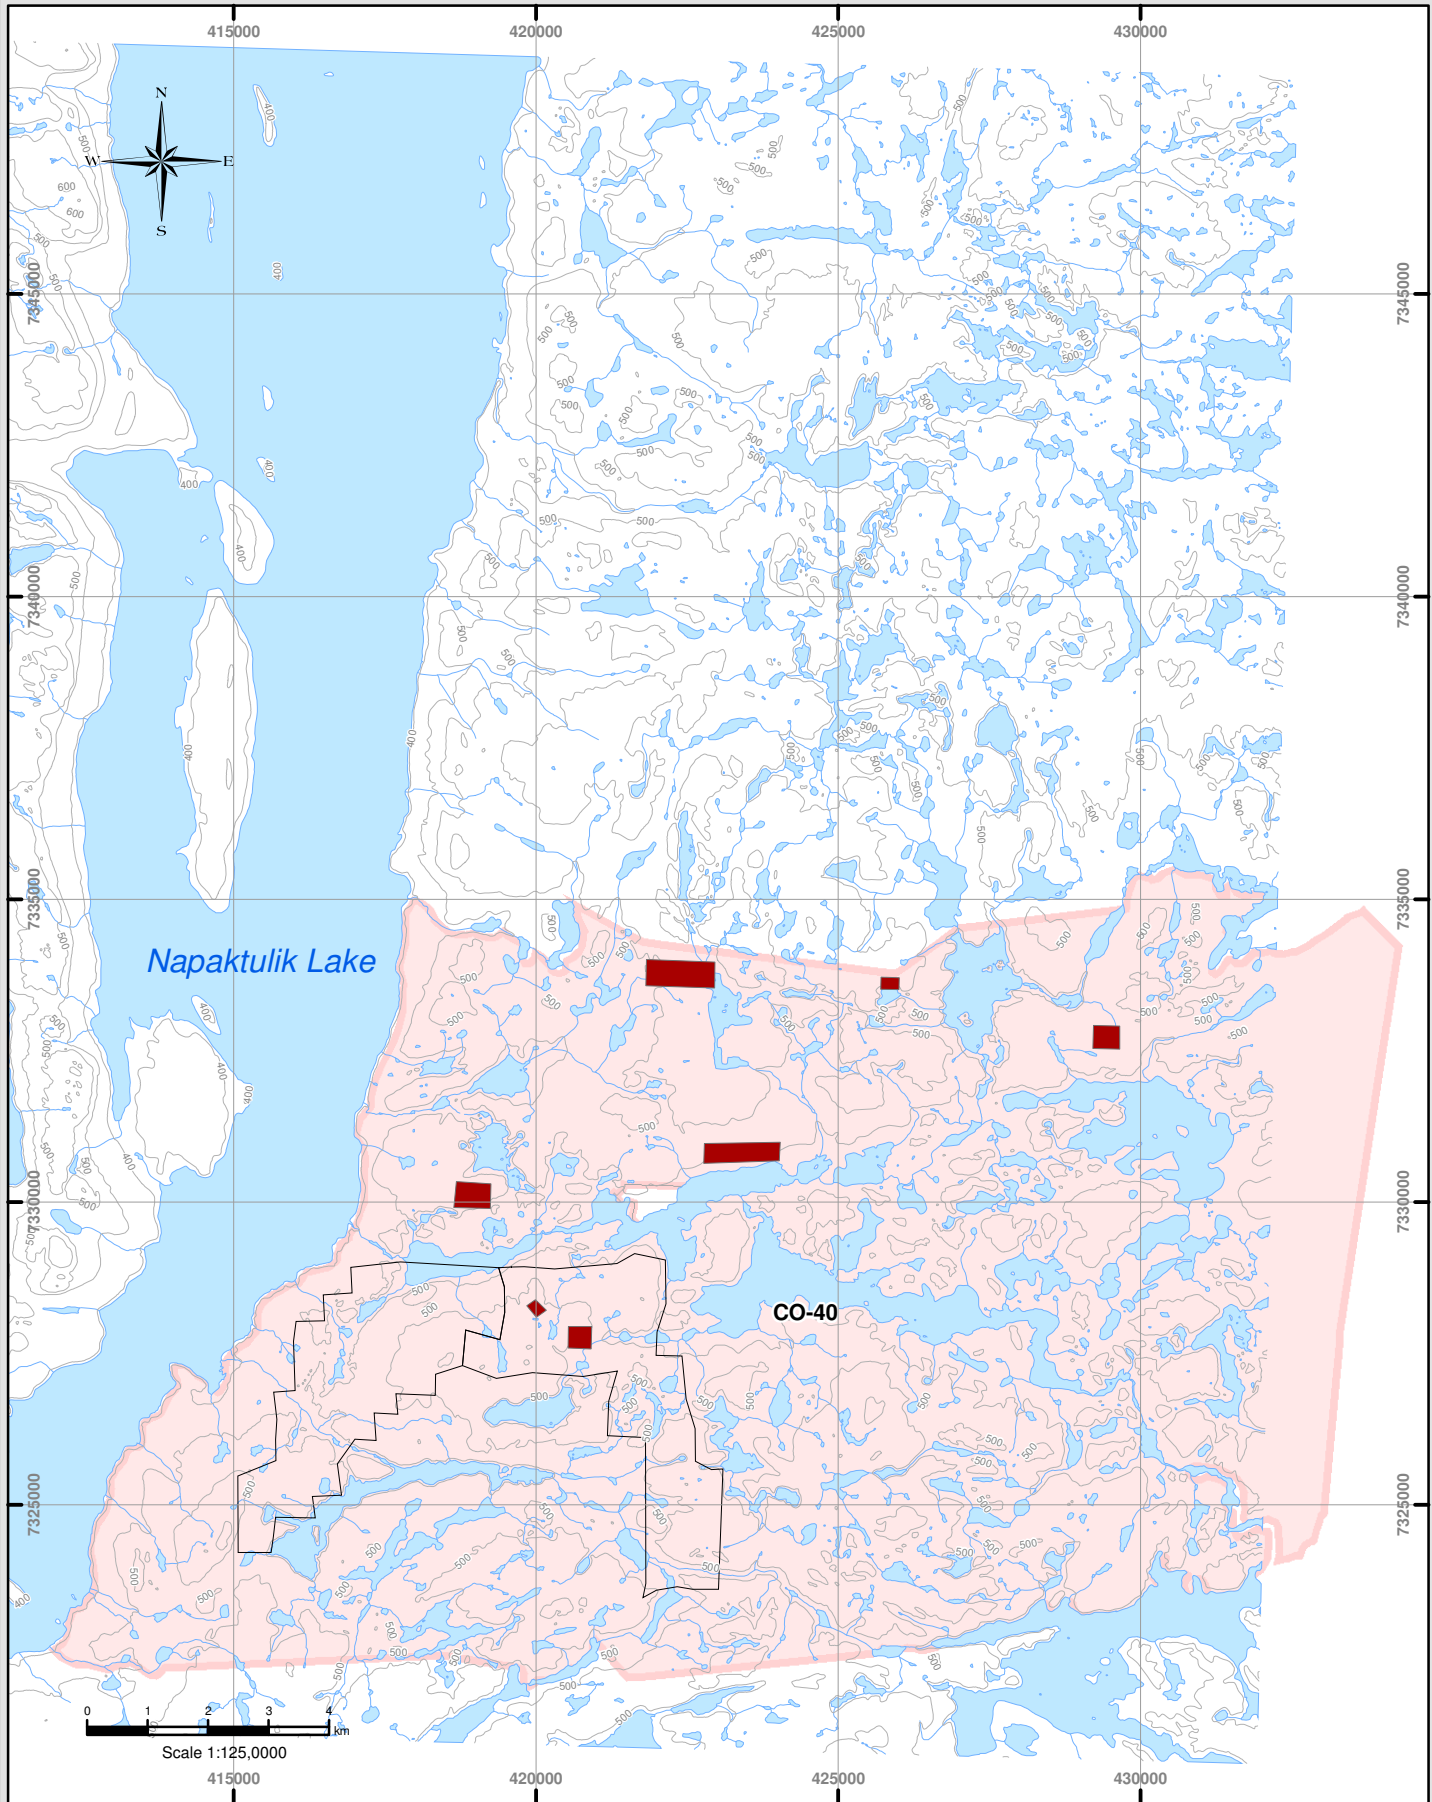

Legend

- | | |
|--|--|
| Planned Drill Areas | Contour (50m) |
| Lease Area | Watercourse |
| Inuit Owned Lands | Waterbody |
| Surface and Sub-Surface Rights | |



Hood Property Exploration Locations

References:


National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCan) at 1:50,000.
Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
Lease areas and planned drill areas provided by Wolfden Resources Inc.

Projection: UTM Zone 12 NAD 83
Revision: 0
Date: May 31, 2006









Gartner Lee

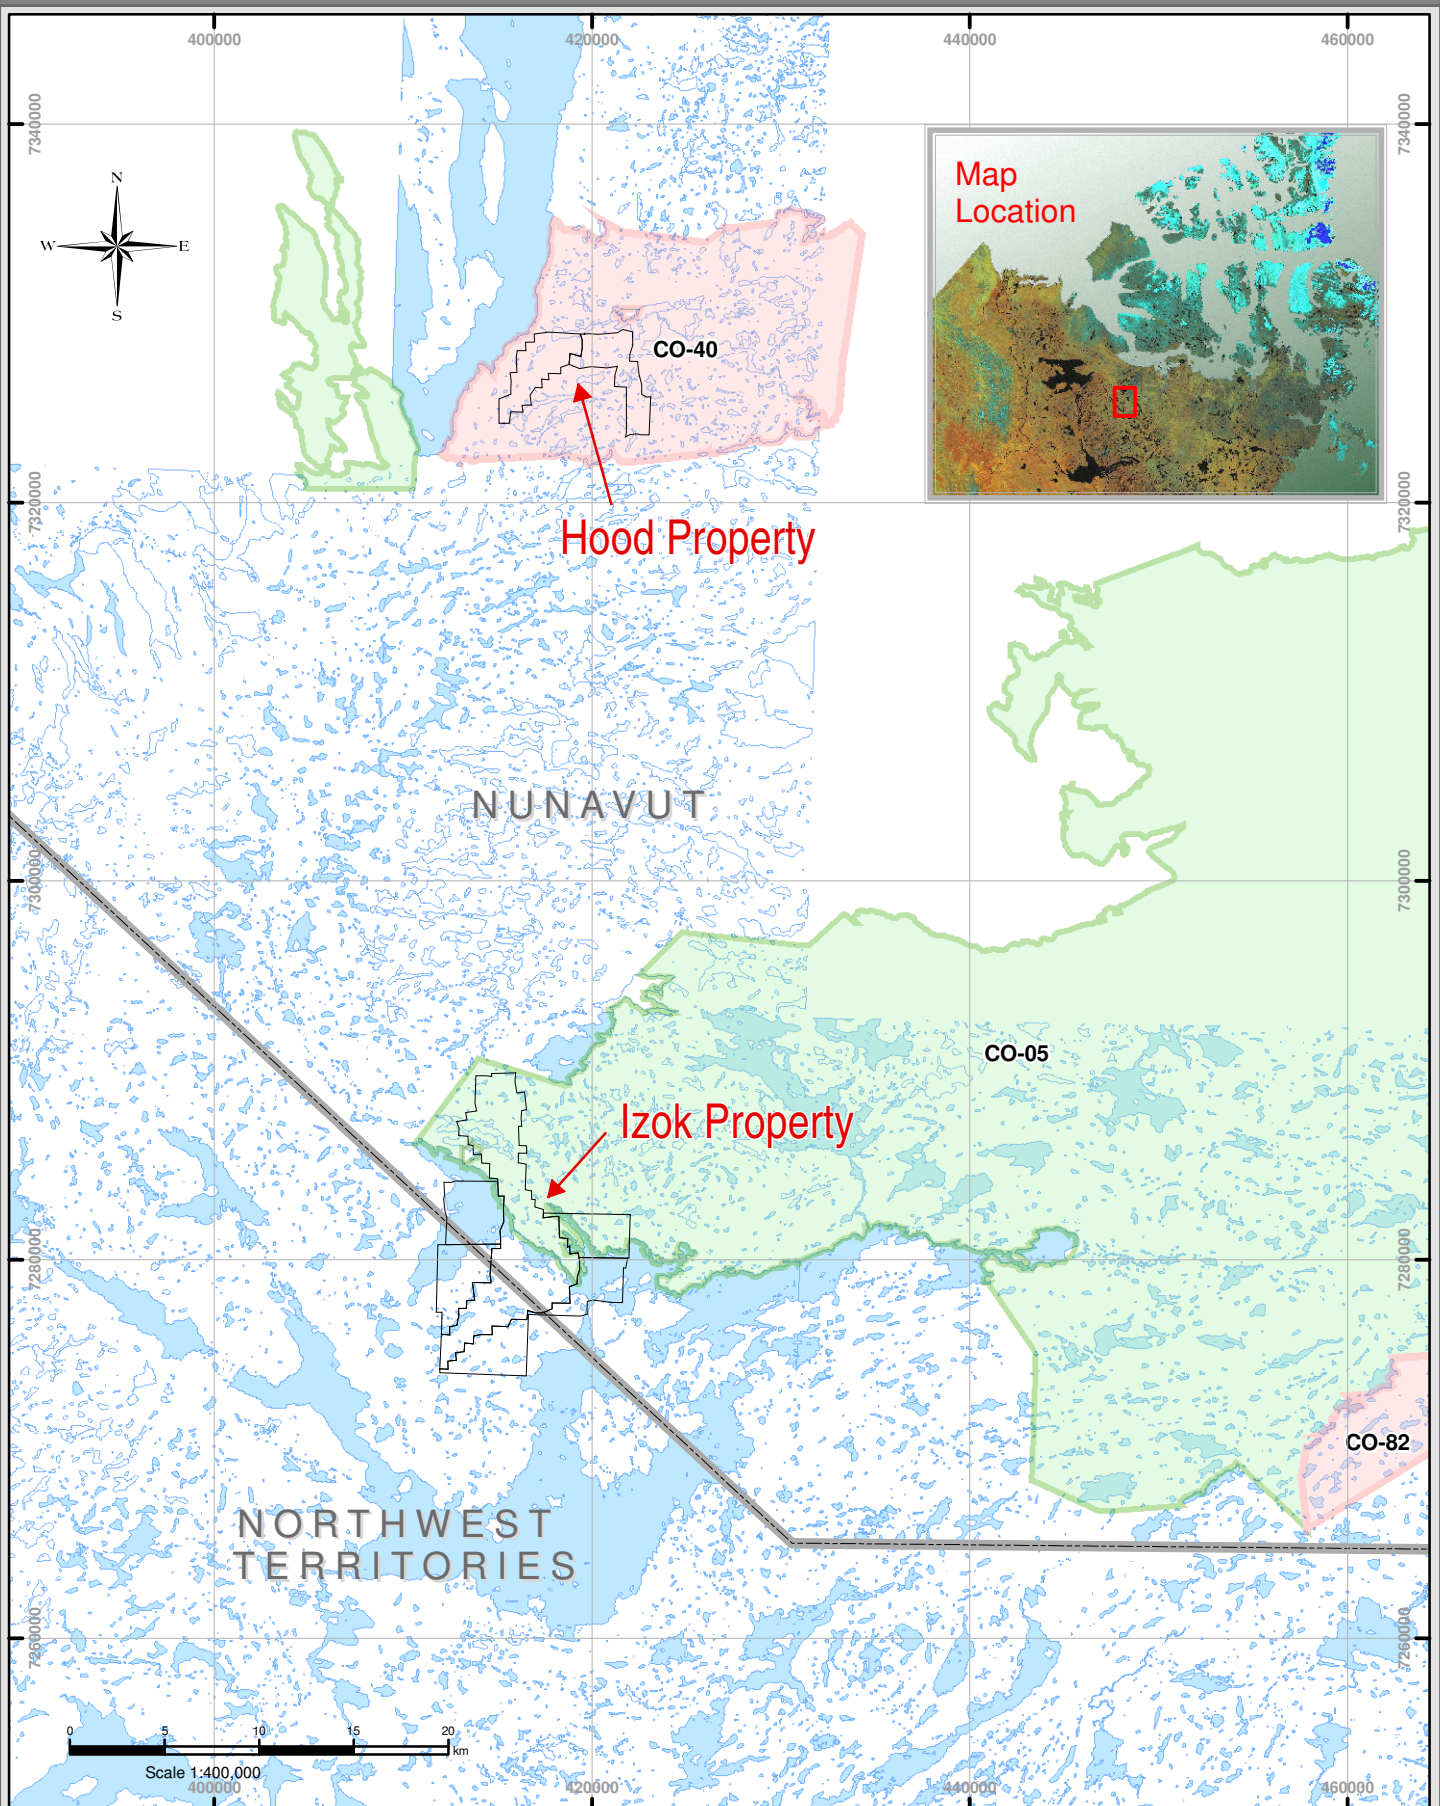Map: **2**



Legend

- | | | | |
|---|--------------------------------|---|-------------|
|  | Lease Area |  | Watercourse |
|  | Inuit Owned Lands |  | Waterbody |
|  | Surface Rights Only | | |
|  | Surface and Sub-Surface Rights | | |



Regional Overview Map

References:

National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCan) at 1:50,000.
 Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
 Lease areas provided by Wolf Den Resources Inc.
 Government of Canada, Natural Resources Canada, Earth Science Sector, Data Management and Dissemination Branch
 Projection: UTM Zone 12 NAD83
 Revision: 0
 Date: May 31, 2006










Gartner Lee

Map: **1**

File: P61013_C1_Fig3IzokExplor_29May2006.mxd



Legend

- | | | | |
|---|---------------------|---|---------------|
|  | Camp |  | Contour (20m) |
|  | Planned Drill Areas |  | Watercourse |
|  | Inuit Owned Lands |  | Waterbody |
|  | Surface Rights Only | | |



Izok Property Exploration Locations


References:

National Topographic Database (NTDB) compiled by the Government of Canada, Natural Resources Canada (NRCan) at 1:50,000.
Inuit Owned Lands compiled by Nunavut Tunngavik Incorporated.
Camp location and planned drill areas provided by Wolf Den Resources Inc.

Projection: UTM Zone 12 NAD 83
Revision: 0
Date: May 31, 2006

 Gartner Lee

Map: **3**

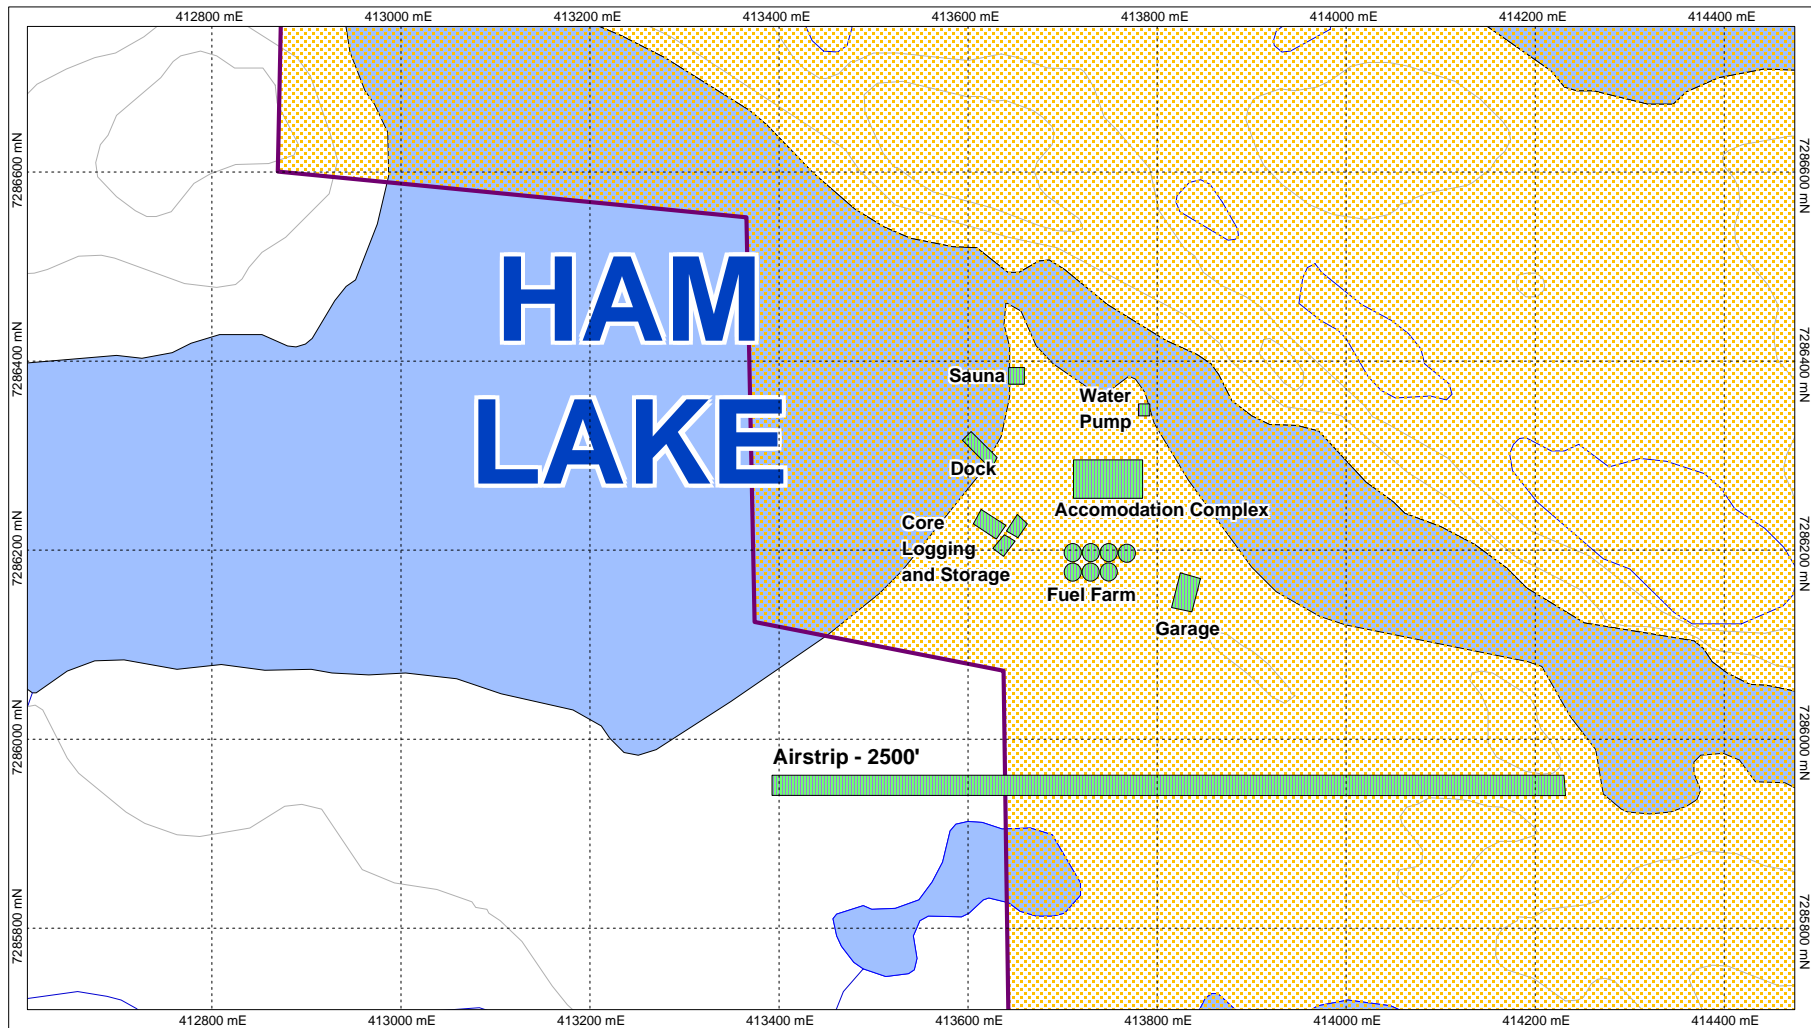

WOLFDEN RESOURCES INC.

Date: 25/5/2006

Author: S. Rickard

Office: Thunder Bay

Drawing: IN/SR

Scale: 1:8,000

Projection: UTM: NAD 83, Zone 12

IZOK/HOOD PROJECTS Water Licence Application Nunavut Water Board Camp layout