

NORTHQUEST LTD
FUEL SPILL CONTINGENCY PLAN
FOR EXPLORATION CAMP AND DRILL SITES
PISTOL BAY AREA
NUNAVUT

Table of Contents

	Page
Preamble	1
1.0 Introduction	2
2.0 Site Information	2
2.1 Proposed Campsite	2
2.2 Camp and Drill Sites	2
2.3 Effective Date of the Plan	2
2.4 Background Information on Site	2
3.0 Response Organization	3
4.0 Reporting Procedure	3
5.0 Initial Action	5
6.0 Action Plans	5
6.1 Spills on Land	5
6.2 Spills on Snow	6
6.3 Spills on Ice	7
6.4 Spills on Water	7
6.5 Spills Due to Accidental Load Release	8
7.0 Resource Inventory	9
8.0 Training/Exercise	9

APPENDICES

Appendix 1	Spill Report Form
Appendix 2	MDS Sheets

PREAMBLE

This Fuel Spill Contingency Plan is effective from the date of issuance of all water licences and land use permits currently being applied for by Northquest Ltd on its Pistol Bay property located 15 km north of Whale Cove, Nunavut, until the expiry of said licences and permits.

The Fuel Spill Contingency Plan has been prepared for internal company use and distributed to NWB for approval as part of Northquest Ltd's Water Licence application.

INTRODUCTION

The purpose of Northquest Ltd.'s Fuel Spill Contingency Plan is to provide a plan of action for any spill event during the Company's exploration program in the Pistol Bay area of Nunavut. This Plan provides the protocol for responding to spills (or potential spills) that will minimize health and safety hazards, environmental damage and clean-up costs as well as defining responsibilities of response personnel. This Fuel Spill Contingency Plan details the sites that operations will be conducted upon, describes the response organizations, action plans, reporting procedures and training exercises in place.

2.0 SITE INFORMATION

2.1. Proposed Campsite The campsite will be located at 62 21 05.2N, 92 45 19.7W

Capacity: 13 – 17 people

Structures: Six 14' x 16' sleep tents
 One 14 x 32' kitchen tent
 One 14' x 16' coreshack
 One 14' x 16' dry
 One 14' x 16' core cutting tent
 One 14' x 16' office tent
 Two outhouses
 One generator shack
 One heli-pad
 One fuel cache in camp, with Spill Kit
 Spill response equipment located outside of coreshack

2.2. Camp and Drill Sites

Drilling will occur within the 5 blocks shown on the attached map titled "Proposed Drilling"

Campsite: JetB and diesel fuel, gasoline to be stored in 45 gal (205 litre) drums stored in portable "Insta Berms".

These will be located a minimum of 31 metres from the normal high water mark and in such a manner that no fuel can enter any such water body.

Drill Sites: 2 – 3 barrels of diesel, propane and drill additives to be stored on each drill pad consecutively.

2.3. Effective Date of Plan

June 5, 2011 is the effective date of the plan.

2.4. Background Information on the Site

The site is located on a wave-modified, flat-topped esker that was once used as part of an ATV trail network. The site is no longer used by ATV's because the Hamlet of Whale Cove recently completed a new road that is located 2 km west of the site. The new road allows two-wheel drive vehicles to travel from Whale Cove to the mouth of the Wilson River.

3.0 RESPONSE ORGANIZATION

Camp Technician – responsible for checking fuel drum conditions and evidence of leakage daily, assuring drip trays are in place and not overflowing; keeping spill kits and absorbent mats in good repair and accessible. If spill or likelihood of a spill occurs the Technician will immediately report to the **Project Supervisor**.

Pilots and Drill Shift Boss to report spills or potential spills to the **Project Supervisor**.

Project Supervisor will report any spill to the NWT 24-Hour Spill Report Line and initiate clean-up. Project Supervisor will request additional aid from external sources if deemed necessary.

If one or more of these key personnel are absent from the site an alternative person will be named as either Camp Technician or Project Supervisor for the interim.

Names of key personnel to be responsible for activating the spill contingency plan will be made available once crew members have been hired.

4.0 REPORTING PROCEDURE

Communication in the way of two-way radios will be set-up in the event that if a spill occurs outside of camp at either the drill rig or external fuel cache it can be immediately reported to the Project Supervisor.

All spill kits located at all sources of fuel will have contact information for the NWT Spill Report Line prominently displayed.

A listing of the NWT 24 Hour Spill Report Line as well as other government contacts and company officials will be displayed adjacent to the satellite phone in camp. (See Reporting Procedure and Contacts below).

SPILL REPORTING PROCEDURE

Fill out "SPILL REPORT" as completely as possible before making the report.
Report IMMEDIATELY to Yellowknife using the 24-hour Spill Report Line.

**24-HOUR SPILL REPORT LINE (867) 920-8130
AND TO
DIAND WATER RESOURCES INSPECTOR (867) 975-4298**

NOTE: Telephone calls can be made collect by informing the Operator that you wish to report a spill.

RCMP communications may be used if other means are not available.

Additional Information or Assistance:**Regulatory Bodies:**

Government of Northwest Territories
Pollution Control Division
Yellowknife

Phone: (867) 873-7654

Department of Indian Affairs and
Northern Development
Yellowknife

Phone: (867) 920-8240

Environment Canada (Jim Noble)
24 Hour Pager
Yellowknife

Phone: (867) 975-4644
Phone: (867) 920-5131
Phone: (867) 873-8185

Environment Canada
Iqaluit

Phone: (867) 975-4639
Emergency Pager: (867) 920-5153

Nunavut Water Board

Phone: (867) 360-6338
Fax: (867) 360-6369

Environmental Protection
Government of Nunavut

Fax: (867) 975-5981

Indian and Northern Affairs Canada
Water Resources Manager
Nunavut Regional Office

Phone: (867) 975-4550
Fax: (867) 975-4585

Indian and Northern Affairs Canada
Land Administration Minister
Nunavut Regional Office

Phone: (867) 975-4280
Fax: (867) 975-4286

Department of Fisheries and Oceans
Nunavut Regional Office
Manager Pollution Control and Air Quality

Phone: (867) 979-8000
Fax: (867) 979-8039
Phone: (867) 975-5907

RCMP Detachment
Whale Cove

Phone: (867) 896-0123
or (867) 896-1111

A detailed report on each occurrence must also be filled out with the DIAND Water Resources Inspector no later than 30 days after initially reporting the event. The Spill Report Form is attached as Appendix I.

5.0 INITIAL ACTION

- 1.0 Stay alert and consider safety first. Identify the source of leak or spill and the type of product.
- 2.0 Assess the hazards to the persons in the vicinity of the spill.
- 3.0 Isolate or remove any potential ignition source.
- 4.0 Control danger to human life if possible.
- 5.0 Assess whether the spill can be readily stopped or brought under control.
- 6.0 If safe (and possible) try to stop the flow.
- 7.0 Report the spill to the Project Supervisor and to the NWT 24-hour Spill Report Line (867) 920-8130.
- 8.0 Initiate or resume clean-up.

6.0 ACTION PLANS

The following responses are recommended for fuel spills in differing environments. Depending on the location and size of the exploration program some of the equipment mentioned in the responses listed below will obviously not be located on site but could be transported to the spill if deemed necessary. The most likely scenario for fuel spills in this type of exploration program would include: leaking drums, hydraulic line malfunction and re-fueling operations. It is not anticipated that a spill of more than 45 gallons will occur as no fuel container on-site will exceed this capacity.

6.1 Spills on Land (gravel, rock, soil and vegetation)

Trench or ditch to intercept or contain flow of fuel or petroleum products on land where feasible (loose sand, gravel and surface layers of organic materials are amenable to trenching/ditching-trenching in rocky substrates is typically impractical and impossible).

Construct a soil berm downslope of the spill. Use of synthetic, impervious sheeting can also be used to act as a barrier.

Where available, recover spills through manual or mechanical means including shovels, heavy equipment and pumps.

Absorb petroleum residue with synthetic sorbent pad materials.

Recover spilled and contaminated material, including soil and vegetation.

Transport contaminated material to approved disposal or recovery site. Equipment used will depend on the magnitude and location of the spill.

Land based disposal is only authorized with the approval of government authorities.

6.2 Spills on Snow

Trench or ditch to intercept or contain flow of fuel or petroleum products on snow, where feasible (ice, snow, loose sand, gravel and surface layers of organic materials as amenable to trench/ditching; trenching in solid, frozen ground or rocky substrates is typically impractical and impossible).

Compact snow around the outside perimeter of the spill area.

Construct a dike or dam out of snow, either manually with shovels or with heavy equipment such as graders or dozers where available.

If feasible, use synthetic lines to provide an impervious barrier at the spill site.

Locate the low point of the spill area and clear channels in the snow, directed away from waterways, to allow non-absorbed material to flow into the low point.

Once collected in the low area, option include shoveling spilled material into containers, picking up with mobile heavy equipment, pumping liquid into tanker trucks or using vacuum truck to pick up material.

Where safe, disposal can be done through in-situ combustion with approval from government and safety consultants.

Transport contaminated material to approved disposal site. Equipment used will depend on the magnitude and location of the spill.

6.3 Spills on Ice

Contain material spill using methods described above for snow, if feasible and/or mechanical recovery with heavy equipment.

Prevent fuel/petroleum products from penetrating ice and entering watercourses.

Remove contaminated material, including snow/ice as soon as possible.

Containment of fuel/petroleum products under ice surface is difficult given the ice thickness and winter conditions. However, if the materials get under ice, determine area where the fuel/petroleum product is located.

Drill holes through ice using ice auger to locate fuel/petroleum product.

Once detected, cut slits in the ice using chain saws and remove ice blocks. Fuel /petroleum products collected in ice slots or holes can be picked up via suction hoses connected to portable pump, vacuum truck or standby tanker. Care should be taken to prevent the end of the suction hose clogging up by snow, ice or debris.

Fuel/petroleum products that have collected in ice slots may be disposed of by in-situ burning if sufficient holes are drilled in ice. Once all the holes are drilled, the oil which collects in the holes may be ignited. Consult with fire/safety consultants and government authorities to obtain approval.

6.4 Spills on Water

Contain spills on open water immediately to restrict the size and extent of the spill

Fuel/petroleum products which float on water may be contained through the use of booms, absorbent materials, skimming and the erection of culverts.

Deploy containment booms to minimize spill area, although effectiveness of booms may be limited by wind, waves and other factors.

Use sorbent booms to slowly encircle and absorb spilled material. These absorbent are hydrophobic (absorb and repel water).

Once booms are secured, use skimmers to draw in hydrocarbons and minimal amounts of water. Skimmed material can be pumped through hoses to empty fuel tanks/drums.

Culverts permit water flow while capturing and collecting fuel along the surface with absorbent materials.

Chemical methods including dispersants, emulsion – treating agents and shoreline cleaning will be considered.

6.5 Spills Due to Accidental Load Release

The loss of external loads of fuel, oil or chemicals from the helicopter requires an immediate response.

1) Obtain GPS co-ordinates of the location and contact base camp. Include quantity and type of load loss.

2) Base camp will contact the 24-Hour Spill Line and receive instructions on follow up procedures.

3) Administer the appropriate procedure for spills on Land, Water, Snow or Ice

NOTE:

1. **Material Safety Data Sheets** for all hazardous materials involved in this project are listed in Appendix II. These MSDS sheets are for all drilling mud, polymers and greases as well as for calcium chloride, diesel, Jet B, propane and gasoline.
2. In-situ combustion is a disposal method available for fuels and petroleum products. In-situ burning can be initiated by using a large size portable propane torch (tiger torch) to ignite the fuel/petroleum products. Highly flammable products such as gasoline or alcohol, or combustible material such as wood, may be used to promote ignition of the spilled product. The objective is to raise the temperature for sustained combustion of the spilled product.

Precautions need to be taken to ensure safety of personnel. Also, spilled product should be confined to control burning. These include areas where the spilled material has pooled naturally or been contained via dikes, trenches, depressions or ice slots. Prior to any attempts at in-situ burning, consultation with experts and approval by government authorities are required.

3. Chemical response methods are also available and may include the use of dispersants, emulsions-treating agents, visco-elastic agents, herding agents, solidifiers, and shoreline cleaning agents.
4. Biological response methods include nutrient enrichment and natural microbe seeding.
5. Site remediation will be completed as per the advice of government authorities.

7.0 RESOURCE INVENTORY

Resources available on site:

Trenching/digging equipment in the form of picks and shovels.

Pumps

Impervious sheeting (tarps)

Plastic bags, buckets, empty drums for collection of contaminated material.

2 Spill Kits containing:

4 – oil sorbent booms (5" x 10')

100 – oil sorbent sheets (16.5" x 20" x 3/8")

1 – drain cover (36" x 36" x 1/16")

1 – Caution Tape (3" x 500')

1 – 1lb plugging compound

2 – pair Nitrile gloves

2 – pair Safety goggles

2 – pair Tyvek coveralls

10 – disposable bags (24" x 48")

8.0 TRAINING/EXERCISE

All contract personnel will be briefed and given a copy of the Fuel Spill Contingency Plan before field operations begin. Mock spill exercises will be conducted early in the program to ensure response criteria, communication and reporting requirements are met and fully understood.

Satellite Image Showing
Location of Proposed
Camp Infrastructure
Pistol Bay Project

Northquest Camp at $62^{\circ}21'05''$ N
 $92^{\circ}45'20''$ W

Water Source
Sleep Tents
Wash Tent
Outhouses
Kitchen Core
Office
Logging Tent
Cutting Tent
Fuel Cache
Helipad


Image © 2011 DigitalGlobe
© 2011 Europa Technologies
© 2011 Google

183 m

366 m



Imagery Date: Sep 2, 2006

$62^{\circ}21'04.46''$ N $92^{\circ}45'10.99''$ W

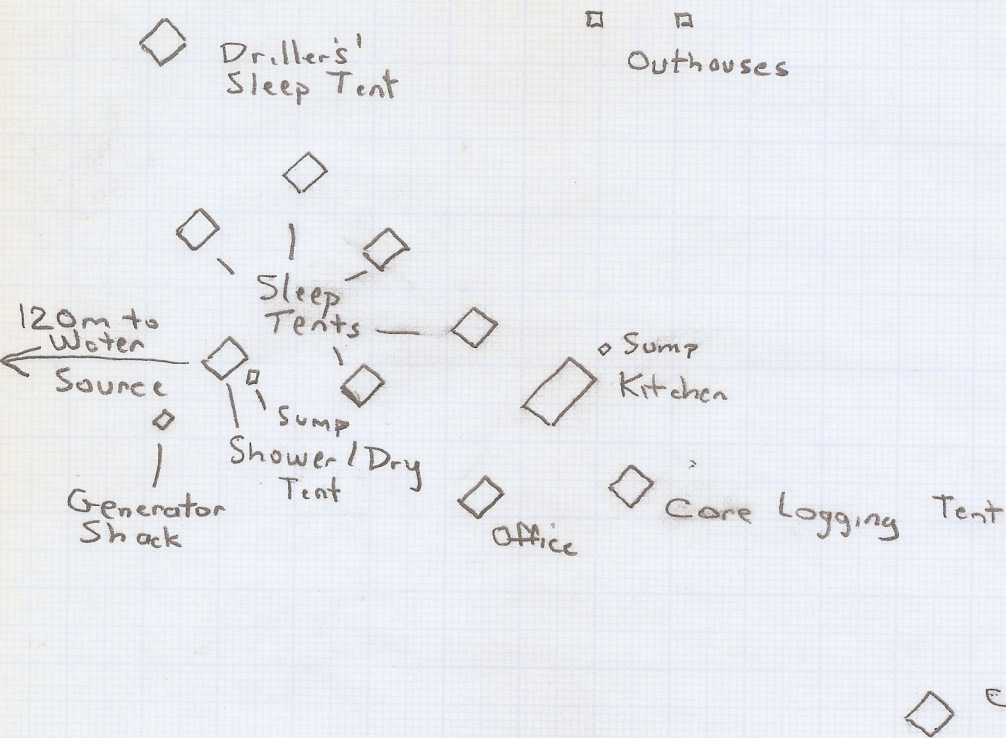


92° 45' 20" W

+ 62° 21' 05" N

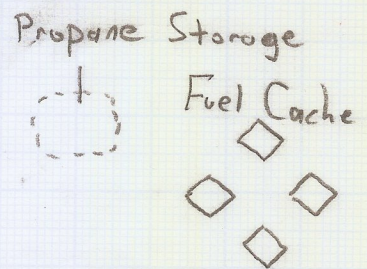

Sketch Map Showing
Proposed Distribution of
Pistol Boy Camp Infrastructure



APPENDIX 1
NT-NU SPILL REPORT FORM



NT-NU SPILL REPORT

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

EMAIL: spills@gov.nt.ca

REPORT LINE USE ONLY

REPORT LINE USE ONLY						
N	RECEIVED AT SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLED	REPORT LINE NUMBER	
		STATION OPERATOR		YELLOWKNIFE, NT	(867) 920-8130	
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> INAC <input type="checkbox"/> NEB <input type="checkbox"/> TC			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED	
AGENCY		CONTACT NAME	CONTACT TIME	REMARKS		
LEAD AGENCY						
FIRST SUPPORT AGENCY						
SECOND SUPPORT AGENCY						
THIRD SUPPORT AGENCY						

APPENDIX 2

MDS SHEETS



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

EMERGENCY OVERVIEW

DANGER!

**EXTREMELY FLAMMABLE - EYE AND MUCOUS MEMBRANE IRRITANT
- EFFECTS CENTRAL NERVOUS SYSTEM - HARMFUL OR FATAL IF
SWALLOWED - ASPIRATION HAZARD**



NFPA 704 (Section 16)

High fire hazard. Keep away from heat, spark, open flame, and other ignition sources.

If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs). Contact may cause eye, skin and mucous membrane irritation. Harmful if absorbed through the skin. Avoid prolonged breathing of vapors or mists. Inhalation may cause irritation, anesthetic effects (dizziness, nausea, headache, intoxication), and respiratory system effects.

Long-term exposure may cause effects to specific organs, such as to the liver, kidneys, blood, nervous system, and skin. Contains benzene, which can cause blood disease, including anemia and leukemia.

1. CHEMICAL PRODUCT and COMPANY INFORMATION

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER (24 hrs):
COMPANY CONTACT (business hours):
MSDS (Environment, Health, Safety) Internet Website

CHEMTREC (800)424-9300
Corporate Safety (732)750-6000
www.hess.com

SYNONYMS: Hess Conventional (Oxygenated and Non-oxygenated) Gasoline; Reformulated Gasoline (RFG); Reformulated Gasoline Blendstock for Oxygenate Blending (RBOB); Unleaded Motor or Automotive Gasoline

See Section 16 for abbreviations and acronyms.

2. COMPOSITION and INFORMATION ON INGREDIENTS *

INGREDIENT NAME (CAS No.)	CONCENTRATION PERCENT BY WEIGHT
Gasoline (86290-81-5)	100
Benzene (71-43-2)	0.1 - 4.9 (0.1 - 1.3 reformulated gasoline)
n-Butane (106-97-8)	< 10
Ethyl Alcohol (Ethanol) (64-17-5)	0 - 10
Ethyl benzene (100-41-4)	< 3
n-Hexane (110-54-3)	0.5 to 4
Methyl-tertiary butyl ether (MTBE) (1634-04-4)	0 to 15.0
Tertiary-amyl methyl ether (TAME) (994-05-8)	0 to 17.2
Toluene (108-88-3)	1 - 25
1,2,4- Trimethylbenzene (95-63-6)	< 6
Xylene, mixed isomers (1330-20-7)	1 - 15

A complex blend of petroleum-derived normal and branched-chain alkane, cycloalkane, alkene, and aromatic hydrocarbons. May contain antioxidant and multifunctional additives. Non-oxygenated Conventional Gasoline and RBOB do not have oxygenates (Ethanol or MTBE and/or TAME).



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

Oxygenated Conventional and Reformulated Gasoline will have oxygenates for octane enhancement or as legally required.

3. HAZARDS IDENTIFICATION

EYES

Moderate irritant. Contact with liquid or vapor may cause irritation.

SKIN

Practically non-toxic if absorbed following acute (single) exposure. May cause skin irritation with prolonged or repeated contact. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are exposed repeatedly.

INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.

INHALATION

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

CHRONIC EFFECTS and CARCINOGENICITY

Contains benzene, a regulated human carcinogen. Benzene has the potential to cause anemia and other blood diseases, including leukemia, after repeated and prolonged exposure. Exposure to light hydrocarbons in the same boiling range as this product has been associated in animal studies with systemic toxicity. See also Section 11 - Toxicological Information.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash). Chronic respiratory disease, liver or kidney dysfunction, or pre-existing central nervous system disorders may be aggravated by exposure.

4. FIRST AID MEASURES

EYES

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

SKIN

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

INGESTION



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

INHALATION

Remove person to fresh air. If person is not breathing, ensure an open airway and provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

FLASH POINT:	-45 °F (-43°C)
AUTOIGNITION TEMPERATURE:	highly variable; > 530 °F (>280 °C)
OSHA/NFPA FLAMMABILITY CLASS:	1A (flammable liquid)
LOWER EXPLOSIVE LIMIT (%):	1.4%
UPPER EXPLOSIVE LIMIT (%):	7.6%

FIRE AND EXPLOSION HAZARDS

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. Flowing product may be ignited by self-generated static electricity. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

EXTINGUISHING MEDIA

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or Halon.

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

During certain times of the year and/or in certain geographical locations, gasoline may contain MTBE and/or TAME. Firefighting foam suitable for polar solvents is recommended for fuel with greater than 10% oxygenate concentration - refer to NFPA 11 "Low Expansion Foam - 1994 Edition."

FIRE FIGHTING INSTRUCTIONS

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

6. ACCIDENTAL RELEASE MEASURES

ACTIVATE FACILITY SPILL CONTINGENCY or EMERGENCY PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal - caution, flammable vapors may accumulate in closed containers. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

7. HANDLING and STORAGE

HANDLING PRECAUTIONS

*****USE ONLY AS A MOTOR FUEL*****

*****DO NOT SIPHON BY MOUTH*****

Handle as a flammable liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Special slow load procedures for "switch loading" must be followed to avoid the static ignition hazard that can exist when higher flash point material (such as fuel oil) is loaded into tanks previously containing low flash point products (such as this product) - see API Publication 2003, "Protection Against Ignitions Arising Out Of Static, Lightning and Stray Currents.

STORAGE PRECAUTIONS

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

WORK/HYGIENIC PRACTICES

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

8. EXPOSURE CONTROLS and PERSONAL PROTECTION

EXPOSURE LIMITS

Component (CAS No.)	Source	TWA (ppm)	STEL (ppm)	Exposure Limits	Note
Gasoline (86290-81-5)	ACGIH	300	500	A3	
Benzene (71-43-2)	OSHA	1	5	Carcinogen	
	ACGIH	0.5	2.5	A1, skin	
	USCG	1	5		
n-Butane (106-97-8)	ACGIH	1000	--	Aliphatic Hydrocarbon Gases Alkane (C1-C4)	
Ethyl Alcohol (ethanol) (64-17-5)	OSHA	1000	--		
	ACGIH	1000	--	A4	
Ethyl benzene (100-41-4)	OSHA	100	--		
	ACGIH	100	125	A3	
n-Hexane (110-54-3)	OSHA	500	--		
	ACGIH	50	--	Skin	
Methyl-tertiary butyl ether [MTBE] (1634-04-4)	ACGIH	50		A3	
Tertiary-amyl methyl ether [TAME] (994-05-8)				None established	
Toluene (108-88-3)	OSHA	200		Ceiling: 300 ppm; Peak: 500 ppm (10 min.)	
	ACGIH	20	--	A4	
1,2,4- Trimethylbenzene (95-63-6)	ACGIH	25	--		
Xylene, mixed isomers (1330-20-7)	OSHA	100	--		
	ACGIH	100	150	A4	

ENGINEERING CONTROLS

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

EYE/FACE PROTECTION

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

SKIN PROTECTION

Gloves constructed of nitrile or neoprene are recommended. Chemical protective clothing such as that made of of E.I. DuPont Tychem®, products or equivalent is recommended based on degree of exposure.

Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.

RESPIRATORY PROTECTION

A NIOSH-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection and limitations.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

9. PHYSICAL and CHEMICAL PROPERTIES

APPEARANCE

A translucent, straw-colored or light yellow liquid



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

ODOR

A strong, characteristic aromatic hydrocarbon odor. Oxygenated gasoline with MTBE and/or TAME may have a sweet, ether-like odor and is detectable at a lower concentration than non-oxygenated gasoline.

ODOR THRESHOLD

	<u>Odor Detection</u>	<u>Odor Recognition</u>
Non-oxygenated gasoline:	0.5 - 0.6 ppm	0.8 - 1.1 ppm
Gasoline with 15% MTBE:	0.2 - 0.3 ppm	0.4 - 0.7 ppm
Gasoline with 15% TAME:	0.1 ppm	0.2 ppm

BASIC PHYSICAL PROPERTIES

BOILING RANGE:	85 to 437 °F (39 to 200 °C)
VAPOR PRESSURE:	6.4 - 15 RVP @ 100 °F (38 °C) (275-475 mm Hg @ 68 °F (20 °C)
VAPOR DENSITY (air = 1):	AP 3 to 4
SPECIFIC GRAVITY (H ₂ O = 1):	0.70 - 0.78
EVAPORATION RATE:	10-11 (n-butyl acetate = 1)
PERCENT VOLATILES:	100 %
SOLUBILITY (H ₂ O):	Non-oxygenated gasoline - negligible (< 0.1% @ 77 °F). Gasoline with 15% MTBE - slight (0.1 - 3% @ 77 °F); ethanol is readily soluble in water

10. STABILITY and REACTIVITY)

STABILITY: Stable. Hazardous polymerization will not occur.

CONDITIONS TO AVOID

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources

INCOMPATIBLE MATERIALS

Keep away from strong oxidizers.

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke). Contact with nitric and sulfuric acids will form nitroresols that can decompose violently.

11. TOXICOLOGICAL PROPERTIES

ACUTE TOXICITY

Acute Dermal LD50 (rabbits): > 5 ml/kg	Acute Oral LD50 (rat): 18.75 ml/kg
Primary dermal irritation (rabbits): slightly irritating	Draize eye irritation (rabbits): non-irritating
Guinea pig sensitization: negative	

CHRONIC EFFECTS AND CARCINOGENICITY

Carcinogenicity: OSHA: NO IARC: YES - 2B NTP: NO ACGIH: YES (A3)

IARC has determined that gasoline and gasoline exhaust are possibly carcinogenic in humans. Inhalation exposure to completely vaporized unleaded gasoline caused kidney cancers in male rats and liver tumors in female mice. The U.S. EPA has determined that the male kidney tumors are species-specific and are irrelevant for human health risk assessment. The significance of the tumors seen in female mice is not known. Exposure to light hydrocarbons in the same boiling range as this product has been associated in animal studies with effects to the central and peripheral nervous systems, liver, and kidneys. The significance of these animal models to predict similar human response to gasoline is uncertain.

This product contains benzene. Human health studies indicate that prolonged and/or repeated overexposure to benzene may cause damage to the blood-forming system (particularly bone marrow), and serious blood disorders such as aplastic anemia and leukemia. Benzene is listed as a human carcinogen by the NTP, IARC, OSHA and ACGIH.



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

This product may contain methyl tertiary butyl ether (MTBE): animal and human health effects studies indicate that MTBE may cause eye, skin, and respiratory tract irritation, central nervous system depression and neurotoxicity. MTBE is classified as an animal carcinogen (A3) by the ACGIH.

12. ECOLOGICAL INFORMATION

Keep out of sewers, drainage areas and waterways. Report spills and releases, as applicable, under Federal and State regulations. If released, oxygenates such as ethers and alcohols will be expected to exhibit fairly high mobility in soil, and therefore may leach into groundwater. The API (www.api.org) provides a number of useful references addressing petroleum and oxygenate contamination of groundwater.

13. DISPOSAL CONSIDERATIONS

Consult federal, state and local waste regulations to determine appropriate disposal options.

14. TRANSPORTATION INFORMATION

DOT PROPER SHIPPING NAME: Gasoline
DOT HAZARD CLASS and PACKING GROUP: 3, PG II
DOT IDENTIFICATION NUMBER: UN 1203
DOT SHIPPING LABEL: FLAMMABLE LIQUID

PLACARD:



15. REGULATORY INFORMATION

U.S. FEDERAL, STATE, and LOCAL REGULATORY INFORMATION

This product and its constituents listed herein are on the EPA TSCA Inventory. Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, state and/or local reporting requirements. This product and/or its constituents may also be subject to other federal, state, or local regulations; consult those regulations applicable to your facility/operation.

CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to "navigable waters" (essentially any surface water, including certain wetlands) or adjoining shorelines sufficient to cause a visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Response Center (1-800-424-8802) as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

The CERCLA definition of hazardous substances contains a "petroleum exclusion" clause which exempts crude oil, refined, and unrefined petroleum products and any indigenous components of such. However, other federal reporting requirements (e.g., SARA Section 304 as well as the Clean Water Act if the spill occurs on navigable waters) may still apply.

SARA SECTION 311/312 - HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	--	--

SARA SECTION 313 - SUPPLIER NOTIFICATION

This product contains the following toxic chemicals subject to the reporting requirements of section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>CONCENTRATION WT. PERCENT</u>
Benzene (71-43-2)	0.1 to 4.9 (0.1 to 1.3 for reformulated gasoline)
Ethyl benzene (100-41-4)	< 3



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

n-Hexane (110-54-3)	0.5 to 4
Methyl-tertiary butyl ether (MTBE) (1634-04-4)	0 to 15.0
Toluene (108-88-3)	1 to 15
1,2,4- Trimethylbenzene (95-63-6)	< 6
Xylene, mixed isomers (1330-20-7)	1 to 15

US EPA guidance documents (www.epa.gov/tri) for reporting Persistent Bioaccumulating Toxics (PBTs) indicate this product may contain the following de minimis levels of toxic chemicals subject to Section 313 reporting:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>CONCENTRATION - Parts per million (ppm) by weight</u>
Polycyclic aromatic compounds (PACs)	17
Benzo (g,h,i) perylene (191-24-2)	2.55
Lead (7439-92-1)	0.079

CALIFORNIA PROPOSITION 65 LIST OF CHEMICALS

This product contains the following chemicals that are included on the Proposition 65 "List of Chemicals" required by the California Safe Drinking Water and Toxic Enforcement Act of 1986:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>Date Listed</u>
Benzene	2/27/1987
Ethyl benzene	6/11/2004
Toluene	1/1/1991

CANADIAN REGULATORY INFORMATION (WHMIS)

Class B, Division 2 (Flammable Liquid)

Class D, Division 2A (Very toxic by other means) and Class D, Division 2B (Toxic by other means)

16. OTHER INFORMATION

<u>NFPA® HAZARD RATING</u>	HEALTH:	1	Slight
	FIRE:	3	Serious
	REACTIVITY:	0	Minimal
<u>HMIS® HAZARD RATING</u>	HEALTH:	1 *	Slight
	FIRE:	3	Serious
	PHYSICAL:	0	Minimal
			* CHRONIC

SUPERSEDES MSDS DATED: 07/01/06

ABBREVIATIONS:

AP = Approximately < = Less than > = Greater than
N/A = Not Applicable N/D = Not Determined ppm = parts per million

ACRONYMS:

ACGIH	American Conference of Governmental Industrial Hygienists	CERCLA	Comprehensive Emergency Response, Compensation, and Liability Act
AIHA	American Industrial Hygiene Association	DOT	U.S. Department of Transportation
ANSI	American National Standards Institute (212)642-4900		[General Info: (800)467-4922]
API	American Petroleum Institute (202)682-8000	EPA	U.S. Environmental Protection Agency
		HMIS	Hazardous Materials Information System



MATERIAL SAFETY DATA SHEET

Gasoline, All Grades

MSDS No. 9950

IARC	International Agency For Research On Cancer	REL	Recommended Exposure Limit (NIOSH)
MSHA	Mine Safety and Health Administration	SARA	Superfund Amendments and Reauthorization Act of 1986 Title III
NFPA	National Fire Protection Association (617)770-3000	SCBA	Self-Contained Breathing Apparatus
NIOSH	National Institute of Occupational Safety and Health	SPCC	Spill Prevention, Control, and Countermeasures
NOIC	Notice of Intended Change (proposed change to ACGIH TLV)	STEL	Short-Term Exposure Limit (generally 15 minutes)
NTP	National Toxicology Program	TLV	Threshold Limit Value (ACGIH)
OPA	Oil Pollution Act of 1990	TSCA	Toxic Substances Control Act
OSHA	U.S. Occupational Safety & Health Administration	TWA	Time Weighted Average (8 hr.)
PEL	Permissible Exposure Limit (OSHA)	WEEL	Workplace Environmental Exposure Level (AIHA)
RCRA	Resource Conservation and Recovery Act	WHMIS	Workplace Hazardous Materials Information System (Canada)

DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.



MATERIAL SAFETY DATA SHEET

Diesel Fuel (All Types)

MSDS No. 9909

EMERGENCY OVERVIEW

CAUTION!

**OSHA/NFPA COMBUSTIBLE LIQUID - SLIGHT TO MODERATE IRRITANT
EFFECTS CENTRAL NERVOUS SYSTEM
HARMFUL OR FATAL IF SWALLOWED**

Moderate fire hazard. Avoid breathing vapors or mists. May cause dizziness and drowsiness. May cause moderate eye irritation and skin irritation (rash). Long-term, repeated exposure may cause skin cancer. If ingested, do NOT induce vomiting, as this may cause chemical pneumonia (fluid in the lungs).



NFPA 704 (Section 16)

1. CHEMICAL PRODUCT AND COMPANY INFORMATION

Hess Corporation
1 Hess Plaza
Woodbridge, NJ 07095-0961

EMERGENCY TELEPHONE NUMBER (24 hrs): **CHEMTREC (800) 424-9300**

COMPANY CONTACT (business hours): Corporate Safety (732) 750-6000

MSDS INTERNET WEBSITE: www.hess.com (See Environment, Health, Safety & Social Responsibility)

SYNONYMS: Ultra Low Sulfur Diesel (ULSD); Low Sulfur Diesel; Motor Vehicle Diesel Fuel; Diesel Fuel #2; Dyed Diesel Fuel; Non-Road, Locomotive and Marine Diesel Fuel; Tax-exempt Diesel Fuel

See Section 16 for abbreviations and acronyms.

2. COMPOSITION and CHEMICAL INFORMATION ON INGREDIENTS

INGREDIENT NAME (CAS No.)	CONCENTRATION PERCENT BY WEIGHT
Diesel Fuel (68476-34-6)	100
Naphthalene (91-20-3)	Typically < 0.01

A complex mixture of hydrocarbons with carbon numbers in the range C9 and higher. Diesel fuel may be dyed (red) for tax purposes. May contain a multifunctional additive.

3. HAZARDS IDENTIFICATION

EYES

Contact with liquid or vapor may cause mild irritation.

SKIN

May cause skin irritation with prolonged or repeated contact. Practically non-toxic if absorbed following acute (single) exposure. Liquid may be absorbed through the skin in toxic amounts if large areas of skin are repeatedly exposed.

INGESTION

The major health threat of ingestion occurs from the danger of aspiration (breathing) of liquid drops into the lungs, particularly from vomiting. Aspiration may result in chemical pneumonia (fluid in the lungs), severe lung damage, respiratory failure and even death.

Ingestion may cause gastrointestinal disturbances, including irritation, nausea, vomiting and diarrhea, and central nervous system (brain) effects similar to alcohol intoxication. In severe cases, tremors, convulsions, loss of consciousness, coma, respiratory arrest, and death may occur.



MATERIAL SAFETY DATA SHEET

Diesel Fuel (All Types)

MSDS No. 9909

INHALATION

Excessive exposure may cause irritations to the nose, throat, lungs and respiratory tract. Central nervous system (brain) effects may include headache, dizziness, loss of balance and coordination, unconsciousness, coma, respiratory failure, and death.

WARNING: the burning of any hydrocarbon as a fuel in an area without adequate ventilation may result in hazardous levels of combustion products, including carbon monoxide, and inadequate oxygen levels, which may cause unconsciousness, suffocation, and death.

CHRONIC EFFECTS and CARCINOGENICITY

Similar products produced skin cancer and systemic toxicity in laboratory animals following repeated applications. The significance of these results to human exposures has not been determined - see Section 11 Toxicological Information.

IARC classifies whole diesel fuel exhaust particulates as probably carcinogenic to humans (Group 2A). NIOSH regards whole diesel fuel exhaust particulates as a potential cause of occupational lung cancer based on animal studies and limited evidence in humans.

MEDICAL CONDITIONS AGGRAVATED BY EXPOSURE

Irritation from skin exposure may aggravate existing open wounds, skin disorders, and dermatitis (rash).

4. FIRST AID MEASURES

EYES

In case of contact with eyes, immediately flush with clean, low-pressure water for at least 15 min. Hold eyelids open to ensure adequate flushing. Seek medical attention.

SKIN

Remove contaminated clothing. Wash contaminated areas thoroughly with soap and water or waterless hand cleanser. Obtain medical attention if irritation or redness develops.

INGESTION

DO NOT INDUCE VOMITING. Do not give liquids. Obtain immediate medical attention. If spontaneous vomiting occurs, lean victim forward to reduce the risk of aspiration. Monitor for breathing difficulties. Small amounts of material which enter the mouth should be rinsed out until the taste is dissipated.

INHALATION

Remove person to fresh air. If person is not breathing provide artificial respiration. If necessary, provide additional oxygen once breathing is restored if trained to do so. Seek medical attention immediately.

5. FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

FLASH POINT:	> 125 °F (> 52 °C) minimum PMCC
AUTOIGNITION POINT:	494 °F (257 °C)
OSHA/NFPA FLAMMABILITY CLASS:	2 (COMBUSTIBLE)
LOWER EXPLOSIVE LIMIT (%):	0.6
UPPER EXPLOSIVE LIMIT (%):	7.5

FIRE AND EXPLOSION HAZARDS

Vapors may be ignited rapidly when exposed to heat, spark, open flame or other source of ignition. When mixed with air and exposed to an ignition source, flammable vapors can burn in the open or explode in confined spaces. Being heavier than air, vapors may travel long distances to an ignition source and flash back. Runoff to sewer may cause fire or explosion hazard.

EXTINGUISHING MEDIA

SMALL FIRES: Any extinguisher suitable for Class B fires, dry chemical, CO₂, water spray, fire fighting foam, or Halon.



MATERIAL SAFETY DATA SHEET

Diesel Fuel (All Types)

MSDS No. 9909

LARGE FIRES: Water spray, fog or fire fighting foam. Water may be ineffective for fighting the fire, but may be used to cool fire-exposed containers.

FIRE FIGHTING INSTRUCTIONS

Small fires in the incipient (beginning) stage may typically be extinguished using handheld portable fire extinguishers and other fire fighting equipment.

Firefighting activities that may result in potential exposure to high heat, smoke or toxic by-products of combustion should require NIOSH/MSHA- approved pressure-demand self-contained breathing apparatus with full facepiece and full protective clothing.

Isolate area around container involved in fire. Cool tanks, shells, and containers exposed to fire and excessive heat with water. For massive fires the use of unmanned hose holders or monitor nozzles may be advantageous to further minimize personnel exposure. Major fires may require withdrawal, allowing the tank to burn. Large storage tank fires typically require specially trained personnel and equipment to extinguish the fire, often including the need for properly applied fire fighting foam.

See Section 16 for the NFPA 704 Hazard Rating.

6. ACCIDENTAL RELEASE MEASURES

ACTIVATE FACILITY'S SPILL CONTINGENCY OR EMERGENCY RESPONSE PLAN.

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction; stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater; professional assistance may be necessary to determine the extent of subsurface impact.

Carefully contain and stop the source of the spill, if safe to do so. Protect bodies of water by diking, absorbents, or absorbent boom, if possible. Do not flush down sewer or drainage systems, unless system is designed and permitted to handle such material. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or areas/equipment that require protection.

Take up with sand or other oil absorbing materials. Carefully shovel, scoop or sweep up into a waste container for reclamation or disposal - caution, flammable vapors may accumulate in closed containers. Response and clean-up crews must be properly trained and must utilize proper protective equipment (see Section 8).

7. HANDLING and STORAGE

HANDLING PRECAUTIONS

Handle as a combustible liquid. Keep away from heat, sparks, and open flame! Electrical equipment should be approved for classified area. Bond and ground containers during product transfer to reduce the possibility of static-initiated fire or explosion.

Diesel fuel, and in particular low and ultra low sulfur diesel fuel, has the capability of accumulating a static electrical charge of sufficient energy to cause a fire/explosion in the presence of lower flashpoint products such as gasoline. The accumulation of such a static charge occurs as the diesel flows through pipelines, filters, nozzles and various work tasks such as tank/container filling, splash loading, tank cleaning; product sampling; tank gauging; cleaning, mixing, vacuum truck operations, switch loading, and product agitation. There is a greater potential for static charge accumulation in cold temperature, low humidity conditions.

Documents such as 29 CFR OSHA 1910.106 "Flammable and Combustible Liquids, NFPA 77 Recommended Practice on Static Electricity, API 2003 "Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents and ASTM D4865 "Standard Guide for Generation and Dissipation of Static



MATERIAL SAFETY DATA SHEET

Diesel Fuel (All Types)

MSDS No. 9909

Electricity in Petroleum Fuel Systems" address special precautions and design requirements involving loading rates, grounding, bonding, filter installation, conductivity additives and especially the hazards associated with "switch loading." ["Switch Loading" is when a higher flash point product (such as diesel) is loaded into tanks previously containing a low flash point product (such as gasoline) and the electrical charge generated during loading of the diesel results in a static ignition of the vapor from the previous cargo (gasoline).]

Note: When conductivity additives are used or are necessary the product should achieve 25 picosiemens/meter or greater at the handling temperature.

STORAGE PRECAUTIONS

Keep away from flame, sparks, excessive temperatures and open flame. Use approved vented containers. Keep containers closed and clearly labeled. Empty product containers or vessels may contain explosive vapors. Do not pressurize, cut, heat, weld or expose such containers to sources of ignition.

Store in a well-ventilated area. This storage area should comply with NFPA 30 "Flammable and Combustible Liquid Code". Avoid storage near incompatible materials. The cleaning of tanks previously containing this product should follow API Recommended Practice (RP) 2013 "Cleaning Mobile Tanks In Flammable and Combustible Liquid Service" and API RP 2015 "Cleaning Petroleum Storage Tanks".

WORK/HYGIENIC PRACTICES

Emergency eye wash capability should be available in the near proximity to operations presenting a potential splash exposure. Use good personal hygiene practices. Avoid repeated and/or prolonged skin exposure. Wash hands before eating, drinking, smoking, or using toilet facilities. Do not use as a cleaning solvent on the skin. Do not use solvents or harsh abrasive skin cleaners for washing this product from exposed skin areas. Waterless hand cleaners are effective. Promptly remove contaminated clothing and launder before reuse. Use care when laundering to prevent the formation of flammable vapors which could ignite via washer or dryer. Consider the need to discard contaminated leather shoes and gloves.

8. EXPOSURE CONTROLS and PERSONAL PROTECTION

EXPOSURE LIMITS

Components (CAS No.)	Source	<u>Exposure Limits</u>		Note
		TWA/STEL		
Diesel Fuel: (68476-34-6)	OSHA	5 mg/m, as mineral oil mist		
	ACGIH	100 mg/m ³ (as totally hydrocarbon vapor) TWA		A3, skin
Naphthalene (91-20-3)	OSHA	10 ppm TWA		
	ACGIH	10 ppm TWA / 15 ppm STEL		A4, Skin

ENGINEERING CONTROLS

Use adequate ventilation to keep vapor concentrations of this product below occupational exposure and flammability limits, particularly in confined spaces.

EYE/FACE PROTECTION

Safety glasses or goggles are recommended where there is a possibility of splashing or spraying.

SKIN PROTECTION

Gloves constructed of nitrile, neoprene, or PVC are recommended. Chemical protective clothing such as of E.I. DuPont TyChem®, Saranex® or equivalent recommended based on degree of exposure. Note: The resistance of specific material may vary from product to product as well as with degree of exposure. Consult manufacturer specifications for further information.



MATERIAL SAFETY DATA SHEET

Diesel Fuel (All Types)

MSDS No. 9909

RESPIRATORY PROTECTION

A NIOSH/MSHA-approved air-purifying respirator with organic vapor cartridges or canister may be permissible under certain circumstances where airborne concentrations are or may be expected to exceed exposure limits or for odor or irritation. Protection provided by air-purifying respirators is limited. Refer to OSHA 29 CFR 1910.134, NIOSH Respirator Decision Logic, and the manufacturer for additional guidance on respiratory protection selection.

Use a positive pressure, air-supplied respirator if there is a potential for uncontrolled release, exposure levels are not known, in oxygen-deficient atmospheres, or any other circumstance where an air-purifying respirator may not provide adequate protection.

9. PHYSICAL and CHEMICAL PROPERTIES

APPEARANCE

Clear, straw-yellow liquid. Dyed fuel oil will be red or reddish-colored.

ODOR

Mild, petroleum distillate odor

BASIC PHYSICAL PROPERTIES

BOILING RANGE: 320 to 690 oF (160 to 366 °C)
VAPOR PRESSURE: 0.009 psia @ 70 °F (21 °C)
VAPOR DENSITY (air = 1): > 1.0
SPECIFIC GRAVITY (H₂O = 1): 0.83 to 0.88 @ 60 °F (16 °C)
PERCENT VOLATILES: 100 %
EVAPORATION RATE: Slow; varies with conditions
SOLUBILITY (H₂O): Negligible

10. STABILITY and REACTIVITY

STABILITY: Stable. Hazardous polymerization will not occur.

CONDITIONS TO AVOID and INCOMPATIBLE MATERIALS

Avoid high temperatures, open flames, sparks, welding, smoking and other ignition sources. Keep away from strong oxidizers; Viton ®; Fluorel ®

HAZARDOUS DECOMPOSITION PRODUCTS

Carbon monoxide, carbon dioxide and non-combusted hydrocarbons (smoke).

11. TOXICOLOGICAL PROPERTIES

ACUTE TOXICITY

Acute dermal LD50 (rabbits): > 5 ml/kg Acute oral LD50 (rats): 9 ml/kg
Primary dermal irritation: extremely irritating (rabbits) Draize eye irritation: non-irritating (rabbits)
Guinea pig sensitization: negative

CHRONIC EFFECTS AND CARCINOGENICITY

Carcinogenic: OSHA: NO IARC: NO NTP: NO ACGIH: A3

Studies have shown that similar products produce skin tumors in laboratory animals following repeated applications without washing or removal. The significance of this finding to human exposure has not been determined. Other studies with active skin carcinogens have shown that washing the animal's skin with soap and water between applications reduced tumor formation.

MUTAGENICITY (genetic effects)

This material has been positive in a mutagenicity study.



MATERIAL SAFETY DATA SHEET

Diesel Fuel (All Types)

MSDS No. 9909

12. ECOLOGICAL INFORMATION

Keep out of sewers, drainage areas, and waterways. Report spills and releases, as applicable, under Federal and State regulations.

13. DISPOSAL CONSIDERATIONS

Consult federal, state and local waste regulations to determine appropriate disposal options.

14. TRANSPORTATION INFORMATION

PROPER SHIPPING NAME:	Diesel Fuel	Placard (International Only):
HAZARD CLASS and PACKING GROUP:	3, PG III	
DOT IDENTIFICATION NUMBER:	NA 1993 (Domestic)	
	UN 1202 (International)	
DOT SHIPPING LABEL:	None	



Use Combustible Placard if shipping in bulk domestically

15. REGULATORY INFORMATION

U.S. FEDERAL, STATE, and LOCAL REGULATORY INFORMATION

This product and its constituents listed herein are on the EPA TSCA Inventory. Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, state and/or local reporting requirements. This product and/or its constituents may also be subject to other regulations at the state and/or local level. Consult those regulations applicable to your facility/operation.

CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to "navigable waters" (essentially any surface water, including certain wetlands) or adjoining shorelines sufficient to cause a visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Response Center (1-800-424-8802) as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

The CERCLA definition of hazardous substances contains a "petroleum exclusion" clause which exempts crude oil, refined, and unrefined petroleum products and any indigenous components of such. However, other federal reporting requirements (e.g., SARA Section 304 as well as the Clean Water Act if the spill occurs on navigable waters) may still apply.

SARA SECTION 311/312 - HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	--	--

SARA SECTION 313 - SUPPLIER NOTIFICATION

This product may contain listed chemicals below the *de minimis* levels which therefore are not subject to the supplier notification requirements of Section 313 of the Emergency Planning and Community Right-To-Know Act (EPCRA) of 1986 and of 40 CFR 372. If you may be required to report releases of chemicals listed in 40 CFR 372.28, you may contact Hess Corporate Safety if you require additional information regarding this product.

CALIFORNIA PROPOSITION 65 LIST OF CHEMICALS

This product contains the following chemicals that are included on the Proposition 65 "List of Chemicals" required by the California Safe Drinking Water and Toxic Enforcement Act of 1986:

<u>INGREDIENT NAME (CAS NUMBER)</u>	<u>Date Listed</u>
Diesel Engine Exhaust (no CAS Number listed)	10/01/1990

CANADIAN REGULATORY INFORMATION (WHMIS)

Class B, Division 3 (Combustible Liquid) and Class D, Division 2, Subdivision B (Toxic by other means)



MATERIAL SAFETY DATA SHEET

Diesel Fuel (All Types)

MSDS No. 9909

16. OTHER INFORMATION

NFPA® HAZARD RATING

HEALTH:	0
FIRE:	2
REACTIVITY:	0

Refer to NFPA 704 "Identification of the Fire Hazards of Materials" for further information

HMIS® HAZARD RATING

HEALTH:	1 *	* Chronic
FIRE:	2	
PHYSICAL:	0	

SUPERSEDES MSDS DATED: 02/28/2001

ABBREVIATIONS:

AP = Approximately < = Less than > = Greater than
N/A = Not Applicable N/D = Not Determined ppm = parts per million

ACRONYMS:

ACGIH	American Conference of Governmental Industrial Hygienists	NTP	National Toxicology Program
AIHA	American Industrial Hygiene Association	OPA	Oil Pollution Act of 1990
ANSI	American National Standards Institute (212) 642-4900	OSHA	U.S. Occupational Safety & Health Administration
API	American Petroleum Institute (202) 682-8000	PEL	Permissible Exposure Limit (OSHA)
CERCLA	Comprehensive Emergency Response, Compensation, and Liability Act	RCRA	Resource Conservation and Recovery Act
DOT	U.S. Department of Transportation [General info: (800) 467-4922]	REL	Recommended Exposure Limit (NIOSH)
EPA	U.S. Environmental Protection Agency	SARA	Superfund Amendments and Reauthorization Act of 1986 Title III
HMIS	Hazardous Materials Information System	SCBA	Self-Contained Breathing Apparatus
IARC	International Agency For Research On Cancer	SPCC	Spill Prevention, Control, and Countermeasures
MSHA	Mine Safety and Health Administration	STEL	Short-Term Exposure Limit (generally 15 minutes)
NFPA	National Fire Protection Association (617)770-3000	TLV	Threshold Limit Value (ACGIH)
NIOSH	National Institute of Occupational Safety and Health	TSCA	Toxic Substances Control Act
NOIC	Notice of Intended Change (proposed change to ACGIH TLV)	TWA	Time Weighted Average (8 hr.)
		WEEL	Workplace Environmental Exposure Level (AIHA)
		WHMIS	Canadian Workplace Hazardous Materials Information System

DISCLAIMER OF EXPRESSED AND IMPLIED WARRANTIES

Information presented herein has been compiled from sources considered to be dependable, and is accurate and reliable to the best of our knowledge and belief, but is not guaranteed to be so. Since conditions of use are beyond our control, we make no warranties, expressed or implied, except those that may be contained in our written contract of sale or acknowledgment.

Vendor assumes no responsibility for injury to vendee or third persons proximately caused by the material if reasonable safety procedures are not adhered to as stipulated in the data sheet. Additionally, vendor assumes no responsibility for injury to vendee or third persons proximately caused by abnormal use of the material, even if reasonable safety procedures are followed. Furthermore, vendee assumes the risk in their use of the material.

Material Safety Data Sheet



JET B AVIATION TURBINE FUEL



1. Product and company identification

Product name	: JET B AVIATION TURBINE FUEL
Synonym	: Jet B; Jet B DI; JP-4; Jet F-40; NATO F-40; Turbine Fuel, Aviation, Wide Cut Type (Can/CGSB-3.22).
Code	: W219, SAP: 150, 151, 152
Material uses	: Used as aviation turbine fuel. May contain a fuel system icing inhibitor.
Manufacturer	: PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3
<u>In case of emergency</u>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2. Hazards identification

Physical state	: Clear liquid.
Odour	: Gasoline like.
WHMIS (Canada)	:   Class B-2: Flammable liquid Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).
OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Emergency overview	: DANGER! EXTREMELY FLAMMABLE LIQUID AND VAPOUR. FLAMMABLE. VAPOUR MAY CAUSE FLASH FIRE. CAUSES SKIN IRRITATION. CANCER HAZARD - CONTAINS MATERIAL WHICH CAN CAUSE CANCER. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA. Extremely flammable liquid. Irritating to skin. Keep away from heat, sparks and flame. Avoid exposure - obtain special instructions before use. Do not breathe vapour or mist. Avoid contact with eyes, skin and clothing. Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure. Contains material which may cause birth defects, based on animal data. Avoid exposure during pregnancy. Use only with adequate ventilation. Keep container tightly closed and sealed until ready for use. Wash thoroughly after handling.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
<u>Potential acute health effects</u>	
Inhalation	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Ingestion	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
Skin	: Irritating to skin.
Eyes	: May cause eye irritation.
<u>Potential chronic health effects</u>	
Chronic effects	: No known significant effects or critical hazards.
Carcinogenicity	: Contains material which can cause cancer. Risk of cancer depends on duration and level of exposure.

2 . Hazards identification

Mutagenicity	: No known significant effects or critical hazards.
Teratogenicity	: Contains material which may cause birth defects, based on animal data.
Developmental effects	: No known significant effects or critical hazards.
Fertility effects	: No known significant effects or critical hazards.
Medical conditions aggravated by over-exposure	: Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (section 11)

3 . Composition/information on ingredients

<u>Name</u>	<u>CAS number</u>	<u>%</u>
Complex mixture of petroleum hydrocarbons (C6-C14)	64741-41-9	60 - 100
Benzene	71-43-2	0.1 - 0.5
Fuel System Icing Inhibitor (FSII) (if added**): (Diethylene Glycol Monomethyl Ether)	111-77-3	0.1 - 0.15
Anti-static, antioxidant, corrosion inhibitor and metal deactivator additives.	Not applicable	< 0.1

** Please note that Jet B DI, JP-4, Jet F-40 and NATO F-40 all contain Fuel System Icing Inhibitor (FSII). corrosion inhibitor

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

4 . First-aid measures

Eye contact	: Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
Skin contact	: In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
Inhalation	: Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
Ingestion	: Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
Protection of first-aiders	: No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.
Notes to physician	: No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

5 . Fire-fighting measures

Flammability of the product	: Flammable liquid (NFPA).
Extinguishing media	
Suitable	: Use dry chemical, CO ₂ , water spray (fog) or foam.
Not suitable	: Do not use water jet.
Special exposure hazards	: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
Products of combustion	: Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.

5 . Fire-fighting measures

- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
- Special remarks on fire hazards** : Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

6 . Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see section 8).
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
- Methods for cleaning up**
- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble or absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

7 . Handling and storage

- Handling** : Put on appropriate personal protective equipment (see section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Avoid exposure during pregnancy. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage** : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

8 . Exposure controls/personal protection

Ingredient	Exposure limits
Benzene	ACGIH TLV (United States). Absorbed through skin. TWA: 0.5 ppm 8 hour(s). STEL: 2.5 ppm 15 minute(s).

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

Engineering measures : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal protection

Respiratory

: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Recommended: polyvinyl alcohol (PVA), Viton. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Eyes

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

Skin

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

9 . Physical and chemical properties

Physical state	: Clear liquid.
Flash point	: Closed cup: -31°C (-23.8°F) [NFPA]
Auto-ignition temperature	: 240°C (464°F) [NFPA]
Flammable limits	: Lower: 1.3% [NFPA] Upper: 8% [NFPA]
Colour	: Clear and colourless.
Odour	: Gasoline like.
Odour threshold	: Not available.
pH	: Not available.
Boiling/condensation point	: 50 to 270°C (122 to 518°F)
Melting/freezing point	: Not available.
Relative density	: 0.75 to 0.8 kg/L @ 15°C (59°F)
Vapour pressure	: 21.1 kPa (158 mm Hg) @ 37.8°C (100°F)
Vapour density	: 3.5 [Air = 1]
Volatility	: Not available.
Evaporation rate	: Not available.
Viscosity	: Not available.
Pour point	: Freezing point: <-51°C (<-60°F) for all types of Jet B including F40
Solubility	: Insoluble in water. Partially miscible in some alcohols. Miscible with other petroleum solvents.

10 . Stability and reactivity

Chemical stability	: The product is stable.
Hazardous polymerisation	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
Materials to avoid	: Reactive with oxidising agents, diborane and halogen compounds.
Hazardous decomposition products	: May release COx, NOx, SOx, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

11 . Toxicological information

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Complex mixture of petroleum hydrocarbons (C6-C14)	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
Diethylene Glycol Monomethyl Ether	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	4000 mg/kg	-
	LC50 Inhalation Vapour	Rat	>50000 mg/m ³	4 hours
Benzene	LD50 Dermal	Rabbit	>9400 mg/kg	-
	LD50 Oral	Rat	930 mg/kg	-
	LC50 Inhalation Vapour	Rat	13200 ppm	4 hours

Conclusion/Summary : Not available.

Chronic toxicity

Conclusion/Summary : Not available.

Irritation/Corrosion

Conclusion/Summary : Not available.

Sensitiser

Conclusion/Summary : Not available.

Carcinogenicity

11 . Toxicological information

Conclusion/Summary : Not available.

Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Complex mixture of petroleum hydrocarbons (C6-C14)	-	2A	-	-	-	-
Benzene	A1	1	A	+	Proven.	+

Mutagenicity

Conclusion/Summary : Not available.

Teratogenicity

Conclusion/Summary : Not available.

Reproductive toxicity

Conclusion/Summary : Not available.

12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

Aquatic ecotoxicity

Conclusion/Summary : Not available.

Biodegradability

Conclusion/Summary : Not available.


13 . Disposal considerations

Waste disposal : The generation of waste should be avoided or minimised wherever possible. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe way. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
TDG Classification	UN1863	FUEL, AVIATION, TURBINE ENGINE	3	II		-
DOT Classification	Not available.	Not available.	Not available.	-		-

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Flammable liquid
Irritating material
Carcinogen

Canada

WHMIS (Canada) : Class B-2: Flammable liquid
Class D-2A: Material causing other toxic effects (Very toxic).
Class D-2B: Material causing other toxic effects (Toxic).

15 . Regulatory information

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

- Canada inventory** : All components are listed or exempted.
- United States inventory (TSCA 8b)** : All components are listed or exempted.
- Europe inventory** : All components are listed or exempted.


16 . Other information

- Label requirements** : EXTREMELY FLAMMABLE LIQUID AND VAPOUR. FLAMMABLE. VAPOUR MAY CAUSE FLASH FIRE. CAUSES SKIN IRRITATION. CANCER HAZARD - CONTAINS MATERIAL WHICH CAN CAUSE CANCER. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA.

Hazardous Material Information System (U.S.A.) :

Health	*	2
Flammability		3
Physical hazards		0
Personal protection		H

National Fire Protection Association (U.S.A.) :

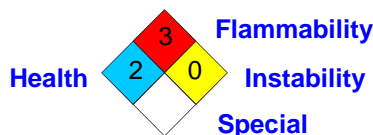

References

- : Available upon request.
TM/MC Marque de commerce de Petro-Canada - Trademark

Date of printing

- : 12/7/2009.

Date of issue

- : 7 December 2009

Date of previous issue

- : No previous validation.

Responsible name

- : **Product Safety - DSR**

Indicates information that has changed from previously issued version.

For Copy of (M)SDS

- : Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

**FAX TRANSMITTAL
CONFIDENTIAL****AGGRESSIVE**
Diamond Drilling Ltd.

3105 Topham Rd., Kelowna, B.C. CANADA V1Z 2J5; Tel: (250)769-0487; Fax: (250)769-0497; E-mail: aggressivediamonddrilling@silkh.net**FROM: MITCH McLELLAN**

Date _____

No. of pages _____

Attn: MICHELLE COTEFax No: 416-365-1830FOR DWAYNE CARTHANK YOU MITCHTIMBERS NEEDED FOR TWO SET UPS14 - 6" x 6" x 12'30 - 2" x 6" x 12'

Material Safety Data Sheet / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.
8069 River Way, Delta, British Columbia,
Canada V4G 1L3
Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-665-6645**SECTION I: IDENTIFICATION OF PRODUCT**

PRODUCT NAME:
CHEMICAL FAMILY:
WHMIS CLASSIFICATION:
WORK PLACE HAZARD:

BIG BEAR DIAMOND DRILL ROD GREASE
Hydrocarbon
Not regulated
Not applicable

1 OF 3

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not regulated
PACKAGE GROUP: Not applicable
PRODUCT IDENTIFICATION NUMBER (PIN): Not applicable

SECTION II: HAZARDOUS INGREDIENTS

INGREDIENT	PERCENTAGE	CAS NUMBER	LD50	LC50
Severely hydrotreated naphthenic oils	< 75.00%	64742-52-5	>3 g/kg (Dermal Rabbit) >5 g/kg (Oral Rat)	N/D
Barium soap	< 35.00%	68201-19-4	Not determined	

SECTION III: TOXICOLOGICAL PROPERTIES**ROUTE OF ENTRY:**

[XXX] Skin, [] Eye Contact, [] Inhalation, [] Ingestion

SKIN CONTACT:

Acute exposure is believed to be minimally irritating

EYE CONTACT:

Acute exposure is believed to be minimally irritating.

INHALATION:

Believed to be minimally irritating if not in excess of permissible concentrations; see Section VIII.

INGESTION:

Not available

CHRONIC OVEREXPOSURE:

Not determined

IRRITATION INDEX:

SKIN: Believed to be 1.0 - 2.0/3.0 (Rabbit); slightly irritating

EYES: Believed to be <15/110 (Rabbit); no appreciable effect

SYMPTOMS OF EXPOSURE:

None expected other than possible minor irritation. Considered practically non-toxic.

SECTION IV: FIRST AID MEASURES

SKIN CONTACT: None considered necessary.

EYE CONTACT: As with most foreign materials, should eye contact occur, flush eyes with plenty of water.

INHALATION: None considered necessary.

INGESTION: None considered necessary. Do not induce vomiting.

OTHER INSTRUCTIONS: In some cases of ingestion and/or inhalation, medical attention should be obtained.

SECTION V: PHYSICAL DATA

APPEARANCE AND ODOR:
DENSITY (SPECIFIC GRAVITY):
BOILING POINT:
MELTING POINT:
WATER SOLUBILITY:
% VOLATILE BY VOLUME:

Brownish yellow, fibrous grease
>1.0
700° F
400° F
Negligible
Not determined



WESTCOAST DRILLING SUPPLIES LTD.
6085 River Way, Delta, British Columbia, Canada V9B 1L1
Phone: (604) 840-6060 • Fax: (604) 840-6080
Toll Free: 1-800-869-0040

BIG BEAR DIAMOND DRILL ROD GREASE

Page 2 of 3

EVAPORATION RATE:	Not determined
VAPOR PRESSURE (mm Hg):	Not determined (low)
VAPOR DENSITY (Air =1):	>1.0
pH:	Not applicable
VISCOSITY:	NLGI No. 3-4 grease

2 OF 3

SECTION VI: FIRE AND EXPLOSION HAZARD DATA

FLASH POINT:	>350° F (COC Method)
FLAMMABLE LIMIT:	Not determined
EXTINGUISHING MEDIA:	According to the National Fire Protection Association Guide, use water spray. Dry chemical. Foam. Carbon Dioxide CO ₂ . Water or foam may cause frothing.
SPECIAL FIRE FIGHTING PROCEDURES:	Use water to cool fire-exposed containers. If a leak or spill has not ignited, use water spray to disperse the vapors and to provide protection for persons attempting to stop the leak. See Hazardous Decomposition Products, Section VII.
UNUSUAL FIRE AND EXPLOSION HAZARDS:	None

SECTION VII: REACTIVITY DATA

STABLE [XXX] INSTABLE []	Info not available
INCOMPATIBILITY (CONDITIONS TO AVOID):	Strong oxidizers
HAZARDOUS DECOMPOSITION PRODUCTS:	This material decomposes at a high temperature to form carbon monoxide, carbon dioxide, aldehydes and ketones, combustion products of nitrogen and sulphur.
HAZARDOUS POLYMERIZATION:	Will not occur [XXX] May occur []

SECTION VIII: PREVENTATIVE MEASURES

RESPIRATORY PROTECTION:	None required if exposures are within the permissible concentrations. See below
VENTILATION:	Natural dilution
PROTECTIVE GLOVES:	Neoprene
EYE PROTECTION:	Chemical type goggle or face shield optional
OTHER PROTECTIVE EQUIPMENT:	Standard work clothing and work shoes.
PERMISSIBLE CONCENTRATIONS: AIR:	5mg/cubic metre of air for mineral oil mist averaged over an 8 hour daily exposure (ACGIH 1986 - 87)

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE:

Exposed persons should exercise reasonable personal cleanliness; this includes cleansing exposed skin areas several times daily with soap and water and laundering or dry cleaning soiled work clothing at least weekly. Minimum feasible handling temperatures should be maintained. Periods of exposure to high temperatures should be minimized. Water contamination should be avoided.



WESTCOAST DRILLING SUPPLIES LTD.
6080 River Way, Delta, British Columbia, Canada V4G 1L3
Phone: (604) 940-0080 Fax: (604) 940-0080
Toll Free: 1-800-689-0840

3 OF 3

BIG BEAR DIAMOND DRILL ROD GREASE

Page 3 of 3

STEPS TO BE TAKEN IN CASE OF SPILL OR LEAK:

Contain spill if possible. Wipe up or absorb on suitable material and shovel up.

WASTE DISPOSAL METHOD:

Re-evaluation of the product may be required by the user at the time of disposal, since the product uses, transformations, mixtures and processes may influence waste classification. Disposal should be in accordance with applicable federal, provincial and local regulations.

SECTION IX: PREPARATION

The information contained herein is given in good faith, but no warranty, expressed or implied is made.

DATE ISSUED: September 17, 1993

DATE REVISED: April 1, 2000

BY: Product Safety Committee

Material Safety Data Sheet / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.
8069 River Way, Delta, British Columbia,
Canada V4G 1L3
Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-665-5545

10F4

SECTION I: IDENTIFICATION OF PRODUCT

PRODUCT NAME: 550X POLYMER (MUD)
CHEMICAL FAMILY: Copolymer of Acrylamide and Sodium Acrylate
PRODUCT USE: Drilling Mud Additive
WHMIS CLASSIFICATION: Not a Controlled Product under WHMIS
WORK PLACE HAZARD: Not applicable

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not applicable
PACKAGE GROUP: Not applicable
PRODUCT IDENTIFICATION NUMBER (PIN): Not applicable

SECTION II: HAZARDOUS INGREDIENTS

INGREDIENT	PERCENTAGE	CAS NUMBER	LD50	LC50
No Hazardous Ingredients				

SECTION III: TOXICOLOGICAL PROPERTIES**ROUTE OF ENTRY:**

[] Skin, [] Eye Contact, [XXX] Inhalation, [] Ingestion

SKIN CONTACT:

Prolonged contact may cause skin irritation or dermatitis in some individuals.

EYE CONTACT:

May cause irritation.

INHALATION:

May cause sneezing, slight irritation of nose and throat.

INGESTION:

Not available

EFFECTS OF ACUTE EXPOSURE:

Not available

EFFECTS OF CHRONIC EXPOSURE:

Not available

SECTION IV: FIRST AID MEASURES

SKIN CONTACT: Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE CONTACT: Immediately flush eyes with water for fifteen (15) minutes and call a physician.

INHALATION: Remove to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. If breathing is difficult, give oxygen. Call a physician.

INGESTION: Do not induce vomiting. If conscious, dilute by giving two glasses of water. Call a physician immediately.

SECTION V: PHYSICAL DATA

APPEARANCE AND ODOR: White granular solid; faint odor
DENSITY (SPECIFIC GRAVITY): 0.80
BOILING POINT: Decomposes
MELTING POINT: Not applicable
WATER SOLUBILITY: Soluble
% VOLATILE BY VOLUME: Not applicable
EVAPORATION RATE: Not applicable
VAPOR PRESSURE (mm Hg): Very low
VAPOR DENSITY (Air = 1): Not applicable

Material Safety Data / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.
8088 River Way, Delta, British Columbia,
Canada V4C 1L3
Ph. (604) 940-6030 Fax (604) 940-6080

EMERGENCY 1-800-805-0045

550X® POLYMER

Page 2 of 4

SECTION VI: PHYSICAL DATA

APPEARANCE	White granular solid
ODOR	None
SPECIFIC GRAVITY	0.8 at 25° C (77 F)
BOILING POINT (°C)	Not applicable
MELTING POINT (°C)	Not determined
SOLUBILITY IN WATER	Forms a gel
PERCENT VOLATILE BY VOLUME	Not determined
EVAPORATION RATE	Not determined
VAPOR PRESSURE (mm Hg)	Not determined
VAPOR DENSITY (Air=1)	Not determined
pH	4 - 9 @ 5g/L

SECTION VI: FIRE AND EXPLOSION HAZARD DATA

FLASH POINT	93° C (200 F)
FLAMMABLE LIMITS	Not determined
EXTINGUISHING MEDIA	Dry Chemical, Carbon Dioxide
SPECIAL FIRE FIGHTING PROCEDURES	Aqueous solutions or powders that become wet render surfaces extremely slippery.
UNUSUAL FIRE AND EXPLOSION HAZARDS	No special equipment required.

SECTION VII: REACTIVITY DATA

STABILITY	[XXX] Stable [] Unstable
INCOMPATIBILITY (Conditions to avoid)	Oxidizing agents
CONDITIONS OF REACTIVITY	Not known
HAZARDOUS DECOMPOSITION PRODUCTS	NO _x , CO _x
HAZARDOUS POLYMERIZATION	[XXX] Will not occur [] May occur

Material Safety Data / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.

8088 River Way, Delta, British Columbia,
Canada V4C 1L3
Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-885-6646**550X® POLYMER**

Page 3 of 4

SECTION VIII: PREVENTIVE MEASURES

SPECIAL PROTECTION INFORMATION**RESPIRATORY PROTECTION**

Dust masks are recommended where concentration of total dust is more than 10 mg/m³

VENTILATION

General mechanical

PROTECTIVE GLOVES

Chemically resistant

EYE PROTECTION

Safety glasses with side shields

OTHER PROTECTIVE EQUIPMENT (Specify)

Not known

ACCIDENTAL RELEASE MEASURES**STEPS TO BE TAKEN IN CASE THE MATERIAL IS SPILLED OR RELEASED**

Do not flush with water. Clean up promptly by sweeping or vacuum

Keep in suitable and closed containers for disposal.

After cleaning, flush away trace with water.

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORING

Avoid contact with skin and eyes. Avoid dust formation. Do not breathe dust. Wash hands before breaks and at the end of the day. Keep in a cool dry place (0 - 30 °C)

WASTE DISPOSAL METHOD

Can be land filled or incinerated, when in compliance with local, provincial and federal regulations.

SECTION IX: TOXICOLOGICAL INFORMATION

CARCINOGENICITY

Not determined

REPRODUCTIVE TOXICITY

Not determined

TERATOGENICITY

Not determined

MUTAGENICITY

Not determined

DEVELOPMENTAL TOXICITY

Not determined

CHRONIC EFFECTS:

This product does not contain any ingredient designated by IARC, NTP, ACGIH or OSHA as probable or suspected human carcinogens.

Material Safety Data / Fiche signalétique**WESTCOAST DRILLING SUPPLIES LTD.**

8089 River Way, Delta, British Columbia,
Canada V4C 1L3
Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-895-8648**550X POLYMER**

Page 4 of 4

SECTION X: PREPARATION

The information contained herein is given in good faith, but no warranty, expressed or implied is made.

DATE ISSUED: August, 2001

DATE REVISED: August, 1999

BY: Product Safety Committees

AMENDMENT
HAZARDOUS INGREDIENTS (550X)

Material or component	WT%	Hazard data
COPOLYACRYLAMIDE/SODIUM ACRYLATE		Not considered hazardous

ENVIRONMENTAL

DEGRADABILITY/AQUATIC TOXICITY:	Not determined	
OCTANOL/WATER PARTITION COEFFICIENT	Not determined	
WASTE DISPOSAL METHODS:	Incineration and/or disposal in Chemical Landfill Disposer must comply with federal, provincial and local disposal or discharge laws.	
RCRA STATUS OF UNUSED MATERIAL IF DISCARDED:	Not a "Hazardous Waste"	
HAZARDOUS WASTE NUMBER:	Not available	
REPORTABLE QUANTITY:	EPA 40 CFR (CERCLA 102):	Not applicable
THRESHOLD PLANNING QUANTITY:	EPA 40 CFR 355 (SERA 301-304):	Not applicable
TOXIC CHEMICAL RELEASE REPORTING:	EPA 40 CFR 372 (SERA 311-313):	Not applicable

EPA HAZARD CLASSIFICATION CODE:	ACUTE - Yes	CHRONIC - No
	FIRE - No	PRESSURE - No
		REACTIVE - No

HMIS AND NFPA RATINGS:	HMIS	NFPA
HEALTH	1	1
FLAMMABILITY	0	0
REACTIVITY	1	1
SPECIAL	Not applicable	Not applicable

SECTION IX: PREPARATION

The information contained herein is given in good faith, but no warranty, expressed or implied is made.

DATE ISSUED: January 1, 1991

BY: Product Safety Committees

Material Safety Data / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.
8068 River Way, Delta, British Columbia,
Canada V4C 1L3
Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-665-6645

SECTION I: IDENTIFICATION OF PRODUCT

PRODUCT NAME:

G-STOP

CHEMICAL FAMILY:

Copolymer of Acrylamide and Sodium Acrylate

WHMIS CLASSIFICATION:

not controlled

WORK PLACE HAZARD:

not applicable

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION:

not dangerous goods

PACKAGE GROUP:

not applicable

PRODUCT IDENTIFICATION NUMBER (PIN):

not applicable

SECTION II: HAZARDOUS INGREDIENTS

WARNING STATEMENTS: Based on currently available data, this product does not meet the regulatory definition of a hazardous substance. However, good industrial hygiene practices should be used in handling it.

<u>INGREDIENTS</u>	<u>PERCENT %</u>	<u>CAS NUMBER</u>	<u>LD50</u>	<u>LC50</u>
Copolymer of acrylamide and sodium acrylate		25085-02-3		
Acrylamide		79-06-1		

SECTION III: TOXICOLOGICAL PROPERTIES

ROUTE OF ENTRY: [XXX] Skin [XXX] Eye Contact [XXX] Inhalation [XXX] Ingestion

SKIN CONTACT

: Low acute dermal toxicity. May cause slight transient irritation.

EYE CONTACT

: Dusts may cause irritation.

INHALATION

: Mists and dusts may cause upper respiratory tract irritation.

INGESTION

: Low acute oral toxicity. May cause nausea, vomiting.

THRESHOLD LIMIT VALUE

: none

EFFECTS OF OVEREXPOSURE

: not determined

EFFECTS OF ACUTE EXPOSURE

: not available

EFFECTS OF CHRONIC EXPOSURE

: This product does not contain any ingredient designated by IARC, NTP, ACGIH or OSHA as probable or suspected human carcinogens.

Material Safety Data / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.

8069 River Way, Delta, British Columbia,

Canada V4C 1L3

Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-685-6848**G-STOP**

Page 2 of 4

SECTION IV: FIRST AID MEASURES

SKIN CONTACT	: In case of contact, immediately wash with plenty of soap and water for at least 5 minutes. Seek medical attention. Remove contaminated clothing and shoes. Clean contaminated clothing and shoes before re-use.
EYE CONTACT	: Hold eyelids open and flush with a steady, gentle stream of water for at least 15 minutes. Seek medical attention.
INHALATION	: Inhalation is not an expected route of exposure. If respiratory irritation or distress occurs remove victim to fresh air. Seek medical attention if respiratory irritation or distress continues.
INGESTION	: If victim is conscious and alert, give 1 - 2 glasses of water to drink. Do not give anything by mouth to an unconscious person. Seek medical attention. Do not leave victim unattended.

NOTES TO PHYSICIAN: All treatments should be based on observed signs and symptom of distress in the patient.
Consideration should be given to the possibility of overexposure to materials other than this product may have occurred.
Treat symptomatically. No specific antidote available.

SECTION V: PHYSICAL DATA

APPEARANCE AND ODOR	: solid white granules, slight odor
SPECIFIC GRAVITY	: 0.8 @ 25 C (77 F)
WATER SOLUBILITY	: > 40%
MELTING POINT	: not available
BOILING POINT	: not applicable
VAPOR PRESSURE	: not applicable
VAPOR DENSITY	: not applicable
pH	: 6 - 7

Material Safety Data / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.

8069 River Way, Delta, British Columbia,
Canada V4G 1L3
Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-665-6645**G-STOP**

Page 3 of 4

SECTION VI: FIRE AND EXPLOSIVE HAZARD DATA

FLASH POINT	: > 93 C (200 F)
FLAMMABILITY CLASS	: will burn
FLAMMABILITY LIMITS	: not determined
EXTINGUISHING MEDIA	: dry chemical, carbon dioxide, alcohol foam, universal foam, water jet not recommended.
SPECIAL FIRE FIGHTING PROCEDURES	: wear NIOSH/MSHA approved self contained breathing apparatus and full protective clothing.
UNUSAL FIRE AND EXPLOSION HAZARD	: product will burn under fire conditions. like all organic and most dry chemicals, as a powder or dust, this product (when mixed with air in critical proportions and in the presence of an ignition source) may present an explosion hazard.

SECTION VII: REACTIVITY DATA

STABLE [XXX]	UNSTABLE []
INCOMPATIBILITY (Conditions to avoid)	: Strong oxidizing agents. Strong reducing agents.
HAZARDOUS DECOMPOSITION PRODUCTS (under fire conditions)	: oxides of nitrogen
HAZARDOUS POLYMERIZATION	: oxides of carbon
	: will not occur

**SECTION VIII: PREVENTIVE MEASURES**

RESPIRATORY PROTECTION	: When respirators are required, select NIOSH/MSHA approved equipment.
EYE/FACE PROTECTION	: Dependent upon work environment conditions and material handling practices. Appropriate ANSI 287 approved equipment should be selected. Chemical safety glasses with side shields or splash proof goggles are recommended.
SKIN PROTECTION	: An emergency eye wash must be near by. : Should be minimized through the use of gloves and suitable long sleeve clothing.

Material Safety Data / Fiche signalétique

WESTCOAST DRILLING SUPPLIES LTD.

8069 River Way, Delta, British Columbia,
Canada V4C 1L3
Ph. (604) 940-6050 Fax (604) 940-6080

EMERGENCY 1-800-665-6645

G-STOP

Page 4 of 4

PRECAUTIONS TO BE TAKEN IN HANDLING AND STORAGE

Do not store near foods, beverages, tobacco products or cosmetics.

Avoid breathing dusts or vapors.

Avoid prolonged contact with skin and eyes.

Avoid creating dusts as this product is pyrophoric in powder form.

Store in tightly closed containers.

Store in an area that is dry, well ventilated away from ignition sources and away from incompatible materials.

STEPS TO BE TAKEN IN CASE OF SPILL OR LEAK

Small spills sweep up. Large spills, collect and return to plant to be recovered. Material is non-hazardous.

Materials may be disposed by incineration or other methods approved by local ordinances for disposal of non-hazardous material.

Do not flush down drains.

WASTE DISPOSAL METHOD:

Material may be disposed by incineration or other methods approved by local ordinances for disposal of non-hazardous material.

SECTION IX: PREPARATION

THE INFORMATION CONTAINED HEREIN IS GIVEN IN GOOD FAITH, BUT NO WARRANTY, EXPRESSED OR IMPLIED IS MADE.

DATE ISSUED: December 16, 1998

DATE REVISED: April 1, 2000

DATE REVISED: February 1, 2002

BY: Product Safety Committee

Review date

March 31/03

Authorized by

Alan Leclerc



MATERIAL SAFETY DATA SHEET


N/A = Not Applicable
N/AV = Not Available

1051

SECTION 1—PRODUCT IDENTIFICATION AND USE				MXDS 483
PRODUCT IDENTIFIER Chevron Polywax EP Grease 2 <i>TUBE GREASE</i>			PRODUCT IDENTIFICATION NUMBER (P-00) N/AV	
PRODUCT USE Machinery lubricant				
SUPPLIER NAME Chevron Canada Limited		UNIDENTIFIED NAME Chevron U.S.A.—Lubricants		
STREET ADDRESS 1500 - 1030 West Pender Street		STREET ADDRESS 575 Market Street		
CITY Vancouver	PROVINCE B.C.	CITY San Francisco	PROVINCE California	
POSTAL CODE V6E 5T4	EMERGENCY TELEPHONE NO. 1-800-457-2022	POSTAL CODE 94105	EMERGENCY TELEPHONE NO. 1-800-457-2022	

SECTION 2—HAZARDOUS INGREDIENTS				
HAZARDOUS INGREDIENTS	%	CAS NUMBER	LD ₅₀ OF INGREDIENT (SPECIFY SPECIES AND ROUTE)	LD ₅₀ OF INGREDIENT (SPECIFY SPECIES)
2, 4 Diaminotoluene	0 - 0.1	93807	N/AV	N/AV
Lubricating base oil	75 - 85	Mixture of any of the following	N/AV	N/AV
		64741884 64741885 64741984		
		64741973 64742014 64742525		
		64742536 64742547 64742627		
		64742650 72623837		

SECTION 3—PHYSICAL DATA				
PHYSICAL STATE Grease	ODOUR AND APPEARANCE Dark green grease with typical petroleum odour			ODOUR THRESHOLD (PPM) N/AV
VAPOR PRESSURE (mm Hg) <1 mm Hg @ 40°C	VAPOR DENSITY (AIR=1) N/AV	EVAPORATION RATE N/AV	BOILING POINT (°C) N/AV	FREEZING POINT (°C) N/AV
pH N/AV	SPECIFIC GRAVITY 0.93 @ 15.6/15.6°C		DEFP. WATER/OIL DIST. N/AV	



Health	2
Fire	0
Reactivity	1
Personal Protection	C

Material Safety Data Sheet

Calcium chloride, Anhydrous MSDS

Section 1: Chemical Product and Company Identification

Product Name: Calcium chloride, Anhydrous

Catalog Codes: SLC5011, SLC2221, SLC4012, SLC4798, SLC1006

CAS#: 10043-52-4

RTECS: EV9800000

TSCA: TSCA 8(b) inventory: Calcium chloride, Anhydrous

CI#: Not available.

Synonym:

Chemical Name: Calcium Chloride, Anhydrous

Chemical Formula: CaCl₂

Contact Information:

Sciencelab.com, Inc.

14025 Smith Rd.

Houston, Texas 77396

US Sales: **1-800-901-7247**

International Sales: **1-281-441-4400**

Order Online: ScienceLab.com

CHEMTREC (24HR Emergency Telephone), call:

1-800-424-9300

International CHEMTREC, call: 1-703-527-3887

For non-emergency assistance, call: 1-281-441-4400

Section 2: Composition and Information on Ingredients

Composition:

Name	CAS #	% by Weight
Calcium chloride, Anhydrous	10043-52-4	100

Toxicological Data on Ingredients: Calcium chloride, Anhydrous: ORAL (LD50): Acute: 1000 mg/kg [Rat]. 1940 mg/kg [Mouse].

Section 3: Hazards Identification

Potential Acute Health Effects:

Hazardous in case of skin contact (irritant), of eye contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Potential Chronic Health Effects:

CARCINOGENIC EFFECTS: Not available. MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. TERATOGENIC EFFECTS: Not available. DEVELOPMENTAL TOXICITY: Not available. The substance may be toxic to heart, cardiovascular system. Repeated or prolonged exposure to the substance can produce target organs damage.

Section 4: First Aid Measures

Eye Contact:

Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. Get medical attention.

Skin Contact:

In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Serious Skin Contact:

Wash with a disinfectant soap and cover the contaminated skin with an anti-bacterial cream. Seek immediate medical attention.

Inhalation:

If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Serious Inhalation: Not available.

Ingestion:

Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

Serious Ingestion: Not available.

Section 5: Fire and Explosion Data

Flammability of the Product: Non-flammable.

Auto-Ignition Temperature: Not applicable.

Flash Points: Not applicable.

Flammable Limits: Not applicable.

Products of Combustion: Not available.

Fire Hazards in Presence of Various Substances: Not applicable.

Explosion Hazards in Presence of Various Substances:

Risks of explosion of the product in presence of mechanical impact: Not available. Risks of explosion of the product in presence of static discharge: Not available.

Fire Fighting Media and Instructions: Not applicable.

Special Remarks on Fire Hazards: Not available.

Special Remarks on Explosion Hazards: Furan-2-peroxycarboxylic acid + calcium chloride causes explosion at room temperature.

Section 6: Accidental Release Measures

Small Spill:

Use appropriate tools to put the spilled solid in a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and dispose of according to local and regional authority requirements.

Large Spill:

Use a shovel to put the material into a convenient waste disposal container. Finish cleaning by spreading water on the contaminated surface and allow to evacuate through the sanitary system.

Section 7: Handling and Storage

Precautions:

Keep locked up.. Do not ingest. Do not breathe dust. Wear suitable protective clothing. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately and show the container or the label. Avoid contact with skin and eyes. Keep away from incompatibles such as moisture.

Storage:

Hygroscopic. Keep container tightly closed. Keep container in a cool, well-ventilated area. Do not store above 30°C (86°F).

Section 8: Exposure Controls/Personal Protection

Engineering Controls:

Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.

Personal Protection: Safety glasses. Synthetic apron. Gloves (impervious).

Personal Protection in Case of a Large Spill:

Splash goggles. Full suit. Boots. Gloves. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Exposure Limits: Not available.

Section 9: Physical and Chemical Properties

Physical state and appearance: Solid. (Crystalline solid.)

Odor: Odorless.

Taste: Saline.

Molecular Weight: 110.99 g/mole

Color: Colorless. White. Off-white.

pH (1% soln/water): 9 [Basic.]

Boiling Point: 1670°C (3038°F)

Melting Point: 772°C (1421.6°F)

Critical Temperature: Not available.

Specific Gravity: 2.15 (Water = 1)

Vapor Pressure: Not applicable.

Vapor Density: Not available.

Volatility: Not available.

Odor Threshold: Not available.

Water/Oil Dist. Coeff.: Not available.

Ionicity (in Water): Not available.

Dispersion Properties: See solubility in water, acetone.

Solubility:

Easily soluble in cold water, hot water, acetone. Freely soluble in alcohol. Soluble in Acetic Acid.

Section 10: Stability and Reactivity Data

Stability: The product is stable.

Instability Temperature: Not available.

Conditions of Instability: Incompatible materials, moisture.

Incompatibility with various substances: Reactive with moisture.

Corrosivity: Non-corrosive in presence of glass.

Special Remarks on Reactivity:

Hygroscopic. Reacts violently (violent boiling) with water, generating heat. Forms flammable gases and evolves hydrogen when reacted with zinc. Solutions attack some metals. Generates heat and violent polymerization occurs when mixed with methyl vinyl ether. Bromine trifluoride reacts violently with and attacks calcium chloride.

Special Remarks on Corrosivity: Not available.

Polymerization: Will not occur.

Section 11: Toxicological Information

Routes of Entry: Absorbed through skin. Inhalation. Ingestion.

Toxicity to Animals: Acute oral toxicity (LD50): 1000 mg/kg [Rat].

Chronic Effects on Humans:

MUTAGENIC EFFECTS: Mutagenic for mammalian somatic cells. Mutagenic for bacteria and/or yeast. May cause damage to the following organs: heart, cardiovascular system.

Other Toxic Effects on Humans:

Hazardous in case of skin contact (irritant), of ingestion, of inhalation. Slightly hazardous in case of skin contact (permeator).

Special Remarks on Toxicity to Animals:

Lowest Published Lethal Dose: LDL [Rabbit] - Route: Oral; Dose: 1384 mg/kg

Special Remarks on Chronic Effects on Humans:

May affect genetic material based on animal data. May cause cancer (tumorigenic) based on animal data.

Special Remarks on other Toxic Effects on Humans:

Acute Potential Health Effects: Skin: May cause severe irritation and possible burns, especially if skin is wet. Contact with dry skin causes mild irritation. Contact of solid with moist/wet skin or skin contact with strong solutions may cause marked irritation or possible burns. Eyes: May cause severe irritation, possible transient corneal injury, and possible eye burns. Inhalation: May cause severe irritation of the upper respiratory tract with pain, inflammation and possible burns. Ingestion: May cause severe gastrointestinal (digestive) tract irritation with nausea, vomiting and possible burns. May affect cardiovascular system (cardiac disturbances, slow heart beat), behavior (seizures), metabolism, blood, and brain, respiration (rapid respiration). Chronic Potential Health Effects: effects may be delayed.

Section 12: Ecological Information

Ecotoxicity: Ecotoxicity in water (LC50): 100 mg/l 96 hours [Fish].

BOD5 and COD: Not available.

Products of Biodegradation:

Possibly hazardous short term degradation products are not likely. However, long term degradation products may arise.

Toxicity of the Products of Biodegradation: The products of degradation are less toxic than the product itself.

Special Remarks on the Products of Biodegradation: Not available.

Section 13: Disposal Considerations

Waste Disposal:

Waste must be disposed of in accordance with federal, state and local environmental control regulations.

Section 14: Transport Information

DOT Classification: Not a DOT controlled material (United States).

Identification: Not applicable.

Special Provisions for Transport: Not applicable.

Section 15: Other Regulatory Information

Federal and State Regulations: TSCA 8(b) inventory: Calcium chloride, Anhydrous

Other Regulations: EINECS: This product is on the European Inventory of Existing Commercial Chemical Substances.

Other Classifications:

WHMIS (Canada): CLASS D-2B: Material causing other toxic effects (TOXIC).

DSCL (EEC):

R36- Irritating to eyes. S2- Keep out of the reach of children. S22- Do not breathe dust. S24- Avoid contact with skin.

HMIS (U.S.A.):

Health Hazard: 2

Fire Hazard: 0

Reactivity: 1

Personal Protection: C

National Fire Protection Association (U.S.A.):

Health: 2

Flammability: 0

Reactivity: 2

Specific hazard:

Protective Equipment:

Gloves (impervious). Synthetic apron. Wear appropriate respirator when ventilation is inadequate. Safety glasses.

Section 16: Other Information

References: Not available.

Other Special Considerations: Not available.

Created: 10/09/2005 04:31 PM

Last Updated: 11/01/2010 12:00 PM

The information above is believed to be accurate and represents the best information currently available to us. However, we make no warranty of merchantability or any other warranty, express or implied, with respect to such information, and we assume no liability resulting from its use. Users should make their own investigations to determine the suitability of the information for their particular purposes. In no event shall ScienceLab.com be liable for any claims, losses, or damages of any third party or for lost profits or any special, indirect, incidental, consequential or exemplary damages, howsoever arising, even if ScienceLab.com has been advised of the possibility of such damages.

MATERIAL SAFETY DATA SHEET

SECTION I – PRODUCT INFORMATION

Product Name: Propane

Trade Name: LPG (Liquefied Petroleum Gas)

Chemical Formula: C₃H₈

WHMIS Classification: Class A – Compressed Gas

Class B, Division I – Flammable Gas

Supplier:

Business:

Non Medical Emergency:

Uses and Occurrence: Propane is commonly used as fuel for heating, cooking, automobiles, forklift trucks, crop drying and welding and cutting operations. Propane is used in industry as a refrigerant, solvent and as a chemical feedstock.

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

SECTION II – HAZARDOUS INGREDIENTS

Components	CAS Registry No.	Proportion of Product	LC50	LD50
Propane	74-98-6	95% - 98%	N/A	N/A
Ethane	74-84-0	3% - 5%	N/A	N/A
Butane	106-97-8	1% - 3%	N/A	N/A
Iso-Butane	75-28-5	0.1% - 0.3%	N/A	N/A
Methane	74-82-8	0.1% - 0.2%	N/A	N/A

Note: Composition given is typical for Grade 1 Propane; exact composition will vary from shipment to shipment.

- Explanation for change – HD5 refers to American specification, Grade 1 is Canadian equivalent in CGSB 3.14 Standard

SECTION III – CHEMICAL AND PHYSICAL DATA

Form: While stored under pressure – liquid and/or vapour

Boiling Point: -42 °C atm

Freezing Point: -188 °C

Evaporation Rate: Rapid (Gas at Normal Ambient Conditions)

Vapour Pressure: 1,013 (kPa) @ 26.0 °C

Vapour Density: 1.52 (Air = 1)

Coefficient of Water/Oil Distribution: Not available

PH: Not available

Soluble in Water: 6.1% by Volume @ 17.8 °C and 753 mmHg

Specific Gravity: 0.51 (Water = 1)

Appearance: Colourless liquid and vapour while stored under pressure.

Colourless and odourless gas in natural state at any concentration.

Commercial propane has an odourant added which is commonly ethyl mercaptan which has an odour similar to boiling cabbage or rotten eggs.

Odour Threshold: 4800 PPM

See Note 1 - Odourants

SECTION IV – FIRE OR EXPLOSION HAZARD DATA

Flash Point: -103.4 °C **Method:** Closed Cup

Flammable Limits: Lower 2.4%, Upper 9.5%

Auto Ignition Temperature: 432 °C

Products Evolved Due to Heat or Combustion:

Carbon monoxide can be produced when primary and secondary airs are deficient while combustion is taking place.

Fire and Explosive Hazards: Explosive air-vapour mixtures may form if allowed to leak to atmosphere.

Sensitivity to Impact: No

Sensitivity to Static Discharge: Yes

Fire Extinguishing Precautions: Use water spray to cool exposed cylinders or tanks. Do not extinguish fire unless the source of the escaping gas that is fuelling the fire can be turned off. Fire can be extinguished with carbon dioxide and/or dry chemical (BC). Container metal shells require cooling with water to prevent flame impingement and the weakening of metal. If weakening, the area must be evacuated. If gas has not ignited, liquid and vapour may be dispersed by water spray or flooding.

Special Fire Fighting Equipment: Protective clothing, hose monitors, fog nozzles, self contained breathing apparatus.

SECTION V – REACTIVITY DATA

Stability: Stable

Conditions to Avoid: Keep separate from oxidizing agents. Gas explodes spontaneously when mixed with chlorine dioxide.

Incompatibility: Remove sources of ignition and observe distance requirements for storage tanks

from combustible material, drains, and openings to buildings.

Hazardous Decomposition Products: Deficient primary and secondary air can produce carbon monoxide.

Hazardous Polymerization: Will not occur.

SECTION VI – TOXICOLOGICAL PROPERTIES OF MATERIAL

ACUTE EXPOSURE:

Eyes: As a gas, none, Liquid causes “cold burns”.

Respiratory System: Little physiological effect at concentrations below 10,000 PPM. Higher concentrations may cause dizziness and unconsciousness due to asphyxiation. *SEE*

NOTE 2 – ASPHYXIAN.

Chronic Exposure: There are no reported effects from long-term low-level exposure.

Other: Liquid can cause burns and frostbite if in direct contact with skin.

Sensitization Properties: Skin – unknown,

Respiratory – unknown.

Carcinogenicity: Not determined. *SEE NOTE 3 (NORM).*

MEDIAN LETHAL DOSE:

Oral: Not applicable for gas.

Inhalation: Not determined.

Dermal: Not applicable for gas.

Other: Not determined.

IRRITATION INDEX:

Skin: No appreciable effect (gas).

Eyes: No appreciable effect (gas).

Symptoms of Exposure: Above 10,000 PPM – dizziness, stupor, unconsciousness. *SEE NOTE 2 attached.* American Conference of Governmental Industrial Hygienists (ACGIH) classifies propane as an asphyxiate; there is no recommended “Threshold Limit Value” (TLV).

Teratogenicity: Not determined.

Mutagenicity: Not determined.

SECTION VII – OCCUPATION CONTROL PROCEDURES

Eyes: Safety glasses, goggles, or face shield required when transferring product.

Skin: Insulated gloves if contact with liquid or liquid cooled equipment is expected. Wear gloves and long sleeves when transferring product.

Inhalation: In atmosphere, where the concentration of propane would reduce oxygen

level below 18% in inhaled air, self contained breathing apparatus required. *SEE NOTE 3 – (NORM).*

Ventilation: Explosion proof ventilation equipment required in confined spaces.

SECTION VIII – EMERGENCY AND FIRST AID PROCEDURES

FIRST AID:

Eyes: Should eye contact with liquid occur, flush eyes with lukewarm water for 15 minutes. Obtain immediate medical care.

Skin: In case of “Cold Burn” from contact with liquid, immediately place affected area in lukewarm water and keep at this temperature until circulation returns. If fingers or hands are frostbitten, have the victim hold his hand next to his body such as under the armpit. Obtain immediate medical care.

SPILL OR LEAK:

Eliminate leak if possible.

Eliminate source of ignition.

Ensure cylinder is upright.

Disperse vapours with hose streams using fog nozzles, watch for low area, as propane is heavier than air and can settle in low areas. Remain upwind of leak, keep people away.

Prevent vapour and/or liquid from entering into sewers, basements or confined areas.

SECTION IX – TRANSPORTATION, HANDLING AND STORAGE

- Transport and store cylinders and tanks secured in an upright position in a ventilated space, away from ignition sources (so relief valve is in contact with vapour space of cylinder or tank).
 - Cylinders that are not in use must have the valves in the closed position and be equipped with a protective cap or guard.
 - Do not store with oxidizing agents, oxygen or chlorine cylinders.
- Transport, handle and store according to applicable federal and provincial regulations (CGA B149.2). **SEE NOTE 4 – MAGNETIC RESIDUES.**
- TDG Classification:** 2.1 (gas)
TDG Shipping Name: Liquid Petroleum Gas (Propane)
TDG Special Provisions: 56, 90, and 102
PIN UN: 1075

SECTION X – PREPARATION INFORMATION

Prepared by: Propane Gas Association of Canada
(403) 543-6500

Date prepared: November 2010

The information contained herein is believed to be accurate. It is provided independently of any sale of the product. It is not intended to constitute performance information concerning the product. No express warranty or implied warranty of merchantability or fitness for a particular purpose is made with respect to the product information contained herein.

This information is in addition to the information supplied on the MSDS and forms a part of the MSDS by reference to note numbers indicated:

NOTE 1 ODOURANTS:

Odourants are not completely effective warning agents in all cases.

Certain odourants are polar and/or chemically reactive and may be depleted by reaction or absorption.

Sensitivity to odourants differs from person to person and may decrease with age or impaired physical conditions such as colds or respiratory allergies.

Prolonged exposure to odourants can create desensitization to the odour.

NOTE 2 ASPHYXIAN AND NARCOTIC EFFECTS OF PROPANE:

LPG's can displace air and can act as an asphyxiant. Lack of oxygen may cause dizziness, headaches, diminished awareness, faulty judgment, increase in fatigue and impaired muscular coordination. If these symptoms are identified while working in close proximity to propane that is released, go immediately into a fresh air environment.

LPG's are anaesthetic gases within the upper explosive limits and higher concentrations. A person working around propane in an enclosed space or in close proximity to a propane source such as filling cylinders, purging lines, investigating leaks, etc. who feels light-headed, dizzy, drunken, sleepy, or intoxicated should go immediately into fresh air. This narcotic effect may impair a person's judgment temporarily but will rapidly disappear in fresh air.

NOTE 3 NATURALLY OCCURRING RADIOACTIVE MATERIAL (NORM):

Sludges and tank scale from propane storage tanks, bulk delivery truck tanks, railway tank cars, and fuel filters and strainers screens may contain Naturally Occurring Radioactive Material (NORM) in the form of lead 210.

Equipment used for the transfer of propane such as propane piping and hoses, pumps and compressors may have detectable levels of radioactive lead 210 on inner surfaces.

Workers involved in cleaning, repair or maintenance on inner surfaces of such equipment should avoid breathing dust generated from such activities. Suitable codes of practice should be developed for the activities, detailing appropriate occupational hygiene and disposal practices.

NOTE 4 MAGNETIC RESIDUES IN PROPANE:

Magnetic residues generated in automotive fuel tanks from "mill scale" or corrosion processes may impair the operation of magnetic gauges and electronic solenoid valves.

Collection of gross amounts of solid residues can affect the proper operation of lock offs, mixers, pressure release valves, etc.

Solid residues could contain NORM (see note 3).