



SPILL CONTINGENCY PLAN

Naujaat Project, Naujaat, Nunavut

Date: April 11, 2017

TABLE OF CONTENTS

	<u>Page</u>
1. INTRODUCTION	1
1.1 Corporate Details.....	1
1.2 Term of Spill Contingency Plan.....	1
1.3 Purpose and Scope	1
1.4 North Arrow Minerals Inc.'s Environmental Policy	1
2. PROJECT AND SITE DESCRIPTION.....	2
2.1 Project Description.....	2
2.2 Current Permits/Licences.....	2
2.3 List of Hazardous Materials On-Site	2
2.4 Petroleum and Chemical Product Storage and Transport	3
2.5 Petroleum Product Transfer.....	3
2.6 Equipment	3
2.7 Existing Preventative Measures.....	4
2.8 Copies of Spill Contingency Plan	4
3. RESPONSE ORGANIZATION	5
3.1 Spill Response Team.....	6
4. REPORTING PROCEDURE.....	6
5. ACTION PLANS	7
5.1 Initial Action	7
5.2 Spill Response Actions – Diesel Fuel, Hydraulic Oil and Lubricating Oil	8
5.3 Spill Response Actions – Jet A/B Aviation Fuel	9
5.4 Spill Response Actions – Quick Foam	10
5.5 Spill Response Actions – Alkamer	11
5.6 Spill Response Actions – Propane.....	12
6. PROCEDURES FOR TRANSFERRING, STORING, AND MANAGING.....	13
SPILL-RELATED WASTES	
7. PROCEDURES FOR RESTORING AFFECTED AREAS	13
8. TRAINING	13

LIST OF TABLES

Table 1	List of hazardous materials stored on-site, type of storage container, storage quantities, and storage locations where known	3
Table 2	Emergency Contacts	7

LIST OF APPENDICES

Appendix 1	NT/NU Spill Report Form and Instructions
Appendix 2	Property and Land Use Area and Fuel Storage Maps
Appendix 3	MSDS Sheets

1. INTRODUCTION

This Spill Contingency Plan (the “Plan”) has been prepared specifically for the Naujaat Project (the “Project”) operated by North Arrow Minerals Inc. (“North Arrow”). The plan demonstrates that project staff will have appropriate response capabilities and measures in place to effectively address potential spills at the Naujaat Project site. A copy of the Plan will be kept at the site of the land use operation and all personnel will be made aware of its contents.

The land use activity being proposed is a diamond and RC drilling program to further delineate and evaluate the Q1-4 Kimberlite Complex at the Naujaat Project. The Naujaat Property (“the Property”) is located approximately 10 km outside of the Hamlet of Naujaat, and takes about 5 to 7 minutes to reach via helicopter.

North Arrow endeavours to take every reasonable precaution toward enduring the protection and conservation of the natural environment and the safety and health of all employees and contractors from any potential harmful effects of stored materials and operations.

1.1 Corporate Details

*North Arrow Minerals Inc.
Suite 960 - 789 West Pender Street
Vancouver, BC V6C 1H2*

1.2 Term of Spill Contingency Plan

This revision of the North Arrow Minerals Inc. Spill Contingency Plan shall be in effect from the date of acceptance of applicable land use permits. Any future changes and/or amendments will be submitted to the appropriate agencies.

1.3 Purpose and Scope

The purpose of this Spill Contingency Plan is to provide a plan of action for all spills of hazardous materials that may occur on the Naujaat Project. This plan identifies key response personnel and their roles and responsibilities in the event of a spill, as well as the equipment and other resources available to respond to a spill. It details spill response procedures that will minimize potential health and safety hazards, environmental damage, and clean-up efforts. The plan has been prepared to ensure quick access to all information required in responding to a spill.

1.4 Environmental Policy

It is North Arrow’s policy to comply with all existing laws and regulations to help ensure the protection of the environment. Both organizations intend to cooperate with other groups committed to protecting the environment and ensures that employees, government, and the public is informed on the procedures followed to help protect the environment.

The plan is presented to all staff during their on-site orientation sessions. All employees and contractors are aware of the locations of the plan on site at the Project and in North Arrow’s offices.

During the orientation meeting, training sessions are scheduled to ensure employees have an understanding of the steps to be undertaken in the event of a spill. All employees and contractors are shown where spill kits are stored, are aware of their contents and are trained in using spill equipment and responding to spills. The company is committed to keeping personnel up to date on the latest

technologies and spill response methods.

2. PROJECT AND SITE DESCRIPTION

2.1 Project Description

The Project is located in the North Kivalliq Region of Nunavut, approximately 10 kilometres northeast of Naujaat, and it consists of three claims and seven leases. The property sits on both Crown and Commissioner's land. Year-round access to the property is via plane, equipped with skis or floats, or helicopter. The property is bounded in a general sense by the following minimum and maximum latitudes/longitudes:

Min Lat (degree/minute)	<u>66° 35' 22"</u>	Min Long (degree/minute)	<u>-86° 07' 50"</u>
Max Lat (degree/minute)	<u>66° 35' 38"</u>	Max Long (degree/minute)	<u>-86° 07' 02"</u>

A map illustrating the regional context of the property and the project area are located in Appendix 2.

2.2 Current Permits/Licences

Permit/License No.	Regulatory Body	Type	Expiry
LUP06-607-014	GN – Community and Gov't Services	Commissioner's Land Use Permit – Drilling, Fuel Storage, Core Logging Facility Construction	Sept. 12, 2017
2BE-QIL1217	NWB	Water License Type B	Nov. 30, 2017

2.3 List of Hazardous Materials On-site

Fuel storage areas at the Naujaat Project will include the main storage site within the Hamlet; in addition, small fuel caches will be located adjacent to active drill sites when drilling is underway. All containers of hazardous materials will be marked with North Arrow's name. Petroleum products and hazardous materials that will be considered in this Spill Contingency Plan include:

- Diesel fuel
- Hydraulic oil
- Lubricating oil
- Jet "A/B" fuel
- Antifreeze
- Propane
- Quick Foam
- Alkamer

Table 1 below presents a list of hazardous materials anticipated to be located at the Project site, the type of storage container, the maximum quantities stored, and the general location.

Table 1: List of hazardous materials stored on-site, type of storage container, storage quantities, and storage locations where known

Material	Storage Container	Maximum on-site	Storage Location and Uses
Diesel fuel	205 litre drums	6 (1230 litres)	Four to six drums at active drilling sites, remainder at the designated fuel cache in Naujaat (all will have secondary containment i.e. instaberms)
Jet A/B fuel	205 litre drums	1 (205 litres)	One drum at each active drilling site for emergency purposed only (will have secondary containment i.e. instaberms)
Quick Foam	5-20 litre plastic containers	1 (5-20 litres)	Active drilling sites
Alkamer	5-20 litre plastic containers	1 (5-20 litres)	Active drilling sites
Oil (Engine and 2 stroke)	1 litre container	Several cases (24 litres/case)	Active drilling sites

2.4 Petroleum and Chemical Product Storage and Transport

All fuel will be stored no closer than the regulated distance from the normal high water mark of any water body (31 metres).

Other petroleum-based materials found on-site in very small quantities will be located in the drill shack. These include lubricants/oil/grease/Quick Foam/Alkamer for maintenance of the drilling equipment and assist with core and rock recovery. The drill setup will also be located over 31 metres from the normal high water mark of any water body when drilling land-based targets.

All fuel, oil and any chemicals will be transported to the drilling sites by helicopter.

2.5 Petroleum Product Transfer

Manual and automatic pumps (and aviation fuel filters for jet fuel) are used for the transfer of all petroleum products. Smoking, sparks, or open flames are **prohibited** in fuel storage and fuelling areas at all times. Portable drip trays and appropriately sized fuel transfer hoses with pumps are used when refuelling aircraft or other equipment, to avoid any leaks/drips onto the land.

2.6 Spill Containment Equipment

Equipment available on site to assist in responding to a hazardous materials spill involves various hand held tools including shovels. In addition to these, one spill kit will be situated at each active drill site with additional spill kits located at the main fuel storage site in the Hamlet and on the helicopter.

Spill kits are located wherever fuel is stored or used. The typical spill kit has a sorbent capacity of 240 litres and the contents include:

- 1 – 360 litre/79 gallon polyethylene over pack drum
- 4 – oil sorbent booms (5" X 10')
- 100 – oil sorbent sheets (16.5" X 20" X 3/8")
- 1 – drain cover (36" X 36" X 1/16")
- 1 – caution tape (3" X 500')
- 1 – 1 lb plugging compound
- 2 – pair Nitrile gloves
- 2 – pair Safety goggles
- 2 – pair Tyvel coveralls
- 1 – instruction booklet
- 10 – printed disposable bags (24" X 48")
- 1 – empty fuel drum

2.7 Existing Preventative Measures

Planning for an emergency situation is imperative, due to the nature of the materials stored on site as well as the remoteness of the site. Along with the preventative measures outlined below, adequate training of staff and contractors is paramount.

All hazardous materials arrive by air as needed throughout periods of active exploration. They are unloaded by airplane and helicopter pilots and North Arrow staff and contractors and carefully placed in the fuel storage and hazardous materials storage areas.

The designated fuel monitor conducts daily visual inspections to check for leaks or damage to the fuel storage containers, as well as for stained or discoloured soils/snow around the fuel storage areas and adjacent equipment. For example, lids/caps are checked for tight seals. A checklist is used to ensure no areas are missed.


Spill response training will be provided to all personnel with particular attention to those personnel who handle fuels and other petroleum products. This training will include a presentation, "mock" spill, review of spill kit contents and their use and reporting.

2.8 Copies of Spill Contingency Plan

Several copies of the plan will be kept on-site at the drill at all times, as well as in Naujaat with the crews. As well, copies will also be located at North Arrow offices.

3. **RESPONSE ORGANIZATION**

The following is a flow chart to illustrate the sequence of events in the event of a hazardous material spill occurring at the Naujaat Project.

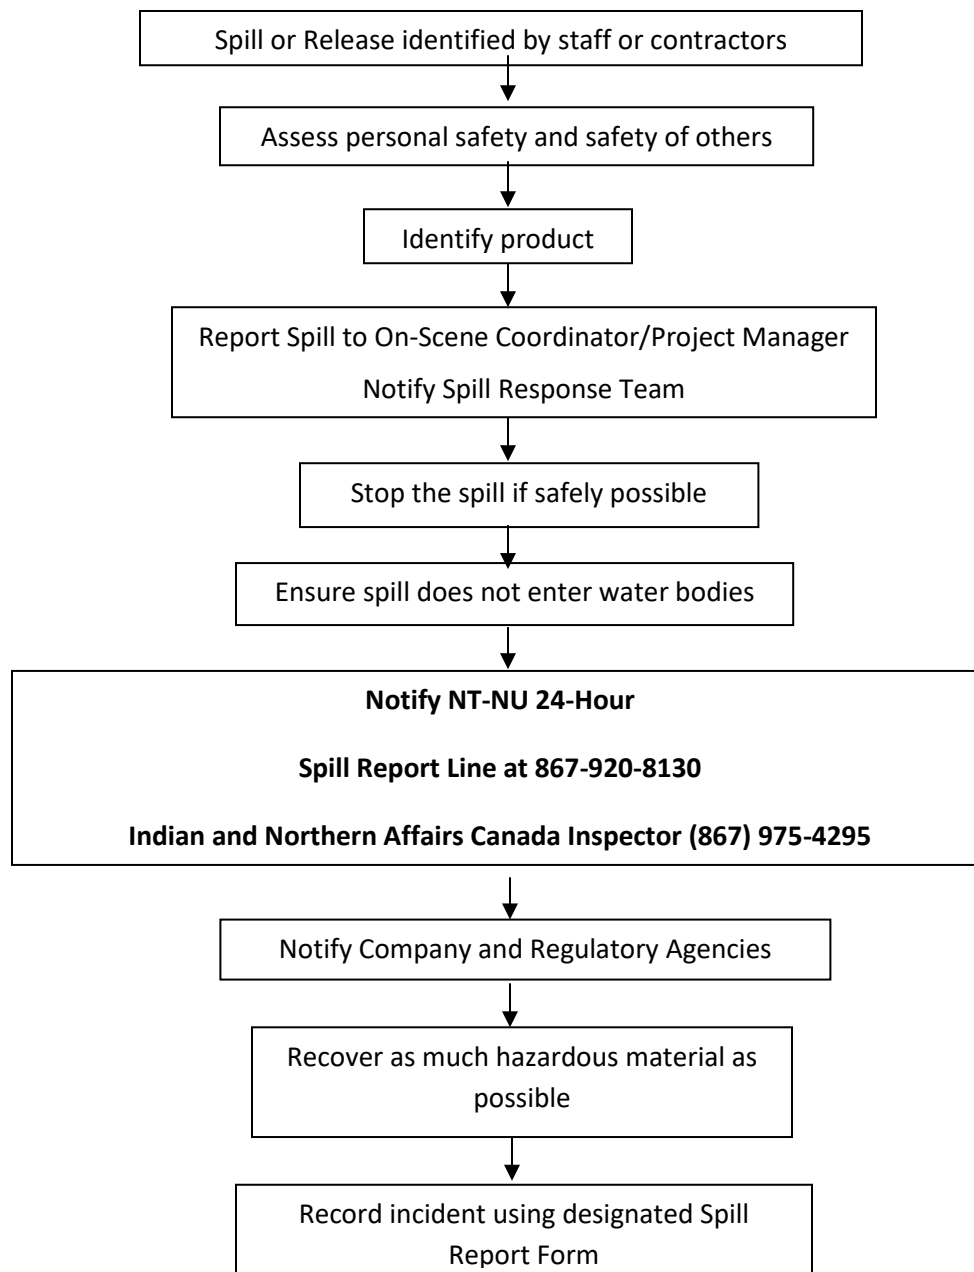

3.1 Spill Response Team

North Arrow will appoint a qualified On-Scene Coordinator and appropriate personnel to make up the Spill Response Team for the Project. The key personnel that make up the Spill Response Team are as follows:

In addition to the On-Scene Coordinator and the Project Manager, approximately 2-3 additional personnel will be available on site to assist in spill response and cleanup activities.

The responsibilities of the On-Scene Coordinator are as follows:

1. Assume complete authority over the spill scene and coordinate all personnel involved.
2. Evaluate spill situation and develop overall plan of action.
3. Activate the spill contingency plan
4. Immediately report the spill to:
NT-NU 24-Hour Spill Report Line (867) 920-8130
Aboriginal Affairs and Northern Development Canada Inspector (867) 975-4295
Other regulatory agencies and North Arrow management (see *Table 2 – Emergency Contacts*).
5. Obtain additional manpower, equipment, and material if not available on site for spill response.

The responsibilities of the Project Manager are as follows:

1. Provide regulatory agencies and North Arrow management with information regarding the status of the cleanup activities.
2. Act as a spokesperson on behalf of North Arrow with regulatory agencies as well as the public and media.
3. Prepare and submit a report on the spill incident to regulatory agencies (including the GN/AANDC/NWB Inspectors) within 30 days of the event.

4. REPORTING PROCEDURE

The On-Scene Coordinator must be notified immediately of any spill either by phone, radio, or in person.

The following is the spill reporting procedure:

1. Report immediately to the NT-NU Environment and Climate Change Canada 24-Hour Spill Report Line (867) 920-8130
INAC Inspector (867) 975-4295
And other regulatory agencies, and North Arrow management
(see *Table 2 – Emergency Contacts*)
2. Complete the NT-NU Spill Report Form and fax the report to the NT-NU 24-Hour Spill Report Line fax (867) 873-6924.
3. Environment and Climate Change Canada will be involved when further involvement is required by a lead agency.

Table 2 – Emergency Contacts

CONTACT	TELEPHONE NUMBER
INAC - Land Use Inspector	(867) 975-4295
North Arrow Minerals Inc.	(604) 668-8355 (Office); (604) 336-4813 (Fax)
Environment and Climate Change Canada 24-hour Spill Report Line (NWT+NU)	(867) 920-8130 (contact first), (867) 766-3737 (contact second)
Environment and Climate Change Canada Environmental Enforcement	(867) 669-4730
INAC – Water Resource Officers, Kugluktuk and Iqaluit, NU	Kugluktuk (867) 982-4308 Iqaluit (867) 975-4298
INAC – Nunavut Regional Office	(867) 975-4275
Elbow River Helicopters	(403) 202-2019
Naujaat Fire Department	(867) 462-4422
RCMP, Naujaat	(867) 462-0123
Stanton Regional Hospital – Yellowknife St. Bonafice Hospital – Winnipeg	(867) 920-4111 (204) 233-8563
On-Site Project Geologist	<i>Information to be supplied once phone system is established on the property</i>
Fisheries and Oceans Canada	(867) 979-8007
Nunavut Department of Environment	(867) 975-7700
Robert Eno, Nunavut Department of Environment, Waste Manifests	(867) 975-7748
Manager, Pollution Control and Air Quality, Environmental Protection, Govt of Nunavut	(867) 975-7748; (867) 975-7739 (Fax)

5. ACTION PLANS

5.1 Initial Action

The instructions to be followed by the first person on the spill scene are as follows:

1. Always be alert and consider your safety first.
2. If possible, identify the material that has been spilled. If you are not sure of the material, use caution and consider your safety first.
3. Assess the hazard of people in the vicinity of the spill.
4. If possible, safely try to stop the flow of material to minimize potential for environmental impacts.
5. Immediately report the spill to the On Scene Coordinator.
6. Resume any effective action to contain, mitigate, or terminate the flow of the spilled material.

The following pages include specific instructions to be followed in the response to various types of spills including diesel fuel, hydraulic oil, lubricating oil, gasoline, aviation fuel (Jet “A/B”), antifreeze, drilling foam, drilling alkamer and propane.

5.2 SPILL RESPONSE ACTIONS

DIESEL FUEL, HYDRAULIC OIL, AND LUBRICATING OIL

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources.

Never smoke when dealing with these types of spills.

On Land

Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm for easy capture of the spill after all vapours have dissipated.

Remove the spill by using absorbent pads or excavating the soil, gravel or snow.

Remove spill splashed on vegetation using particulate absorbent material.

On Muskeg

Do not deploy personnel and equipment on marsh or vegetation.

Remove pooled oil with sorbent pads and/or skimmer.

Flush with low pressure water to herd oil to collection point.

In the event of a diesel spill, burn only in localized areas (e.g., trenches, piles or windrows), with the approval and direction of proper authorities.

Do not burn if root systems can be damaged (low water table).

Minimize damage caused by equipment and excavation.

On Water

Contain spill as close to release point as possible.

Use containment boom to capture spill for recovery after vapours have dissipated.

Use absorbent pads to capture small spills.

Use skimmer for larger spills.

On Ice and Snow

Build a containment berm around spill using snow.

Remove spill using absorbent pads or particulate sorbent material.

The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags.

Storage and Transfer

All contaminated water, ice, snow, soil, and clean up supplies will be stored in closed, labelled containers. All containers will be stored in a well-ventilated area away from incompatible materials.

Disposal

All contaminated material will be transported to an appropriate disposal facility.

5.3 SPILL RESPONSE ACTIONS JET A/B AVIATION FUEL

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources.

Never smoke when dealing with these types of spills.

On Land

Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm for easy capture of the spill after all vapours have dissipated.

Remove the spill by using absorbent pads or excavating the soil, gravel or snow.

Remove spill splashed on vegetation using particulate absorbent material.

On Muskeg

Do not deploy personnel and equipment on marsh or vegetation.

Remove pooled Jet A/B with sorbent pads and/or skimmer.

Flush with low pressure water to herd fuel to collection point.

On advice from regulatory agencies, burn only in localized areas (e.g., trenches, piles or windrows).

Do not burn if root systems can be damaged (low water table).

Minimize damage caused by equipment and excavation.

On Water

Contain spill as close to release point as possible.

Use containment boom to capture spill for recovery after vapours have dissipated.

Use absorbent pads to capture small spills.

Use skimmer for larger spills.

On Ice and Snow

Build a containment berm around spill using snow.

Remove spill using absorbent pads or particulate sorbent material.

The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags.

Storage and Transfer

All contaminated water, ice, snow, soil, and clean up supplies will be stored in closed, labelled containers. All containers will be stored in a well-ventilated area away from incompatible materials.

Disposal

All contaminated material will be transported to an approved disposal facility.

5.4 SPILL RESPONSE ACTIONS

Quick Foam

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources.

Never smoke when dealing with these types of spills.

On Land

Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm for easy capture of the spill after all vapours have dissipated.

Remove the spill by using absorbent pads or excavating the soil, gravel or snow.

Remove spill splashed on vegetation using particulate absorbent material.

On Muskeg

Do not deploy personnel and equipment on marsh or vegetation.

Remove pooled foam with sorbent pads and/or skimmer.

Flush with low pressure water to herd foam to collection point.

On advice from regulatory agencies, burn only in localized areas (e.g., trenches, piles or windrows).

Do not burn if root systems can be damaged (low water table).

Minimize damage caused by equipment and excavation.

On Water

Contain spill as close to release point as possible.

Use containment boom to capture spill for recovery after vapours have dissipated.

Use absorbent pads to capture small spills.

Use skimmer for larger spills.

On Ice and Snow

Build a containment berm around spill using snow.

Remove spill using absorbent pads or particulate sorbent material.

The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags.

Storage and Transfer

All contaminated water, ice, snow, soil, and clean up supplies will be stored in closed, labelled containers. All containers will be stored in a well-ventilated area away from incompatible materials.

Disposal

All contaminated material will be transported to an approved disposal facility.

5.5 SPILL RESPONSE ACTIONS

Alkamer

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources.

Never smoke when dealing with these types of spills.

On Land

Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm for easy capture of the spill after all vapours have dissipated.

Remove the spill by using absorbent pads or excavating the soil, gravel or snow.

Remove spill splashed on vegetation using particulate absorbent material.

On Muskeg

Do not deploy personnel and equipment on marsh or vegetation.

Remove pooled alkamer with sorbent pads and/or skimmer.

Flush with low pressure water to herd alkamer to a collection point.

On advice from regulatory agencies, burn only in localized areas (e.g., trenches, piles or windrows).

Do not burn if root systems can be damaged (low water table).

Minimize damage caused by equipment and excavation.

On Water

Contain spill as close to release point as possible.

Use containment boom to capture spill for recovery after vapours have dissipated.

Use absorbent pads to capture small spills.

Use skimmer for larger spills.

On Ice and Snow

Build a containment berm around spill using snow.

Remove spill using absorbent pads or particulate sorbent material.

The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags.

Storage and Transfer

All contaminated water, ice, snow, soil, and clean up supplies will be stored in closed, labelled containers. All containers will be stored in a well-ventilated area away from incompatible materials.

Disposal

All contaminated material will be transported to an approved disposal facility.

5.6 SPILL RESPONSE ACTIONS PROPANE

Take action only if safety permits. Gases stored in cylinders can explode when ignited.
Keep vehicles away from area.

Never smoke when dealing with these types of spills.

On Land

Do not attempt to contain the propane release.

On Water

Do not attempt to contain the propane release.

On Ice and Snow

Do not attempt to contain the propane release.

General

It is not possible to contain vapours when released.

Water spray can be used to knock down vapours if there is no chance of ignition.

Small fires can be extinguished with dry chemical or CO₂.

Personnel should withdraw immediately from area unless a small leak is stopped immediately after it has been detected.

If tanks are damaged, gas should be allowed to disperse and no recovery attempt should be made.

Personnel should avoid touching release point on containers since frost forms very rapidly.

Keep away from tank ends.

Storage and Transfer

It is not possible to contain vapours when released.

Disposal

All contaminated material will be transported to an appropriate disposal facility.

6.0 PROCEDURES FOR TRANSFERRING, STORING, AND MANAGING SPILL-RELATED WASTES

In most cases, spill cleanups are initiated at the far end of the spill and contained moving toward the centre of the spill. Sorbent socks and pads are generally used for small spill cleanup. A pump with attached fuel transfer hose can suction spills from leaking containers or large accumulations on land or ice, and direct these larger quantities into empty drums. Hand tools such as cans, shovels, and rakes are also very effective for small spills or hard to reach areas. Heavy equipment can be used if deemed necessary but may be constrained by transportation to site constraints.

Used sorbent materials are to be placed in plastic bags for future disposal at an approved disposal facility. All materials mentioned in this section are available in spill kits located at the drill site and in Naujaat at the crew houses. Following cleanup, any tools or equipment used will be properly washed and decontaminated, or replaced if this is not possible.

For most of the containment procedures outlined in Section 5, spilled petroleum products and materials used for containment will be placed into empty waste oil containers and sealed for proper disposal at an approved disposal facility.

7.0 PROCEDURES FOR RESTORING AFFECTED AREAS

Once a spill has been contained, North Arrow will consult with GN/AANDC/NWB and an inspector assigned to the property to determine the level of cleanup required. The inspector may require a site-specific study to ensure appropriate cleanup levels are met. Criteria that may be considered include natural biodegradation of oil, replacement of soil and re-vegetation.

8.0 TRAINING

All employees working on the Project will be trained in the safe operation of all machinery and tools to help prevent hazardous material spills. All employees on site will also be required to participate in an orientation session, during which all locations of the spill plan and spill kits will be provided. An overview of the plan will be provided by the On-Scene Coordinator leading the orientation session. Specific training sessions are scheduled for individuals directly involved in handling hazardous materials to ensure they know all steps to be undertaken in handling these materials, as well as the steps involved in the event of a spill, including the proper use of spill kits.

APPENDIX 1

NT/NU Spill Report Form and Instructions



Canada

NT-NU SPILL REPORT

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

NT-NU 24-HOUR SPILL REPORT LINE

TEL: (867) 920-8130

FAX: (867) 873-6924

EMAIL: spills@gov.nt.ca

REPORT LINE USE ONLY

A	REPORT DATE: MONTH - DAY - YEAR		REPORT TIME		<input type="checkbox"/> ORIGINAL SPILL REPORT, OR <input type="checkbox"/> UPDATE # _____ TO THE ORIGINAL SPILL REPORT	REPORT NUMBER _____
	OCCURRENCE DATE: MONTH - DAY - YEAR		OCCURRENCE TIME			
C	LAND USE PERMIT NUMBER (IF APPLICABLE)			WATER LICENCE NUMBER (IF APPLICABLE)		
D	GEOGRAPHIC PLACE NAME OR DISTANCE AND DIRECTION FROM NAMED LOCATION				REGION <input type="checkbox"/> NWT <input type="checkbox"/> NUNAVUT <input type="checkbox"/> ADJACENT JURISDICTION OR OCEAN	
E	LATITUDE DEGREES MINUTES SECONDS			LONGITUDE DEGREES MINUTES SECONDS		
F	RESPONSIBLE PARTY OR VESSEL NAME		RESPONSIBLE PARTY ADDRESS OR OFFICE LOCATION			
G	ANY CONTRACTOR INVOLVED		CONTRACTOR ADDRESS OR OFFICE LOCATION			
H	PRODUCT SPILLED		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
	SECOND PRODUCT SPILLED (IF APPLICABLE)		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
I	SPILL SOURCE		SPILL CAUSE		AREA OF CONTAMINATION IN SQUARE METRES	
J	FACTORS AFFECTING SPILL OR RECOVERY		DESCRIBE ANY ASSISTANCE REQUIRED		HAZARDS TO PERSONS, PROPERTY OR EQUIPMENT	
K	ADDITIONAL INFORMATION, COMMENTS, ACTIONS PROPOSED OR TAKEN TO CONTAIN, RECOVER OR DISPOSE OF SPILLED PRODUCT AND CONTAMINATED MATERIALS					
L	REPORTED TO SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLING FROM	TELEPHONE	
M	ANY ALTERNATE CONTACT	POSITION	EMPLOYER	ALTERNATE CONTACT LOCATION	ALTERNATE TELEPHONE	
REPORT LINE USE ONLY						
N	RECEIVED AT SPILL LINE BY	POSITION STATION OPERATOR	EMPLOYER	LOCATION CALLED YELLOWKNIFE, NT	REPORT LINE NUMBER (867) 920-8130	
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> INAC <input type="checkbox"/> NEB <input type="checkbox"/> TC			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED	
AGENCY		CONTACT NAME	CONTACT TIME	REMARKS		
LEAD AGENCY						
FIRST SUPPORT AGENCY						
SECOND SUPPORT AGENCY						
THIRD SUPPORT AGENCY						

PAGE 1 OF _____


Instructions for Completing the NT-NU Spill Report Form


This form can be filled out electronically and e-mailed as an attachment to spills@gov.nt.ca. Until further notice, please verify receipt of e-mail transmissions with a follow-up telephone call to the spill line. Forms can also be printed and faxed to the spill line at 867-873-6924. Spills can still be phoned in by calling collect at 867-920-8130.


A. Report Date/Time	The actual date and time that the spill was reported to the spill line. If the spill is phoned in, the Spill Line will fill this out. Please do not fill in the Report Number: the spill line will assign a number after the spill is reported.
B. Occurrence Date/Time	Indicate, to the best of your knowledge, the exact date and time that the spill occurred. Not to be confused with the report date and time (see above).
C. Land Use Permit Number / Water Licence Number	This only needs to be filled in if the activity has been licenced by the Nunavut Water Board and/or if a Land Use Permit has been issued. Applies primarily to mines and mineral exploration sites.
D. Geographic Place Name	In most cases, this will be the name of the city or town in which the spill occurred. For remote locations – outside of human habitations – identify the most prominent geographic feature, such as a lake or mountain and/or the distance and direction from the nearest population center. You must include the geographic coordinates (Refer to Section E).
E. Geographic Coordinates	This only needs to be filled out if the spill occurred outside of an established community such as a mine site. Please note that the location should be stated in degrees, minutes and seconds of Latitude and Longitude.
F. Responsible Party Or Vessel Name	This is the person who was in management/control/ownership of the substance at the time that it was spilled. In the case of a spill from a ship/vessel, include the name of the ship/vessel. Please include full address, telephone number and e-mail. Use box K if there is insufficient space. Please note that, the owner of the spilled substance is ultimately responsible for any spills of that substance, regardless of who may have actually caused the spill.
G. Contractor involved?	Were there any other parties/contractors involved? An example would be a construction company who is undertaking work on behalf of the owner of the spilled substance and who may have contributed to, or directly caused the spill and/or is responding to the spill.
H. Product Spilled	Identify the product spilled; most commonly, it is gasoline, diesel fuel or sewage. For other substances, avoid trade names. Wherever possible, use the chemical name of the substance and further, identify the product using the four digit UN number (eg: UN1203 for gasoline; UN1202 for diesel fuel; UN1863 for Jet A & B)
I. Spill Source	Identify the source of the spill: truck, ship, home heating fuel tank and, if known, the cause (eg: fuel tank overfill, leaking tank; ship ran aground; traffic accident, vandalism, storm, etc.). Provide an estimate of the extent of the contaminated/impacted area (eg: 10 m ²)
J. Factors Affecting Spill	Any factors which might make it difficult to clean up the spill: rough terrain, bad weather, remote location, lack of equipment. Do you require advice and/or assistance with the cleanup operation? Identify any hazards to persons, property or environment: for example, a gasoline spill beside a daycare centre would pose a safety hazard to children. Use box K if there is insufficient space.
K. Additional Information	Provide any additional, pertinent details about the spill, such as any peculiar/unique hazards associated with the spilled material. State what action is being taken towards cleaning up the spill; disposal of spilled material; notification of affected parties. If necessary, append additional sheets to the spill report. Number the pages in the same format found in the lower right hand corner of the spill form: eg. "Page 1 of 2", "Page 2 of 2" etc. Please number the pages to ensure that recipients can be certain that they received all pertinent documents. If only the spill report form was filled out, number the form as "Page 1 of 1".
L. Reported to Spill Line by	Include your full name, employer, contact number and the location from which you are reporting the spill. Use box K if there is insufficient space.
M. Alternate Contact	Identify any alternate contacts. This information assists regulatory agencies to obtain additional information if they cannot reach the individual who reported the spill.
N. Report Line Use Only	Leave Blank. This box is for the Spill Line's use only.

APPENDIX 2

Property and Proposed Land Use Area and Fuel Storage Maps

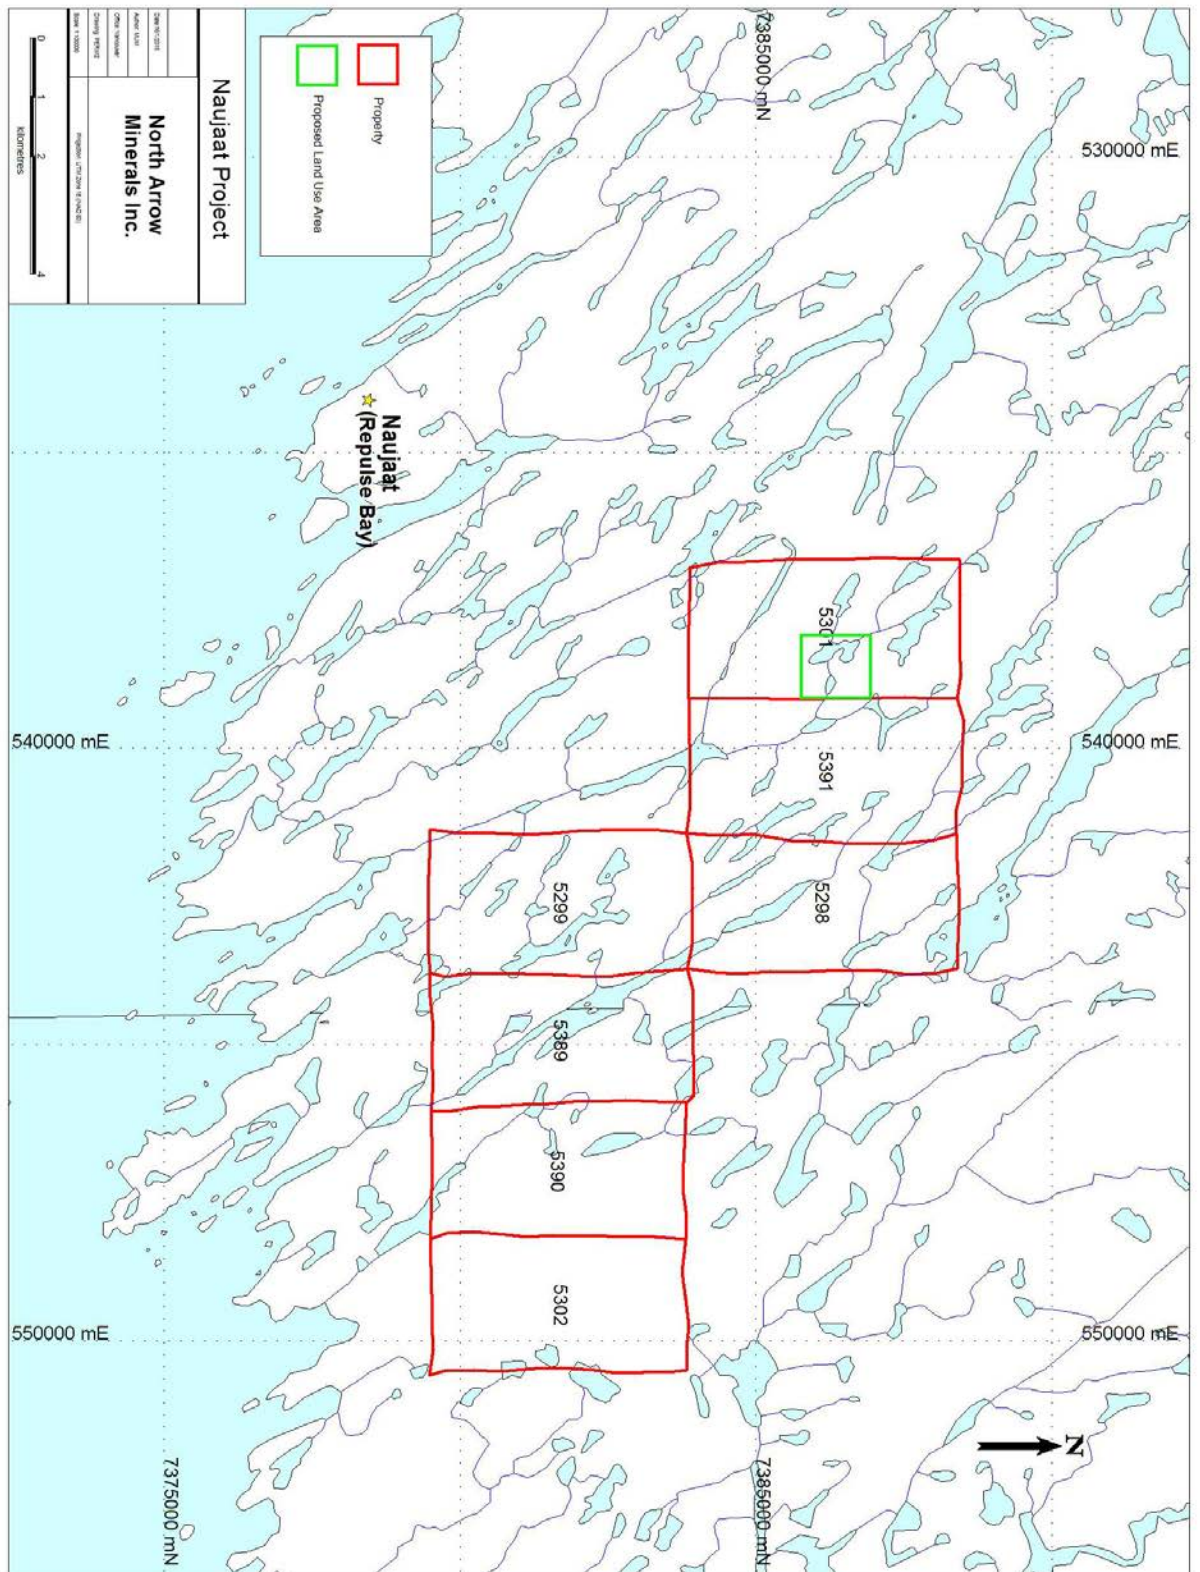

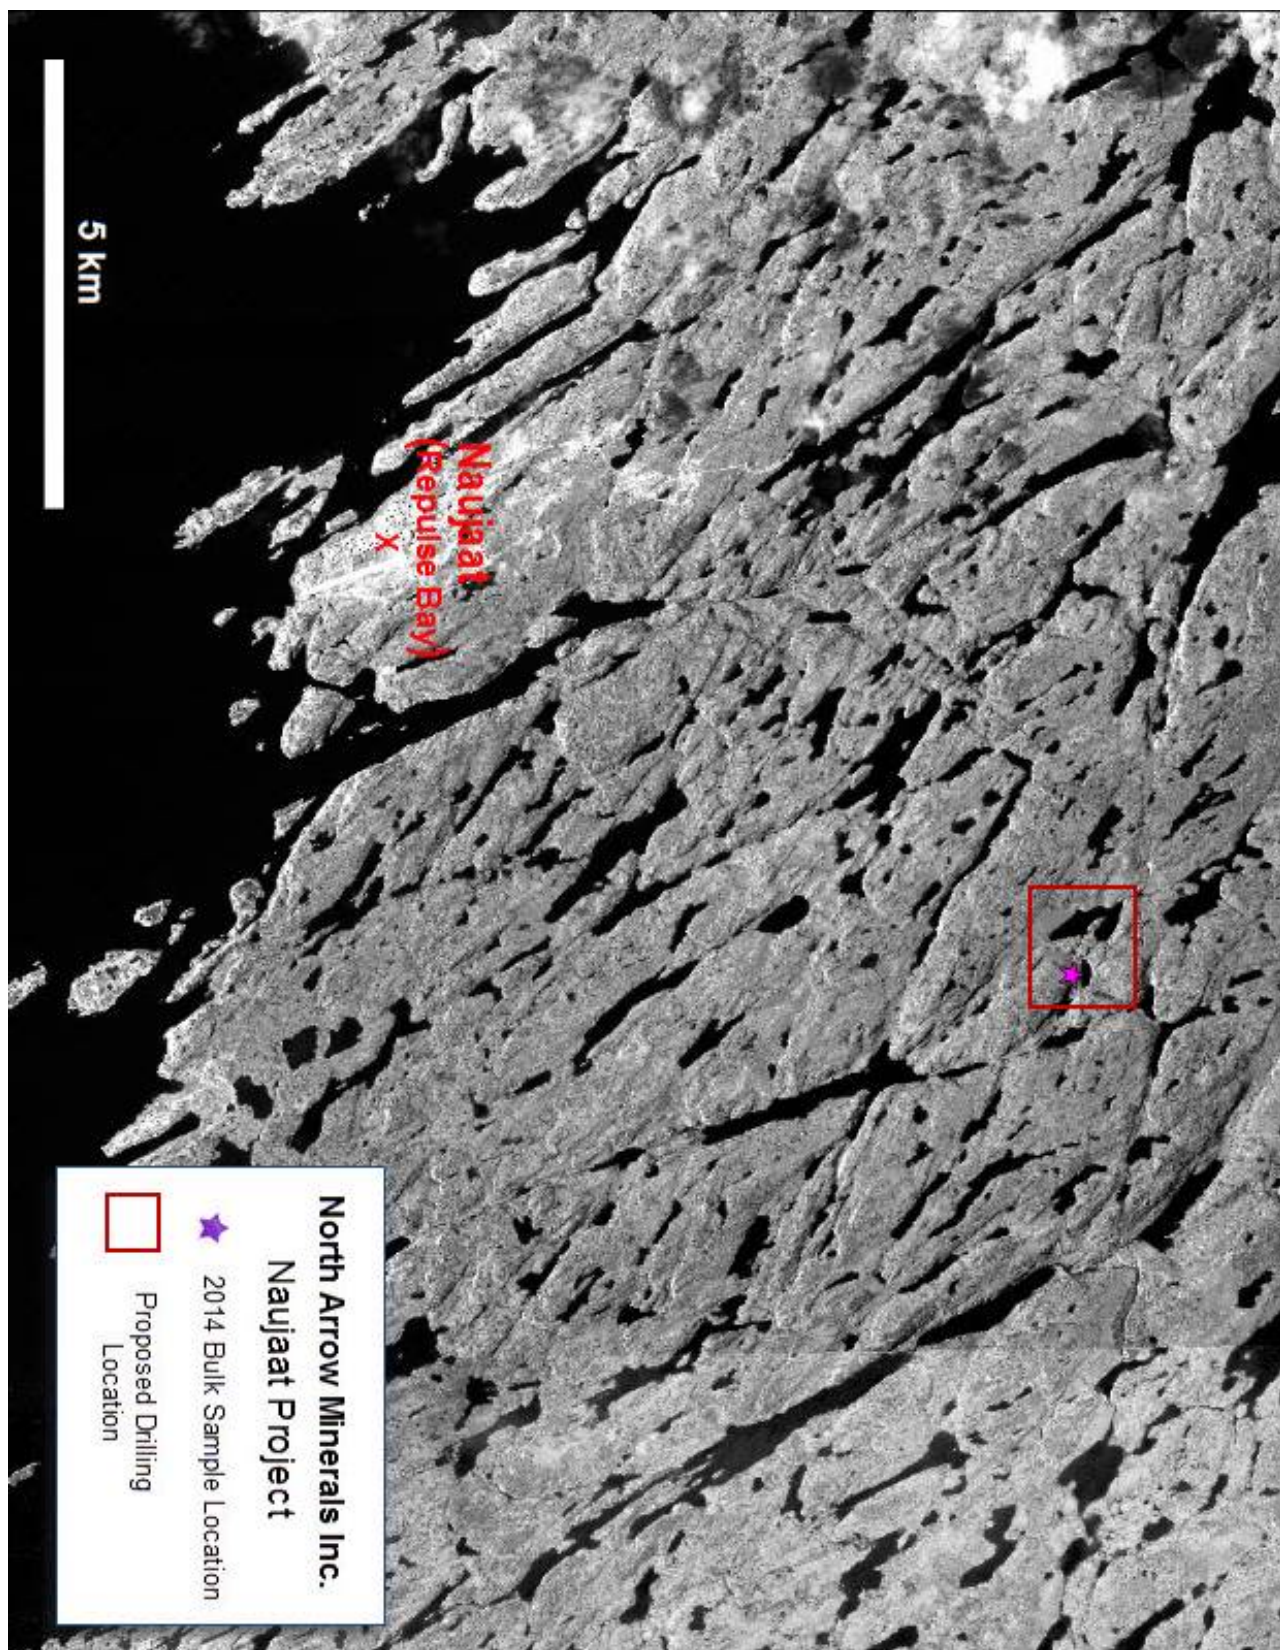

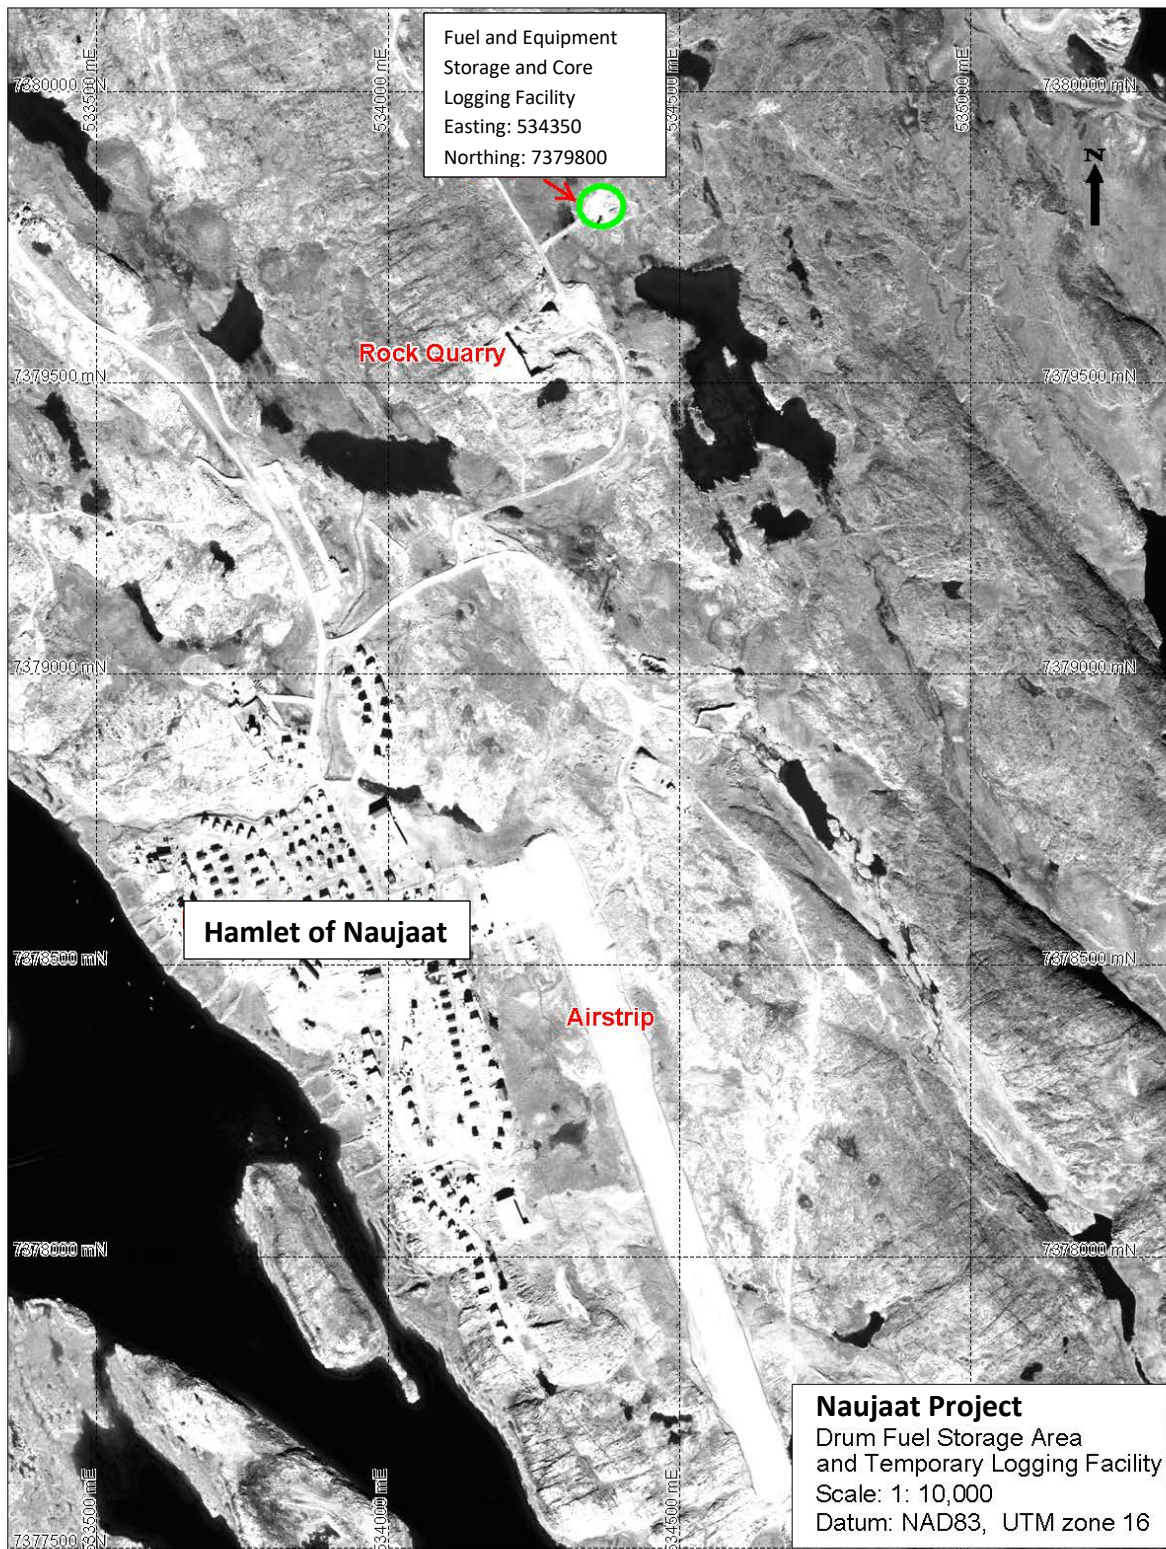

APPENDIX 3

MSDS Sheets

Material Safety Data Sheet



JET A/A-1 AVIATION TURBINE FUEL



1. Product and company identification

Product name	: JET A/A-1 AVIATION TURBINE FUEL
Synonym	: Jet A-1; Jet A-1-DI; Aviation Turbine Kerosene (ATK); JP-8; NATO F-34; Jet F-34; Turbine Fuel, Aviation, Kerosene Type (CAN/CGSB-3.32)
Code	: W213, SAP: 149
Material uses	: Used as aviation turbine fuel. May contain a fuel system icing inhibitor. In the arctic, Jet A-1 may also be used as diesel fuel (if it contains a lubricity additive) and heating oil.
Manufacturer	: PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3
<u>In case of emergency</u>	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2. Hazards identification

Physical state	: Clear liquid.
Odour	: Kerosene-like.
WHMIS (Canada)	:   Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F). Class D-2A: Material causing other toxic effects (Very toxic). The WHMIS classification of Jet A/A-1 is B3. The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A.
OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Emergency overview	: CAUTION! COMBUSTIBLE LIQUID AND VAPOUR. MAY CAUSE EYE AND SKIN IRRITATION. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA. Combustible liquid. Slightly irritating to the eyes and skin. Keep away from heat, sparks and flame. Avoid exposure - obtain special instructions before use. Do not breathe vapour or mist. Avoid contact with eyes, skin and clothing. Contains material which may cause birth defects, based on animal data. Avoid exposure during pregnancy. Use only with adequate ventilation. Wash thoroughly after handling.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
<u>Potential acute health effects</u>	
Inhalation	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Ingestion	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
Skin	: Slightly irritating to the skin.
Eyes	: Slightly irritating to the eyes.
<u>Potential chronic health effects</u>	
Chronic effects	: No known significant effects or critical hazards.

Date of issue : 5/24/2012.

Internet: www.petro-canada.ca/msds

Page: 1/8

Petro-Canada is a Suncor Energy business

™ Trademark of Suncor Energy Inc. Used under licence.

2. Hazards identification

Carcinogenicity	: No known significant effects or critical hazards.
Mutagenicity	: No known significant effects or critical hazards.
Teratogenicity	: Contains material which may cause birth defects, based on animal data.
Developmental effects	: No known significant effects or critical hazards.
Fertility effects	: No known significant effects or critical hazards.
Medical conditions aggravated by over-exposure	: Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (Section 11)

3. Composition/information on ingredients

<u>Name</u>	<u>CAS number</u>	<u>%</u>
Complex mixture of petroleum hydrocarbons (C9-C16)*(Kerosene)	8008-20-6	99.9
Fuel System Icing Inhibitor (FSII) (if added**): (Diethylene Glycol Monomethyl Ether)	111-77-3	0.1 - 0.15
Anti-static, antioxidant and metal deactivator additives	Not applicable	<0.1

*Aromatic content is 25% maximum (benzene: nil).

**Please note that Jet A-1-DI, JP-8, Jet F-34 and NATO F-34 all contain Fuel System Icing Inhibitor.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

4. First-aid measures

Eye contact	: Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
Skin contact	: In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
Inhalation	: Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
Ingestion	: Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
Protection of first-aiders	: No action shall be taken involving any personal risk or without suitable training. If it is suspected that fumes are still present, the rescuer should wear an appropriate mask or self-contained breathing apparatus. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Wash contaminated clothing thoroughly with water before removing it, or wear gloves.
Notes to physician	: No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

5. Fire-fighting measures

Flammability of the product	: Class II - combustible liquid (NFPA).
Extinguishing media	
Suitable	: Use dry chemical, CO ₂ , water spray (fog) or foam.
Not suitable	: Do not use water jet.
Special exposure hazards	: Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.

Date of issue : 5/24/2012.

Internet: www.petro-canada.ca/msds

Page: 2/8

Petro-Canada is a Suncor Energy business

™ Trademark of Suncor Energy Inc. Used under licence.

5. Fire-fighting measures

- Products of combustion** : Carbon oxides (CO, CO₂), nitrogen oxides (NO_x), sulphur oxides (SO_x), smoke and irritating vapours as products of incomplete combustion.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
- Special remarks on fire hazards** : Flammable in presence of open flames, sparks and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire.

6. Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flames, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see Section 8).
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
- Methods for cleaning up**
- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

7. Handling and storage

- Handling** : Put on appropriate personal protective equipment (see Section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. Avoid exposure during pregnancy. Do not get in eyes or on skin or clothing. Do not ingest. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.

7. Handling and storage

Storage : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

8. Exposure controls/personal protection

Ingredient	Exposure limits
Kerosene	ACGIH TLV (United States). Absorbed through skin. TWA: 200 mg/m ³ 8 hour(s).

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

Engineering measures : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal protection

Respiratory : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Recommended: polyvinyl alcohol (PVA), Viton®. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Eyes : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

Skin : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

8 . Exposure controls/personal protection

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

9 . Physical and chemical properties

Physical state : Clear liquid.
Flash point : Closed cup: $\geq 38^{\circ}\text{C}$ ($\geq 100.4^{\circ}\text{F}$) [Tag. Closed Cup]
Auto-ignition temperature : 210°C (410°F)
Flammable limits : Lower: 0.7%
 Upper: 5%
Colour : Clear and colourless.
Odour : Kerosene-like.
Odour threshold : Not available.
pH : Not available.
Boiling/condensation point : 140 to 300°C (284 to 572°F)
Melting/freezing point : Not available.
Relative density : 0.775 to 0.84 (Water=1)
Vapour pressure : 0.7 kPa (5.25 mm Hg) @ 20°C (68°F).
Vapour density : 4.5 [Air = 1]
Volatility : Volatile.
Evaporation rate : Not available.
Viscosity : 1.0 - 1.9 cSt @ 40°C (104°F)
Pour point : $< -51^{\circ}\text{C}$ ($< -60^{\circ}\text{F}$)
Solubility : Insoluble in water. Partially miscible in some alcohols. Miscible with other petroleum solvents.

10 . Stability and reactivity

Chemical stability : The product is stable.
Hazardous polymerisation : Under normal conditions of storage and use, hazardous polymerisation will not occur.
Materials to avoid : Reactive with oxidising agents, acids and alkalis.
Hazardous decomposition products : May release COx, NOx, SOx, aldehydes, acids, ketones, smoke and irritating vapours when heated to decomposition.

11 . Toxicological information

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Kerosene	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation	Rat	>5000 mg/m ³	4 hours
	Vapour			

Conclusion/Summary : Not available.

Chronic toxicity

Conclusion/Summary : Not available.

Irritation/Corrosion

Conclusion/Summary : Not available.

Sensitiser

Conclusion/Summary : Not available.

Carcinogenicity

Date of issue : 5/24/2012.

Internet: www.petro-canada.ca/msds

Page: 5/8

Petro-Canada is a Suncor Energy business

TM Trademark of Suncor Energy Inc. Used under licence.

11 . Toxicological information

Conclusion/Summary : Not available.

Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Kerosene	A3	3	-	-	-	-

Mutagenicity

Conclusion/Summary : Not available.

Teratogenicity

Conclusion/Summary : Not available.

Reproductive toxicity

Conclusion/Summary : Not available.

12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

Aquatic ecotoxicity

Conclusion/Summary : Not available.

Biodegradability

Conclusion/Summary : Not available.


13 . Disposal considerations

Waste disposal : The generation of waste should be avoided or minimised wherever possible. Significant quantities of waste product residues should not be disposed of via the foul sewer but processed in a suitable effluent treatment plant. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
TDG Classification	UN1863	FUEL, AVIATION, TURBINE ENGINE	3	III		-
DOT Classification	Not available.	Not available.	Not available.	-		-

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Combustible liquid

Canada

WHMIS (Canada) : Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).
Class D-2A: Material causing other toxic effects (Very toxic).

The WHMIS classification of Jet A/A-1 is B3.

The WHMIS classification of Jet A/A-1-DI, JP-8, Jet F-34 and NATO F-34, which all contain FSII (Diethylene Glycol Monomethyl Ether), is B3, D2A.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

Canada inventory : All components are listed or exempted.

United States inventory (TSCA 8b) : All components are listed or exempted.

Europe inventory : All components are listed or exempted.

16 . Other information

Label requirements : COMBUSTIBLE LIQUID AND VAPOUR. MAY CAUSE EYE AND SKIN IRRITATION. POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL WHICH MAY CAUSE BIRTH DEFECTS, BASED ON ANIMAL DATA.

Hazardous Material Information System (U.S.A.) :

Health	2
Flammability	2
Physical hazards	0
Personal protection	H

National Fire Protection Association (U.S.A.) :



References : Available upon request.
™ Trademark of Suncor Energy Inc. Used under licence.

Date of printing : 5/24/2012.

Date of issue : 24 May 2012

Date of previous issue : 5/24/2012.

Responsible name : Product Safety - DSR

Indicates information that has changed from previously issued version.

For Copy of (M)SDS : Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Notice to reader







16 . Other information

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	JET B AVIATION TURBINE FUEL	Code	W219 SAP: 150, 151, 152
Synonym	Jet B; Jet B DI; JP-4; Jet F-40; NATO F-40; Turbine Fuel, Aviation, Wide Cut Type (CAN/CGSB-3.22).	Validated on	12/3/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as aviation turbine fuel. May contain a fuel system icing inhibitor.		

Section 2. Composition and Information on Ingredients

Name	CAS #	% (V/V)	Exposure Limits (ACGIH)		
			TLV-TWA(8 h)	STEL	CEILING
1) Complex mixture of petroleum hydrocarbons (C6-C14).	64741-41-9	>99	Not established	Not established	Not established
2) Benzene	71-43-2	<0.5	0.5 ppm	2.5 ppm	Not established
3) Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether	111-77-3	≤0.15	Not established	Not established	Not established
4) Anti-static, antioxidant and metal deactivator additives.	Not applicable	<0.1	Not applicable	Not applicable	Not applicable
* Please note that Jet B DI, JP-4, Jet F-40 and NATO F-40 all contain Fuel System Icing Inhibitor (FSII).					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Skin and eye contact can cause irritation. Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. This product contains a cancer causing agent. For more information, refer to Section 11.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	LOWER: 1.3% UPPER: 8% (NFPA)
Flash Points	CLOSED CUP: -31°C (-24°F) (NFPA)	Auto-Ignition Temperature	240°C (464°F) (NFPA)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.		

Continued on Next Page

Available in French

JET B AVIATION TURBINE FUEL

Page Number: 2

Fire Fighting Media and Instructions

NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible).

CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.

If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.

SMALL FIRES: Dry chemical, CO₂, water spray or regular foam.

LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk.

Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.

Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.

Section 6. Accidental Release Measures

Material Release or Spill

NAERG96, GUIDE 128, Flammable Liquids (Non-polar/ Water-immiscible). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.

Section 7. Handling and Storage

Handling

Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT ingest. Do not breathe gas/vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately. Avoid contact with skin and eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.

Storage

Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles. Ground all equipment containing material. Keep away from direct sunlight.

Section 8. Exposure Controls/Personal Protection

Engineering Controls

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.

Eyes

Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body

Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory

Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands

Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet

Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available (similar to gasoline)
Colour	Clear and colourless.	Pour Point	Freezing Point: <-51°C (<-80°F) for Jet B/Jet B DI; <-58°C (<-72°F) for Jet Fuel F-40.
Odour	Gasoline like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	50 to 270°C (122 to 518°F)	Penetration	Not applicable.
Density	0.75 to 0.80 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3.5 (Air = 1)	Ionicity (in water)	Not available
Vapour Pressure	21 kPa (158 mmHg) @ 37.8°C (100°F).	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents.

Continued on Next Page

Available in French

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<p>Based on toxicity of similar product.</p> <p>Acute oral toxicity (LD50): >20000 mg/kg (rat).</p> <p>Acute dermal toxicity (LD50): >5000 mg/kg (rabbit).</p> <p>Acute inhalation toxicity (LC50): >5000 mg/m³/4h (rat).</p> <p>Benzene</p> <p>Acute oral toxicity (LD50): 930 mg/kg (rat).</p> <p>Acute dermal toxicity (LD50): >9400 mg/kg (rabbit).</p> <p>Acute inhalation toxicity (LC50): 13200 ppm/4h (rat).</p> <p>Diethylene Glycol Monomethyl Ether</p> <p>Acute oral toxicity (LD50): 4140-5180 mg/kg (rat).</p> <p>Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).</p> <p>Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).</p>
Chronic or Other Toxic Effects	
Dermal Route:	Skin contact can cause irritation.
Inhalation Route:	Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death.
Oral Route:	Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure.
Eye Irritation/Inflammation:	Eye contact can cause irritation.
Immunotoxicity:	Not available
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Benzene is tumorigenic by RTECS criteria.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	Fetotoxicity, embryotoxicity and/or teratogenicity have been observed in rats or rabbits following oral or dermal administration, in the absence of maternal toxicity. [Diethylene Glycol Monomethyl Ether]
Carcinogenicity (ACGIH):	ACGIH A1: confirmed human carcinogen. [Benzene]
Carcinogenicity (IARC):	IARC Group 1: carcinogenic to Humans. [Benzene]
Carcinogenicity (NTP):	NTP Group 1: known to be a carcinogen. [Benzene]
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	Benzene is an OSHA known carcinogen.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	Currently: Fuel, aviation, turbine engine, 3, UN1863, PGII As of August 15, 2002: FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII	Special Provisions for Transport	Not applicable.
---------------------------	--	---	-----------------

Section 15. Regulatory Information

Other Regulations	This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).													
	All components of this formulation are listed on the US EPA-TSCA Inventory.													
	All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).													
	This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.													
	Please contact Product Safety for more information.													
DSD/DPD (Europe)	Not evaluated.		HCS (U.S.A.)	CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Toxic. CLASS: Irritating substance. CLASS: Target organ effects.										
ADR (Europe) (Pictograms)	NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)											
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(3)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table>		Health Hazard	(2*)	Fire Hazard	(3)	Reactivity	(0)	Personal Protection	(H)	NFPA (U.S.A.)		Fire Hazard Reactivity Specific hazard	Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	(2*)													
Fire Hazard	(3)													
Reactivity	(0)													
Personal Protection	(H)													

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>		
Glossary	<p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials (</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 - Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSL - Dangerous Substances Classification and Labeling (Europe)</p> <p>DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)</p> <p>DSL - Domestic Substance List</p> <p>EEC/EU - European Economic Community/European Union</p> <p>EINECS - European Inventory of Existing Commercial Chemical Substances</p> <p>EPCRA - Emergency Planning and Community Right to Know Act</p> <p>FDA - Food and Drug Administration</p> <p>FIFRA - Federal Insecticide, Fungicide and Rodenticide Act</p> <p>HCS - Hazardous Communication System</p> <p>HMIS - Hazardous Material Information System</p> <p>IARC - International Agency for Research on Cancer</p> <p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> <p>TDG - Transportation Dangerous Goods (Canada)</p> <p>TDLo/TCLo - Lowest Published Toxic Dose/Concentration</p> <p>Tlm - Median Tolerance Limit</p> <p>TLV-TWA - Threshold Limit Value-Time Weighted Average</p> <p>TSCA - Toxic Substances Control Act</p> <p>USEPA - United States Environmental Protection Agency</p> <p>USP - United States Pharmacopoeia</p> <p>WHMIS - Workplace Hazardous Material Information System</p>		
For Copy of MSDS	Prepared by Product Safety - TAR on 12/3/2001.		

Continued on Next Page

Available in French

Western Canada, telephone: 403-296-4158; fax: 403-296-6551
Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228
Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

Data entry by Product Safety - JDW.

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

Material Safety Data Sheet



DIESEL FUEL



1. Product and company identification

Product name	: DIESEL FUEL
Synonym	: Seasonal Diesel, #1 Diesel, #2 Heating Oil, #1 Heating Oil, D50, D60, P40, P50, Arctic Diesel, Farm Diesel, Marine Diesel, Low Sulphur Diesel, LSD, Ultra Low Sulphur Diesel, ULSD, Mining Diesel, Naval Distillate, Dyed Diesel, Marked Diesel, Coloured Diesel, Furnace special, Biodiesel blend, B1, B2, B5, Diesel Low Cloud (LC), Marine Gas Oil.
Code	: W104, W293
Material uses	: Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining diesels, marine diesels, MDO and naval distillates may have a higher flash point requirement.
Manufacturer	: PETRO-CANADA P.O. Box 2844 150 – 6th Avenue South-West Calgary, Alberta T2P 3E3
In case of emergency	: Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2. Hazards identification

Physical state	: Bright oily liquid.
Odour	: Mild petroleum oil like.
WHMIS (Canada)	:   Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F). Class D-2A: Material causing other toxic effects (Very toxic). Class D-2B: Material causing other toxic effects (Toxic).
OSHA/HCS status	: This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Emergency overview	: WARNING! COMBUSTIBLE LIQUID AND VAPOUR. CAUSES EYE AND SKIN IRRITATION. Combustible liquid. Severely irritating to the skin. Irritating to eyes. Keep away from heat, sparks and flame. Do not get in eyes. Avoid breathing vapour or mist. Avoid contact with skin and clothing. Use only with adequate ventilation. Wash thoroughly after handling.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
Potential acute health effects	
Inhalation	: Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Ingestion	: Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract.
Skin	: Severely irritating to the skin.
Eyes	: Irritating to eyes.
Potential chronic health effects	
Chronic effects	: No known significant effects or critical hazards.
Carcinogenicity	: Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).
Mutagenicity	: No known significant effects or critical hazards.
Teratogenicity	: No known significant effects or critical hazards.

Date of issue : 6/28/2013.

Internet: www.petro-canada.ca/msds

Page: 1/8

Petro-Canada is a Suncor Energy business

™ Trademark of Suncor Energy Inc. Used under licence.

2. Hazards identification

- Developmental effects** : No known significant effects or critical hazards.
- Fertility effects** : No known significant effects or critical hazards.
- Medical conditions aggravated by over-exposure** : Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.

See toxicological information (Section 11)

3. Composition/information on ingredients

Name	CAS number	%
Hydrotreated Renewable Diesel/ Fuels, diesel/ Fuel Oil No. 1/ Fuel Oil No. 2	64742-81-0/ 68334-30-5/ 8008-20-6/ 68476-30-2	95 - 100
Alkanes, C10 – 20 Branched and Linear (R100)	928771-01-1	10 - 20
Fatty acids methyl esters	61788-61-2 / 67784-80-9 / 73891-99-3	0 - 5

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

4. First-aid measures

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.
- Notes to physician** : No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

5. Fire-fighting measures

- Flammability of the product** : Combustible liquid
- Extinguishing media**
- Suitable** : Use dry chemical, CO₂, water spray (fog) or foam.
- Not suitable** : Do not use water jet.
- Special exposure hazards** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training. Move containers from fire area if this can be done without risk. Use water spray to keep fire-exposed containers cool.
- Products of combustion** : Carbon oxides (CO, CO₂), nitrogen oxides (NO_x), sulphur oxides (SO_x), sulphur compounds (H₂S), smoke and irritating vapours as products of incomplete combustion.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Date of issue : 6/28/2013.

Internet: www.petro-canada.ca/msds

Page: 2/8

Petro-Canada is a Suncor Energy business

™ Trademark of Suncor Energy Inc. Used under licence.

5. Fire-fighting measures

- Special remarks on fire hazards** : Flammable in presence of open flames, sparks and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Runoff to sewer may create fire or explosion hazard.

6. Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Shut off all ignition sources. No flares, smoking or flames in hazard area. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see Section 8).
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
- Methods for cleaning up**
- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Use spark-proof tools and explosion-proof equipment. Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

7. Handling and storage

- Handling** : Put on appropriate personal protective equipment (see Section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapour or mist. Use only with adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Do not enter storage areas and confined spaces unless adequately ventilated. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Store and use away from heat, sparks, open flame or any other ignition source. Use explosion-proof electrical (ventilating, lighting and material handling) equipment. Use non-sparking tools. Take precautionary measures against electrostatic discharges. To avoid fire or explosion, dissipate static electricity during transfer by earthing and bonding containers and equipment before transferring material. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage** : Store in accordance with local regulations. Store in a segregated and approved area. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Eliminate all ignition sources. Separate from oxidizing materials. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination. Ensure the storage containers are grounded/bonded.

8 . Exposure controls/personal protection

Ingredient	Exposure limits
Fuels, diesel	ACGIH TLV (United States). Absorbed through skin. TWA: 100 mg/m ³ , (Inhalable fraction and vapour) 8 hour(s).
Fuel oil No. 2	ACGIH TLV (United States). Absorbed through skin. TWA: 100 mg/m ³ , (Inhalable fraction and vapour) 8 hour(s).
Hydrotreated Renewable Diesel	ACGIH TLV (United States). Absorbed through skin. TWA: 200 mg/m ³ 8 hour(s).
Fuel oil No. 1	ACGIH TLV (United States). Absorbed through skin. TWA: 200 mg/m ³ 8 hour(s).

Consult local authorities for acceptable exposure limits.

Recommended monitoring procedures : If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.

Engineering measures : Use only with adequate ventilation. Use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure to airborne contaminants below any recommended or statutory limits. The engineering controls also need to keep gas, vapour or dust concentrations below any lower explosive limits. Use explosion-proof ventilation equipment.

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Personal protection

Respiratory

: Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hands

: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Recommended: nitrile, neoprene, polyvinyl alcohol (PVA), Viton®. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Eyes

: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.

Skin

: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Environmental exposure controls

: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

9 . Physical and chemical properties

Physical state	: Bright oily liquid.
Flash point	: Diesel fuel and other distillate fuels: Closed cup: $\geq 40^{\circ}\text{C}$ ($\geq 104^{\circ}\text{F}$) Marine Diesel/MDO/Naval Distillate: Closed Cup: $\geq 60^{\circ}\text{C}$ ($\geq 140^{\circ}\text{F}$) Mining Diesel: Closed Cup: $\geq 52^{\circ}\text{C}$ ($\geq 126^{\circ}\text{F}$)
Auto-ignition temperature	: 225°C (437°F)
Flammable limits	: Lower: 0.7% Upper: 6%
Colour	: Clear to yellow (This product may be dyed red for taxation purposes).
Odour	: Mild petroleum oil like.
Odour threshold	: Not available.
pH	: Not available.
Boiling/condensation point	: 150 to 371°C (302 to 699.8°F)
Melting/freezing point	: Not available.
Relative density	: 0.80 to 0.88 kg/L @ 15°C (59°F)
Vapour pressure	: 1 kPa (7.5 mm Hg) @ 20°C (68°F).
Vapour density	: 4.5 [Air = 1]
Volatility	: Not available.
Evaporation rate	: Not available.
Viscosity	: Diesel fuel: 1.3 - 4.1 cSt @ 40°C (104°F) Marine Diesel Fuel: 1.3 - 4.4 cSt @ 40°C (104°F)
Pour point	: Not available.
Solubility	: Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

10 . Stability and reactivity

Chemical stability	: The product is stable.
Hazardous polymerisation	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
Materials to avoid	: Reactive with oxidising agents and acids.
Hazardous decomposition products	: May release COx, NOx, SOx, H ₂ S, smoke and irritating vapours when heated to decomposition.

11 . Toxicological information

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Fuels, diesel	LD50 Dermal	Mouse	24500 mg/kg	-
	LD50 Oral	Rat	7500 mg/kg	-
Fuel oil No. 2	LD50 Oral	Rat	12000 mg/kg	-
Fuel oil No. 1	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation	Rat	>5000 mg/m ³	4 hours
	Vapour			
Hydrotreated Renewable Diesel	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral	Rat	>5000 mg/kg	-
	LC50 Inhalation	Rat	>5200 mg/m ³	4 hours
	Vapour			

Conclusion/Summary : Not available.

Chronic toxicity

Conclusion/Summary : Not available.

Irritation/Corrosion

Conclusion/Summary : Not available.

Sensitiser

Date of issue : 6/28/2013.

Internet: www.petro-canada.ca/msds

Page: 5/8

Petro-Canada is a Suncor Energy business

™ Trademark of Suncor Energy Inc. Used under licence.

11 . Toxicological information

Conclusion/Summary : Not available.

Carcinogenicity

Conclusion/Summary : Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).

Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Fuels, diesel	A3	3	-	-	-	-
Fuel oil No. 1	A3	3	-	-	-	-
Fuel oil No. 2	A3	3	-	-	-	-
Hydrotreated Renewable Diesel	A3	3	-	-	-	-

Mutagenicity

Conclusion/Summary : Not available.

Teratogenicity

Conclusion/Summary : Not available.

Reproductive toxicity

Conclusion/Summary : Not available.

12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

Aquatic ecotoxicity

Conclusion/Summary : Not available.

Biodegradability

Conclusion/Summary : Not available.


13 . Disposal considerations

Waste disposal : The generation of waste should be avoided or minimised wherever possible. Significant quantities of waste product residues should not be disposed of via the foul sewer but processed in a suitable effluent treatment plant. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Vapor from product residues may create a highly flammable or explosive atmosphere inside the container. Do not cut, weld or grind used containers unless they have been cleaned thoroughly internally. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
TDG Classification	UN1202	DIESEL FUEL	3	III		-
DOT Classification	Not available.	Not available.	Not available.	-	-	-

Date of issue : 6/28/2013.

Internet: www.petro-canada.ca/msds

Page: 6/8

Petro-Canada is a Suncor Energy business

™ Trademark of Suncor Energy Inc. Used under licence.

14 . Transport information

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Combustible liquid
Irritating material

Canada

WHMIS (Canada) : Class B-3: Combustible liquid with a flash point between 37.8°C (100°F) and 93.3°C (200°F).
Class D-2A: Material causing other toxic effects (Very toxic).
Class D-2B: Material causing other toxic effects (Toxic).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

Canada inventory : All components are listed or exempted.

United States inventory (TSCA 8b) : All components are listed or exempted.

Europe inventory : All components are listed or exempted.

16 . Other information

Label requirements : COMBUSTIBLE LIQUID AND VAPOUR. CAUSES EYE AND SKIN IRRITATION.

Hazardous Material Information System (U.S.A.) :

Health	2
Flammability	2
Physical hazards	0
Personal protection	H

National Fire Protection Association (U.S.A.) :



References : Available upon request.
™ Trademark of Suncor Energy Inc. Used under licence.

Date of printing : 4/14/2014.

Date of issue : 28 June 2013

Date of previous issue : No previous validation.

Responsible name : Product Safety - DSR

Indicates information that has changed from previously issued version.

For Copy of (M)SDS : Internet: www.petro-canada.ca/msds

Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228

For Product Safety Information: (905) 804-4752

Notice to reader

Date of issue : 6/28/2013.

Internet: www.petro-canada.ca/msds

Page: 7/8

Petro-Canada is a Suncor Energy business

™ Trademark of Suncor Energy Inc. Used under licence.

16 . Other information

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

MATERIAL SAFETY DATA SHEET

NAME OF PRODUCT: AW Hydraulic Oil ISO 46

FILE NO. 9636, 9637, 9638, 9616, 11360

MSDS DATE: December, 2009

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME: AW Hydraulic Oil ISO 46
SYNONYMS: hydraulic fluid
PRODUCT CODES: 9616,9636,9637,9637Tray,9638,11360, CG46AWBlue

MANUFACTURER: CGF INC
DIVISION: N/A
ADDRESS: 317 Peoples Avenue Rockford, IL 61104 USA

EMERGENCY PHONE: 800/424-9300
CHEMTREC PHONE: 800/424-9300
OTHER CALLS: 815-967-4400
FAX PHONE: 815-967-4404

PRODUCT USE: Hydraulic Fluid
PREPARED BY: Irena Larson/Denise Brauer

SECTION 1 NOTES:

SECTION 2: COMPOSITION/INFORMATION ON INGREDIENTS

INGREDIENT: Petroleum base oils, additive package.

<u>CAS NO.</u>	<u>% WT</u>	<u>% VOL</u>	<u>SARA 313 REPORTABLE</u>
64741-88-4	75-85		None
64742-01-4	15-25		None
Proprietary Additive(s)	0.5-1.5		None

SECTION 3: HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW: This material is not considered hazardous according to OSHA criteria.

ROUTES OF ENTRY: Skin contact or inhalation.

POTENTIAL HEALTH EFFECTS

EYES: Contact may cause mild eye irritation including stinging, watering, and redness.

SKIN: Contact may cause mild skin irritation including redness and a burning sensation. Prolonged or repeated contact can defat the skin, causing drying and cracking of the skin and possibly dermatitis (inflammation). No harmful effects from skin absorption are expected.

INGESTION: No harmful effects expected from ingestion.

INHALATION: No information available on acute toxicity.

ACUTE HEALTH HAZARDS: No

CHRONIC HEALTH HAZARDS: No

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE: Skin disorders may be aggravated by exposure.

CARCINOGENICITY			
OSHA: None	ACGIH: None	NTP: None	IARC: None
OTHER:			

SECTION 3 NOTES:

MATERIAL SAFETY DATA SHEET

NAME OF PRODUCT: AW Hydraulic Oil ISO 46

FILE NO. 9636, 9637, 9638, 9616, 11360

MSDS DATE: December, 2009

SECTION 4: FIRST AID MEASURES

EYES: If irritation or redness develops, flush eyes with clean water. If symptoms persist, seek medical attention.

SKIN: Remove contaminated shoes and clothing and cleanse affected area(s) thoroughly by washing with a mild soap and water or a waterless hand cleaner. If irritation persists, seek medical attention.

INGESTION: First aid is not normally required; however, if swallowed and symptoms develop, seek medical attention.

INHALATION: If respiratory symptoms develop, move victim away from source of exposure and into fresh air. If symptoms persist, seek medical attention.

NOTES TO PHYSICIANS OR FIRST AID PROVIDERS: High-pressure hydrocarbon injection injuries may produce substantial necrosis of underlying tissue despite an innocuous appearing wound. Often these injuries require emergency surgical debridement and all injuries should be evaluated by a specialist in order to assess the extent of injury.

Acute aspirations of large amounts of mineral oil-laden material may produce serious aspiration pneumonia. Patients who aspirate these oils should be followed for the development of long-term sequelae. Inhalation exposure to oil mists below current workplace exposure limits is unlikely to cause pulmonary abnormalities.

SECTION 4 NOTES:

SECTION 5: FIRE-FIGHTING MEASURES

EXTINGUISHING MEDIA: Dry chemical, carbon dioxide, foam, or water spray is recommended.

SPECIAL FIRE FIGHTING PROCEDURES:

Water or foam may cause frothing of materials heated above 212 F. Carbon dioxide can displace oxygen. Use caution when applying dioxide in confined spaces.

SPECIAL PROTECTIVE EQUIPMENT: For fires in enclosed areas, fire fighters must use self-contained breathing apparatus.

UNUSUAL FIRE AND EXPLOSION HAZARDS: This material may burn, but will not ignite readily. If container is not properly cooled, it can rupture in the heat of fire.

HAZARDOUS DECOMPOSITION PRODUCTS: No data

Flash Point: C(F) : >210(410) (ASTM D-92)

Flammable Limits (approx. % vol. in air)- LEL: 0.9%, UEL: 7.0%

NFPA HAZARD ID: Health: 1, Flammability: 1, Reactivity: 0

SECTION 6: ACCIDENTAL RELEASE MEASURES

ACCIDENTAL RELEASE MEASURES:

Personal Precautions:

This material may burn, but will not ignite readily. Keep all sources of ignition away from spill/release. The use of explosion-proof electrical equipment is recommended. Stay upwind and away from spill/release. Notify persons downwind of the spill/release, isolate immediate hazard area and keep unauthorized personnel out. Wear appropriate protective equipment, including respiratory protection, as conditions warrant.

Environmental Precautions: Stop spill/release if it can be done with minimal risk. Prevent spilled material from entering sewers, storm drains, other unauthorized drainage systems, and natural waterways. Contact appropriate agency for spills into or upon navigable waters that cause a sheen or discoloration on the water surface.

Methods for Containment and Clean Up:

Notify fire authorities and appropriate regulatory authorities. Immediate cleanup of any spill is recommended. Dike far ahead of spill for later recovery or disposal. Spilled material may be absorbed into an appropriate absorbent material.

SECTION 7: HANDLING AND STORAGE

HANDLING AND STORAGE:

Wash thoroughly after handling. Use good personal hygiene practices and wear appropriate personal protective equipment. High pressure injection of hydrocarbon fuels, hydraulic oils or greases under the skin may have serious consequences even though no symptoms or injury may be apparent. This can happen accidentally when using high pressure equipment such as high pressure grease guns, fuel injection

PAGE 2 OF 6

MATERIAL SAFETY DATA SHEET

NAME OF PRODUCT: AW Hydraulic Oil ISO 46

FILE NO. 9636, 9637, 9638, 9616, 11360

MSDS DATE: December, 2009

apparatus or from pinhole leaks in tubing of high pressure hydraulic oil equipment. Do not enter confined spaces such as tanks or pits without following proper entry procedures. Do not wear contaminated clothing or shoes. "Empty" containers retain residue and may be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, or other sources of ignition. They may explode and cause injury or death. "Empty" drums should be completely drained, properly bunged, and promptly shipped to the supplier or a drum reconditioner. All containers should be disposed of in an environmentally safe manner and in accordance with governmental regulations. Use and store this material in cool, dry, well-ventilated areas away from heat and all sources of ignition. Keep container(s) tightly closed. Store only in approved containers. Keep away from any incompatible material. Protect container(s) against physical damage.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

Componet	ACGIH	OSHA
Lubricant Base Oil-Petroleum	TWA: 5mg/m ³ STEL: 10mg/m ³ As oil mist, if generated	TWA: 5mg/m ³ as Oil mist, if generated

ENGINEERING CONTROLS: If current ventilation practices are not adequate to maintain airborne concentrations below the established exposure limits, additional engineering controls may be required.

RESPIRATORY PROTECTION: Where there is potential for airborne exposure above the exposure limit a NIOSH certified air purifying respirator equipped with R or P95 filters may be used. A respiratory protection program that meets or is equivalent to OSHA 29 CFR 1910.134 and ANSI Z88.2 should be followed whenever workplace conditions warrant a respirator's use. Air purifying respirators provide limited protection and cannot be used in atmospheres that exceed the maximum use concentration (MUC) as directed by regulation or the manufacturer's instructions, in oxygen deficient (less than 19.5 percent oxygen) situations, or other conditions that are immediately dangerous to life and health (IDLH).

EYE PROTECTION: The use of eye protection that meets or exceeds ANSI Z.87.1 is recommended to protect against potential eye contact, irritation, or injury. Depending on conditions of use, a face shield may be necessary.

SKIN PROTECTION: The use of gloves impervious to the specific material handled is advised to prevent skin contact. Users should check with manufacturers to confirm the performance of their products. Suggested protective materials: Nitrile

SECTION 8 NOTES: State, local or other agencies or advisory groups may have established more stringent limits. Consult an industrial hygienist or similar professional, or your local agencies, for further information.

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE: Clear Blue Liquid

ODOR: mild petroleum

PHYSICAL STATE: Liquid

pH AS SUPPLIED: Not applicable

pH (Other):

BOILING POINT: No data

F: >600

C: >316

FLASH POINT:

F: >410

C: >210

METHOD USED: (ASTM D-92)

AUTOIGNITION TEMPERATURE:

F: 671

C: 355

MELTING POINT: No data

F:

C:

FREEZING POINT: No data

F:

MATERIAL SAFETY DATA SHEET

NAME OF PRODUCT: AW Hydraulic Oil ISO 46

FILE NO. 9636, 9637, 9638, 9616, 11360

MSDS DATE: December, 2009

C:

VAPOR PRESSURE (mmHg): <1
@ 20 C : < 0.1

VAPOR DENSITY (AIR = 1): >2

@
F: 68
C: 20

SPECIFIC GRAVITY (H₂O = 1): 0.87

@
F: 60
C: 15.6

EVAPORATION RATE: n/a

BASIS (=1):

SOLUBILITY IN WATER: not soluble

PERCENT SOLIDS BY WEIGHT: n/a

PERCENT VOLATILE: Negligible

BY WT/ BY VOL @
F: 68
C: 20

VOLATILE ORGANIC COMPOUNDS (VOC): no data

WITH WATER: LBS/GAL
WITHOUT WATER: LBS/GAL

MOLECULAR WEIGHT: no data

VISCOSITY:
200-300 SUS @ 100 Degree F
@ 40 C cST 47.25

SECTION 9 NOTES: Data represents typical values and are not intended to be specifications.

SECTION 10: STABILITY AND REACTIVITY

STABLE

UNSTABLE

STABILITY: YES

CONDITIONS TO AVOID (STABILITY): Avoid excessive heat, formations of vapors or mists.

INCOMPATIBILITY (MATERIAL TO AVOID): Strong oxidizing agents

HAZARDOUS DECOMPOSITION OR BY-PRODUCTS: None under normal storage.

HAZARDOUS POLYMERIZATION: No

CONDITIONS TO AVOID (POLYMERIZATION): n/a

SECTION 10 NOTES:

SECTION 11: TOXICOLOGICAL INFORMATION

TOXICOLOGICAL INFORMATION:

Carcinogenicity: The petroleum base oils contained in this product have been highly refined by a variety of processes including solvent extraction, hydrotreating, and/or dewaxing to remove aromatics and improve performance characteristics. No components in this formulation have been identified as a carcinogen.

Component
Lubricant Base Oil

Oral LD50
>5g/kg

Dermal LD50
>2g/kg

Inhalation LC50
No data

PAGE 4 OF 6

MATERIAL SAFETY DATA SHEET

NAME OF PRODUCT: AW Hydraulic Oil ISO 46

FILE NO. 9636, 9637, 9638, 9616, 11360

MSDS DATE: December, 2009

SECTION 11 NOTES:

SECTION 12: ECOLOGICAL INFORMATION

ECOLOGICAL INFORMATION: Ecotoxicological data have not been determined specifically for this product. Information given is based on knowledge of the components and the ecotoxicology of similar products.

Acute Toxicity: Poorly soluble mixture. May cause physical fouling of aquatic organisms. Expected to be practically non toxic: LL/EL/IL50 > 100 mg/l (to aquatic organisms) (LL/EL50 expressed as the nominal amount of product required to prepare aqueous test extract). Mineral oil is not expected to cause any chronic effects to aquatic organisms at concentrations less than 1 mg/l.

Mobility: Liquid under most environmental conditions. Floats on water. If it enters soil, it will adsorb to soil particles and will not be mobile.

Persistence/degradability: Expected to be not readily biodegradable. Major constituents are expected to be inherently biodegradable, but the product contains components that may persist in the environment.

Bioaccumulation : Contains components with the potential to bioaccumulate.

Other Adverse Effects: Product is a mixture of non-volatile components, which are not expected to be released to air in any significant quantities. Not expected to have ozone depletion potential, photochemical ozone creation potential or global warming potential

SECTION 12 NOTES:

SECTION 13: DISPOSAL CONSIDERATIONS

WASTE DISPOSAL METHOD:

Material Disposal: Recover or recycle if possible. It is the responsibility of the waste generator to determine the toxicity and physical properties of the material generated to determine the proper waste classification and disposal methods in compliance with applicable regulations. Do not dispose into the environment, in drains or in water courses.

Container Disposal: Dispose in accordance with prevailing regulations, preferably to a recognized collector or contractor. The competence of the collector or contractor should be established beforehand.

Local Legislation: Disposal should be in accordance with applicable regional, national, and local laws and regulations.

SECTION 14: TRANSPORT INFORMATION

U.S. DEPARTMENT OF TRANSPORTATION: Not regulated

PROPER SHIPPING NAME:

HAZARD CLASS:

ID NUMBER:

PACKING GROUP:

LABEL STATEMENT:

WATER TRANSPORTATION: Not regulated

PROPER SHIPPING NAME:

HAZARD CLASS:

ID NUMBER:

PACKING GROUP:

LABEL STATEMENTS:

AIR TRANSPORTATION: Not regulated

PROPER SHIPPING NAME:

HAZARD CLASS:

ID NUMBER:

PACKING GROUP:

LABEL STATEMENTS:

OTHER AGENCIES:

SECTION 14 NOTES:

SECTION 15: REGULATORY INFORMATION

U.S. FEDERAL REGULATIONS

MATERIAL SAFETY DATA SHEET

NAME OF PRODUCT: AW Hydraulic Oil ISO 46

FILE NO. 9636, 9637, 9638, 9616, 11360

MSDS DATE: December, 2009

TSCA (TOXIC SUBSTANCE CONTROL ACT): All components of this formulation are listed on the US EPA-TSCA inventory or not regulated under TSCA.

EU Labeling: Product is not dangerous as defined by the European Union Dangerous Substances/Preparations Directives. EU labeling is not required.

Governmental Inventory Status: All components comply with TSCA, EINECS/ELINCS, AICS, METI, DSL, KOREA, and PHILIPPINES.

CERCLA (COMPREHENSIVE RESPONSE COMPENSATION, AND LIABILITY ACT): This material does not contain any chemicals subject to the reporting requirements of SARA 302 and 40 CFR 372.

SARA TITLE III (SUPERFUND AMENDMENTS AND REAUTHORIZATION ACT): This product contains no "EXTREMELY HAZARDOUS SUBSTANCES".

311/312 HAZARD CATEGORIES: None

Acute Health: No
Chronic Health: No
Fire Hazard: No
Pressure Hazard: No
Reactive Hazard: No

313 REPORTABLE INGREDIENTS: This material does not contain any chemicals subject to the reporting requirements of SARA 313 and 40 CFR 372.

STATE REGULATIONS: This material does not contain any chemicals with CERCLA Reportable Quantities.

California Proposition 65:

This material does not contain any chemicals which are known to the State of California to cause cancer, birth defects or other reproductive harm at concentrations that trigger the warning requirements of California Proposition 65.

INTERNATIONAL REGULATIONS:

Canadian Regulations:

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the CPR.

WHMIS Hazard Class

None

SECTION 15 NOTES:

SECTION 16: OTHER INFORMATION

OTHER INFORMATION:

PREPARATION INFORMATION: Issue Date: August 2009 Rev. #1

DISCLAIMER:

The information presented herein has been compiled from sources considered to be dependable and accurate to the best of Cutting & Grinding Fluids Inc., knowledge. However, CGF INC., makes no warranty whatsoever expressed or implied of merchantability or fitness for the particular purpose, regarding the accuracy of such data or the results to be obtained from the use thereof. Cutting & Grinding Fluids, Inc. assumes no responsibility for the injury to recipient or to the third persons or for any damage to any property and recipient assumes all such risks.

HALLIBURTON

MATERIAL SAFETY DATA SHEET

Product Trade Name: **QUIK-FOAM®**

Revision Date: 30-Sep-2011

1. CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product Trade Name: QUIK-FOAM®
Synonyms: None
Chemical Family: Blend
Application: Foaming Agent
Manufacturer/Supplier: Baroid Fluid Services
Product Service Line of Halliburton
P.O. Box 1675
Houston, TX 77251
Telephone: (281) 871-4000
Emergency Telephone: (281) 575-5000
Prepared By: Chemical Compliance
Telephone: 1-580-251-4335
e-mail: fdunexchem@halliburton.com

2. COMPOSITION/INFORMATION ON INGREDIENTS

Substances	CAS Number	PERCENT	ACGIH TLV-TWA	OSHA PEL-TWA
Ethanol	64-17-5	5 - 10%	1000 ppm	1000 ppm
Isopropanol	67-63-0	5 - 10%	200 ppm	400 ppm

3. HAZARDS IDENTIFICATION

Hazard Overview May cause eye, skin, and respiratory irritation. May cause headache, dizziness, and other central nervous system effects. May be absorbed through the skin. May be harmful if swallowed. Repeated overexposure may cause liver and kidney effects. Flammable.

4. FIRST AID MEASURES

Inhalation If inhaled, remove to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. If breathing is difficult give oxygen. Get medical attention.

Skin In case of contact, immediately flush skin with plenty of soap and water for at least 15 minutes. Get medical attention. Remove contaminated clothing and laundry before reuse.

Eyes In case of contact, or suspected contact, immediately flush eyes with plenty of water for at least 15 minutes and get medical attention immediately after flushing.

Ingestion Do not induce vomiting. Slowly dilute with 1-2 glasses of water or milk and seek medical attention. Never give anything by mouth to an unconscious person.

Notes to Physician Not Applicable

5. FIRE FIGHTING MEASURES

Flash Point/Range (F):	74
Flash Point/Range (C):	23
Flash Point Method:	PMCC
Autoignition Temperature (F):	750
Autoignition Temperature (C):	398
Flammability Limits in Air - Lower (%):	2
Flammability Limits in Air - Upper (%):	12

Fire Extinguishing Media Water fog, carbon dioxide, foam, dry chemical.

Special Exposure Hazards May be ignited by heat, sparks or flames. Use water spray to cool fire exposed surfaces. Closed containers may explode in fire. Decomposition in fire may produce toxic gases.

Special Protective Equipment for Fire-Fighters Full protective clothing and approved self-contained breathing apparatus required for fire fighting personnel.

NFPA Ratings: Health 1, Flammability 3, Reactivity 0

HMIS Ratings: Health 1, Flammability 3, Physical Hazard 0 , PPE: H

6. ACCIDENTAL RELEASE MEASURES

Personal Precautionary Measures Use appropriate protective equipment.

Environmental Precautionary Measures Prevent from entering sewers, waterways, or low areas.

Procedure for Cleaning / Absorption Isolate spill and stop leak where safe. Remove ignition sources and work with non-sparking tools. Contain spill with sand or other inert materials. Scoop up and remove.

7. HANDLING AND STORAGE

Handling Precautions Avoid contact with eyes, skin, or clothing. Avoid breathing vapors. Wash hands after use. Launder contaminated clothing before reuse. Ground and bond containers when transferring from one container to another.

Storage Information Store away from oxidizers. Keep from heat, sparks, and open flames. Keep container closed when not in use. Product has a shelf life of 24 months.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Engineering Controls Use in a well ventilated area. Local exhaust ventilation should be used in areas without good cross ventilation.

Personal Protective Equipment If engineering controls and work practices cannot prevent excessive exposures, the selection and proper use of personal protective equipment should be determined by an industrial hygienist or other qualified professional based on the specific application of this product.

Respiratory Protection Organic vapor respirator.

Hand Protection Impervious rubber gloves.

Skin Protection Rubber apron.

Eye Protection Chemical goggles; also wear a face shield if splashing hazard exists.

QUIK-FOAM®
Page 2 of 6

Other Precautions

Eyewash fountains and safety showers must be easily accessible.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical State:	Liquid
Color:	Light yellow
Odor:	Alcohol
pH:	7.3-7.8
Specific Gravity @ 20 C (Water=1):	1.02
Density @ 20 C (lbs./gallon):	8.52
Bulk Density @ 20 C (lbs/ft ³):	Not Determined
Boiling Point/Range (F):	Not Determined
Boiling Point/Range (C):	Not Determined
Freezing Point/Range (F):	Not Determined
Freezing Point/Range (C):	Not Determined
Vapor Pressure @ 20 C (mmHg):	Not Determined
Vapor Density (Air=1):	Not Determined
Percent Volatiles:	Not Determined
Evaporation Rate (Butyl Acetate=1):	Not Determined
Solubility in Water (g/100ml):	Soluble
Solubility in Solvents (g/100ml):	Not Determined
VOCs (lbs./gallon):	Not Determined
Viscosity, Dynamic @ 20 C (centipoise):	192
Viscosity, Kinematic @ 20 C (centistokes):	Not Determined
Partition Coefficient/n-Octanol/Water:	Not Determined
Molecular Weight (g/mole):	Not Determined

10. STABILITY AND REACTIVITY

Stability Data:	Stable
Hazardous Polymerization:	Will Not Occur
Conditions to Avoid	Keep away from heat, sparks and flame.
Incompatibility (Materials to Avoid)	Strong oxidizers. Strong alkalis.
Hazardous Decomposition Products	Oxides of sulfur. Oxides of nitrogen. Ammonia. Carbon monoxide and carbon dioxide.
Additional Guidelines	Not Applicable

11. TOXICOLOGICAL INFORMATION

Principle Route of Exposure	Eye or skin contact, inhalation.
Inhalation	May cause respiratory irritation. May cause central nervous system depression including headache, dizziness, drowsiness, incoordination, slowed reaction time, slurred speech, giddiness and unconsciousness.
Skin Contact	May cause skin irritation. May be absorbed through the skin and produce effects similar to those caused by inhalation and/or ingestion.
Eye Contact	May cause eye irritation.

Ingestion Irritation of the mouth, throat, and stomach. May cause central nervous system depression including headache, dizziness, drowsiness, muscular weakness, incoordination, slowed reaction time, fatigue blurred vision, slurred speech, giddiness, tremors and convulsions. May cause kidney damage.

Aggravated Medical Conditions None known.

Chronic Effects/Carcinogenicity Repeated overexposure may cause liver and kidney effects.

Other Information None known.

Toxicity Tests

Oral Toxicity: LD50: 5840 mg/kg (Rat)

Dermal Toxicity: Not determined

Inhalation Toxicity: Not determined

Primary Irritation Effect: Not determined

Carcinogenicity Not determined

Genotoxicity: Not determined

**Reproductive /
Developmental Toxicity:** Not determined

12. ECOLOGICAL INFORMATION

Mobility (Water/Soil/Air) Not determined

Persistence/Degradability Not determined

Bio-accumulation Not determined

Ecotoxicological Information

Acute Fish Toxicity: Not determined

Acute Crustaceans Toxicity: Not determined

Acute Algae Toxicity: Not determined

Chemical Fate Information Not determined

Other Information Not applicable

13. DISPOSAL CONSIDERATIONS

Disposal Method Disposal should be made in accordance with federal, state, and local regulations.

Contaminated Packaging Follow all applicable national or local regulations.

14. TRANSPORT INFORMATION

Land Transportation

DOT

UN1993, Flammable Liquid, N.O.S. (Contains Ethanol, Isopropanol), 3, III, (23.3 C)

QUIK-FOAM®
Page 4 of 6

NAERG 128

Not Restricted when shipped in containers less than 119 gallons as authorized by 49 CFR 173.150(e)(1) and 49 CFR 173.150(f)(2).

DOT BULK

Canadian TDG

Flammable Liquid, N.O.S.(Contains Ethanol, Isopropanol), 3, UN1993, III, (23.3 C)

ADR

UN1993,Flammable Liquid, N.O.S.(Contains Ethanol, Isopropanol), 3, III

Air Transportation

ICAO/IATA

UN1993,Flammable Liquid, N.O.S., 3, III
(Contains Ethanol, Isopropanol Solution)

Sea Transportation

IMDG

UN1993,Flammable Liquid, N.O.S.(Contains Ethanol, Isopropanol), 3, III, (23.3 C)
EmS F-E, S-E

Other Transportation Information

Labels: Flammable Liquid

15. REGULATORY INFORMATION

US Regulations

US TSCA Inventory All components listed on inventory or are exempt.

EPA SARA Title III Extremely Hazardous Substances Not applicable

EPA SARA (311,312) Hazard Class Acute Health Hazard
Chronic Health Hazard
Fire Hazard

EPA SARA (313) Chemicals This product contains toxic chemical(s) listed below which is(are) subject to the reporting requirements of Section 313 of Title III of SARA and 40 CFR Part 372: Isopropanol/67-63-0

EPA CERCLA/Superfund Reportable Spill Quantity Not applicable.

EPA RCRA Hazardous Waste Classification If product becomes a waste, it does meet the criteria of a hazardous waste as defined by the US EPA, because of:

Ignitability D001

California Proposition 65	The California Proposition 65 regulations apply to this product.
MA Right-to-Know Law	One or more components listed.
NJ Right-to-Know Law	One or more components listed.
PA Right-to-Know Law	One or more components listed.
Canadian Regulations	
Canadian DSL Inventory	All components listed on inventory or are exempt.
WHMIS Hazard Class	B2 Flammable Liquids D2B Toxic Materials

16. OTHER INFORMATION

The following sections have been revised since the last issue of this MSDS
Not applicable

Additional Information For additional information on the use of this product, contact your local Halliburton representative.

For questions about the Material Safety Data Sheet for this or other Halliburton products, contact Chemical Compliance at 1-580-251-4335.

Disclaimer Statement This information is furnished without warranty, expressed or implied, as to accuracy or completeness. The information is obtained from various sources including the manufacturer and other third party sources. The information may not be valid under all conditions nor if this material is used in combination with other materials or in any process. Final determination of suitability of any material is the sole responsibility of the user.

END OF MSDS

MATERIAL SAFETY DATA SHEET



102-17910, 55 Ave, Surrey, BC, Canada V3S 6C8 • Toll Free 1-866-535-6699
Tel: 604-575-6660 Fax: 604-575-5494 e-mail: extreme.ron@telus.net

EXTREME ALKAMER

EMERGENCY PHONE NO. (604) 575-6660

PAGE 1 OF 5

WHMIS HAZARD INDEX:

DEGREE OF HAZARD:

HEALTH 1
FIRE 1
REACTIVITY 0
OTHER: B (GLASSES & GLOVES)

HAZARD RATING:

0 LEAST
1 SLIGHT
2 MODERATE
3 HIGH
4 EXTREME

SECTION 1

PRODUCT IDENTIFICATION

PRODUCT NAME: EXTREME ALKAMER
CHEMICAL IDENTIFICATION: Anionic copolymer of acrylamide, and acrylate emulsion
MATERIAL USE: Viscosifier, clay inhibitor
WHMIS CLASSIFICATION: Class D-2(B)
WORK PLACE HAZARD: Skin, eye irritant

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not dangerous goods
PACKAGE GROUP: Not applicable
CAS NUMBER: 25085-02-3
MSDS CODE: Not available

SECTION 2

HAZARDOUS INGREDIENTS

INGREDIENT:	MINERAL SPIRITS	ALKYL PHENOL ETHOXYLATE
PERCENTAGE:	20 -40	3 - 7
CAS NUMBER:	64742-47-8	9016-45-9
LD (50):	6480 Mg/Kg.	3000 Mg/Kg.
LC (50):	Not available	Not determined

EXTREME ALKAMER

MATERIAL SAFETY DATA SHEET**SECTION 3****PHYSICAL DATA**

APPEARANCE AND ODOUR:	Off white liquid, mild odour
DENSITY (SPECIFIC GRAVITY):	Less than 1.0
BOILING POINT:	290°C
MELTING POINT:	Not applicable
SOLUBILITY:	Soluble
EVAPORATION RATE: (EE=1):	Not available
VAPOUR PRESSURE: (MM HG):	Not available
VAPOUR DENSITY: (AIR = 1):	Not available

SECTION 4**FIRE AND EXPLOSION**

FLASHPOINT:	> 200°C
FLAMMABLE LIMIT:	Not available
AUTO IGNITION TEMP:	No data
EXTINGUISHING MEDIA:	Dry chemical, carbon dioxide, foam, water spray, water will cause extreme slipperiness
SPECIAL FIRE FIGHTING PROCEDURES:	Self-contained respirators for fire fighting personnel.
UNUSUAL FIRE AND EXPLOSION HAZARDS:	Sensitivity to static charge.

SECTION 5**REACTIVITY DATA**

STABILITY (THERMAL, LIGHT, ETC.):	Stable
INCOMPATIBILITY (CONDITIONS TO AVOID):	Strong oxidizing and reducing agents
HAZARDOUS POLYMERIZATION:	Will not occur
HAZARDOUS DECOMPOSITION PRODUCTS:	Not available

EXTREME ALKAMER

MATERIAL SAFETY DATA SHEET**SECTION 6****HEALTH HAZARDS**

ROUTE OF ENTRY:

(X) SKIN

(X) EYE CONTACT

() INHALATION

(X) INGESTION

SKIN CONTACT:

May be minimally irritating to sensitive skin upon direct contact.

EYE CONTACT:

May cause stinging, burning of eyes and lids, inflammation and discomfort.

INHALATION:

Not available.

INGESTION:

May cause nausea, vomiting.

SECTION 7**PREVENTATIVE MEASURES**

SKIN PROTECTION:

Impervious gloves, protective clothing as required

EYE PROTECTION:

Chemical goggles.

VENTILATION:

None required for normal use. 10 changes per hour.

RESPIRATORY PROTECTION:

None required for normal use. Otherwise approved organic vapour-type respirator.

LEAK & SPILL PROCEDURE:

Eliminate sources of ignition. Absorb with earth or sand and dispose with solid waste. Wash site after collection.

WASTE DISPOSAL:

Dispose in compliance with government regulations and local requirements.

STORAGE REQUIREMENTS:

Cool, dry area, away from sources of heat, oxidizing and reducing agents. Keep containers closed when not in use.

EXTREME ALKAMER

MATERIAL SAFETY DATA SHEET**SECTION 8****FIRST AID MEASURES**

SKIN:	Wash thoroughly with soap and warm water
EYE:	Flush with water for at least 15 minutes.
INHALATION:	Vapour pressure is negligible. Remove victim from further exposure.
INGESTION:	Do not induce vomiting. If conscious, dilute by giving two glasses of water. Seek medical attention.

SECTION 9**PREPARATION DATE**

DATE ISSUED:	AUGUST 20, 2009
DATE REVISED:	JANUARY 1, 2015
BY:	PRODUCT SAFETY COMMITTEE

THE DATA REPRESENTED HEREIN IS BELIEVED ACCURATE AND REFLECTS OUR BEST PROFESSIONAL JUDGMENT. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY USE, OR ANY OTHER WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF SUCH DATA, THE RESULTS TO BE OBTAINED FROM THE USE THEREOF, OR THAT ANY SUCH USE DOES NOT INFRINGE ANY PATENT. SINCE THE INFORMATION CONTAINED HEREIN MAY BE APPLIED UNDER CONDITIONS OF USE BEYOND OUR CONTROL AND WITH WHICH WE MAY BE UNFAMILIAR, WE DO NOT ASSUME ANY RESPONSIBILITY FOR THE RESULTS OF SUCH APPLICATION. THIS INFORMATION IS FURNISHED UPON THE CONDITION THAT THE PERSON RECEIVING IT SHALL MAKE HIS OWN DETERMINATION OF THE SUITABILITY OF THE MATERIAL FOR HIS PARTICULAR PURPOSE.

MATERIAL SAFETY DATA SHEET**EXTREME ALKAMER****ADDENDUM****SECTION 10****ECOLOGICAL INFORMATION**

This product has very low acute toxicity.

ACUTE TOXICITY:

- Oral:
- Dermal:
- Inhalation:

LD50/oral/rat > 5000 mg/kg

The product is not toxic in contact with the skin.

The product is not expected to be toxic by inhalation.

IRRITATION:

- Skin:

The results obtained using OECD test 404 demonstrated that the product was irritating to the skin.

- Eyes:

Irritating to eyes.

SENSITIZATION:

The product is not expected to be sensitizing.

ECOTOXICITY

The product has very low toxicity to aquatic organisms or to the aquatic environment.

However, as with all chemical products, do not introduce directly into the environment.

- Fish:
- Algae:

LC50 / Fathead minnows / 96 hours > 1000 mg/l

EC50 / 72h / *Phesodactylum tricournum* > 1000 mg/l

- Daphnie:

LC50 / 48h / *Chastogrammus marinus* ³ 15 mg/l

Bioaccumulation:

The product is not expected to bioaccumulate.

Persistence / degradability:

Not readily biodegradable.