


APPENDIX E.5.9

Q1 Quarry Management Plan


	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 1 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

Baffinland Iron Mines Corporation

Q1 Quarry Management Plan

BAF-PH1-830-P16-0017


Rev 1

Prepared By: Steve Borcsok
Department: Sustainable Development
Title: Permitting Specialist
Date: May 6, 2019
Signature: 

Approved By: Christopher Murray
Department: Sustainable Development
Title: Environmental & Regulatory Compliance Manager
Date: May 6, 2019
Signature: 

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 2 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

DOCUMENT REVISION RECORD

Issue Date MM/DD/YY	Revision	Prepared By	Approved By	Issue Purpose
July 28, 2017	0	AV	MA	For Use.
May 3, 2019	1	SB	CM	For Use.

TRACK CHANGES TABLE

A review and update of the Q1 Quarry Management Plan has been undertaken, the following revisions have been completed.

Index of Major Changes/Modifications in Revision 1, May 2019:

Item No.	Description of Change	Relevant Section
1	Updated document to reflect increased quarry limits.	1.3

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.



	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 3 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

TABLE OF CONTENTS

1	<i>Introduction</i>	<i>5</i>
1.1	Purpose and Scope	5
1.2	Regulatory Context	5
1.3	Site Description	5
2	<i>BAFFINLAND POLICIES</i>	<i>8</i>
2.1	Health Safety and Environment (HSE) Policy	8
2.2	Baffinland Sustainable Development Policy	9
3	<i>Site Security and Safety</i>	<i>12</i>
4	<i>Quarry Operations</i>	<i>13</i>
4.1	Development and Operation	13
4.2	Current Quarry Development and Proposed Design	13
4.3	Quarry Development	13
4.4	Quarry Activities	14
4.5	Site Management Measures	15
4.6	Monitoring	20
5	<i>Supporting Management Plans</i>	<i>21</i>
6	<i>Closure and Reclamation Activities</i>	<i>22</i>
6.1	Closure of Active Quarry Face	22
6.2	Waste Disposal	22
6.3	Stockpile Removal	22
6.4	Road Reclamation	23
6.5	Soil Remediation for Contaminated Soils	23
6.6	Permafrost and Ground Ice	23
7	<i>ENVIRONMENTAL RESPONSIBILITIES</i>	<i>24</i>
7.1	Roles and Responsibilities	24
8	<i>REFERENCES</i>	<i>25</i>

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 4 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	


List of Tables

Table 1-1: Q1 Quarry Specifications	6
Table 4-1: Q1 Quarry Water Quality Monitoring Locations.....	20
Table 7-1: Baffinland Iron Mines Corporation Senior Management	24
Table 7-2: Baffinland Iron Mines Corporation On-Site Environmental Team.....	25

List of Appendices

APPENDIX A – Q1 Quarry Drainage Drawing and Updated Quarry Design

APPENDIX B – AMEC - Tote Road Aggregate Sources Geochemistry Characterization Report

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 5 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

1 INTRODUCTION

1.1 PURPOSE AND SCOPE

The Mary River Project requires aggregate to sustain current production levels (up to 6.0Mt per annum). This document outlines the site description, operations and reclamation for the Milne Inlet Q1 Quarry (Q1 Quarry). This plan will be periodically revised to ensure the plan reflects current operations and the aggregate volumes to be extracted from the Q1 Quarry.

1.2 REGULATORY CONTEXT

The guidelines provided by the Nunavut Impact Review Board (NIRB) and Crown Indigenous Relations and Northern Affairs Canada (CIRNAC) with regards to a Quarrying Permit Application state:

1. A Quarry Operations Plan is required with (this) application and must be approved by a Land Use Inspector prior to approval and issuance of the quarry permit if:
2. The volume being applied for is greater than 1,000 m³ and/or
3. The quarry site is being operated by multiple users.

Q1 Quarry near Milne Port exceeds the volume threshold of 1,000 m³, and therefore this plan is required. This plan should be used in conjunction with the Borrow Pit and Quarry Management Plan (BAF-PH1-830-P16-0004), and other plans referred to in this document. In the case of the Q1 Quarry, because the quarry is situated on Inuit Owned Lands, the Qikiqtani Inuit Association (QIA) is the regulatory body that approves the quarry operation. As such, revisions of this plan will be submitted to QIA for approval under the Quarry Concession Agreement that forms part of the Commercial Lease No. Q13C301 (Commercial Lease) agreed upon by the QIA and Baffinland Iron Mines Corporation (Baffinland).

1.3 SITE DESCRIPTION

The following physical description and environmental setting are summaries from the Mary River Final Environmental Impact Statement (FEIS) and FEIS Addendum. For a more complete description, refer to Baffinland Iron Mines Corporation, Final Environmental Impact Statement, 2012, Volumes 6, 7, and 8, Site Physical Description. The drainage plan, quarry permit limits and proposed quarry design for the Q1 Quarry are shown Appendix A. The basic quarry specifics are shown in Table 1-1 below:


	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 6 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017


TABLE 1-1: Q1 QUARRY SPECIFICATIONS

Requirement	Description
NTS Map Sheet (1:50,000)	47 H/16 Edition 1 ASE Series A 713
Corresponding Plan of Property Drawing	Refer to Appendix A for quarry location.
Canada Lands Survey	Conducted in February 2019 by Allnorth Land Surveyors and provided to QIA.
Topographic Survey Data	Conducted by Baffinland Operations. Provided upon request.
Quarry Vertices Coordinates (UTM)	504217E 7974941N (centre point) 503886E 7975727N (N extent) 504830E 7975175N (E extent) 504526E 7974191N (S extent) 503785E 7974454N (SW extent) 503724E 7975076N (W extent)
Total Area of Quarry (ha)	110.20
Current Volume Removed	Approx. 725,000 banked cubic metres (BCM)
Total Volume to be Removed with Contingency	2,500,000 BCM
Total Area of Proposed Quarrying	Appendix A shows the quarry permit limits, current development and proposed quarry design boundaries. The total area of the proposed quarrying (existing and additional) and associated land disturbance is 110.20 hectares
Topsoil / Overburden Storage Area	None is required as the site is primarily exposed rock
Access Roads/Trails	The historical Milne Inlet Tote Road (Km 1 – 2) currently cuts through the southwestern corner of quarry permit limits, adjacent to the area to be quarried. As part of quarry operation and development, temporary access roads will be constructed. Current access roads are presented in Appendix A.
Camp Locations	No camp will be built specifically for the quarry operation. Personnel will be housed at the existing Milne Port camps.

Topography varies considerably across the Project area. The dominant landforms in the Milne Inlet area are typically a result of glacial activity, marine and mechanical forms in various degrees. Glacial activity is not overly apparent on the immediate Milne Port site but is more pronounced in the higher elevations south of the site where the proposed quarry is located. The Milne Inlet area consists of a series of variably dipping, dissected terraces sloping towards the waters of Milne Inlet. The surficial deposits are marine and glacial marine sediments, ranging from coarse beach sediments (gravel and sand), to finer deltaic sediments (clay, silt, sand, and gravel), to even finer deep water periglacial silt veneers (silt, clay and fine sand). The soils in the area are often covered by a thin layer of organics at the ground surface. The soils were noted to typically be frozen below 2 m depth and locally can contain ice lenses.

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 7 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

The nearest receivers that are considered to be fish habitat, as measured along interpreted flow paths, are between 1.6 and 2.2 km (Northeast to Phillips Creek estuary and North to Milne Inlet) (refer to Appendix A). There are some small ephemeral channels discharging seasonally into several shallow ponds that are not fish habitat. The streams or oriented generally in a northwest direction from the planned quarry area.

1.3.1 ENVIRONMENTAL SETTING

The existing surficial deposits near the quarry site range from coarse beach sediments (gravel and sand) to clay, silt, sand and gravel to even finer silt veneers (silt, clay and fine sand). The soils in the area are often covered by a thin layer of organics at the ground surface, creating a productive growing zone of topsoil for local vegetation.


Vegetation within the Mary River Project area is described in the Vegetation Baseline Study Report in Volume 6 of the FEIS (Appendix 6C). A total of 155 vascular plant species were recorded through the total Project area, a vegetation classification system was developed and a species list was compiled. No plant species considered to be “rare” in Canada were found to occur in the survey locations. Vegetation is present in the area of the proposed quarry, and exists in small patches where organic soil deposits occur along the hill slopes, and within the depressions between hills.

The existing surficial deposits near the quarry site range from coarse beach sediments (gravel and sand) to clay, silt, sand and gravel to even finer silt veneers (silt, clay and fine sand). These soils in the area are often covered by a thin layer of organics at the ground surface, creating a productive growing zone of topsoil for local vegetation.

Several species of songbirds and shorebirds migrate to this area annually to breed, and were predominately found in the various types of lowland habitats (river deltas, coastal plains, tundra, and near wetlands) that offer an abundant source of insects and vegetation for foraging and nesting habitat. This type of habitat is absent within and near the proposed quarry site, but is relatively abundant to the north and northwest. It should be noted that the Peregrine Falcon habitat is abundant in the area south of Milne Port, although the area itself is rated as not suitable. No major sea bird colonies or nesting areas were identified in the coastal waters near the quarry site.

Terrestrial wildlife on North Baffin Island is described in the terrestrial wildlife baseline report (Volume 6: Terrestrial, Appendix 6F). Terrestrial wildlife includes caribou, wolves, foxes, arctic hares, ermine, and small mammals. Occurrence of most wildlife species on North Baffin Island is relatively sparse, and this is expected to be especially true at the quarry site given the type of terrain.

Marine mammals present in the area include polar bear, ringed seal, bearded seal, walrus, beluga whale, and narwhal. With the exception of the polar bear, the quarry site is displaced from shoreline habitat sufficiently to avoid being regarded as suitable habitat.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 8 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

2 BAFFINLAND POLICIES

2.1 HEALTH SAFETY AND ENVIRONMENT (HSE) POLICY

This Baffinland Iron Mines Corporation Policy on Health, Safety and Environment is a statement of our commitment to achieving a safe, healthy and environmentally responsible workplace. We will not compromise this policy for the achievement of any other organizational goals.

We implement this Policy through the following commitments:

- Continual improvement of safety, occupational health and environmental performance
- Meeting or exceeding the requirements of regulations and company policies
- Integrating sustainable development principles into our decision-making processes
- Maintaining an effective Health, Safety and Environmental Management System
- Sharing and adopting improved technologies and best practices to prevent injuries, occupational illnesses and environmental impacts
- Engaging stakeholders through open and transparent communication.
- Efficiently using resources, and practicing responsible minimization, reuse, recycling and disposal of waste.
- Reclamation of lands to a condition acceptable to stakeholders.

Our commitment to provide the leadership and action necessary to accomplish this policy is exemplified by the following principles:


- As evidenced by our motto “Safety First, Always” and our actions Health and Safety of personnel and protection of the environment are values not priorities.
- All injuries, occupational illnesses and environmental impacts can be prevented.
- Employee involvement and active contribution through courageous leadership is essential for preventing injuries, occupational illnesses and environmental impacts.
- Working in a manner that is healthy, safe and environmentally sound is a condition of employment.
- All operating exposures can be safeguarded.
- Training employees to work in a manner that is healthy, safe and environmentally sound is essential.
- Prevention of personal injuries, occupational illnesses and environmental impacts is good business.
- Respect for the communities in which we operate is the basis for productive relationships.

We have a responsibility to provide a safe workplace and utilize systems of work to meet this goal. All employees must be clear in understanding the personal responsibilities and accountabilities in relation to the tasks we undertake.

The health and safety of all people working at our operation and responsible management of the environment are core values to Baffinland. In ensuring our overall profitability and business success every Baffinland and business partner employee working at our work sites is required to adhere to this Policy.



Brian Penney
Chief Executive Officer
April 2018

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 9 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

2.2 BAFFINLAND SUSTAINABLE DEVELOPMENT POLICY

At Baffinland Iron Mines Corporation (Baffinland), we are committed to conducting all aspects of our business in accordance with the principles of sustainable development & corporate responsibility and always with the needs of future generations in mind. Baffinland conducts its business in accordance with the Universal Declaration of Human Rights and ArcelorMittal's Human Rights Policy which applies to all employees and affiliates globally.

Everything we do is underpinned by our responsibility to protect the environment, to operate safely and fiscally responsibly and with utmost respect for the cultural values and legal rights of Inuit. We expect each and every employee, contractor, and visitor to demonstrate courageous leadership in personally committing to this policy through their actions. The Sustainable Development and Human Rights Policy is communicated to the public, all employees and contractors and it will be reviewed and revised as necessary on a regular basis. These four pillars form the foundation of our corporate responsibility strategy:


1. Health and Safety
2. Environment
3. Upholding Human Rights of Stakeholders
4. Transparent Governance

1.0 HEALTH AND SAFETY

- We strive to achieve the safest workplace for our employees and contractors; free from occupational injury and illness, where everyone goes home safe everyday of their working life. Why? Because our people are our greatest asset. Nothing is as important as their health and safety. Our motto is "Safety First, Always".
- We report, manage and learn from injuries, illnesses and high potential incidents to foster a workplace culture focused on safety and the prevention of incidents.
- We foster and maintain a positive culture of shared responsibility based on participation, behaviour, awareness and promoting active courageous leadership. We allow our employees and contractors the right to stop any work if and when they see something that is not safe.

2.0 ENVIRONMENT

- Baffinland employs a balance of the best scientific and traditional Inuit knowledge to safeguard the environment.
- Baffinland applies the principles of pollution prevention, waste reduction and continuous improvement to minimize ecosystem impacts, and facilitate biodiversity conservation.
- We continuously seek to use energy, raw materials and natural resources more efficiently and effectively. We strive to develop more sustainable practices.
- Baffinland ensures that an effective closure strategy is in place at all stages of project development to ensure reclamation objectives are met.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 10 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

3.0 UPHOLDING HUMAN RIGHTS OF STAKEHOLDERS

- We respect human rights, the dignity of others and the diversity in our workforce. Baffinland honours and respects the unique cultural values and traditions of Inuit.
- Baffinland does not tolerate discrimination against individuals on the basis of race, colour, gender, religion, political opinion, nationality or social origin, or harassment of individuals freely employed.
- Baffinland contributes to the social, cultural and economic development of sustainable communities in the North Baffin Region.
- We honour our commitments by being sensitive to local needs and priorities through engagement with local communities, governments, employees and the public. We work in active partnership to create a shared understanding of relevant social, economic and environmental issues, and take their views into consideration when making decisions.
- We expect our employees and contractors, as well as community members, to bring human rights concerns to our attention through our external grievance mechanism and internal human resources channels. Baffinland is committed to engaging with our communities of interest on our human rights impacts and to reporting on our performance.


4.0 TRANSPARENT GOVERNANCE

- Baffinland will take steps to understand, evaluate and manage risks on a continuing basis, including those that may impact the environment, employees, contractors, local communities, customers and shareholders.
- Baffinland endeavours to ensure that adequate resources are available and that systems are in place to implement risk-based management systems, including defined standards and objectives for continuous improvement.
- We measure and review performance with respect to our safety, health, environmental, socio-economic commitments and set annual targets and objectives.
- Baffinland conducts all activities in compliance with the highest applicable legal & regulatory requirements and internal standards.
- We strive to employ our shareholder's capital effectively and efficiently and demonstrate honesty and integrity by applying the highest standards of ethical conduct.

4.1 FURTHER INFORMATION

Please refer to the following policies and documents for more information on Baffinland's commitment to operating in an environmentally and socially responsible manner:


Health, Safety and Environment Policy
Workplace Conduct Policy
Inuktitut in the Workplace Policy
Site Access Policy
Hunting and Fishing (Harvesting) Policy
Annual Report to Nunavut Impact Review Board

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 11 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

If you have questions about Baffinland's commitment to upholding human rights, please direct them to contact@baffinland.com.



Brian Penney
Chief Executive Officer
March 2016


	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 12 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

3 SITE SECURITY AND SAFETY

Copies of all safety and management documents will be made available to on site personnel. On site personnel involved with operations at the Q1 Quarry are required to take mandatory operational and safety training. The active supervisor, with support from the onsite Environment and Health & Safety departments, will ensure that quarry operations are consistent with other management plans, terms and conditions of the issued permits and safety procedures for the Project.

Security signage will be posted at the entrance to the quarry. The remoteness of the quarry and the onsite presence of operations personnel will make perimeter fencing unnecessary.

Blasting and processing operations will be suspended if incursions into the quarry occur, or if observations of wildlife in the immediate quarry area are made. Personnel working in the area will provide warnings if approach by any animals are noted. All employees working on the quarry operation will receive wildlife awareness training. Baffinland's Operations Blasting Procedure (BAF-PH1-340-PRO-0003) further describes safety protocols followed onsite.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 13 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

4 QUARRY OPERATIONS

4.1 DEVELOPMENT AND OPERATION

The quarry is accessed by a section of the historical Milne Inlet Tote Road which runs adjacent to the southwest corner of the Q1 Quarry. Current operations transports the following equipment to and from the quarry, as required:

- Drilling equipment
- Rock hauling trucks
- Excavators
- Blasting equipment
- Portable crusher/screener units

4.2 CURRENT QUARRY DEVELOPMENT AND PROPOSED DESIGN


Development of the Q1 Quarry began in 2013 near Milne Port to support the construction of the Mary River Project's Early Revenue Phase. Following the completion of construction in 2014, the quarry continues to be used to support current operations at Milne Port and the Tote Road.

To ensure operations at Milne Port and the Tote Road continue to have access to the required amount of aggregate to support production, an updated quarry design that allows for an additional 2,000,000 bank cubic metres (BCMs) to be removed is proposed in this plan. The current quarry development and the limits of the proposed quarry design are within the Q1 Quarry permit limits and are presented in Appendix A.

4.3 QUARRY DEVELOPMENT

The following steps provide a general description of how the Q1 Quarry was developed and provides details of the different activities associated with quarry development. Since there may be several faces where quarry mining is progressed at Q1, the following steps apply to each quarry face.

1. Access Road: Construct an access road with culvert water crossings and sediment and erosion controls from the crusher pad to the quarry face using fill material from a previously developed borrow/quarry site. This access road is used to transport the blasted quarry rock to a designated crusher pad.
2. Pioneer Bench and Loading Pad: Using a pioneer track drill, the first bench is drilled and blasted at some higher elevation so the bench bottom elevation is similar to the desired loading pad elevation. A portion of the initial blasted quarry rock will be utilized at the quarry face to create a level pad for loading quarry rock into haul trucks. After the

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 14 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

loading pad is finished, blasted quarry rock is hauled to the crushing pad as crusher feed material to produce rock products.

3. Bench Drilling: As each drill round is blasted out, the drill either stays at this elevation to expand the bench in a longitudinal direction along the face, or the drill climbs up the quarry site to a higher elevation to drill and blast subsequent higher elevation benches. These benches are expanded in length as required for subsequent blasting of rock at that bench elevation. Benches are created for safety and for efficient drill/blast operations.
4. Subsequent Bench Development: Additional benches are created at higher elevations, starting at the open face of the site. Each bench proceeds toward the main body of rock at that elevation. Lower benches follow behind upper benches and drilled and blasted to move toward the main body of rock. Ramps may be constructed to the upper benches for truck loading near the blasted rock. Material is excavated from benches and loaded onto trucks for delivery to the crusher.
5. Drilling Quarry Rock: Drilling of the quarry rock is normally completed with the use of one drill rig. The boreholes are laid out by a surveyor to the engineered spacing and burden for each particular rock type, geology, and desired product size. The drill is removed from the area for loading explosives and blasting. The drill can proceed along the bench to continue drilling or proceed to a new bench.
6. Blasting Operations: Blasting rock is completed by installing high explosive detonating boosters with initiation wires, followed by dropping pre-packaged sticks of explosives, or pouring from pre-packaged bags, or by pumping bulk explosives (i.e. emulsion) from an explosives truck into the boreholes. Detonation and initiation is carried out with the use of delays to time the detonators in a very fast millisecond sequence of smaller blasts for efficient rock breakage. Blasting lags behind the drill as more drilling is completed. As each new drill round is completed, the drill moves on and the drilled round is loaded with explosives and blasted.
7. Hauling Quarry Rock: The blasted rock is loaded onto trucks for delivery to the crusher.
8. Crushing Operations: Quarry rock is fed to the crusher and screening equipment to size and produce the desired rock product, stored in stockpiles and loaded into trucks for delivery to construction sites.

4.4 QUARRY ACTIVITIES

4.4.1 EXPLOSIVES MANAGEMENT AND BLASTING

A Blasting Management Framework has been developed and is presented in Annex 3 of the Borrow Pit and Quarry Management Plan. The framework focuses on the control and mitigation of key potential risks arising from the management and use of ammonium nitrate explosives at Project quarries.

The blasting operations will be carried out by Operations and/or an experienced contractor(s). Quarry operations will be using a combination of Ammonium Nitrate Emulsion (ANE), manufactured onsite at the

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 15 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

Mary River Mine Site Emulsion Plant, and pre-packaged explosives. Transportation of ANE and pre-packaged explosives to and from the quarry site will occur from the magazine storage area(s) and the Mary River Mine Site Emulsion Plant via Project roadways.

Blast hole drilling will take place on an appropriate grid pattern, determined by field testing, in an effort to optimize blast rock size and blasting efficiency. Blasting will normally take place at the beginning and end of each shift on a seven days per week basis. The management of explosives for the Q1 Quarry will be consistent with the Project's Explosives Management Plan developed by Dyno Nobel (Dyno Nobel, 2013).

4.4.2 EXCAVATION AND CRUSHING

The entire operation takes place in an area of permafrost, and groundwater is therefore not an issue. Drilling will be monitored to avoid creating run off and drainage issues. Washing of aggregate is not required.

Some minor organic surface soils are present in the quarry area. If these overburden soils cannot be avoided, then they will be stripped and stored separately at the storage area for later re-use. Quarrying will work along the exposed rock faces and will be terraced to minimize run off from the site. Efforts will be made during blasting operations to avoid creating depressions which might collect run off or melt waters. Drilling and extraction exercises may occur concurrently, depending on issues of safety and schedule. Blasted rock will be cleared by loader and/or scraper and loaded into rock trucks for transport to the crusher/screener units. Loaders will feed rock to the crushing and screening operation.

Crushing and stockpiling areas will be located as near as practical to the southern extent of the quarry within easy access to the road location. Topsoil is present at the site, and will be retained in the stockpiling area for later re-use.

Crushing operations and screening operations will take place as required, occurring during night and day shift, seven days per week, if necessary. Crushing operations will process rock from the quarry, and may also process rock from other areas if required. Final material will be cleaned and stored by aggregate size in stockpiles for transport to the appropriate locations.

4.5 SITE MANAGEMENT MEASURES


Best management practices for quarry operations will be followed for the Q1 Quarry. The following management activities are incorporated into the site operations:

4.5.1 PRE-DEVELOPMENT ASSESSMENT FOR METAL LEACHING AND ACID ROCK DRAINAGE (ML/ARD)

The Milne Inlet Q1 Quarry was initially assessed prior to development utilizing the Protocol for the Assessment for the Potential for Acid Rock Drainage (Borrow Pit and Quarry Management Plan, Annex 2). AMEC was retained in the summer and fall of 2010 to undertake an assessment of proposed quarries to assess metal leaching and acid rock drainage (ML/ARD). One of the quarries assessed was the Q1 Quarry.

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 16 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

The AMEC report presenting these results is provided in Appendix B. Industry standard methods have confirmed that aggregate materials used have a low potential for ARD/ML.

Field observations and sampling from quarry operations to date continue to confirm the low potential for ARD/ML at the Q1 Quarry. Operational sampling results for the Q1 Quarry are provided to QIA annually in the Annual Report, required by the Commercial Lease.

4.5.1.1 REVIEW OF GEOLOGICAL INFORMATION AND SITE RECONNAISSANCE

Prior to quarry development, a review was conducted of existing site information and a visual inspection of surface portions of the proposed quarry development area was undertaken by means of a walk around. The review indicated that the quarry and surrounding areas are underlain by Archean age Precambrian rocks consisting of migmatitic gneisses. The gneisses are heterogeneous commonly with inclusions and bands of mafic, metasedimentary and other granitic rocks. Visual observations of the quarry development area indicated that outcrop exposure was excellent with little soil covering. Trace to no sulphides was observed during the site visit and there were no surface areas of visible sulphide oxidation.

4.5.1.2 SAMPLING

Prior to quarry development, one borehole (BH10-04) was advanced to a depth of 15 metres. Refer to Appendix A for the borehole location. Three representative samples of the rock core were sent for laboratory analyses. The intervals for rock sample selection were based on review of available drill logs and photographs. The strategy for sample selection and collection was based upon guidance found in MEND 2009 (Prediction Manual for Drainage Chemistry from Sulphidic Geologic Materials). Visual inspection of the core from BH10-04 indicated only the rare presence of sulphide minerals, primarily on fracture surfaces.

4.5.1.3 ANALYTICAL TESTING METHODS

Analytical tests included the following:

- Acid base accounting (ABA) including paste pH, modified Sobek neutralization potential (NP), total sulphur, sulphate sulphur, sulphide sulphur by difference, total carbon (TC) and total inorganic carbon (TIC)
- Total metals analysis
- Leachable metals by shake flask extraction (SFE)
- Mineralogy by X-ray diffraction (XRD) with Rietfeld refinement.


4.5.1.4 RESULTS

The results of the above analyses for BH10-04 indicate that the bedrock gneiss underlying the Milne Inlet (Q1) quarry development area exhibit the following characteristics:

- Paste pH is weakly alkaline (9.56 to 9.92).

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 17 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

- Sulphide content was less than 0.01% for all samples.
- All samples had neutralization potential ratios (NPR) well in excess of 2. These materials are considered non potentially acid generating.
- Neutralization potential (NP) values were low and ranged from 7.9 to 8.8.
- In a comparison of total metal results of samples to crustal abundances, no notable elevated metal concentrations were noted.
- There were no concerns regarding the results of the SFE tests.
- The Rietveld XRD analyses indicated no acid producing sulphide minerals identified, showing consistency with the low Acid Potential (AP) of all the samples analyzed. Calcite was identified in the sample.

4.5.1.5 KEY CONCLUSIONS AND RECOMMENDATIONS FROM PRE-DEVELOPMENT ML/ARD ASSESSMENT

- Based on the results of geochemical and mineralogical analyses and general surface and subsurface geological observations there is a low potential for ML/ARD and the materials are therefore expected to be a suitable quarry source.
- Based on the work to date, both locally and regionally, in other areas of gneiss that have been investigated along the Tote Road and Milne Port, there is no evidence of elevated sulphide. Regardless, the relatively low NP in the material sampled suggests that the presence of low sulphide could potentially result in ML/ARD conditions.

Based on the above conclusions, the operational testing program is recommended to continue during the quarry extraction process. Approximately one (1) composite sample of quarry material representative of a blast (muck sample or blast hole cuttings) be collected per 10,000 m³ of material quarried. The analytical methods to be adopted will be as for the predictive sampling (MEND, 2009) or a defined alternative that has been shown to be predictive of ARD/ML. The sampling frequency should be adjusted to account for ongoing results. The quarried material can also be visually inspected for the presence of sulphides.


4.5.1.6 FUTURE REPORTING

Operational testing results will continue to be included in the Annual Report prepared for the QIA as required by the Commercial Lease.

4.5.2 BLASTING OPERATIONAL MANAGEMENT

A Blasting Management Framework has been developed and is presented in Annex 3 of the Borrow Pit and Quarry Management Plan. The framework focuses on the control and mitigation of key potential risks arising from the management and use of ammonium nitrate explosives at Project quarries.

In addition, blasting operations at the Q1 Quarry will adhere to the protocols outlined in Baffinland's Operations Blasting Procedure (BAF-PH1-340-PRO-0003).

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 18 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

4.5.3 DRAINAGE MANAGEMENT

The potential exists to alter drainage patterns of overland flow paths and to cause minor affects to local water quality. The hydrological regime around the quarry site has been defined, and the appropriate direction of flows from site will be managed to maintain the natural flow patterns as much as possible. Poorly developed overland flow paths that intersect with the quarry development area will be modified as required to accommodate flows around the quarry development. This can be accomplished by means of diversion berms or excavation of shallow ditches. The quarry is currently designed to avoid fish bearing streams. The nearest downstream fish-bearing receiver is over one kilometre away as measured along the interpreted flow paths. A drainage plan showing interpreted flow paths and downstream receivers for the Q1 Quarry is presented in Appendix A.

Sources of contamination from the operation that could affect water quality include dust from blasting and refuelling of equipment. Blasting residue from explosives will be managed by following best practices to ensure that all material is fully consumed during the blasting process. Vehicle re-fuelling will be conducted at a centralized fuelling facility off site that has proper containment and spill response capability. Refuelling of stationary onsite equipment, such as generators, will take place in a secured area with approved spill containment.


4.5.4 GROUND ICE AND PERMAFROST MANAGEMENT

Current development of the Q1 Quarry has uncovered no significant amounts of permafrost (frozen unconsolidated rock) and/or ground ice. Due to this and the limited amount of data available, the depth of the permafrost active layer in unconsolidated rock near the Q1 Quarry is assumed to be consistent with the Project area's typical depth of 1 to 2 metres.

In the event that significant sections of permafrost and/or ground ice are uncovered during quarry development, a specific action plan will be developed and submitted for approval to the relevant agencies prior to executing the mitigation measures outlined in the action plan. In general, mitigation measures to prevent degradation of uncovered permafrost and/or ground ice will consist of removing any ponding water and backfilling the impacted permafrost and/or ground ice with available material to reinstate the original topography.

Until the uncovered permafrost and/or ground ice can be addressed, the condition of the uncovered permafrost and/or ground ice will be periodically monitored by Operations personnel and inspected twice a year during the summer months by a Geotechnical Engineer as part of the biannual Geotechnical Inspections required by Baffinland's Type "A" Water Licence (2AM-MRY1325 – Amend. 1). The condition of the permafrost and/or ground ice at the quarry will be included in the biannual Geotechnical Inspection Reports and provided to the Nunavut Water Board and QIA as required.

4.5.5 DUST MANAGEMENT

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 19 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

The primary sources of dust associated with activities at the Q1 Quarry are blasting, loading and crushing and screening of aggregates. Very little topsoil exists at the quarry site, and is not considered a primary source of dust. The management of dust will be accomplished by minimizing the creation of dust at source. Crushing activity will take place as far from surface water or dust sensitive areas as is practical at the site. If possible, protection from prevailing winds will be accomplished by situating the crushing operation to take advantage of the local topography for shelter. Transport of material will be subject to speed limit restrictions to help reduce dust.

Dust management activities will include dustfall monitoring. Dustfall monitoring for the Q1 Quarry will consist of monitoring the snow near the quarry for deposits of quarry dust by means of visual observations in concert with the Project's Dustfall Monitoring Program, developed to quantify the extent and magnitude of dust fall generated by Project activities. If significant dust deposits are observed, an action plan will be developed to mitigate potential risks to receiving water bodies. The Project's current Dustfall Monitoring Program is presented in Baffinland's Terrestrial Environment Mitigation and Monitoring Plan (BAF-PH1-830-P16-0027) and includes several monitoring locations at and around Milne Port.

4.5.6 NOISE MANAGEMENT

Quarry activities will generate noise from equipment operation, blasting and crushing and screening operations. Noise receptors within the area are restricted to wildlife and accommodation camps at Milne Port.

During quarry operations, wildlife monitors will inform management if significant wildlife activity, such as caribou movements, is occurring. Depending on the concentrations and likely effect of the noise generating activity, management may temporarily suspend operation of the quarry.


4.5.7 CHANCE FINDS ("CARVING STONE" DEPOSITS AND CULTURAL HERITAGE SITES)

The Mary River Project area has been occupied by humans for over 4,000 years. Archaeological sites are very common throughout the region, mostly consisting of stone structures that usually represent tent rings and shelters, caches, traps, hunting blinds, cairns and inukshuks. Therefore the potential exists to encounter undiscovered cultural heritage or archaeological resources (Chance Finds) during quarry development.

The quarry permitted limits, as shown in Appendix A, for the Q1 Quarry were fully assessed for cultural heritage and archaeological sites as well as "carving stone" deposits during 2007 and 2008. No sites or deposits were found in the permitted quarry limits during the assessment.

In the event that a cultural heritage or archeological site is discovered, the discovery will be managed as outlined in the Section 2.1 of Baffinland's Environmental Protection Plan (BAF-PH1-830-P16-008).

Similarly, discoveries of "carving stone" deposits, as defined in the Commercial Lease, will be reported to the onsite Environment Department and confirmed by the onsite Project geologist. If confirmed,

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 20 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

Baffinland will notify the QIA and relevant agencies of the discovery and manage the deposit in accordance with Article 19 of the IIBA between the QIA and Baffinland.

4.6 MONITORING

Operation of the Q1 Quarry must be monitored to ensure compliance with the Borrow Pit and Quarry Management Plan and to meet the terms and conditions of the regulations and land-use permits granted for the Project. Current monitoring focuses on:

- Regular inspection of site-preparation measures
- Regular inspection of drainage from the quarry site
- Volume and quality estimates of the granular resource material produced
- Monitoring for permafrost and ground-ice presence
- Monitoring for presence of avian, terrestrial and marine mammals in the area
- Monitoring of water quality for changes
- Monitoring of snow surrounding quarries for dust deposition
- Any additional reporting requirements as outlined in any permits


Water quality monitoring stations established will be sampled and compared to the relevant discharge criteria in accordance with Baffinland's Type A Water Licence 2AM-MRY1325 (Type A Water Licence). The current water quality monitoring stations, MP-Q1-01 and MP-Q1-02 are described below in Table 4-1. Due to changes in the Port Site Water Management Plan completed in the winter of 2018 and 2019, the water quality monitoring locations will be relocated to the proposed locations shown on Drawing No. H353004-40000-228-272-0002-0001, provided they are demonstrated to be suitable and water is observed to be discharging from the quarry at this locations in spring 2019

TABLE 4-1: Q1 QUARRY WATER QUALITY MONITORING LOCATIONS

Monitoring Location	UTM Coordinates (NAD83)		Latitude	Longitude	Flow Path No. ¹
	Easting (m)	Northing (m)			
MP-Q1-01	503,828	7,975,062	71° 52' 32" N	80° 53' 23" W	1
MP-Q1-02	503,811	7,975,272	71° 52' 39" N	80° 53' 25" W	2

¹ Drainage flow paths are identified on the Q1 Quarry Drainage Layout in Appendix A.


In the event that water quality at monitoring locations exceed the relevant discharge criteria, additional investigative water sampling will be conducted to identify the source of elevated water quality parameters and prescribe the appropriate corrective actions to ensure water quality meets the relevant discharge criteria outlined in the Type A Water Licence.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 21 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

5 SUPPORTING MANAGEMENT PLANS

This plan should be viewed in concert with the following additional plans:

- Emergency response plan (BAF-PH1-830-P16-0007)
- Spill contingency plan (BAF-PH1-830-P16-0036)
- Surface water and aquatic ecosystems management plan (BAF-PH1-830-P16-0026)
- Terrestrial environment mitigation and monitoring plan (BAF-PH1-830-P16-0027)
- Explosives management plan (Dyno Nobel, 2013)
- Waste management plan (BAF-PH1-830-P16-0028)
- Acid rock drainage testing protocol (refer to Borrow Pit And Quarry Management Plan, Annex c)
- Blasting management framework protocol (refer to Borrow Pit And Quarry Management Plan, Annex b)
- Operations blasting procedure (BAF-PH1-340-PRO-0003)

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 22 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

6 CLOSURE AND RECLAMATION ACTIVITIES

The closure and reclamation of the Q1 Quarry and access roads have been integrated into the Projects Interim Closure and Reclamation Plan (BAF-PH1-830-P16-0012). Specific activities required for closure and reclamation of the Q1 Quarry are described in the subsections below. Closure of the active quarry face will involve removing all materials, equipment and infrastructure and reclaiming the site to a self-sustaining productive ecosystem.

6.1 CLOSURE OF ACTIVE QUARRY FACE

The active quarry face will be terraced during operation to closely manage issues related to drainage and will not be altered for closure. The quarry development will minimize the creation of pits and depressions to the degree practicable to reduce the potential for standing water. The quarry pit floor will be left as free draining.

6.2 WASTE DISPOSAL

All site waste will be collected and placed in appropriate containers for removal. Pre and post waste removal inspections will be made to ensure the thoroughness of the program. Waste will include metallic waste, construction material waste and domestic waste.


At the current time, no washroom facilities for personnel are expected at the quarry site. Any requirement for such facilities will be met by easily removable portable toilets. These will be operated in a manner consistent with regulations, and disposal will be in accordance with Baffinland's Waste Management Plan (BAF-PH1-830-P16-0028).

6.3 STOCKPILE REMOVAL

Quarrying activities will be closely managed to avoid the accumulation of unnecessary stockpiles of aggregate. Any stockpiles that do remain will be dealt with as follows:

- Large rock will be spread out on the landscape or used as rip-rap for erosion control
- Medium sized rock will be used to re-contour affected areas to re-establish a more natural appearance to the area
- Small crushed rock will be used to assist in drainage restoration, and spread on the landscape to re-establish more natural contours

Any collected soils will be spread to allow for the re-establishment of vegetation. No vegetation planting or seeding operations will take be undertaken to avoid introducing invasive species and natural re-vegetation will be allowed to take place

	Q1 Quarry Management Plan	Issue Date: May 6, 2019	Page 23 of 27
	Environment	Revision: 1	Document #: BAF-PH1-830-P16-0017

6.4 ROAD RECLAMATION


The Q1 Quarry access road(s) and the historical Milne Inlet Tote Road will be rehabilitated under Baffinland's Interim Closure and Reclamation Plan for the Mary River Project. Road bed will be removed as required to re-establish natural contours throughout the area.

6.5 SOIL REMEDIATION FOR CONTAMINATED SOILS

A pre-closure inspection of the entire quarry site will be made. Any contaminated soils, snow or ice packs, or overburden will be flagged. The extent of the contamination will be determined, and the material removed. Hydrocarbon contaminated soils or overburden will be transported to the Milne Port Landfarm Facility for treatment. Other contamination, such as heavy metals or toxins, will require containerization for shipment off site to an appropriate facility (refer to Interim Closure and Reclamation Plan)

6.6 PERMAFROST AND GROUND ICE

Reclamation of uncovered permafrost and ground/ice will involve removing any ponding water and backfilling the impacted permafrost and/or ground ice with available material as described in Section 6.3 of this plan.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 24 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

7 ENVIRONMENTAL RESPONSIBILITIES

7.1 ROLES AND RESPONSIBILITIES

The Baffinland environmental team is organised into two parts, on site as well as off site. The organisational structure for the Mary River Project in relation to the environment discipline is shown in the Table 5-1 below. Communication channels are described as liaisons in the tables outlining the responsibilities and accountabilities in the following sections.

7.1.1 ENVIRONMENTAL PROJECT TEAM

7.1.1.1 THE BAFFINLAND ENVIRONMENTAL TEAM

The Baffinland Environmental Team will oversee all environmental and community works on and off site. The Baffinland Corporate Environmental Team responsibilities are summarized in Table 5-1.

TABLE 7-1: BAFFINLAND IRON MINES CORPORATION SENIOR MANAGEMENT

Baffinland Senior Management	
Position	Responsibilities and Accountabilities
VP Human Resources and Sustainable Development	<ul style="list-style-type: none"> - Reports to Baffinland's President & CEO - Oversees government relations and northern affairs
Vice President, Corporate Sustainability	<ul style="list-style-type: none"> - Reports to VP Human Resources and Sustainable Development - Accountable for environmental permitting and regulatory compliance
Director of Health, Safety, Environment and Security	<ul style="list-style-type: none"> - Reports to Baffinland's President & CEO - Establish corporate environmental policies and objectives - Monitors and reports on Baffinland's performance related to environmental policies and objectives - Accountable for emergency response systems and activities
Director, Corporate Sustainability	<ul style="list-style-type: none"> - Reports to Baffinland's VP Human Resources and Sustainable Development - Liaise with regulatory authorities - Obtains necessary permits and authorizations - Monitors compliance with terms and conditions of permits and licences

The Baffinland Environmental Team will oversee all environmental activities on site. These responsibilities on-site are outlined in Table 7-2.



	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 25 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

TABLE 7-2: BAFFINLAND IRON MINES CORPORATION ON-SITE ENVIRONMENTAL TEAM

Baffinland Project Environmental Department (Onsite)	
Position	Responsibilities and Accountabilities
Health, Safety, Environment and Security Manager	<ul style="list-style-type: none"> - Reports to Head of Health, Safety, Environment and Security - Monitors environmental performance of contractors on site - Monitors compliance with permits, licenses and authorizations - Regulatory environmental monitoring and reporting (monthly, annual) - Routine audit of contractor's environmental performance on-site - Initiate/supervise environmental studies - Investigate and reports on accidents and incidents when they occur - Liaises with regulatory inspectors - Review and update environmental management plans.
Environmental Superintendent	<ul style="list-style-type: none"> - Reports to Health, Safety, Environment and Security Manager - Specific accountabilities for environmental monitoring and reporting - Assists in providing induction and environmental awareness information to trainers who conduct orientations to new employees and contract workers.
Environmental Coordinators and Technicians	<ul style="list-style-type: none"> - Reports to the Environmental Superintendent - Environmental database management - Various sampling, monitoring and reporting activities as required by permits, licenses and environmental management plans - Prepare updates to environmental protection plan and management plans.
Environmental Monitors	<ul style="list-style-type: none"> - Reports to the Environmental Superintendent - Conduct monitoring activities as per the Environmental Management Plans
QIA Monitors	<ul style="list-style-type: none"> - Various monitoring and follow up activities - Role defined in the IIBA agreement - Liaises with QIA and attends applicable meetings.

8 REFERENCES

Dyno Nobel. 2013. Baffinland Iron Mines: Mary River Project – Explosives Management Plan


	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 26 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

APPENDIX A

Q1 Quarry Drainage Drawing and Updated Quarry Design

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

	Q1 Quarry Management Plan	Issue Date: May 6, 2019 Revision: 1	Page 27 of 27
	Environment	Document #: BAF-PH1-830-P16-0017	

APPENDIX B

AMEC - Tote Road Aggregate Sources Geochemistry Characterization Report

The information contained herein is proprietary to Baffinland Iron Mines Corporation and is used solely for the purpose for which it is supplied. It shall not be disclosed in whole or in part, to any other party, without the express permission in writing by Baffinland Iron Mines Corporation.

Note: This is an UNCONTROLLED COPY. All staff members are responsible to ensure the latest revision is used.

TECHNICAL MEMORANDUM

To	Greg Wortman, AMEC Doron Golan, AMEC	Project No.	TC101510
		File No.	017
From	Catherine Daniels, AMEC Steve Walker, AMEC	cc	Brian Lapos – AMEC Stephan Theben - AMEC Steve Sibbick – AMEC
Tel	905-568-2929 x 4104		
Email	steve.walker@amec.com		
Date	December 10, 2010		
Subject	Baffinland Mary River Project – Trucking Feasibility Study Interim ML/ARD Assessment of Tote Road Quarry and Borrow Pit Samples Rev1 – Issued for DEIS		

1.0 INTRODUCTION

AMEC was retained by Baffinland Iron Mines Corporation (Baffinland) to conduct environmental studies in support of an environmental impact assessment (EIA). As part of the supporting environmental studies, AMEC assessed the metal leaching and acid rock drainage (ML/ARD) characteristics of rock samples to support future borrow pit and quarry development along the proposed Milne Inlet Tote Road alignment upgrade.

Drill core and unconsolidated surficial materials were collected from potential quarry and borrow pit locations along the Tote Road alignment during a geotechnical investigation aggregate sourcing program. AMEC submitted selected samples to SGS Mineral Services (SGS) of Lakefield for geochemical analyses on the potential quarry and borrow pit materials. This memo reports on a screening level ML/ARD assessment of these materials.

2.0 SITE DESCRIPTION

The Mary River Project is located in the northern region of Baffin Island in Nunavut territory, Canada. This area experiences a mean annual temperature of approximately -12°C and monthly averages below -20°C from December to March. Above freezing temperatures occur only from June to August, with an average high of 4.4°C in July.

The existing all-season Milne Inlet Tote Road (Tote Road) is currently undergoing design for the purpose of upgrades for the transportation of ore from the mine site to Milne Inlet. The road was originally established in the 1960's and runs approximately 107 km from the Mary River exploration camp to Milne Inlet.

The majority of the Tote Road alignment follows the valley of Phillips Creek which is bounded by steep ridges located on either side of the road corridor.

Regional geologic mapping is available for the entire route of the Tote Road (Scott and de Kemp, 1998). Approximately the first 20 km of the Tote Road from Milne Inlet passes through Precambrian terrane. The middle 73 km of the road travels across relatively flat lying Paleozoic rocks and the final 14 km of the road to the Mary River site again passes through Precambrian terrane near the boundary with the Paleozoic units.

Paleozoic rocks along the route include the Cambrian-Ordovician age Gallery and Turner Cliffs Formations, the Ordovician age Ship Point Formation, and the Ordovician Silurian age Baillarge Formation. The Gallery Formation is ~340 m thick medium to coarse grained quartzose sandstone with minor siltstone, conglomerate and shale, and rare breccia, dolomitic sandstone and dolostone. The Turner Cliffs Formation is an approximately 310 m thick shaly to pure dolostone unit with intra-beds of dolomitic clastic sedimentary rocks. The Ship Point Formation is a 50 to 275 m thick finely crystalline dolostone that is commonly silty or sandy and interbedded with clastic dolomitic rocks. The formation is resistant and forms prominent cliffs in the area. The Baillarge Formation is an ~490 m thick unit of fine-grained limestones interbedded with minor dolostone, breccia, conglomerate, sandstone and cherty beds, and is often fossiliferous.

The Precambrian rocks are interpreted to be Archean age migmatitic gneisses in the region between Milne Inlet and the Paleozoic rocks and again between the Paleozoic sediments and the Mary River site. The migmatitic gneisses are heterogeneous commonly with inclusions and bands of mafic, metasedimentary and other granitic rocks. Archean Mary River Group rocks are present in close proximity to the migmatites along the route near the Mary River site. Mary River Group rocks consist mainly of siliciclastic sedimentary and mafic volcanic rocks. The Mary River Group hosts the Algoman-type iron formation deposits at the site.

3.0 METHODS

3.1 Sampling

During the autumn of 2010, AMEC conducted a geotechnical investigation of proposed quarry and borrow pit locations along the Tote Road alignment. The investigation included the collection of drill core from the quarry locations and the collection of unconsolidated material from borrow pit locations. .

3.2 Sample Selection for Testing

The objective in sample selection for ML/ARD characterization was to collect a set of samples for analysis which are representative of the geochemical variation of the different soil and rock types that will be used as quarry and borrow material for the Tote Road upgrade. Samples were selected from drill core and from the collected borrow pit material.

Intervals for rock sample selection were identified by AMEC after reviewing available drill logs, photographs and following direct inspection of the core. The strategy for sample selection and collection was based upon the guidance found within the document *Prediction Manual for Drainage Chemistry from Sulphidic Geologic Materials* (MEND 2009). Borehole locations and observed rock types are tabulated below.

Regional Mapped Geology and Borehole Rock Type

Regional Mapped Geology*	Borehole Number	Approximate Tote Road Chainage	Rock Type
Archean Migmatitic Gneiss	BH-10-04	2+100	Granitic Gneiss
	BH-10-05	3+100	Granitic Gneiss
	BH-10-06	4+100	Granitic Gneiss
	BH-10-07	5+000	Granitic Gneiss
	BH-10-08	6+000	Granitic Gneiss
	BH-10-09	7+000	Granitic Gneiss
	BH-10-12	22+000	Granitic Gneiss
Cambrian-Ordovician Gallery or Turner Cliffs Formation	BH-10-13	39+100	Carbonate bound quartz sandstone with silty interlayers
	BH-10-14	45+200	Sandy carbonate
	BH-10-15	50+000	Carbonate with minor shale and mudstone
	BH-10-16	61+500	Carbonate
Archean Migmatitic Gneiss	BH-10-21	85+000	Schist with pegmatite veining

* Scott and de Kemp, 1998

The drill core and material from 14 of the 15 borrow pits were shipped from the site to AMEC offices in Hamilton Ontario where the samples were split for ML/ARD analyses and aggregate testing. For the purposes of ML/ARD characterization, three sections of 1 m lengths of drill core

were selected from each of the 12 boreholes. The 1 m lengths of core were split in half with half retained and half submitted for geochemical analysis.

Borrow pit material was crushed and screened to <20 mm. The unconsolidated material from the borrow pits was then split such that approximately two kilograms of each sample was sent for geochemical analyses. The remainder of the borrow pit material and the remainder of quarry material will be used for aggregate source material testing presently underway.

The drill core samples selected represented 21 samples of gneiss and three samples of schist from the Precambrian units, and 12 samples of clastic and carbonate sedimentary rocks from the Paleozoic units. The borrow pit materials were typically sand or silty sand with varying quantities of gravel cobbles and boulders. Some had finer grained material as well as occasional small boulders. Cobbles and boulders in the samples generally consisted of carbonate or gneiss.

Visual inspection of the Precambrian core during the sample collection indicated the rare presence of sulphide minerals, primarily on fractured surfaces. No visible sulphide minerals were observed during inspection of the Paleozoic rock core samples at the time of sample selection. However, there was some iron staining noted in some samples.

3.3 Testing Methods

Split samples were shipped to SGS Lakefield for analysis. Testing methodologies followed those described in MEND (2009).

Analytical tests conducted included:

- Acid base accounting (ABA), including paste pH, modified Sobek neutralization potential (NP), total sulphur, sulphate sulphur, sulphide sulphur by difference, total carbon (TC) and total inorganic carbon (TIC);
- Total metals analysis by aqua regia digestion with ICP-MS finish;
- Leachable metals by shake flask extraction (SFE); and
- Mineralogy by X-ray diffraction (XRD) with Rietveld refinement.

Each sample was analysed for ABA and total metals. Testing by SFE and XRD were performed on a subset of samples, selected from the initial sample set. Considering project time-lines, the subset was selected prior to completion of the ABA and metals analyses. The subset was selected to best represent the entire sample set using the data available at the time.

4.0 GEOCHEMICAL TESTING RESULTS

4.1 Acid Base Accounting (ABA)

Results of ABA testing are summarized in Figures 1 and 2, with complete results presented in Table 1. A statistical summary of the results presented in Table 2. Results for rock samples are subdivided by lithology.

Figure 1 shows the relationship between modified Sobek NP and carbonate NP (CaNP) and indicates that carbonate minerals are the main source of NP in the sedimentary rocks and unconsolidated borrow pit materials. Non-carbonate minerals appear to be the primary source of NP for the schist and gneiss samples (Figure 1).

For the purposes of this screening level assessment, the calculated acid potential of the samples has been conservatively based on the total sulphur content, and is referred to as the maximum potential acidity (MPA) (Figure 2).

Overall findings of the results are summarized as follows:

- Paste pH of all samples were weakly alkaline. Carbonate rocks had a median paste pH of 8.3), whereas the schist and gneiss samples had the higher paste pH with a median of 9.8). Borrow pit materials reported a median paste pH of 8.9.
- Sulphide content of all samples was very low with the maximum concentrations ranging from 0.04% in carbonate sedimentary rocks to 0.02% in schist and 0.01% in gneiss and unconsolidated borrow pit materials.
- All samples had neutralization potential ratios (NPR) well in excess of 2 based on the more conservative MPA (Figure 2). These materials are considered non potentially acid generating (non-PAG).
- Gneiss and schist samples exhibited low NP values (median 8 and 10 kg CaCO_3/t respectively).
- Carbonate rich sedimentary rocks exhibited high NP (median carbonate NP of 890 kg CaCO_3/t).
- Unconsolidated materials had a generally high NP with most samples reporting >100 kg CaCO_3/t (median CaNP of 218 kg CaCO_3/t). However, the lowest NP of the sample set (5 kg CaCO_3/t) was from an unconsolidated borrow pit sample.

4.2 Metals Analyses

4.2.1 Total Metals

In order to identify metals of potential environmental significance, total metals results were compared to average continental crustal abundances (Price 1997). For screening purposes the concentration of an element was considered enriched if concentrations were greater than ten times the average crustal abundance. Metal results are presented in Table 3 and a statistical summary is provided in Table 4. It should be noted that the total concentration of an element does not determine the metal leaching potential of that element.

In general, the quarry and borrow pit samples demonstrated no notable elevation of elements relative to the average composition of the continental crust. However, the MDL values for bismuth and selenium were greater than ten times the average continental crust values. Therefore, any detectable values for bismuth or selenium were above ten times the average continental concentration.

4.2.2 Shake Flask Extraction Test

Eleven samples representing the three different rock types and four samples of unconsolidated borrow material underwent Shake Flask Extraction (SFE) testing. The SFE testing (Table 5) were compared to Metal Mining Effluent Regulation values (MMER, 2002). More stringent guideline values are also provided for reference purposes only. Guidelines for the protection of aquatic life and the drinking water guidelines (CWQG-PAL and CDWG guidelines in Table 5), which are focused on the preservation of water quality in the receiving waterbody for specific receptors (i.e., aquatic life, drinking water) are conservative since these values represent concentrations at point of use or exposure, not point of discharge. These guidelines are useful to identify parameters of interest when evaluating final discharge to receiving waters.

Results of SFE analyses (Table 5) for all samples, had a final pH that was neutral to alkaline with generally low concentrations of metals and no exceedances of MMER limits. The pH in SFE leachates for a number of these samples exceeded the MMER limit of 9.5. This is not unexpected for freshly exposed rock materials under agitation and at the high solid-solution ratios of the test. The high pH (and corresponding elevated aluminum concentrations) were likely related to the weak alkalinity associated with aluminosilicate mineral dissolution. It is unlikely the elevated pH (and associated aluminum) will be observed under field conditions. A single borrow material sample had an elevated copper concentration in comparison to the rest of the sample set. However, the concentration was an order of magnitude lower than the MMER limit.

4.3 Mineralogy

Rietveld XRD analysis was completed on 15 selected quarry and unconsolidated borrow pit samples. Results are presented in Table 6. The Rietveld method is effective at identifying crystalline phases present in abundance greater than a few weight percent. Lower abundances can be quantified where favourable scattering properties exist.

There were no acid producing sulphide minerals identified by XRD in the quarry or borrow pit samples, which is consistent with the low AP of all samples analysed. There were carbonate minerals identified in most of the samples.

Calcite was identified at low weight percent to trace values (<1.2%) in all but one of the granitic gneiss samples. Trace amounts of dolomite and rhodocrosite were also identified in a single granitic gneiss sample along with similarly low calcite. No carbonates were identified in one granitic gneiss sample and the single schist sample analysed.

Calcite was the dominant mineral (>98 wt.%) identified in the three carbonate samples. Trace dolomite and ankerite were also identified in these samples. In the carbonate cemented sandstone, dolomite (approximately 26%) was the only carbonate mineral identified.

Calcite, dolomite and ankerite were identified in most of the borrow material samples. Rhodocrosite was also identified in one sample. In the fourth sample the only carbonate mineral identified was calcite at very low weight percent (0.2%).

Calcite and dolomite have effective acid neutralizing properties, while the neutralizing ability of iron and manganese bearing carbonate minerals such as ankerite and rhodocrosite is uncertain. Dissolution rates of these minerals may be slower and under oxidizing conditions, hydrolysis of the iron and manganese released leads to no net neutralization. However, for this sample set the iron and manganese carbonates, when present, are always in low abundance compared to calcite and dolomite. Therefore, the presence of these minerals in this case will have only a minor influence on the neutralization potential of the materials.

5.0 CONCLUSIONS

Lithologically-based ML/ARD assessments have been completed on selected quarry and borrow materials along the Tote Road. Based on the results of this assessment, the following conclusions are made:

- The materials investigated in the proposed quarries and borrow pits along the Tote Road route appear to have a low potential for ML/ARD and are expected to be suitable as quarry or borrow sources. However, individual quarry and borrow sites should be

subjected to additional site specific ML/ARD characterization with consideration given for additional assessment depending upon the tonnages to be used and anticipated geological variability.

- The relatively low NP in the Precambrian rocks suggests that the presence of low contents of sulphide could potentially result in ML/ARD conditions. Diligence through adequate levels of sampling and monitoring during extraction operations will be necessary to ensure that the low concentrations of sulphide observed in this study are confirmed elsewhere.
- Paleozoic sedimentary rocks selected as potential quarry sources in this study are all carbonate rich and pose no ML/ARD risk. However, other non-carbonate sedimentary rocks are present in the region, so caution should be exercised should other quarry locations in the Paleozoic region be selected.
- Rietveld XRD results are consistent with ABA data for the rock-types analysed. Calcite or dolomite is confirmed to be in abundance in all carbonate rich samples and low to trace carbonate minerals are present in the granitic gneiss samples. For the gneiss samples neutralization from silicate minerals present in greater abundance than the carbonates is inferred.
- Borrow materials tested have high NPR values and pose no apparent ML/ARD risk.
- Carbonate as calcite and dolomite appear to be common components in most borrow materials tested; however, one sample was identified that was carbonate poor and quartz rich, thus having very low NP and suggesting not all borrow sources will have high carbonate NP.
- Ankerite and rhodocrosite were sometimes identified in carbonate-bearing samples, suggesting a portion of the carbonate content may not contribute to neutralization under oxidizing conditions. However, these carbonate forms were always subordinate to calcite or dolomite.

6.0 FUTURE WORK

The following work is planned and proposed.

- Continued collection and analysis of material from any future drilling or excavation programs along the Tote Road alignment to the extent necessary to minimize risk of ML/ARD.

7.0 REFERENCES

Canadian Council of Ministers of the Environment. 2007, Canadian Water Quality Guidelines for the Protection of Aquatic Life.

Health Canada. 2008, Guidelines for Canadian Drinking Water Quality.

MMER. 2002. Metal Mine Effluent Regulations SOR/2002-222.

MEND 2009, Prediction Manual for Drainage Chemistry from Sulphidic Geologic Materials.
Natural Resources Canada.

Price, W.A., 1997. Draft Guidelines and Recommended Methods for the Prediction of Metal Leaching and Acid Rock Drainage at Minesites in British Columbia.

Scott, D.J. and de Kemp, E.A. Bedrock geology compilation, northern Baffin Island and northern Melville Peninsula, North West Territories; Geological Survey of Canada, Open File, 3633, scale 1:500,000.

CMD/SW/SS/vc

P:\EM\Projects\2010\TC101510 Baffinland Trucking Feasibility\2. Correspondence\TC101510-2010_12_09-290_MEM-017rev1-ToteRoadGeochem.docx

Attachments:

Table 1 — Acid Base Accounting Results

Table 2 — Acid Base Accounting Statistics

Table 3 — Total Metals Results

Table 4 — Total Metals Statistics

Table 5 — Shake Flask Analysis Results

Table 6 — Rietveld Quantitative Analysis X-ray Diffraction Results

Figure 1 — ABA Results - CaNP vs. NP

Figure 2 — ABA Results – NP vs. MPA

TABLES

**Table 1 Acid Base
Accounting Results**

Sample ID	Drill Log Lithology	Sample weight(g)	HCl added mL	HCl Normality	NaOH Normality	NaOH to pH=8.3 mL	Final pH units	Fizz Rate ---	Paste pH units
10-TR-001 BH10-04	gneiss	2.05	20.00	0.10	0.10	16.77	1.36	1	9.56
10-TR-002 BH10-04	gneiss	2.01	20.00	0.10	0.10	16.75	1.39	1	9.92
10-TR-003 BH10-04	gneiss	1.98	20.00	0.10	0.10	16.50	1.39	1	9.58
10-TR-004 BH10-05	gneiss	2.03	20.00	0.10	0.10	17.00	1.40	1	9.79
10-TR-005 BH10-05	gneiss	1.97	20.00	0.10	0.10	17.41	1.38	1	9.76
10-TR-006 BH10-05	gneiss	2.03	20.00	0.10	0.10	17.48	1.38	1	9.73
10-TR-007 BH10-06	gneiss	1.98	20.00	0.10	0.10	17.03	1.39	1	9.78
10-TR-008 BH10-06	gneiss	2.01	20.00	0.10	0.10	17.05	1.42	1	9.65
10-TR-009 BH10-06	gneiss	1.98	20.00	0.10	0.10	16.95	1.41	1	9.90
10-TR-010 BH10-07	gneiss	2.00	20.00	0.10	0.10	16.18	1.46	1	9.98
10-TR-011 BH10-07	gneiss	1.98	20.00	0.10	0.10	15.37	1.50	1	9.66
10-TR-012 BH10-07	gneiss	1.96	20.00	0.10	0.10	15.48	1.43	1	9.90
10-TR-013 BH10-08	gneiss	2.00	20.00	0.10	0.10	17.47	1.38	1	9.68
10-TR-014 BH10-08	gneiss	2.04	20.00	0.10	0.10	16.10	1.44	1	9.46
10-TR-015 BH10-08	gneiss	2.04	20.00	0.10	0.10	15.75	1.46	1	9.52
10-TR-016 BH10-09	gneiss	1.98	20.00	0.10	0.10	17.53	1.40	1	10.00
10-TR-017 BH10-09	gneiss	2.04	20.00	0.10	0.10	17.10	1.41	1	9.91
10-TR-018 BH10-09	gneiss	1.99	20.00	0.10	0.10	17.36	1.37	1	9.99
10-TR-019 BH10-12	gneiss	2.05	20.00	0.10	0.10	16.74	1.42	1	9.94
10-TR-020 BH10-12	gneiss	1.98	20.00	0.10	0.10	15.89	1.44	1	9.93
10-TR-021 BH10-12	gneiss	2.04	20.00	0.10	0.10	16.43	1.42	1	9.84
10-TR-034 BH10-21	schist	1.97	20.00	0.10	0.10	15.09	1.26	2	9.97
10-TR-035 BH10-12	schist	2.02	20.00	0.10	0.10	15.86	1.26	1	9.80
10-TR-036 BH10-12	schist	2.03	20.00	0.10	0.10	15.76	1.17	1	9.67
10-TR-022 BH10-13	sandstone	2.01	118.20	0.10	0.10	26.10	1.70	3	9.43
10-TR-023 BH10-13	sandstone	2.00	127.75	0.10	0.10	27.00	1.76	3	9.34
10-TR-024 BH10-13	sandstone	1.95	135.60	0.10	0.10	29.10	1.75	3	9.38
10-TR-025 BH10-14	sandy carbonate	2.03	589.90	0.10	0.10	200	1.51	4	8.27
10-TR-026 BH10-14	sandy carbonate	2.02	643.90	0.10	0.10	268	1.52	4	8.07
10-TR-027 BH10-14	sandy carbonate	2.00	641.20	0.10	0.10	259	1.50	4	8.22
10-TR-028 BH10-15	carbonate	1.97	685.90	0.10	0.10	301	1.50	4	8.22
10-TR-029 BH10-15	carbonate	1.96	640.00	0.10	0.10	266	1.50	4	8.38
10-TR-030 BH10-15	carbonate	1.98	490.00	0.10	0.10	116	1.71	4	8.23
10-TR-031 BH10-16	carbonate	1.99	490.00	0.10	0.10	106	1.74	4	8.23
10-TR-032 BH10-16	carbonate	1.98	474.20	0.10	0.10	93.80	1.78	4	8.27
10-TR-033 BH10-16	carbonate	1.96	470.00	0.10	0.10	96.20	1.76	4	8.26
S449-10	sand/gravel	2.00	393.20	0.10	0.10	122	1.60	4	8.75
S450-10	sand/gravel	2.01	338.10	0.10	0.10	57.00	1.85	4	8.38
S451-10	sand/gravel	1.97	131.70	0.10	0.10	38.20	1.55	4	8.55
S452-10	sand/gravel	1.97	146.40	0.10	0.10	48.00	1.59	4	8.97
S453-10	sand/gravel	1.99	135.30	0.10	0.10	29.10	1.69	4	8.87
S454-10	sand/gravel	1.95	20.00	0.10	0.10	17.94	1.11	1	8.42
S455-10	sand/gravel	1.96	26.00	0.10	0.10	11.31	1.57	1	9.51
S456-10	sand/gravel	1.97	79.10	0.10	0.10	20.21	1.75	3	8.99
S457-10	sand/gravel	2.00	83.90	0.10	0.10	15.24	1.85	3	9.07
S458-10	sand/gravel	1.97	55.40	0.10	0.10	21.25	1.58	3	9.24
S459-10	sand/gravel	2.03	154.20	0.10	0.10	28.60	1.83	4	8.86
S460-10	sand/gravel	1.96	77.40	0.10	0.10	23.81	1.65	4	8.93
S461-10	sand/gravel	1.99	97.90	0.10	0.10	21.30	1.78	3	9.14
S462-10	sand/gravel	2.01	153.10	0.10	0.10	28.40	1.82	3	8.95

**Table 1 Acid Base
Accounting Results (Continued)**

Sample ID	Drill Log Lithology	Total Carbon %	CO3 %	Total Sulphur %	Sulphate Sulphur %	Sulphide Sulphur %	Neutralization Potential kg CaCO ₃ /t	Acid Potential kg CaCO ₃ /t
10-TR-001 BH10-04	gneiss	0.059	0.103	0.014	0.01	<0.01	7.9	0.31
10-TR-002 BH10-04	gneiss	0.050	0.101	<0.005	<0.01	<0.01	8.1	0.31
10-TR-003 BH10-04	gneiss	0.064	0.137	<0.005	<0.01	<0.01	8.8	0.31
10-TR-004 BH10-05	gneiss	0.041	0.059	0.020	0.02	<0.01	7.4	0.31
10-TR-005 BH10-05	gneiss	0.032	0.033	0.015	0.01	<0.01	6.6	0.31
10-TR-006 BH10-05	gneiss	0.029	0.028	0.038	0.02	0.01	6.2	0.44
10-TR-007 BH10-06	gneiss	0.036	0.048	<0.005	<0.01	<0.01	7.5	0.31
10-TR-008 BH10-06	gneiss	0.028	0.025	0.008	<0.01	<0.01	7.3	0.31
10-TR-009 BH10-06	gneiss	0.035	0.075	0.006	<0.01	<0.01	7.7	0.31
10-TR-010 BH10-07	gneiss	0.027	0.014	0.035	0.02	0.01	9.5	0.36
10-TR-011 BH10-07	gneiss	0.038	0.027	0.036	0.04	<0.01	11.7	0.31
10-TR-012 BH10-07	gneiss	0.036	0.052	0.019	0.02	<0.01	11.5	0.31
10-TR-013 BH10-08	gneiss	0.028	0.035	<0.005	<0.01	<0.01	6.3	0.31
10-TR-014 BH10-08	gneiss	0.044	0.380	0.020	0.02	<0.01	9.6	0.31
10-TR-015 BH10-08	gneiss	0.043	0.062	0.028	0.03	<0.01	10.4	0.31
10-TR-016 BH10-09	gneiss	0.020	0.034	0.012	0.01	<0.01	6.2	0.31
10-TR-017 BH10-09	gneiss	0.070	0.048	0.012	0.01	<0.01	7.1	0.31
10-TR-018 BH10-09	gneiss	0.023	<0.005	0.038	0.04	<0.01	6.6	0.31
10-TR-019 BH10-12	gneiss	0.035	0.018	0.029	0.03	<0.01	8.0	0.31
10-TR-020 BH10-12	gneiss	0.051	0.071	0.028	0.02	0.01	10.4	0.40
10-TR-021 BH10-12	gneiss	0.046	0.065	0.006	<0.01	<0.01	8.8	0.31
10-TR-034 BH10-21	schist	0.096	0.282	0.015	0.02	<0.01	12.5	0.31
10-TR-035 BH10-12	schist	0.052	0.054	0.060	0.04	0.02	10.2	0.77
10-TR-036 BH10-12	schist	0.049	0.023	0.023	0.01	0.01	10.4	0.41
10-TR-022 BH10-13	sandstone	2.77	12.0	<0.005	<0.01	<0.01	229	0.31
10-TR-023 BH10-13	sandstone	2.98	12.5	<0.005	<0.01	<0.01	252	0.31
10-TR-024 BH10-13	sandstone	3.25	14.0	<0.005	<0.01	<0.01	273	0.31
10-TR-025 BH10-14	sandy carbonate	11.1	54.3	<0.005	<0.01	<0.01	959	0.31
10-TR-026 BH10-14	sandy carbonate	10.8	52.3	<0.005	<0.01	<0.01	930	0.31
10-TR-027 BH10-14	sandy carbonate	11.2	54.0	0.071	0.03	0.04	956	1.29
10-TR-028 BH10-15	carbonate	10.9	53.2	0.014	0.01	<0.01	978	0.31
10-TR-029 BH10-15	carbonate	10.7	51.3	0.041	0.02	0.02	953	0.77
10-TR-030 BH10-15	carbonate	10.7	51.5	0.020	<0.01	0.01	945	0.34
10-TR-031 BH10-16	carbonate	10.8	53.5	<0.005	<0.01	<0.01	965	0.31
10-TR-032 BH10-16	carbonate	10.7	52.9	<0.005	<0.01	<0.01	961	0.31
10-TR-033 BH10-16	carbonate	10.7	52.1	<0.005	<0.01	<0.01	954	0.31
S449-10	sand/gravel	7.86	33.9	0.011	0.01	<0.01	678	0.31
S450-10	sand/gravel	8.02	36.0	<0.005	<0.01	<0.01	699	0.31
S451-10	sand/gravel	2.92	11.7	<0.005	<0.01	<0.01	237	0.31
S452-10	sand/gravel	2.89	12.4	0.014	0.01	<0.01	250	0.31
S453-10	sand/gravel	3.22	13.9	<0.005	<0.01	<0.01	267	0.31
S454-10	sand/gravel	0.061	0.016	<0.005	<0.01	<0.01	5.3	0.31
S455-10	sand/gravel	0.410	0.255	<0.005	<0.01	<0.01	37.5	0.31
S456-10	sand/gravel	1.82	6.20	0.007	<0.01	<0.01	150	0.31
S457-10	sand/gravel	1.44	5.37	<0.005	<0.01	<0.01	172	0.31
S458-10	sand/gravel	1.12	4.17	0.007	<0.01	<0.01	86.7	0.31
S459-10	sand/gravel	3.87	16.2	<0.005	<0.01	<0.01	309	0.31
S460-10	sand/gravel	1.71	7.29	<0.005	<0.01	<0.01	137	0.31
S461-10	sand/gravel	2.33	10.2	0.005	<0.01	<0.01	192	0.31
S462-10	sand/gravel	3.75	16.7	0.007	<0.01	<0.01	310	0.31

**Table 1 Acid Base
Accounting Results (Continued)**

Sample ID	Drill Log Lithology	Maximum Potential Acidity kg CaCO ₃ /t	Carbonate Neutralization Potential kg CaCO ₃ /t	Ratio NP/AP ratio	Ratio NP/MPA ratio	Ratio CaNP/AP ratio	Net NP kg CaCO ₃ /t
10-TR-001 BH10-04	gneiss	0.44	4.92	25.5	18.1	15.9	7.59
10-TR-002 BH10-04	gneiss	0.16	4.17	26.1	51.8	13.4	7.79
10-TR-003 BH10-04	gneiss	0.16	5.33	28.4	56.3	17.2	8.49
10-TR-004 BH10-05	gneiss	0.63	3.42	23.9	11.8	11.0	7.09
10-TR-005 BH10-05	gneiss	0.47	2.67	21.3	14.1	8.6	6.29
10-TR-006 BH10-05	gneiss	1.19	2.42	14.2	5.2	5.5	5.76
10-TR-007 BH10-06	gneiss	0.16	3.00	24.2	48.0	9.7	7.19
10-TR-008 BH10-06	gneiss	0.25	2.33	23.5	29.2	7.5	6.99
10-TR-009 BH10-06	gneiss	0.19	2.92	24.8	41.1	9.4	7.39
10-TR-010 BH10-07	gneiss	1.09	2.25	26.2	8.7	6.3	9.14
10-TR-011 BH10-07	gneiss	1.13	3.17	37.7	10.4	10.2	11.4
10-TR-012 BH10-07	gneiss	0.59	3.00	37.1	19.4	9.7	11.2
10-TR-013 BH10-08	gneiss	0.16	2.33	20.3	40.3	7.5	5.99
10-TR-014 BH10-08	gneiss	0.63	3.67	31.0	15.4	11.8	9.29
10-TR-015 BH10-08	gneiss	0.88	3.58	33.5	11.9	11.6	10.1
10-TR-016 BH10-09	gneiss	0.38	1.67	20.0	16.5	5.4	5.89
10-TR-017 BH10-09	gneiss	0.38	5.83	22.9	18.9	18.8	6.79
10-TR-018 BH10-09	gneiss	1.19	1.92	21.3	5.6	6.2	6.29
10-TR-019 BH10-12	gneiss	0.91	2.92	25.8	8.8	9.4	7.69
10-TR-020 BH10-12	gneiss	0.88	4.25	26.0	11.9	10.6	10.0
10-TR-021 BH10-12	gneiss	0.19	3.83	28.4	46.9	12.4	8.49
10-TR-034 BH10-21	schist	0.47	8.00	40.3	26.7	25.8	12.2
10-TR-035 BH10-12	schist	1.88	4.33	13.3	5.4	5.6	9.43
10-TR-036 BH10-12	schist	0.72	4.08	25.6	14.5	10.0	9.99
10-TR-022 BH10-13	sandstone	0.16	230.85	739	1465.6	744.7	229
10-TR-023 BH10-13	sandstone	0.16	248.35	813	1612.8	801.1	252
10-TR-024 BH10-13	sandstone	0.16	270.85	881	1747.2	873.7	273
10-TR-025 BH10-14	sandy carbonate	0.16	925.06	3095	6137.6	2984.1	959
10-TR-026 BH10-14	sandy carbonate	0.16	900.06	2998	5952.0	2903.4	929
10-TR-027 BH10-14	sandy carbonate	2.22	933.40	742	430.9	723.6	955
10-TR-028 BH10-15	carbonate	0.44	908.39	3155	2235.4	2930.3	978
10-TR-029 BH10-15	carbonate	1.28	891.73	1245	743.8	1158.1	952
10-TR-030 BH10-15	carbonate	0.63	891.73	2749	1512.0	2622.7	945
10-TR-031 BH10-16	carbonate	0.16	900.06	3114	6176.0	2903.4	965
10-TR-032 BH10-16	carbonate	0.16	891.73	3099	6150.4	2876.5	960
10-TR-033 BH10-16	carbonate	0.16	891.73	3076	6105.6	2876.5	953
S449-10	sand/gravel	0.34	655.04	2185	1972.4	2113.0	677
S450-10	sand/gravel	0.16	668.38	2256	4473.6	2156.1	699
S451-10	sand/gravel	0.16	243.35	765	1516.8	785.0	237
S452-10	sand/gravel	0.44	240.85	805	571.4	776.9	249
S453-10	sand/gravel	0.16	268.35	861	1708.8	865.6	266
S454-10	sand/gravel	0.16	5.08	17.1	33.9	16.4	4.99
S455-10	sand/gravel	0.16	34.17	121	240.0	110.2	37.2
S456-10	sand/gravel	0.22	151.68	482	685.7	489.3	149
S457-10	sand/gravel	0.16	120.01	554	1100.8	387.1	171
S458-10	sand/gravel	0.22	93.34	280	396.3	301.1	86.4
S459-10	sand/gravel	0.16	322.52	998	1977.6	1040.4	309
S460-10	sand/gravel	0.16	142.51	441	876.8	459.7	136
S461-10	sand/gravel	0.16	194.18	621	1228.8	626.4	192
S462-10	sand/gravel	0.22	312.52	1001	1417.1	1008.1	310

Note:

CaNP = Carbonate neutralization potential was calculated based on total carbon content (%C)

MPA = Maximum potential acidity was calculated based on total sulphur content (%S)

Table 2 Statistical Summary of Acid Base Accounting Results

	Paste pH	Total Carbon %	Total Sulphur %	Sulphate Sulphur %	Sulphide Sulphur %	Neutral- ization Potential kg CaCO ₃ /t	Acid Potential kg CaCO ₃ /t	CaNP kg CaCO ₃ /t	Maximum Potential Acidity kg CaCO ₃ /t	Ratio NP/AP (NPR)	Ratio NP/MPA calculated ratio	Ratio CaNP/AP
All Quarry Pit Rock (gneiss, schist, carbonate rocks)												
Min	8.1	0.02	<0.005	<0.01	<0.01	6.2	0.31	1.7	0.16	13	5.2	5.4
Max	10	11	0.071	0.04	0.04	978	1.29	933	2.2	3155	6176	2984
Mean	-	2.99	0.019	0.02	0.01	266	0.37	249	0.58	710	458	666
Median	9.7	0.1	<0.014	<0.01	<0.01	10.3	0.31	4.2	0.44	33	24	13.6
Standard Deviation	0.7	4.7	0.016	0.01	0.01	410	0.19	389	0.51	1191	2111	1130
No. of Samples	36	36	36	36	36	36	36	36	36	36	36	36
5th Percentile	8.2	0.026	0.005	0.01	0.01	6.3	0.31	2.2	0.16	19	5.5	5.6
25th Percentile	9.1	0.036	0.005	0.01	0.01	7.7	0.31	3.0	0.16	24	14	9.4
75th Percentile	9.9	5.1	0.028	0.02	0.01	437	0.31	426	0.88	830	1477	819
95th Percentile	10	11	0.046	0.04	0.02	962	0.77	913	1.43	3103	6141	2910
Gneiss												
Min	9.5	0.02	<0.005	<0.01	<0.01	6.2	0.31	1.7	0.16	14	5.2	5.4
Max	10	0.07	0.038	0.04	0.01	11.7	0.44	5.8	1.19	38	56	19
Mean	-	0.04	0.018	0.02	0.01	8.3	0.32	3.3	0.57	26	14	10
Median	9.8	0.04	0.015	<0.01	<0.01	7.9	0.31	3.0	0.47	25	17	9.7
Standard Deviation	0.17	0.01	0.012	0.01	0.00	1.7	0.03	1.1	0.38	5.6	17	3.7
No. of Samples	21	21	21	21	21	21	21	21	21	21	21	21
5th Percentile	9.5	0.02	0.005	0.01	0.01	6.2	0.31	1.9	0.16	20	5.6	5.5
25th Percentile	9.7	0.03	0.006	0.01	0.01	7.1	0.31	2.4	0.19	23	12	7.5
75th Percentile	9.9	0.05	0.028	0.02	0.01	9.5	0.31	3.8	0.88	28	40	12
95th Percentile	10	0.06	0.038	0.04	0.01	12	0.40	5.3	1.19	37	52	17
Schist												
Min	9.7	0.05	0.015	<0.01	<0.01	10	0.31	4.1	0.47	13.3	5.4	5.6
Max	10	0.10	0.060	0.04	0.02	13	0.77	8.0	1.88	40	27	26
Median	9.8	0.05	0.023	0.02	0.01	10	0.41	4.3	0.72	26	14	10
No. of Samples	3	3	3	3	3	3	3.00	3	3.00	3	3	3

**Table 2 Statistical Summary of
Acid Base Accounting Results (Continued)**

	Paste pH	Total Carbon %	Total Sulphur %	Sulphate Sulphur %	Sulphide Sulphur %	Neutral- ization Potential kg CaCO ₃ /t	Acid Potential kg CaCO ₃ /t	CaNP kg CaCO ₃ /t	Maximum Potential Acidity kg CaCO ₃ /t	Ratio NP/AP (NPR)	Ratio NP/MPA calculated ratio	Ratio CaNP/AP
Carbonate Rocks												
Min	8.1	2.8	<0.005	<0.01	<0.01	229	0.31	231	0.16	739	431	724
Max	9.4	11	0.071	0.03	0.04	978	1.29	933	2.2	3155	6176	2984
Mean	-	8.9	0.016	0.01	0.01	780	0.43	740	0.48	1803	1609	1712
Median	8.3	11	<0.005	<0.01	<0.01	954	0.31	892	0.16	3076	6102	2877
Standard Deviation	0.5	3.6	0.021	0.01	0.01	319	0.30	296	0.64	1122	2469	1044
No. of Samples	12	12	12	12	12	12	12	12	12	12	12	12
5th Percentile	8.2	2.9	0.005	0.01	0.01	242	0.31	240	0.16	741	603	735
25th Percentile	8.2	8.8	0.005	0.01	0.01	766	0.31	737	0.16	864	1500	856
75th Percentile	8.2	11	0.005	0.01	0.01	932	0.31	892	0.16	930	1526	912
95th Percentile	9.4	11	0.055	0.02	0.03	971	1.00	929	1.70	3132	6162	2954
Unconsolidated Borrow Material												
Min	8.4	0.1	<0.005	<0.01	<0.01	5.3	0.31	5.1	0.16	17	34	16
Max	9.5	8.0	0.014	0.01	0.01	699	0.31	668	0.44	2256	4474	2156
Mean	-	3.0	0.0065	0.01	0.01	252	0.31	247	0.20	813	1241	795
Median	8.9	2.6	<0.005	<0.01	<0.01	215	0.31	218	0.16	692	1373	702
Standard Deviation	0.3	2.4	0	0	0	207	0	200	0.09	667	1105	646
No. of Samples	14	14	14	14	14	14	14	14	14	14	14	14
5th Percentile	8.4	0.3	0.005	0.01	0.01	26	0.31	24	0.16	85	168	77
25th Percentile	8.8	1.5	0.005	0.01	0.01	140	0.31	126	0.16	451	600	405
75th Percentile	8.9	2.2	0.005	0.01	0.01	185	0.31	180	0.16	598	1024	579
95th Percentile	9.3	7.9	0.012	0.01	0.01	685	0.31	660	0.38	2210	2851	2128

Note:

CaNP = Carbonate neutralization potential was calculated based on total carbon content (%C)

MPA = Maximum potential acidity was calculated based on total sulphur content (%S)

Table 3 Results of Metals Analyses

Sample ID	Drill Log	Al	As	Ba	Be	Bi	Ca	Cd	Co	Cr	Cu
	Lithology	%	µg/g	µg/g	µg/g	µg/g	%	µg/g	µg/g	µg/g	µg/g
Average Crustal Abundance		8.23	1.8	425	3	0.0085	4.15	0.15	25	102	60
10x Average Crustal Abundance		82.3	18	4250	30	0.085	41.5	1.5	250	1020	600
10-TR-001 BH10-04	gneiss	0.33	<0.5	21	0.13	<0.09	0.12	<0.02	1.2	100	18
10-TR-002 BH10-04	gneiss	0.36	<0.5	23	0.15	<0.09	0.13	<0.02	1.1	99	5.0
10-TR-003 BH10-04	gneiss	0.35	<0.5	24	0.13	<0.09	0.14	<0.02	1.1	110	8.5
10-TR-004 BH10-05	gneiss	0.41	<0.5	23	0.17	<0.09	0.11	<0.02	1.5	91	2.9
10-TR-005 BH10-05	gneiss	0.39	<0.5	27	0.15	<0.09	0.07	<0.02	1.3	110	8.1
10-TR-006 BH10-05	gneiss	0.37	<0.5	20	0.18	<0.09	0.06	<0.02	1.3	87	3.2
10-TR-007 BH10-06	gneiss	0.43	<0.5	23	0.20	<0.09	0.10	<0.02	2.0	110	5.2
10-TR-008 BH10-06	gneiss	0.50	<0.5	25	0.29	<0.09	0.10	<0.02	2.3	110	6.6
10-TR-009 BH10-06	gneiss	0.49	<0.5	39	0.19	<0.09	0.14	<0.02	2.5	94	8.4
10-TR-010 BH10-07	gneiss	0.78	<0.5	68	0.25	<0.09	0.29	<0.02	5.2	92	17
10-TR-011 BH10-07	gneiss	1.20	<0.5	110	0.40	0.09	0.36	<0.02	8.0	75	17
10-TR-012 BH10-07	gneiss	1.10	<0.5	57	0.27	0.10	0.36	<0.02	9.9	110	16
10-TR-013 BH10-08	gneiss	0.32	<0.5	23	0.16	<0.09	0.07	<0.02	1.4	110	5.3
10-TR-014 BH10-08	gneiss	0.85	<0.5	64	0.49	<0.09	0.21	<0.02	4.4	79	10
10-TR-015 BH10-08	gneiss	1.00	<0.5	78	0.48	<0.09	0.23	<0.02	5.9	78	12
10-TR-016 BH10-09	gneiss	0.43	<0.5	33	0.14	<0.09	0.09	<0.02	2.4	82	4.3
10-TR-017 BH10-09	gneiss	0.45	<0.5	33	0.17	<0.09	0.14	<0.02	2.6	100	7.2
10-TR-018 BH10-09	gneiss	0.39	<0.5	32	0.14	0.13	0.11	0.05	4.9	81	12
10-TR-019 BH10-12	gneiss	0.59	<0.5	30	0.17	<0.09	0.26	<0.02	5.7	100	28
10-TR-020 BH10-12	gneiss	0.83	<0.5	51	0.18	<0.09	0.23	<0.02	6.1	100	14
10-TR-021 BH10-12	gneiss	0.49	<0.5	24	0.15	<0.09	0.19	<0.02	2.8	100	8.8
10-TR-034 BH10-21	schist	0.74	<0.5	36	0.17	<0.09	0.30	<0.02	2.2	67	6.3
10-TR-035 BH10-12	schist	1.10	<0.5	35	0.27	0.09	0.18	0.03	3.6	69	13
10-TR-036 BH10-12	schist	1.30	1.1	37	0.41	<0.09	0.14	<0.02	3.6	70	8.0
10-TR-022 BH10-13	carbonate rocks	0.05	<0.5	5.5	0.06	<0.09	3.9	<0.02	1.3	99	5.0
10-TR-023 BH10-13	carbonate rocks	0.31	<0.5	16	0.32	<0.09	4.1	0.03	2.1	96	6.1
10-TR-024 BH10-13	carbonate rocks	0.23	<0.5	13	0.22	<0.09	4.8	0.02	1.5	82	2.0
10-TR-025 BH10-14	carbonate rocks	0.08	<0.5	3.0	0.06	<0.09	28.8	<0.02	1.6	2.2	4.0
10-TR-026 BH10-14	carbonate rocks	0.16	0.7	5.3	0.14	<0.09	28.3	0.06	2.1	3.4	3.9
10-TR-027 BH10-14	carbonate rocks	0.08	0.5	2.7	0.06	<0.09	27.0	<0.02	1.6	2.6	4.3
10-TR-028 BH10-15	carbonate rocks	0.08	0.6	3.4	0.07	<0.09	28.2	<0.02	1.7	4.1	2.2
10-TR-029 BH10-15	carbonate rocks	0.12	1.8	4.5	0.08	<0.09	26.7	<0.02	1.9	2.2	4.5
10-TR-030 BH10-15	carbonate rocks	0.13	1.2	4.2	0.08	<0.09	28.4	<0.02	2.0	2.6	5.4
10-TR-031 BH10-16	carbonate rocks	0.08	<0.5	3.2	0.06	<0.09	27.4	<0.02	1.7	2.1	2.0
10-TR-032 BH10-16	carbonate rocks	0.08	1.2	3.1	0.07	<0.09	27.3	<0.02	1.7	2.2	3.9
10-TR-033 BH10-16	carbonate rocks	0.13	1.1	3.9	0.07	<0.09	27.5	<0.02	1.9	2.6	2.4
S449-10	borrow pit material	0.26	1.7	11	0.18	<0.09	13.4	0.03	2.9	39	8.1
S450-10	borrow pit material	0.12	<0.5	6.7	0.09	<0.09	17.2	<0.02	1.9	30	3.5
S451-10	borrow pit material	0.29	0.8	16	0.20	<0.09	4.0	0.03	3.0	89	12
S452-10	borrow pit material	0.39	<0.5	29	0.18	<0.09	5.0	<0.02	3.2	64	8.3
S453-10	borrow pit material	0.20	1.2	16	0.27	<0.09	4.8	0.02	3.4	79	7.5
S454-10	borrow pit material	0.08	<0.5	5.0	0.03	<0.09	0.1	<0.02	0.73	110	2.0
S455-10	borrow pit material	0.24	<0.5	20	0.12	<0.09	0.6	0.02	7.0	170	10
S456-10	borrow pit material	0.35	<0.5	16	0.21	<0.09	3.6	<0.02	2.0	75	6.9
S457-10	borrow pit material	0.39	<0.5	25	0.25	<0.09	2.4	<0.02	2.5	90	4.3
S458-10	borrow pit material	0.38	0.7	25	0.21	<0.09	1.8	<0.02	2.0	82	6.7
S459-10	borrow pit material	0.18	<0.5	9.6	0.14	<0.09	7.4	<0.02	1.7	68	4.2
S460-10	borrow pit material	0.20	<0.5	12	0.13	<0.09	3.6	<0.02	1.5	93	19
S461-10	borrow pit material	0.29	<0.5	15	0.17	<0.09	3.6	<0.02	1.8	74	38
S462-10	borrow pit material	0.25	<0.5	14	0.19	<0.09	6.2	<0.02	1.8	73	8.7

**Table 3 Results of Metals Analyses
(Continued)**

Sample ID	Drill Log	Fe	K	Li	Mg	Mn	Mo	Na	Ni	P	Pb
	Lithology	%	%	µg/g	%	µg/g	µg/g	%	µg/g	µg/g	µg/g
Average Crustal Abundance		5.63	2.085	20	2.33	950	1.2	2.355	84	1050	14
10x Average Crustal Abundance		56.3	20.85	200	23.3	9500	12	23.55	840	10500	140
10-TR-001 BH10-04	gneiss	0.71	0.15	15	0.12	150	0.4	0.05	3.9	25	11
10-TR-002 BH10-04	gneiss	0.66	0.17	18	0.13	180	0.4	0.05	4.1	28	9.3
10-TR-003 BH10-04	gneiss	0.76	0.17	14	0.13	160	0.4	0.05	3.9	47	7.1
10-TR-004 BH10-05	gneiss	0.88	0.17	13	0.20	200	0.4	0.05	3.8	140	5.4
10-TR-005 BH10-05	gneiss	0.82	0.16	11	0.16	190	0.3	0.05	4.3	67	4.1
10-TR-006 BH10-05	gneiss	0.75	0.11	10	0.16	170	0.6	0.05	3.7	61	4.0
10-TR-007 BH10-06	gneiss	0.88	0.24	15	0.22	140	0.3	0.05	3.8	210	4.2
10-TR-008 BH10-06	gneiss	0.93	0.19	15	0.29	160	0.2	0.05	3.7	230	3.8
10-TR-009 BH10-06	gneiss	1.20	0.33	19	0.24	160	0.2	0.05	4.3	270	6.5
10-TR-010 BH10-07	gneiss	1.90	0.56	23	0.50	280	0.4	0.06	5.6	630	9.3
10-TR-011 BH10-07	gneiss	2.60	0.71	36	0.93	300	0.5	0.05	7.1	1000	2.8
10-TR-012 BH10-07	gneiss	1.86	0.72	34	1.10	290	2.1	0.06	25	440	3.2
10-TR-013 BH10-08	gneiss	0.83	0.17	11	0.16	150	0.3	0.05	3.4	92	5.3
10-TR-014 BH10-08	gneiss	1.40	0.49	26	0.59	240	0.4	0.04	4.9	490	2.5
10-TR-015 BH10-08	gneiss	1.70	0.70	29	0.76	320	0.2	0.04	5.3	670	2.0
10-TR-016 BH10-09	gneiss	1.00	0.28	17	0.23	150	2.5	0.05	3.2	230	6.6
10-TR-017 BH10-09	gneiss	1.20	0.30	20	0.25	180	1.1	0.05	4.2	260	5.8
10-TR-018 BH10-09	gneiss	0.95	0.28	13	0.20	140	1.5	0.05	3.4	220	29
10-TR-019 BH10-12	gneiss	1.10	0.35	10	0.46	180	1.0	0.06	20	160	5.0
10-TR-020 BH10-12	gneiss	1.90	0.54	20	0.64	280	6.8	0.05	15	220	6.8
10-TR-021 BH10-12	gneiss	1.40	0.27	9	0.30	140	3.4	0.05	5.0	250	12
10-TR-034 BH10-21	schist	1.10	0.54	8	0.41	250	0.4	0.03	2.9	120	3.2
10-TR-035 BH10-12	schist	1.60	0.60	12	0.74	280	0.2	0.03	3.1	260	3.3
10-TR-036 BH10-12	schist	1.80	0.50	17	1.00	280	0.4	0.03	3.8	120	1.7
10-TR-022 BH10-13	carbonate rocks	0.40	0.04	<2	2.20	270	0.5	0.01	5.0	370	0.83
10-TR-023 BH10-13	carbonate rocks	0.73	0.17	18	2.60	280	0.4	0.01	8.9	540	0.98
10-TR-024 BH10-13	carbonate rocks	0.58	0.14	13	2.80	340	<0.1	0.02	7.0	1090	0.89
10-TR-025 BH10-14	carbonate rocks	0.16	0.03	<2	0.65	70	<0.1	0.02	14	21	1.0
10-TR-026 BH10-14	carbonate rocks	0.28	0.04	<2	0.41	120	<0.1	0.01	15	43	1.6
10-TR-027 BH10-14	carbonate rocks	0.17	0.03	<2	1.30	71	<0.1	0.01	14	42	1.1
10-TR-028 BH10-15	carbonate rocks	0.19	0.03	<2	0.95	77	<0.1	0.02	14	78	1.3
10-TR-029 BH10-15	carbonate rocks	0.25	0.04	2	0.57	170	<0.1	0.02	15	85	2.0
10-TR-030 BH10-15	carbonate rocks	0.25	0.04	3	0.66	120	<0.1	0.02	15	86	1.6
10-TR-031 BH10-16	carbonate rocks	0.17	0.03	<2	0.98	66	<0.1	0.02	14	57	1.2
10-TR-032 BH10-16	carbonate rocks	0.18	0.03	<2	0.98	62	<0.1	0.02	14	70	1.4
10-TR-033 BH10-16	carbonate rocks	0.26	0.05	3	0.86	89	<0.1	0.02	15	92	1.8
S449-10	borrow pit material	0.59	0.18	24	4.90	140	0.5	0.02	11	130	4.3
S450-10	borrow pit material	0.34	0.07	<2	2.90	100	0.2	0.02	10	120	1.9
S451-10	borrow pit material	0.74	0.12	5	2.50	130	0.3	0.02	10	230	7.0
S452-10	borrow pit material	0.99	0.24	10	2.10	140	0.2	0.03	6.9	200	3.8
S453-10	borrow pit material	0.89	0.09	4	2.80	270	0.1	0.02	8.6	830	2.1
S454-10	borrow pit material	0.30	0.03	<2	0.03	25	0.4	0.01	3.4	16	0.75
S455-10	borrow pit material	1.10	0.09	2	1.20	120	0.3	0.02	110	130	2.7
S456-10	borrow pit material	0.79	0.13	9	1.10	140	0.5	0.03	5.2	140	3.5
S457-10	borrow pit material	0.81	0.15	11	1.20	130	0.2	0.03	5.7	140	3.7
S458-10	borrow pit material	0.87	0.16	9	1.00	130	0.4	0.03	5.1	240	4.5
S459-10	borrow pit material	0.50	0.07	5	2.00	94	0.3	0.02	6.3	120	2.2
S460-10	borrow pit material	0.53	0.09	3	0.77	74	0.6	0.02	5.5	140	2.0
S461-10	borrow pit material	0.70	0.12	8	1.90	130	0.3	0.03	4.6	170	3.8
S462-10	borrow pit material	0.63	0.11	7	2.70	100	0.3	0.02	6.6	110	3.3

**Table 3 Results of Metals Analyses
(Continued)**

Sample ID	Drill Log	Sb	Se	Si	Sn	Sr	Ti	Tl	U	V	Y	Zn
	Lithology	µg/g	µg/g	µg/g	µg/g	µg/g	%	µg/g	µg/g	µg/g	µg/g	µg/g
Average Crustal Abundance		0.2	0.05	281500	2.3	370	0.565	0.85	2.7	120	33	70
10x Average Crustal Abundance		2	0.5	2815000	23	3700	5.65	8.5	27	1200	330	700
10-TR-001 BH10-04	gneiss	<0.8	0.8	530	<0.5	6.6	0.02	0.07	4.8	3	2.0	20
10-TR-002 BH10-04	gneiss	<0.8	<0.7	450	<0.5	6.6	0.02	0.09	5.2	3	2.2	20
10-TR-003 BH10-04	gneiss	<0.8	<0.7	480	<0.5	6.2	0.02	0.08	4.4	3	2.4	21
10-TR-004 BH10-05	gneiss	<0.8	<0.7	440	<0.5	5.6	0.02	0.10	5.2	5	4.1	21
10-TR-005 BH10-05	gneiss	<0.8	<0.7	460	<0.5	6.3	0.02	0.07	2.8	3	2.7	22
10-TR-006 BH10-05	gneiss	<0.8	<0.7	440	<0.5	5.6	0.01	0.06	13	3	3.9	18
10-TR-007 BH10-06	gneiss	<0.8	<0.7	490	<0.5	6.5	0.04	0.12	2.1	9	4.1	24
10-TR-008 BH10-06	gneiss	<0.8	<0.7	560	<0.5	6.2	0.03	0.10	2.7	10	4.9	27
10-TR-009 BH10-06	gneiss	<0.8	<0.7	530	0.6	7.6	0.06	0.23	6.0	14	6.7	31
10-TR-010 BH10-07	gneiss	<0.8	<0.7	700	1.2	13	0.17	0.38	4.5	32	16	46
10-TR-011 BH10-07	gneiss	<0.8	<0.7	650	0.8	14	0.19	0.44	4.0	48	14	49
10-TR-012 BH10-07	gneiss	<0.8	<0.7	780	<0.5	7.3	0.14	0.48	3.5	43	9.8	36
10-TR-013 BH10-08	gneiss	<0.8	<0.7	500	<0.5	6.6	0.03	0.07	2.5	5	3.3	19
10-TR-014 BH10-08	gneiss	<0.8	<0.7	690	<0.5	8.5	0.09	0.31	4.7	22	7.1	34
10-TR-015 BH10-08	gneiss	<0.8	<0.7	610	<0.5	8.2	0.13	0.46	3.1	28	8.2	50
10-TR-016 BH10-09	gneiss	<0.8	<0.7	470	<0.5	6.6	0.06	0.17	2.6	13	3.7	23
10-TR-017 BH10-09	gneiss	<0.8	<0.7	460	0.6	7.1	0.07	0.19	4.2	15	4.7	31
10-TR-018 BH10-09	gneiss	<0.8	<0.7	520	<0.5	8.1	0.06	0.22	9.6	12	5.5	29
10-TR-019 BH10-12	gneiss	<0.8	<0.7	470	<0.5	6.8	0.08	0.19	2.9	19	3.5	24
10-TR-020 BH10-12	gneiss	<0.8	<0.7	600	1.2	9.7	0.12	0.31	4.0	30	3.4	38
10-TR-021 BH10-12	gneiss	<0.8	<0.7	600	0.8	17	0.07	0.13	4.9	12	8.2	31
10-TR-034 BH10-21	schist	<0.8	1.5	540	<0.5	5.8	0.06	0.21	2.2	6	3.9	23
10-TR-035 BH10-12	schist	<0.8	2.2	590	<0.5	4.8	0.06	0.21	2.3	6	7.4	26
10-TR-036 BH10-12	schist	<0.8	0.9	630	<0.5	3.4	0.03	0.15	2.2	7	5.2	28
10-TR-022 BH10-13	carbonate rocks	<0.8	<0.7	270	<0.5	14	0.00	0.02	0.31	7	2.3	2.2
10-TR-023 BH10-13	carbonate rocks	<0.8	<0.7	590	<0.5	24	0.02	0.04	0.40	11	5.0	9.9
10-TR-024 BH10-13	carbonate rocks	<0.8	1.0	450	<0.5	22	0.01	0.02	0.41	7	9.1	5.8
10-TR-025 BH10-14	carbonate rocks	<0.8	<0.7	390	<0.5	290	0.00	<0.02	0.30	4	1.5	4.0
10-TR-026 BH10-14	carbonate rocks	<0.8	<0.7	420	<0.5	300	0.00	<0.02	0.34	5	4.0	6.4
10-TR-027 BH10-14	carbonate rocks	<0.8	0.9	350	<0.5	280	0.00	<0.02	0.34	4	1.6	4.5
10-TR-028 BH10-15	carbonate rocks	<0.8	0.9	530	<0.5	270	0.00	<0.02	0.34	4	2.2	3.3
10-TR-029 BH10-15	carbonate rocks	<0.8	1.0	340	<0.5	240	0.00	<0.02	0.39	5	2.8	6.1
10-TR-030 BH10-15	carbonate rocks	<0.8	1.0	430	<0.5	290	0.00	<0.02	0.33	5	2.9	6.2
10-TR-031 BH10-16	carbonate rocks	<0.8	1.5	440	<0.5	270	0.00	<0.02	0.28	4	1.8	3.0
10-TR-032 BH10-16	carbonate rocks	<0.8	1.8	400	<0.5	260	0.00	<0.02	0.32	4	2.2	5.0
10-TR-033 BH10-16	carbonate rocks	<0.8	1.0	420	<0.5	270	0.00	<0.02	0.34	5	2.7	3.9
S449-10	borrow pit material	<0.8	2.1	520	<0.5	85	0.01	0.05	0.37	12	3.5	9.6
S450-10	borrow pit material	<0.8	0.9	350	<0.5	130	0.01	0.03	0.36	7	2.1	4.4
S451-10	borrow pit material	<0.8	1.2	470	<0.5	18	0.03	0.07	0.47	13	4.4	14
S452-10	borrow pit material	<0.8	1.1	530	0.7	31	0.05	0.11	1.2	15	3.2	18
S453-10	borrow pit material	<0.8	1.7	430	<0.5	21	0.01	<0.02	0.57	10	3.4	7.7
S454-10	borrow pit material	<0.8	1.9	310	<0.5	2.2	0.00	<0.02	0.24	1	0.60	1.7
S455-10	borrow pit material	<0.8	2.0	610	<0.5	5.3	0.02	0.03	0.71	8	2.2	13
S456-10	borrow pit material	<0.8	1.8	370	0.6	27	0.02	0.06	1.7	9	3.8	17
S457-10	borrow pit material	<0.8	1.4	440	<0.5	18	0.02	0.07	2.3	10	4.3	14
S458-10	borrow pit material	<0.8	2.0	520	0.6	13	0.03	0.08	2.6	9	4.8	18
S459-10	borrow pit material	<0.8	2.0	380	<0.5	47	0.01	<0.02	0.68	7	2.4	6.9
S460-10	borrow pit material	<0.8	1.7	370	<0.5	27	0.01	<0.02	0.62	6	2.0	12
S461-10	borrow pit material	<0.8	1.9	400	0.8	21	0.02	0.04	1.8	8	3.4	20
S462-10	borrow pit material	<0.8	1.8	400	<0.5	36	0.02	0.03	1.3	8	2.8	13

*Price (1997)

Table 4 Statistical Summary of Metals Analyses

[illegible]

**Table 4 Statistical Summary
of Metals Analyses (Continued)**

	Al	As	Ba	Be	Bi	Ca	Cd	Co	Cr	Cu	Fe	K	Li	Mg	Mn
	%	µg/g	µg/g	µg/g	µg/g	%	µg/g	µg/g	µg/g	µg/g	%	%	µg/g	%	µg/g
Average Concentration (Continental Crust)*	8.2	1.8	425	3	0.0085	4.15	0.15	25	102	60	5.63	2.09	20	2.33	950
Ten Times Average Concentration (Continental Crust)*	82	18	4250	30	0.085	42	1.5	250	1020	600	56	21	200	23.3	9500
Carbonate Rocks															
Min	0.05	0.5	2.7	0.06	0.09	3.90	0.02	1.3	2.1	2.0	0.16	0.03	2.0	0.41	62
Max	0.31	1.8	16	0.32	0.09	29	0.06	2.1	99	6.1	0.73	0.17	18	2.80	340
Mean	0.13	0.8	5.7	0.11	0.09	22	0.02	1.8	25	3.8	0.30	0.06	4.4	1.25	145
Median	0.10	0.6	4.1	0.07	0.09	27	0.02	1.7	2.6	4.0	0.25	0.04	2.0	0.97	105
Standard Deviation	0.08	0.4	4.3	0.08	0	11	0.01	0.2	41	1.4	0.18	0.05	5.3	0.82	98
No. of Samples	12.0	12	12	12	12	12	12	12	12	12	12	12	12	12	12
5th Percentile	0.07	0.5	2.9	0.06	0.09	4.01	0.02	1.4	2.2	2.0	0.17	0.03	2.0	0.50	64
25th Percentile	0.08	0.5	3.2	0.06	0.09	21	0.02	1.6	2.2	2.4	0.18	0.03	2.0	0.66	71
75th Percentile	0.14	1.1	5.4	0.10	0.09	28	0.02	1.9	24	4.6	0.31	0.04	3.0	1.53	195
95th Percentile	0.27	1.5	14	0.27	0.09	29	0.04	2.1	97	5.7	0.65	0.15	15	2.69	307
Unconsolidated Borrow Material															
Min	0.08	0.5	5.0	0.03	0.09	0.05	0.02	0.7	30	2.0	0.30	0.03	2.0	0.03	25
Max	0.39	1.7	29	0.27	0.09	17	0.03	7.0	170	38.0	1.10	0.24	24	4.90	270
Mean	0.26	0.7	16	0.17	0.09	5.3	0.02	2.5	81	9.9	0.70	0.12	7.2	1.94	123
Median	0.26	0.5	16	0.18	0.09	3.8	0.02	2.0	77	7.8	0.72	0.12	6.0	1.95	130
Standard Deviation	0.10	0.4	7.0	0.06	0	4.8	0.004	1.5	33	9.1	0.23	0.05	5.8	1.21	53
No. of Samples	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
5th Percentile	0.11	0.5	6.1	0.07	0.09	0.41	0.02	1.2	36	3.0	0.33	0.05	2.0	0.51	57
25th Percentile	0.20	0.5	11	0.13	0.09	2.7	0.02	1.8	69	4.9	0.55	0.09	3.3	1.13	100
75th Percentile	0.34	0.7	19	0.21	0.09	5.9	0.02	3.0	90	9.7	0.86	0.15	9.0	2.65	138
95th Percentile	0.39	1.4	26	0.26	0.09	15	0.03	4.7	131	26	1.03	0.20	16	3.60	186

[illegible]

**Table 4 Statistical Summary
of Metals Analyses (Continued)**

	Mo	Na	Ni	P	Pb	Sb	Se	Si	Sn	Sr	Ti	Tl	U	V	Y	Zn
	µg/g	%	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	µg/g	%	µg/g	µg/g	µg/g	µg/g	µg/g
Average Concentration (Continental Crust)*	1.2	2.4	84	1050	14	0.2	0.05	281500	2.3	370	0.57	0.85	2.7	120	33	70
Ten Times Average Concentration (Continental Crust)*	12	24	840	10500	140	2	0.5	2815000	23	3700	5.7	8.5	27	1200	330	700
Carbonate Rocks																
Min	0.10	0.012	5	21	0.8	0.8	0.7	270	0.5	14	0.001	0.02	0.3	4.0	1.5	2.2
Max	0.50	0.018	15	1090	2.0	0.8	1.8	590	0.5	300	0.02	0.04	0.4	11.0	9.1	9.9
Mean	0.16	0.015	13	215	1.3	0.8	1.0	419	0.5	211	0.004	0.02	0.3	5.4	3.2	5.0
Median	0.10	0.015	14	82	1.3	0.8	1.0	420	0.5	270	0.001	0.02	0.3	5.0	2.5	4.8
Standard Deviation	0.14	0.002	3.5	317	0.4	0	0.3	84	0	116	0.01	0.01	0.0	2.1	2.1	2.1
No. of Samples	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12	12
5th Percentile	0.10	0.013	6.1	33	0.9	0.8	0.7	309	0.5	18	0.001	0.02	0.3	4.0	1.6	2.6
25th Percentile	0.10	0.014	13	54	1.0	0.8	0.7	380	0.5	186	0.001	0.02	0.3	4.0	2.1	3.8
75th Percentile	0.10	0.016	15	162	1.6	0.8	1.0	443	0.5	283	0.002	0.02	0.4	5.5	3.2	6.1
95th Percentile	0.45	0.017	15	788	1.9	0.8	1.6	557	0.5	295	0.02	0.03	0.4	8.8	6.8	8.0
Unconsolidated Borrow Material																
Min	0.10	0.011	3.4	16	0.8	0.8	0.9	310	0.5	2.2	0.004	0.02	0.2	1.0	0.6	1.7
Max	0.60	0.031	110	830	7.0	0.8	2.1	610	0.8	130	0.05	0.11	2.6	15.0	4.8	20.0
Mean	0.33	0.021	14	194	3.3	0.8	1.7	436	0.6	34	0.02	0.05	1.1	8.8	3.1	12.1
Median	0.30	0.020	6.5	140	3.4	0.8	1.8	415	0.5	24	0.02	0.04	0.7	8.5	3.3	13.0
Standard Deviation	0.14	0.006	28	191	1.5	0.0	0.4	84	0.1	34	0.01	0.03	0.8	3.4	1.1	5.4
No. of Samples	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14	14
5th Percentile	0.17	0.014	4.2	77	1.5	0.8	1.0	336	0.5	4.2	0.01	0.02	0.3	4.3	1.5	3.5
25th Percentile	0.23	0.017	5.3	123	2.1	0.8	1.5	373	0.5	18	0.01	0.02	0.5	7.3	2.3	8.2
75th Percentile	0.40	0.026	9.7	193	3.8	0.8	2.0	508	0.6	35	0.02	0.07	1.6	10.0	3.7	16.3
95th Percentile	0.54	0.030	46	447	5.4	0.8	2.0	558	0.7	101	0.03	0.09	2.4	13.7	4.5	18.7

*Price (1997)

**Table 5 Results of
Shake Flask Extraction Test**

	Units	MMER	CWQG (PAL)	CDWQ	10-TR-001 BH10-04	10-TR-005 BH10-05	10-TR-009 BH10-06	10-TR-014 BH10-08	10-TR-017 BH10-09	10-TR-019 BH10-12	10-TR-035 BH10-12
					Gneiss	Gneiss	Gneiss	Gneiss	Gneiss	Gneiss	Schist
Sample Weight	g				250	250	250	250	250	250	250
Volume mL	D.I. H ₂ O				750	750	750	750	750	750	750
Initial pH	units				9.51	9.41	9.63	9.63	9.59	9.58	9.74
Final pH	units	6.0 - 9.5	6.5 - 9.0	6.5 - 8.5	9.45	9.64	9.73	9.67	9.69	9.73	9.67
Mercury (Hg)	mg/L	-	0.026	0.001	< 0.0001	< 0.0001	< 0.0001	< 0.0001	< 0.0001	< 0.0001	< 0.0001
Aluminum (Al)	mg/L	-	0.005-0.1 ^a	-	0.97	0.84	0.98	0.58	0.91	0.75	1.42
Arsenic (As)	mg/L	0.5	0.005	0.005	0.0013	0.0004	0.0009	0.0005	0.0005	<0.0002	0.0012
Barium (Ba)	mg/L	-	-	1	0.00450	0.00444	0.00438	0.00420	0.00340	0.00309	0.00449
Beryllium (Be)	mg/L	-	-	-	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002
Bismuth (Bi)	mg/L	-	-	-	< 0.00001	< 0.00001	< 0.00001	< 0.00001	< 0.00001	< 0.00001	< 0.00001
Calcium (Ca)	mg/L	-	-	-	2.95	3.01	2.86	2.96	2.59	2.25	1.29
Cadmium (Cd)	mg/L	-	0.000017	0.005	< 0.000003	< 0.000003	< 0.000003	< 0.000003	< 0.000003	< 0.000003	< 0.000003
Cobalt (Co)	mg/L	-	-	-	0.000028	0.000030	0.000049	0.000060	0.000053	0.000122	0.000062
Chromium (Cr)	mg/L	-	0.001	0.051	<0.0005	0.0009	0.0010	<0.0005	0.0011	0.0013	0.0010
Copper (Cu)	mg/L	0.3	0.002-0.004 ^b	≤1.0 ^c	0.0009	<0.0005	<0.0005	<0.0005	<0.0005	0.0005	<0.0005
Iron (Fe)	mg/L	-	0.3	<0.3 ^c	0.069	0.094	0.115	0.127	0.116	0.186	0.233
Potassium (K)	mg/L	-	-	-	6.75	6.51	8.50	8.88	7.66	8.41	13.8
Lithium (Li)	mg/L	-	-	-	0.006	0.006	0.011	0.016	0.012	0.010	0.003
Magnesium (Mg)	mg/L	-	-	-	0.245	0.477	0.370	0.788	0.345	0.422	0.321
Manganese (Mn)	mg/L	-	-	≤0.05	0.00225	0.00268	0.00279	0.00265	0.00308	0.00364	0.00330
Molybdenum (Mo)	mg/L	-	0.073	-	0.00125	0.00096	0.00039	0.00084	0.00073	0.00432	0.00118
Sodium (Na)	mg/L	-	-	-	5.94	5.21	5.39	6.26	5.53	3.75	11.7
Nickel (Ni)	mg/L	0.5	0.025-0.15 ^b	-	0.0001	< 0.0001	0.0002	0.0002	0.0002	0.0006	0.0003
Lead (Pb)	mg/L	0.2	0.001-0.007 ^b	0.01	0.00083	0.00029	0.00043	0.00013	0.00053	0.00046	0.00032
Antimony (Sb)	mg/L	-	-	0.006	< 0.0002	< 0.0002	< 0.0002	< 0.0002	< 0.0002	< 0.0002	0.0003
Selenium (Se)	mg/L	-	0.001	-	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
Tin (Sn)	mg/L	-	-	-	0.00003	0.00004	0.00003	0.00003	0.00004	0.00002	< 0.00001
Strontium (Sr)	mg/L	-	-	-	0.0105	0.0109	0.0123	0.0190	0.0109	0.0077	0.0037
Titanium (Ti)	mg/L	-	-	-	0.0037	0.0047	0.0118	0.0138	0.0134	0.0185	0.0126
Thallium (Tl)	mg/L	-	-	-	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002
Uranium (U)	mg/L	-	-	-	0.00940	0.00860	0.00817	0.00277	0.00528	0.00242	0.00143
Vanadium (V)	mg/L	-	-	-	0.00200	0.00268	0.00547	0.0111	0.00557	0.0129	0.00299
Zinc (Zn)	mg/L	0.5	0.03	≤5.0	< 0.001	< 0.001	< 0.001	0.002	< 0.001	0.001	< 0.001

**Table 5 Results of
Shake Flask Extraction Test (Continued)**

	Units	MMER	CWQG (PAL)	CDWQ	10-TR-024	10-TR-025	10-TR-029	10-TR-033	S449-10	S454-10	S458-10	S461-10
					BH10-13 Sand- stone	BH10-14 Sandy Carbonate	BH10-15 Carb- onate	BH10-16 Carb- onate	Sand/ Gravel	Sand/ Gravel	Sand/ Gravel	Sand/ Gravel
Sample Weight	g				250	250	250	250	250	250	250	250
Volume mL	D.I. H ₂ O				750	750	750	750	750	750	750	750
Initial pH	units				9.66	9.52	9.60	9.64	9.46	7.44	9.53	9.31
Final pH	units	6.0 - 9.5	6.5 - 9.0	6.5 - 8.5	9.38	9.11	8.95	9.03	8.94	7.90	9.30	9.27
Mercury (Hg)	mg/L	-	0.026	0.001	< 0.0001	< 0.0001	< 0.0001	< 0.0001	< 0.0001	< 0.0001	< 0.0001	< 0.0001
Aluminum (Al)	mg/L	-	0.005- 0.1 ^a	-	0.04	0.23	0.16	0.10	0.04	0.50	0.21	0.25
Arsenic (As)	mg/L	0.5	0.005	0.005	0.0013	0.0003	0.0004	< 0.0002	0.0008	0.0003	0.0014	0.0007
Barium (Ba)	mg/L	-	-	1	0.00385	0.00167	0.00170	0.00144	0.00376	0.00406	0.00324	0.00388
Beryllium (Be)	mg/L	-	-	-	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002
Bismuth (Bi)	mg/L	-	-	-	< 0.00001	< 0.00001	0.00001	< 0.00001	< 0.00001	< 0.00001	< 0.00001	< 0.00001
Calcium (Ca)	mg/L	-	-	-	8.32	10.8	12.2	11.4	11.3	4.61	9.28	13.0
Cadmium (Cd)	mg/L	-	0.000017	0.005	< 0.000003	< 0.000003	< 0.000003	< 0.000003	< 0.000003	< 0.000003	< 0.000003	< 0.000003
Cobalt (Co)	mg/L	-	-	-	0.000039	0.000051	0.000059	0.000054	0.000080	0.000137	0.000045	0.000099
Chromium (Cr)	mg/L	-	0.001	0.051	0.0013	0.0007	0.0006	0.0006	0.0027	0.0014	0.0006	0.0008
Copper (Cu)	mg/L	0.3	0.004 ^b	≤ 1.0 ^c	< 0.0005	< 0.0005	< 0.0005	< 0.0005	0.0011	0.0023	0.0015	0.0484
Iron (Fe)	mg/L	-	0.3	< 0.3 ^c	< 0.002	< 0.002	< 0.002	< 0.002	0.010	0.169	0.004	0.059
Potassium (K)	mg/L	-	-	-	8.56	2.03	2.27	2.51	6.90	0.818	7.14	4.94
Lithium (Li)	mg/L	-	-	-	0.009	0.004	0.005	0.006	0.028	< 0.001	0.004	0.010
Magnesium (Mg)	mg/L	-	-	-	7.40	2.55	2.74	3.71	11.3	1.73	3.42	3.83
Manganese (Mn)	mg/L	-	-	≤ 0.05	0.00037	0.00030	0.00065	0.00023	0.00064	0.00898	0.00024	0.00165
Molybdenum (Mo)	mg/L	-	0.073	-	0.00073	0.00048	0.00207	0.00069	0.00390	0.00053	0.00177	0.00226
Sodium (Na)	mg/L	-	-	-	0.94	1.38	1.82	1.65	1.85	0.15	4.06	2.35
Nickel (Ni)	mg/L	0.5	0.025- 0.15 ^b	-	0.0001	< 0.0001	0.0002	0.0001	0.0004	0.0006	0.0002	0.0004
Lead (Pb)	mg/L	0.2	0.001- 0.007 ^b	0.01	< 0.00002	0.00002	< 0.00002	< 0.00002	< 0.00002	0.00079	< 0.00002	0.00015
Antimony (Sb)	mg/L	-	-	0.006	< 0.0002	< 0.0002	< 0.0002	< 0.0002	< 0.0002	< 0.0002	< 0.0002	0.0013
Selenium (Se)	mg/L	-	0.001	-	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001	< 0.001
Tin (Sn)	mg/L	-	-	-	< 0.00001	< 0.00001	< 0.00001	< 0.00001	< 0.00001	0.00001	< 0.00001	0.00006
Strontium (Sr)	mg/L	-	-	-	0.0224	0.139	0.121	0.120	0.0422	0.0073	0.0217	0.0202
Titanium (Ti)	mg/L	-	-	-	0.0003	< 0.0001	0.0003	0.0001	0.0008	0.0111	0.0001	0.0037
Thallium (Tl)	mg/L	-	-	-	< 0.00002	< 0.00002	0.00006	< 0.00002	< 0.00002	< 0.00002	< 0.00002	< 0.00002
Uranium (U)	mg/L	-	-	-	0.000234	0.000071	0.000095	0.000107	0.000486	0.000243	0.000974	0.00225
Vanadium (V)	mg/L	-	-	-	0.00494	0.00084	0.00068	0.00042	0.00112	0.00109	0.00456	0.00417
Zinc (Zn)	mg/L	0.5	0.03	≤ 5.0	< 0.001	< 0.001	< 0.001	0.001	< 0.001	0.001	< 0.001	0.001

Note:

MMER = Metals, Mining Effluent (SOR 2002 - 222)

Bold values indicate parameters above the MMER value.

** Lab data reported for total chromium.

CWQG (PAL) and CDWQ provided for reference only (see text)

CWQG (PAL) = Canadian Water Quality Guidelines Protection of Aquatic Life, 2007

CDWQ = Health Canada - Canadian Drinking Water Guideline


a) varies with pH

b) varies with hardness


c) Aesthetic objective

Mineral/Compound		Ideal Formula	10-TR-024	10-TR-025	10-TR-029	10-TR-033	S449-10	S454-10	S458-10	S461-10
			BH10-13	BH10-14	BH10-15	BH10-16				
			carbonate cemented sandstone	carbonate	carbonate	carbonate	borrow material	borrow material	borrow material	borrow material
			(wt %)	(wt %)	(wt %)	(wt %)	(wt %)	(wt %)	(wt %)	(wt %)
Calcite	Carbonates	CaCO ₃	--	99.3	98.9	98.3	22.6	0.2	0.1	2.2
Rhodochrosite		MnCO ₃	--	--	--	--	--	--	--	0.6
Dolomite		CaMg(CO ₃) ₂	25.9	0.3	0.3	0.6	46.4	--	6.2	11.5
Ankerite		Ca(Mg, Fe)(CO ₃) ₂	--	0.1	0.1	0.3	11.7	--	3.3	3.0
Quartz		SiO ₂	56.3	0.3	0.7	0.8	9.7	98.8	33.0	28.5
Albite	Feldspars	NaAlSi ₃ O ₈	1.2	--	--	--	1.1	0.7	22.7	25.2
Anorthite		CaAl ₂ Si ₂ O ₈	--	--	--	--	--	--	5.1	3.5
Orthoclase		KAlSi ₃ O ₈	1.4	--	--	--	1.3	--	3.9	4.1
Microcline		KAlSi ₃ O ₈	15.2	--	--	--	4.6	--	18.3	12.8
Diopside (clinopyroxene)		CaMgSi ₂ O ₆	--	--	--	--	--	--	2.8	3.1
Actinolite (amphibole)		Ca ₂ (Mg, Fe) ₅ Si ₈ O ₂₂ (OH) ₂	--	--	--	--	--	--	--	--
Phlogopite	Phyllo-silicates	KMg ₃ (AlSi ₃ O ₁₀)(OH) ₂	--	--	--	--	--	--	3.7	3.4
Biotite		K(Mg, Fe) ₃ (AlSi ₃ O ₁₀)(OH) ₂	--	--	--	--	--	--	--	--
Clinochlore (chlorite)		(Mg, Fe) ₅ (Si ₃ Al)O ₁₀ (OH) ₈	--	--	--	--	2.6	0.3	0.5	1.6
Magnetite		Fe ₃ O ₄	--	--	--	--	--	--	0.4	0.5
TOTAL			100	100	100	100	100	100	100	100

FIGURES

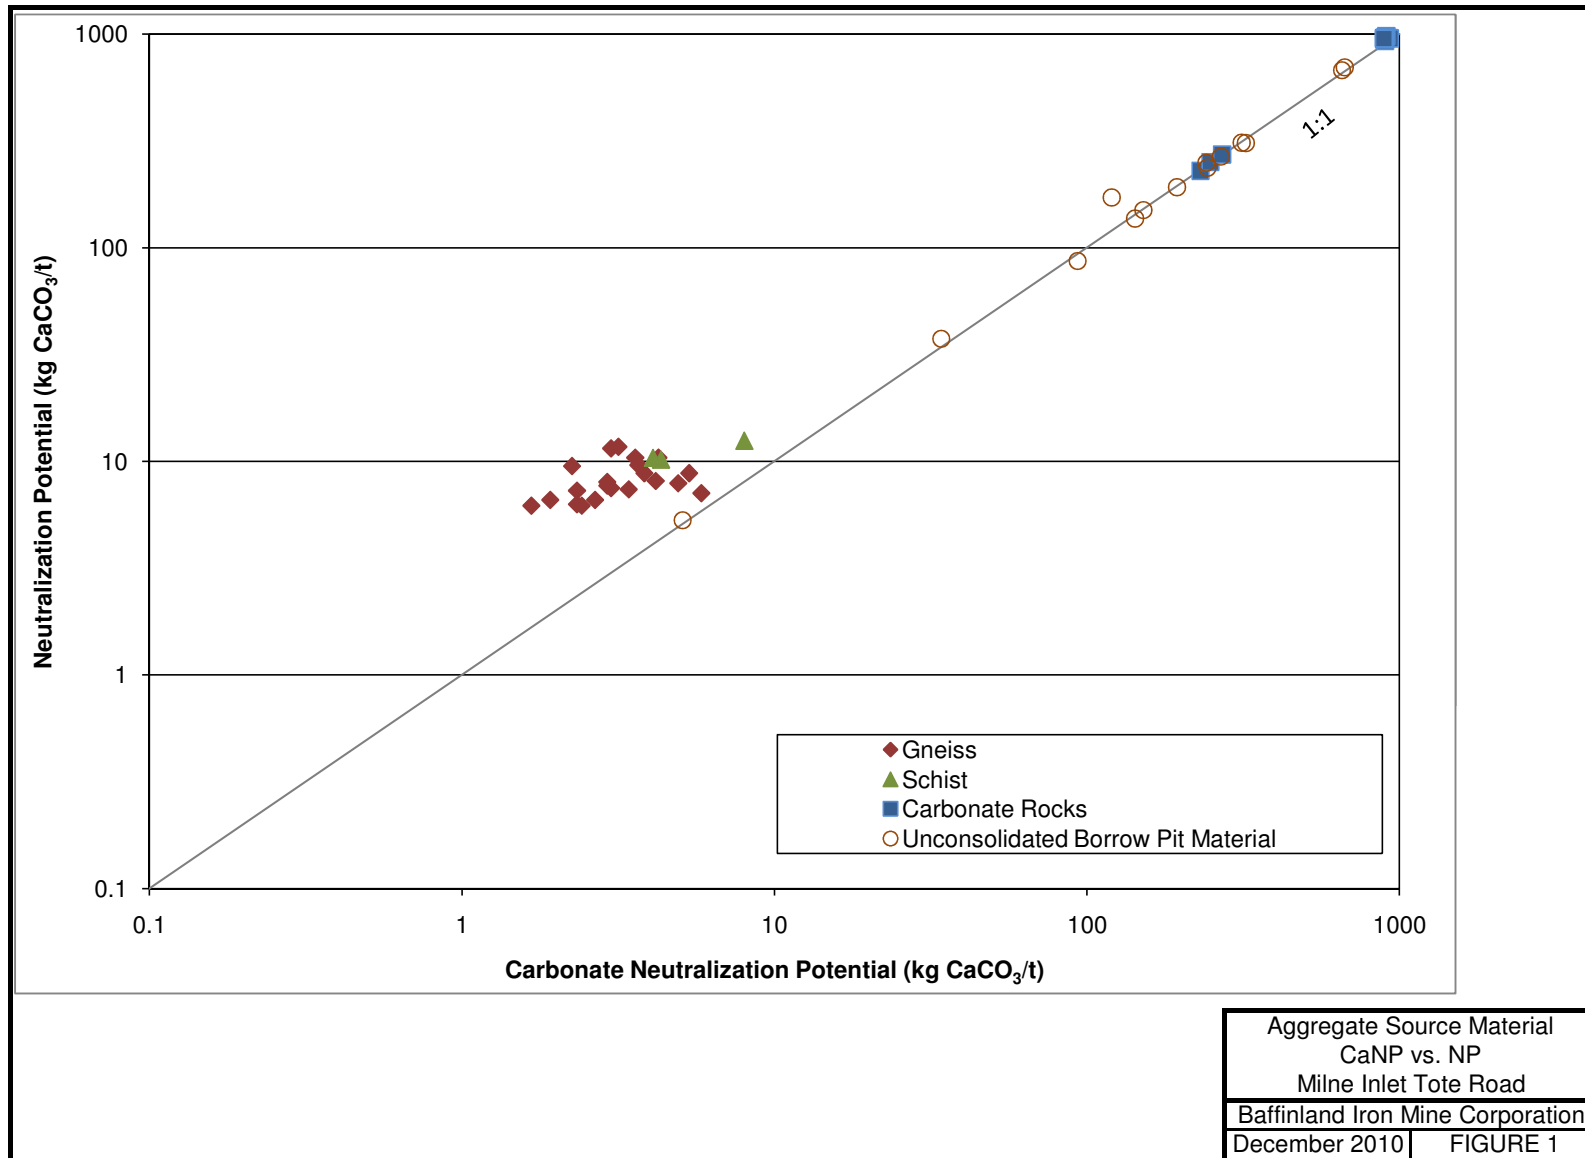

Job No. TC101510

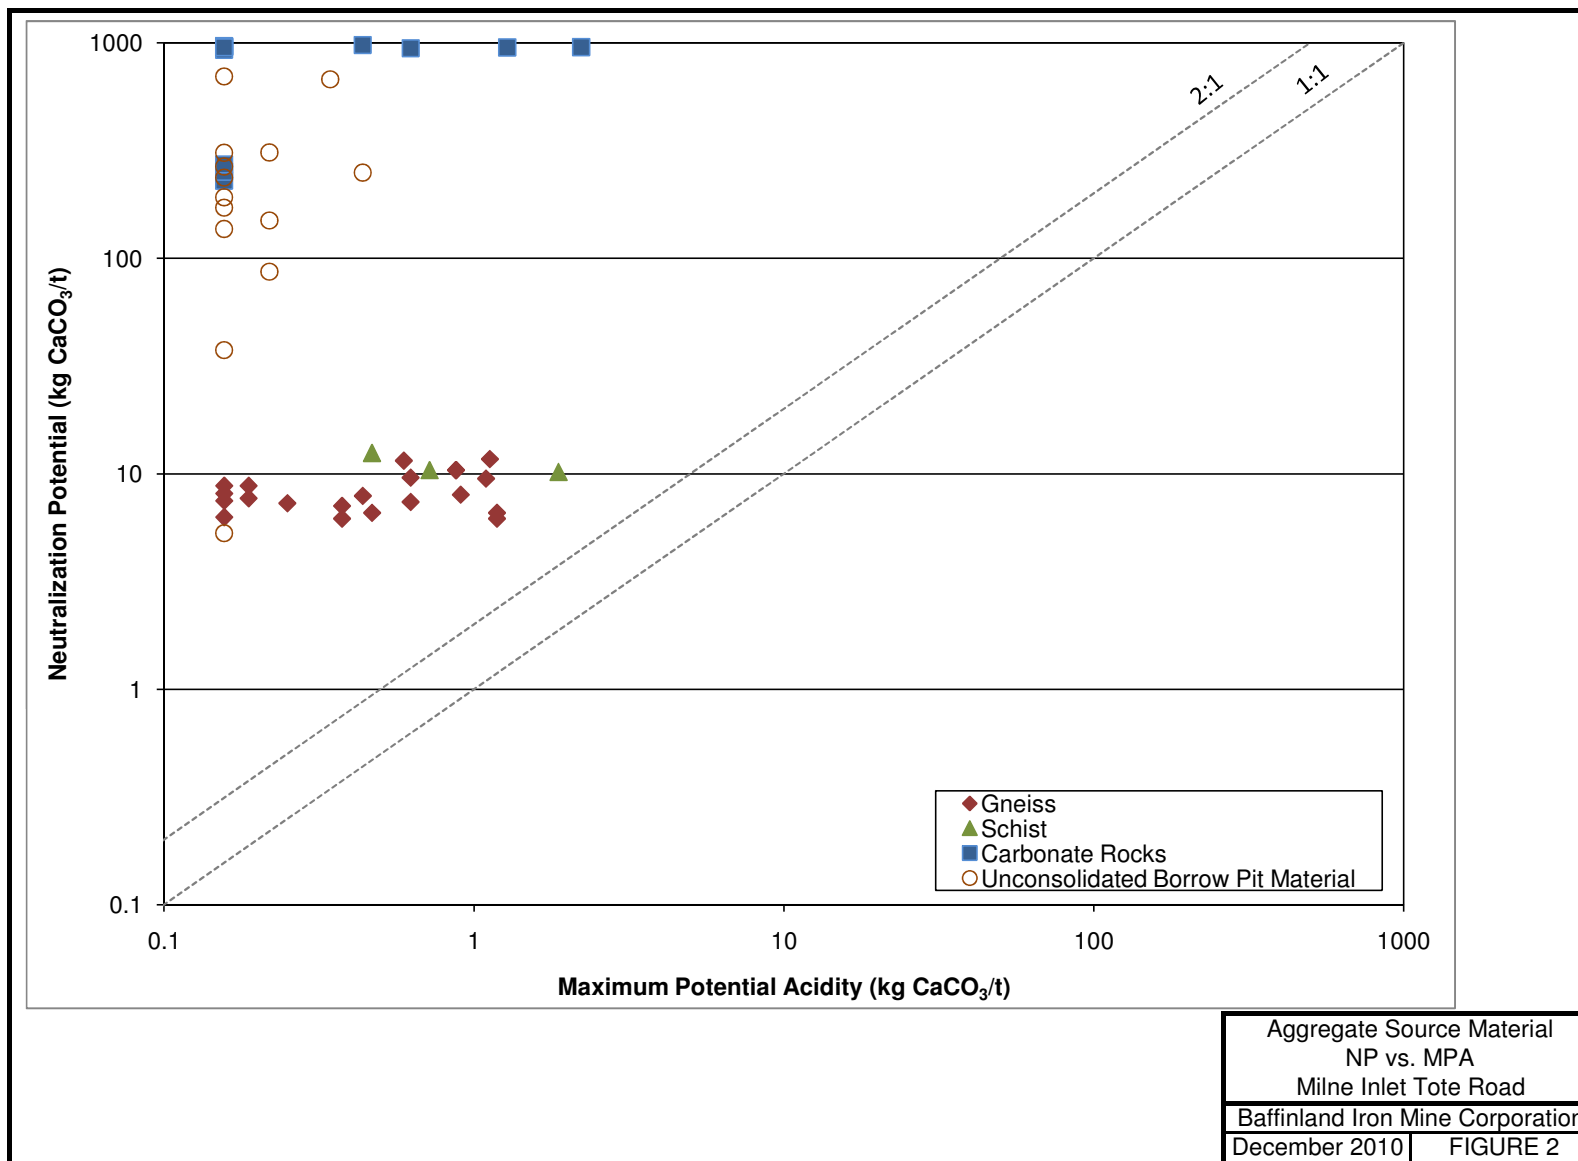

Job No. TC101510