#### SECTION 11 TOXICOLOGICAL INFORMATION

Information on toxicological effects

Serious Eye Damage/Irritation: The eye irritation hazard is based on evaluation of data for product components.

Skin Corrosion/Irritation: The skin irritation hazard is based on evaluation of data for product components.

Skin Sensitization: The skin sensitization hazard is based on evaluation of data for product components.

Acute Dermal Toxicity: The acute dermal toxicity hazard is based on evaluation of data for product components.

Acute Oral Toxicity: The acute oral toxicity hazard is based on evaluation of data for product components.

Acute Inhalation Toxicity: The acute inhalation toxicity hazard is based on evaluation of data for product

components.

Acute Toxicity Estimate: Not Determined

Germ Cell Mutagenicity: The hazard evaluation is based on data for components or a similar material.

Carcinogenicity: The hazard evaluation is based on data for components or a similar material.

Reproductive Toxicity: The hazard evaluation is based on data for components or a similar material.

Specific Target Organ Toxicity - Single Exposure: The hazard evaluation is based on data for components or a similar material

Specific Target Organ Toxicity - Repeated Exposure: The hazard evaluation is based on data for components or a similar material.

#### ADDITIONAL TOXICOLOGY INFORMATION:

During use in engines, contamination of oil with low levels of cancer-causing combustion products occurs. Used motor oils have been shown to cause skin cancer in mice following repeated application and continuous exposure. Brief or intermittent skin contact with used motor oil is not expected to have serious effects in humans if the oil is thoroughly removed by washing with soap and water.

This product contains petroleum base oils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils requires a cancer warning under the OSHA Hazard Communication Standard (29 CFR 1910.1200). These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as; carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A), or possibly carcinogenic to humans (Group 2B).

These oils have not been classified by the American Conference of Governmental Industrial Hygienists (ACGIH) as: confirmed human carcinogen (A1), suspected human carcinogen (A2), or confirmed animal carcinogen with unknown relevance to humans (A3).

#### SECTION 12 ECOLOGICAL INFORMATION

#### **ECOTOXICITY**

This material is expected to be harmful to aquatic organisms and may cause long-term adverse effects in the aquatic environment.

The product has not been tested. The statement has been derived from the properties of the individual components.

#### MOBILITY

No data available.

# PERSISTENCE AND DEGRADABILITY

This material is not expected to be readily biodegradable. The biodegradability of this material is based on an

Revision Number: 9

Revision Date: January 20, 2020

**5** of 7

Delo 400 LE SAE 15W-40 SDS: 17108 evaluation of data for the components or a similar material.

The product has not been tested. The statement has been derived from the properties of the individual components.

#### POTENTIAL TO BIOACCUMULATE

Bioconcentration Factor: No data available.

Octanol/Water Partition Coefficient: No data available

#### SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. Oil collection services are available for used oil recycling or disposal. Place contaminated materials in containers and dispose of in a manner consistent with applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods.

# SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

DOT Shipping Description: NOT REGULATED AS HAZARDOUS MATERIAL UNDER 49 CFR

 ${\bf IMO/IMDG~Shipping~Description:}$  NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER THE IMDG CODE

 $\label{lem:condition} \textbf{ICAO/IATA Shipping Description:} \ \ \text{NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER ICAO}$ 

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC code: Not applicable

# SECTION 15 REGULATORY INFORMATION

EPCRA 311/312 CATEGORIES: Not applicable

#### REGULATORY LISTS SEARCHED:

01-1=IARC Group 1 03=EPCRA 313 01-2A=IARC Group 2A 04=CA Proposition 65 01-2B=IARC Group 2B 05=MA RTK 02=NTP Carcinogen 06=NJ RTK 07=PA RTK

The following components of this material are found on the regulatory lists indicated. Zinc alkyl dithiophosphate 06, 07

#### CHEMICAL INVENTORIES:

All components comply with the following chemical inventory requirements: AICS (Australia), DSL (Canada), KECI (Korea), NZIOC (New Zealand), PICCS (Philippines), TSCA (United States).

One or more components does not comply with the following chemical inventory requirements: EINECS (European Union), ENCS (Japan), IECSC (China), TCSI (Taiwan).

#### NEW JERSEY RTK CLASSIFICATION:

 Revision Number:
 9
 6
 of
 7
 Delo 400 LE SAE 15W-40 SDS:
 17108

Under the New Jersey Right-to-Know Act L. 1983 Chapter 315 N.J.S.A. 34:5A-1 et. seq., the product is to be identified as follows: PETROLEUM OIL (Motor oil)

#### SECTION 16 OTHER INFORMATION

NFPA RATINGS: Health: 0 Flammability: 1 Reactivity: 0

**HMIS RATINGS:** Health: 0 Flammability: 1 Reactivity: 0

(0-Least, 1-Slight, 2-Moderate, 3-High, 4-Extreme, PPE:- Personal Protection Equipment Index recommendation, \*-Chronic Effect Indicator). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

REVISION STATEMENT: SECTION 02 - Environmental Classification information was added.

SECTION 02 - Hazard Statements information was added.

SECTION 02 - Hazards Otherwise Not Classified information was modified.

SECTION 02 - Precautionary Statements information was added.

SECTION 03 - Composition information was modified.

SECTION 08 - General Considerations information was modified.

SECTION 09 - Physical/Chemical Properties information was deleted.

SECTION 09 - Physical/Chemical Properties information was modified.

SECTION 12 - Ecological Information information was modified.

SECTION 15 - Chemical Inventories information was modified.

SECTION 15 - New Jersey Right To Know information was modified.

SECTION 15 - Regulatory Information information was added.

Revision Date: January 20, 2020

#### ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:

TLV - Threshold Limit Value	TWA - Time Weighted Average
STEL - Short-term Exposure Limit	PEL - Permissible Exposure Limit
GHS - Globally Harmonized System	CAS - Chemical Abstract Service Number
ACGIH - American Conference of Governmental	IMO/IMDG - International Maritime Dangerous
Industrial Hygienists	Goods Code
API - American Petroleum Institute	SDS - Safety Data Sheet
HMIS - Hazardous Materials Information System	NFPA - National Fire Protection Association (USA)
DOT - Department of Transportation (USA)	NTP - National Toxicology Program (USA)
IARC - International Agency for Research on	OSHA - Occupational Safety and Health
Cancer	Administration
NCEL - New Chemical Exposure Limit	EPA - Environmental Protection Agency
SCBA - Self-Contained Breathing Apparatus	

Prepared according to the 29 CFR 1910.1200 (2012) by Chevron Energy Technology Company, 6001 Bollinger Canyon Road, San Ramon, CA 94583.

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.

 Revision Number:
 9
 7
 of
 7
 Delo 400 LE SAE 15W-40

 Revision Date:
 January 20, 2020
 SDS:
 17108

Effective June 2020 141





# AMC CALCIUM CHLORIDE

AMC

Chemwatch: 20922 Version No: 6.1.1.1

Safety Data Sheet according to WHS and ADG requirements

#### Chemwatch Hazard Alert Code: 2

Issue Date: 02/04/2016 Print Date: 12/08/2017 L.GHS.A.US.EN

# SECTION 1 IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY/UNDERTAKING

#### Product Identifier

Productname	AMC CALCIUM CHLORIDE
Chemical Name	calcium chloride
Chemical formula	Ca-Cl2
Other means of identification	Not Available
CAS number	10043-52-4

# Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses Used as a drying, dehydrating, desiccating agent for organic liquids, gases. Obsolescent use as refrigerant brine.

#### Details of the supplier of the safety data sheet

Registered company name	АМС
Address	216 Balcatta Rd Balcatta WA 6021 Australia
Telephone	+61 8 9445 4000
Fax	+61 8 9445 4040
Website	www.amcmud.com
Email	a mc@imdexlimited.com

# Emergency telephone number

Association / Organisation	Not Available
Emergency telephone numbers	1800 039 008 or +61 3 9673 3112,+800 2436 2255 +613 9573 3112
Other emergency telephone numbers	Not Available

# SECTION 2 HAZARDS IDENTIFICATION


# Classification of the substance or mixture

HAZARDOUS CHEMICAL, NON-DANGEROUS GOODS, According to the WHS Regulations and the ADG Code.


#### CHEMWATCH HAZARD RATINGS

	Min	Max	
Flam ma bility	0		
Toxicity	2		0 = Minimum
Body Contact	2		1 = Low
Reactivity	0		2 = Moderate 3 = High
Chronic	0	i	4 = Extreme

Poisons Schedule	Not Applicable
Classification [1]	Acute Toxicity (Oral) Category 4, Eye Irritation Category 2A

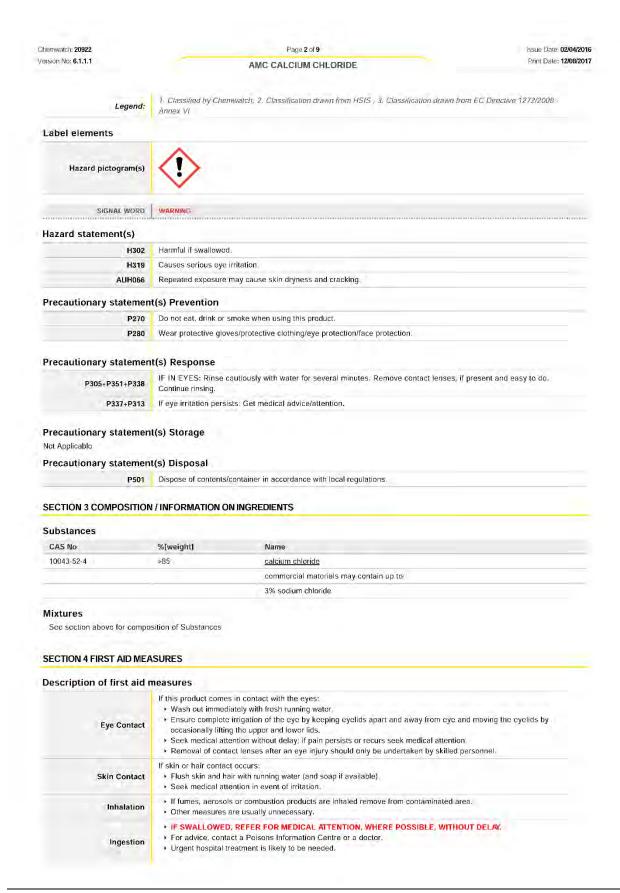



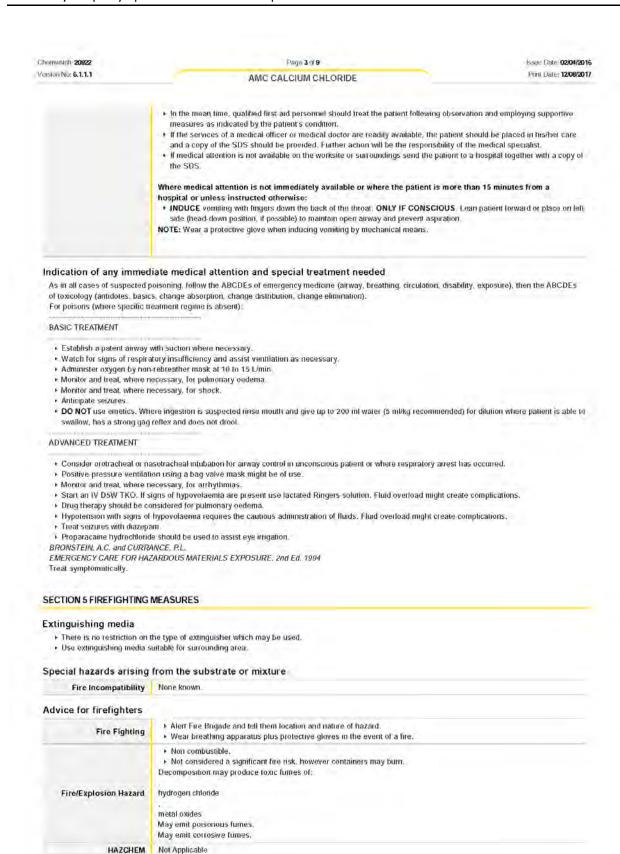







Chemwatch: 20922 Page 5 of 9 Issue Date: 02/04/2016 Version No: 6.1.1.1 Print Date: 12/08/2017 AMC CALCIUM CHLORIDE At this time no TLV has been established, even though this material may produce adverse health effects (as evidenced in animal experiments or clinical Sensory irritants are chemicals that produce temporary and undesirable side-effects on the eyes, nose or throat. Historically occupational exposure standards for these irritants have been based on observation of workers' responses to various airborne concentrations. **Exposure controls** Engineering controls are used to remove a hazard or place a barrier between the worker and the hazard. Well-designed Appropriate engineering engineering controls can be highly effective in protecting workers and will typically be independent of worker interactions controls to provide this high level of protection Personal protection Safety glasses with side shields. Eye and face protection · Chemical googles. Skin protection See Hand protection below The selection of suitable gloves does not only depend on the material, but also on further marks of quality which vary from manufacturer to manufacturer. Where the chemical is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application. Hands/feet protection Experience indicates that the following polymers are suitable as glove materials for protection against undissolved, dry solids, where abrasive particles are not present. polychloroprene. **Body protection** See Other protection below

#### Respiratory protection

Other protection

Thermal hazards

Particulate. (AS/NZS 1716 & 1715, EN 143:2000 & 149:001, ANSI Z88 or national equivalent)

· Overalls.

Not Available


P.V.C


- Respirators may be necessary when engineering and administrative controls do not adequately prevent exposures.
- The decision to use respiratory protection should be based on professional judgment that takes into account toxicity information, exposure measurement
  data, and frequency and likelihood of the worker's exposure ensure users are not subject to high thermal loads which may result in heat stress or
  distress due to personal protective equipment (powered, positive flow, full face apparatus may be an option)
- Published occupational exposure limits, where they exist, will assist in determining the adequacy of the selected respiratory protection. These may be government mandated or vendor recommended.
- Certified respirators will be useful for protecting workers from inhalation of particulates when properly selected and fit tested as part of a complete respiratory protection program.
- Use approved positive flow mask if significant quantities of dust becomes airborne.
- Try to avoid creating dust conditions.

#### SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Appearance	Material is hygroscopic, absorbs moisture from surrounding air.  Small white crystals, granules, or flakes. No odour.		
Physical state	Divided Solid	Relative density (Water = 1)	2.15
Odour	Not Available	Partition coefficient n-octanol / water	Not Available
Odour threshold	Not Available	Auto-ignition temperature (°C)	Not Applicable
pH (as supplied)	Not Applicable	Decomposition temperature	Not available.
Melting point / freezing point (°C)	772	Viscosity (cSt)	Not Applicable
Initial boiling point and boiling range (°C)	>1600	Molecular weight (g/mol)	110.99
Flash point (°C)	Not Applicable	Taste	Not Available
Evaporation rate	Not Applicable	Explosive properties	Not Available
Flammability	Not Applicable	Oxidising properties	Not Available

nernwatch: <b>20922</b> arsion No: <b>6.1.1.1</b>		Page 6 // 9 AMC CALCIÚM CHLORIDE	Print Date: 12/08/2	
	-	INC CAECION CHEORIDE		
and the second second		a Vandaria de la companya del companya de la companya del companya de la companya		
Upper Explosive Limit (%)	Not Applicable	Surface Tension (dyn/cm or mN/m)	Not Applicable	
Lower Explosive Limit (%)	Not Applicable	Volatile Component (%vol)	Nii	
Vapour pressure (kPa)	Negligible	Gas group	Not Available	
Solubility in water (g/L)	Miscible	pH as a solution (1%)	Not available,	
Vapour density (Air = 1)	Not Applicable	VOC g/L	Not Applicable	
SECTION 10 STABILITY AI	ND REACTIVITY			
Reactivity	See section 7			
Chemical stability	Unstable in the presenc     Product is considered st	e of incompatible materials. table.		
Possibility of hazardous reactions	See section 7			
Conditions to avoid	See section 7			
Incompatible materials	See section 7			
Hazardous decomposition products	See section 5			
SECTION 11 TOXICOLOGI	CAL INFORMATION			
Information on toxicolog	jical effects			
Inhaled	Persons with impaired resp may incur further disability If prior damage to the circu screenings should be condi result	control measures be used in an occupational setti tratory function, airway diseases and conditions s if excessive concentrations of particulate are inh latory or nervous systems has occurred or if kidn ucted on individuals who may be exposed to furth	uch as emphysema or chronic bronchitis, aled. ey damage has been sustained, proper	
ingestion	in excessive exposures.  Accidental ingestion of the material may be harmful; animal experiments indicate that ingestion of less than 150 gram may be fatal or may produce serious damage to the health of the individual.  Compared with other metals, the calcium ion and most calcium compounds have low toxicity. Acute calcium poisoning is rare, and difficult to achieve unless calcium compounds are administered intravenously or taken in high doses over a protonged period.  [Use as a food additive indicates toferance of small amounts, but irritant properties and toxic effects of large amounts are well documented. Estimated lethal dose for adult is 30 grams.			
Skin Contact	Systemic harm, however, himay still produce health dar Repeated exposure may car Open cuts, abraded or irrita Solution of material in mois Entry into the blood stream injury with harmful effects, suitably protected.	to produce harmful health effects (as classified uses been identified following exposure of animals in age following entry through wounds, lesions or a use skin cracking, flaking or drying following nomited skin should not be exposed to this material ture on the skin, or perspiration, may increase in through, for example, cuts, abrasions, puncture Examine the skin prior to the use of the material perspiration, superficial burns may result. Contact	by at least one other route and the material brasions. nal handling and use: itant effects wounds or lesions, may produce systemic and ensure that any external damage is	
Eye	number of individuals and/o	of experience predicts, that the material may caus or may produce significant ocular lesions which ar f experimental animals. Eye contact may cause s	e present twenty four hours or more after	
Chronic	Limited evidence suggests involving organs or biocher High blood concentrations or	contact may cause drying with cracking, irritation that repeated or long-term occupational exposure nical systems. of calcium ion may give rise to vasodilation and dicalcium ions enhance the effects of digitalis on the	may produce cumulative health effects epress cardiac function leading to	

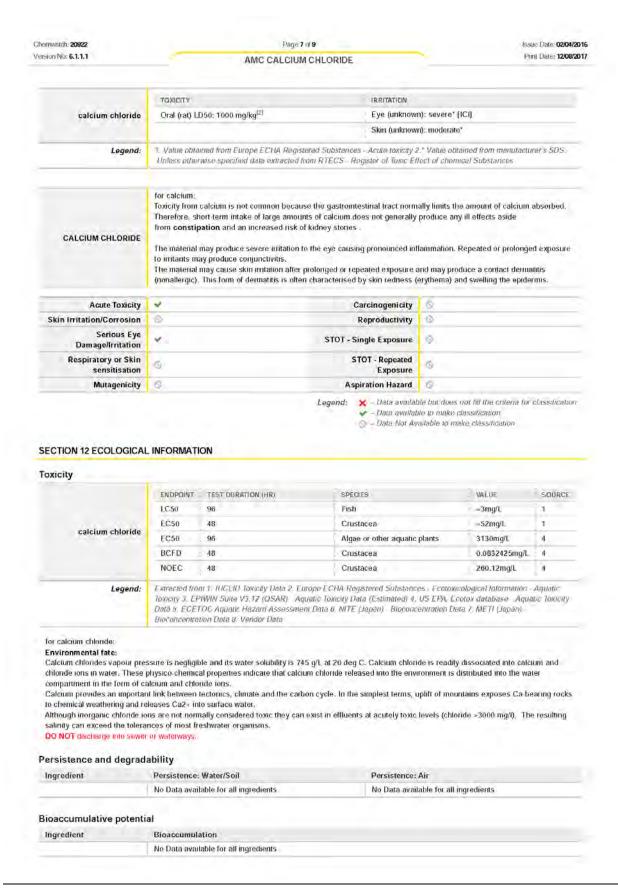

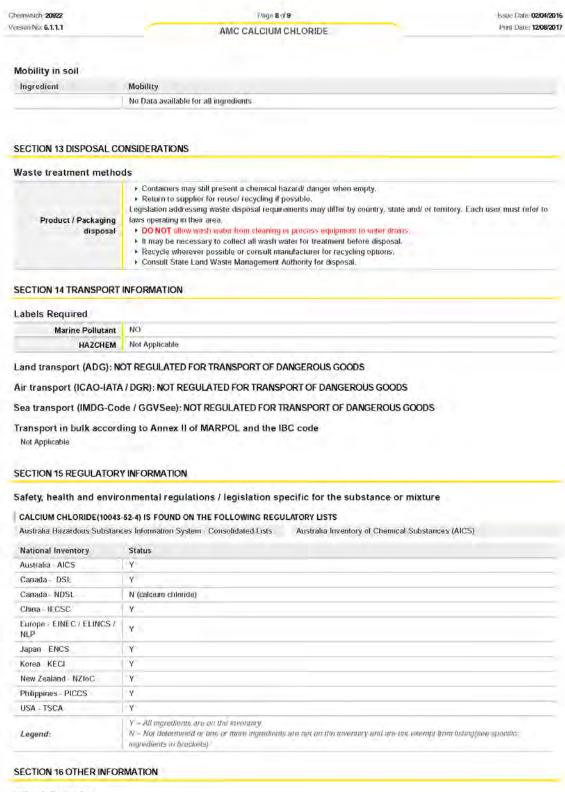


# Other information

Classification of the preparation and its individual components has drawn on official and authoritative sources as well as independent review by the Chemwatch Classification committee using available literature references.



149



The SDS is a Hazard Communication tool and should be used to assist in the Risk Assessment. Many factors determine whether the reported Hazards are Risks in the workplace or other settings.

#### Definitions and abbreviations

PC - TWA: Permissible Concentration-Time Weighted Average

PC-STEL: Permissible Concentration-Short Term Exposure Limit

IARC: International Agency for Research on Cancer

ACGIH: American Conference of Governmental Industrial Hygienists STEL: Short Term Exposure Limit

TEEL: Temporary Emergency Exposure Limit。
IDLH: Immediately Dangerous to Life or Health Concentrations

OSF: Odour Safety Factor NOAFL: No Observed Adverse Effect Level

LOAFL: Lowest Observed Adverse Effect Level

TLV: Threshold Umit Value

LOD: Limit Of Detection

OTV: Odour Threshold Value

BCF: BioConcentration Factors **BEI: Biological Exposure Index** 

Apart from any fair dealing for the purposes of private study, research, review or criticism, as permitted under the Copyright Act, no part may be reproduced by any process without written permission from CHEMWATCH.



# AMC CR 650™

#### AMC

Chemwatch: 4902-92 Version No: 14.1.1.1

Salety Data Sheet according to WHMIS 2015 requirements

Chemwatch Hazard Alert Code: 0

Issue Date; 01/09/2018 Print Date; 10/15/2019 L.GHS.CAN.EN

#### **SECTION 1 IDENTIFICATION**

#### Product Identifier

r roduct identifier	
Product name	AMC CR 650™
Synonyms	PHPA
Other means of identification	Not Available

# Recommended use of the chemical and restrictions on use

Relevant identified uses | Drilling fluid additive.

#### Name, address, and telephone number of the chemical manufacturer, importer, or other responsible party

Registered company name	AMC	
Address	220 N. 2200 W. Suite# 600, Salt Lake City UT 84116 United States	
Telephone	801-364-0233	
Fax	801-364-0278	
Website	www.amcmud.com	
Email	amc@imdexlimited.com	

# Emergency phone number

Association / Organisation	AMC	CHEMWATCH EMERGENCY RESPONSE
Emergency telephone numbers	Chemwatch - (1) 877 715 9305	+61 2 9186 1132
Other emergency telephone numbers	*	Not Available

# SECTION 2 HAZARD(S) IDENTIFICATION

# Classification of the substance or mixture

NFPA 704 diamond



Note: The hazard category numbers found in GHS classification in section 2 of this SDSs are NOT to be used to fill in the NFPA 704 diamond. Blue = Health Red = Fire Yellow = Reactivity White = Special (Oxidizer or water reactive substances)

#### CANADIAN WHMIS SYMBOLS


Classification Not Applicable

# Label elements

Hazard pictogram(s) Not Applicable

SIGNAL WORD NOT APPLICABLE



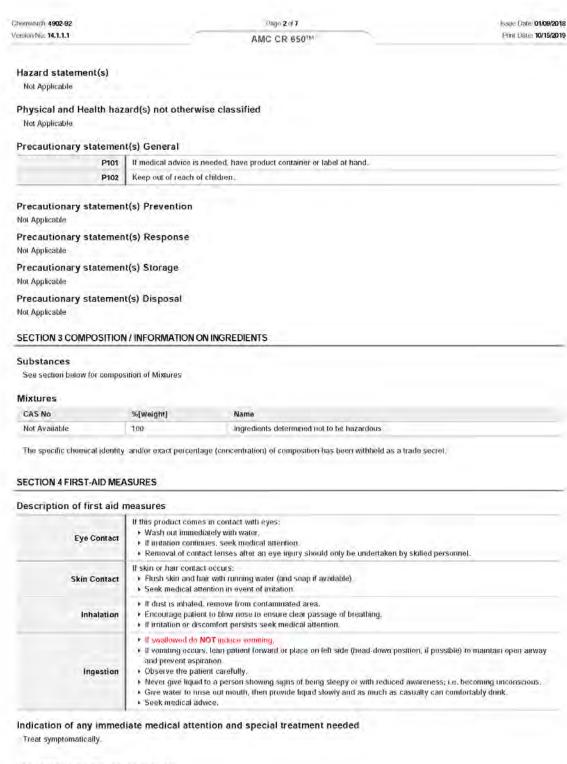

#### SECTION 5 FIRE-FIGHTING MEASURES

#### Extinguishing media

- . There is no restriction on the type of extinguisher which may be used.
- Use extinguishing media suitable for surrounding area.

Chemwatch: <b>4902-92</b>	Page <b>3</b> of <b>7</b>	Issue Date: 01/09/2018
Version No: 14.1.1.1	AMC CR 650™	Print Date: 10/15/2019

#### Special hazards arising from the substrate or mixture

Fire Incompatibility	None known.
Special protective equir	ment and precautions for fire-fighters

Fire Fighting	<ul> <li>Alert Fire Brigade and tell them location and nature of hazard.</li> <li>Wear breathing apparatus plus protective gloves in the event of a fire.</li> </ul>
Fire/Explosion Hazard	Non combustible. Not considered a significant fire risk, however containers may burn.  Decomposes on heating and produces toxic fumes of: carbon monoxide (CO) carbon dioxide (CO2)
	nitrogen oxides (NOx)

# SECTION 6 ACCIDENTAL RELEASE MEASURES

# Personal precautions, protective equipment and emergency procedures

See section 8

# **Environmental precautions**

See section 12

# Methods and material for containment and cleaning up

Minor Spills	Clean up all spills immediately.     Avoid contact with skin and eyes.
Major Spills	<ul> <li>Clear area of personnel and move upwind.</li> <li>Alert Fire Brigade and tell them location and nature of hazard.</li> </ul>

Personal Protective Equipment advice is contained in Section 8 of the SDS.

#### SECTION 7 HANDLING AND STORAGE

#### Precautions for safe handling

Safe handling	Limit all unnecessary personal contact.     Wear protective clothing when risk of exposure occurs.
Other information	► Store in original containers.  ► Keep containers securely sealed.

# Conditions for safe storage, including any incompatibilities

Suitable container	> Lined metal can, lined metal pail/ can. ▶ Plastic pail.
Storage incompatibility	Avoid contamination of water, foodstuffs, feed or seed.

# SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

# Control parameters

# OCCUPATIONAL EXPOSURE LIMITS (OEL)

INGREDIENT DATA

Not Available

# **EMERGENCY LIMITS**

Ingredient	Material name	TEEL-1	TEEL-2	TEEL-3
AMC CR 650™	Not Available	Not Available	Not Available	Not Available
Ingredient	Original IDLH		Revised IDLH	
AMC CR 650™	Not Available		Not Available	

# MATERIAL DATA

# Exposure controls

 Chemwatch 4902-92
 Page 4 of 7
 Issue Date: 01/09/2018

 Version No: 14.1.1.1
 AMC CR 650<sup>TM</sup>
 Print Date: 10/15/2019

Engineering controls are used to remove a hazard or place a barrier between the worker and the hazard. Well-designed Appropriate engineering engineering controls can be highly effective in protecting workers and will typically be independent of worker interactions controls to provide this high level of protection Personal protection Safety glasses with side shields Eye and face protection Chemical goggles. Contact lenses may pose a special hazard; soft contact lenses may absorb and concentrate irritants. Skin protection The selection of suitable gloves does not only depend on the material, but also on further marks of quality which vary from manufacturer to manufacturer. Where the chemical is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application. Hands/feet protection Experience indicates that the following polymers are suitable as glove materials for protection against undissolved, dry solids, where abrasive particles are not present. · polychloroprene. See Other protection below **Body protection** No special equipment needed when handling small quantities. OTHERWISE: Other protection · Overalls.

#### Respiratory protection

Particulate. (AS/NZS 1716 & 1715, EN 143:2000 & 149:001, ANSI Z88 or national equivalent)

Required Minimum Protection Factor	Half-Face Respirator	Full-Face Respirator	Powered Air Respirator
up to 10 x ES	P1 Air-line*		PAPR-P1
up to 50 x ES	Air-line**	P2	PAPR-P2
up to 100 x ES	-	P3	
		Air-line*	
100+ x ES	è	Air-line**	PAPR-P3

<sup>\* -</sup> Negative pressure demand \*\* - Continuous flow

A(All classes) = Organic vapours, B AUS or B1 = Acid gasses, B2 = Acid gas or hydrogen cyanide(HCN), B3 = Acid gas or hydrogen cyanide(HCN), E = Sulfur dioxide(SO2), G = Agricultural chemicals, K = Ammonia(NH3), Hg = Mercury, NO = Oxides of nitrogen, MB = Methyl bromide, AX = Low boiling point organic compounds(below 65 degC)

# SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Appearance	White powder, soluble in water.				
Physical state	Divided Solid	Relative density (Water = 1)	Not Available		
Odour	Not Available	Partition coefficient n-octanol / water	Not Available		
Odour threshold	Not Available	Auto-ignition temperature (°C)	Not Applicable		
pH (as supplied)	Not Applicable	Decomposition temperature	Not Available		
Melting point / freezing point (°C)	>150	Viscosity (cSt)	Not Applicable		
Initial boiling point and boiling range (°C)	Not Available	Molecular weight (g/mol)	Not Applicable		
Flash point (°C)	Not Applicable	Taste	Not Available		
Evaporation rate	Not Applicable	Explosive properties	Not Available		
Flammability	Not Applicable	Oxidising properties	Not Available		
Upper Explosive Limit (%)	Not Applicable	Surface Tension (dyn/cm or mN/m)	Not Applicable		





asion No: 14.1.1.1	ernwsich: 4902-92		Page 6 d 7		
ASIOTINO: 14.1.1.1		AMC	CR 650™	Print Date: 10/15/	
	Not Available	Not Available	Not Available	Not Not Available Available	
Legend:	Toxicity 3, EPI Data 5, EGL1	IWIN Suite V3.12 (QSAR) - A	Arope ECHA Registered Substances - Ecolo Aquatic Toxicity Data (Estimated) 4, US EPA, Cont. Data 6 - NITE (Tagas) - Bioconcentration	Ecotox database - Aquauc Toxicity	
DO NOT discharge into sewer May be harmful to Tauna if no	The second secon	cording to Section 13 and le	gislative requirements. [AMC]		
Persistence and degrad	ability				
Ingredient	Persistence:	Water/Soil	Persistence: Air		
	No Data avail	able for all ingredients	No Data available for a	dl ingredients	
at the state of the state of					
Bioaccumulative potenti					
Ingredient	Bioaccumula				
	No Data avail	able for all ingredients			
Mahilihi in e-il					
Mobility in soil	The Control of				
Ingredient	Mobility	ah I. Yan all to one ili and			
	No Data avail	able for all ingredients			
Product / Packaging disposal		tate Land Waste Manageme	manulacturer for recycling options. nr Authority for disposal.		
TOTION ALTRANSPORT	INFORMATIO	N			
SECTION 14 TRANSPORT	uu sigramiis				
_abels Required	Fue.				
	NO				
abels Required  Marine Pollutant		ED FOR TRANSPORT OF	DANGEROUS GOODS		
Labels Required  Marine Pollutant  Land transport (TDG): NO	T REGULATE		DANGEROUS GOODS ISPORT OF DANGEROUS GOODS		
Land transport (TDG): NC Air transport (ICAO-IATA	T REGULATE	REGULATED FOR TRAN		os	
Labels Required  Marine Pollutant  Land transport (TDG): NC  Air transport (ICAO-IATA  Sea transport (IMDG-Cod	OT REGULATE ./DGR): NOT e/GGVSee):	REGULATED FOR TRAN	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD	os	
Labels Required  Marine Pollutant  Land transport (TDG): NO	OT REGULATE (/DGR): NOT e/GGVSee): (ing to Annex	REGULATED FOR TRAN	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD	DS .	
Labels Required  Marine Pollutant  Land transport (TDG): NO  Air transport (ICAO-IATA  Sea transport (IMDG-Cod  Transport in bulk accord  Not Applicable  SECTION 15 REGULATORY  Safety, health and environ	OT REGULATE  I / DGR): NOT  e / GGVSee):  ing to Annex  Y INFORMATIC  onmental reg  ed in accordance	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD	ure	
Marine Pollutant Marine Pollutant Land transport (TDG): NO Air transport (ICAO-IATA Sea transport (IMDG-Cod Fransport in bulk accord Not Applicable SECTION 15 REGULATORY Safety, health and enviro This product has been classift required by the Controlled Pro-	of REGULATE  I / DGR): NOT  I / GGVSee):  Ing to Annex  Y INFORMATIO  Commental reg  ed in accordance  ducts Regulatio	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD BIBC code Specific for the substance or mixt	ure	
Marine Pollutant Marine Pollutant Amarine Pollutant Amarine Pollutant Cand transport (ICAO-IATA Gea transport (IMDG-Cod Transport in bulk accord tot Applicable SECTION 15 REGULATORS Safety, health and enviro This product has been classift required by the Controlled Pro-	of REGULATE  I / DGR): NOT  I / GGVSee):  Ing to Annex  Y INFORMATIO  Commental reg  ed in accordance  ducts Regulatio	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD BIBC code Specific for the substance or mixt	ure	
Marine Pollutant Marine Pollutant  and transport (TDG): NC  Air transport (ICAO-IATA  Sea transport (IMDG-Cod  Transport in bulk accord  tot Applicable  SECTION 15 REGULATORY  Safety, health and enviro  This product has been classifi required by the Controlled Pro-  National Inventory Status	of REGULATE  I / DGR): NOT  I / GGVSee):  Ing to Annex  I INFORMATIO  Commental reg  ed in accordance  ducts Regulations	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD BIBC code Specific for the substance or mixt	ure	
Marine Pollutant Marine Pollutant  and transport (TDG): NC  Air transport (ICAO-IATA  Sea transport (IMDG-Cod  Transport in bulk accord  tot Applicable  SECTION 15 REGULATORY  Safety, health and enviro  This product has been classifi required by the Controlled Pro  National Inventory	of REGULATE  I / DGR): NOT  I / GGVSee):  Ing to Annex  I INFORMATIO  Informental reged in accordance  ducts Regulations  Status	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD BIBC code Specific for the substance or mixt	ure	
Marine Pollutant  Marine Pollutant  Land transport (TDG): NC  Air transport (ICAO-IATA  Sea transport (IMDG-Cod  Transport in bulk accord  tot Applicable  SECTION 15 REGULATORY  Safety, health and enviro  This product has been classifi required by the Controlled Pro  National Inventory  Australia AICS	of REGULATE  I / DGR): NOT  I / GGVSee):  Ing to Annex  I / INFORMATIO  Informental reged in accordance  ducts Regulations  Status  Yes	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD BIBC code Specific for the substance or mixt	ure	
Abels Required  Marine Pollutant  Land transport (TDG): NO  Air transport (ICAO-JATA  Sea transport (IMDG-Cod  Transport in bulk accord  tot Applicable  SECTION 15 REGULATORY  Safety, health and enviro  This product has been classifi required by the Controlled Pro  National Inventory Status  National Inventory  Australia AICS  Canada DSL  Canada NDSL  China - IECSC	of REGULATE  I DGR): NOT  e / GGVSee): ing to Annex  Y INFORMATIO  conmental reg ed in accordance ducts Regulations  Status  Yes	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD BIBC code Specific for the substance or mixt	ure	
Abels Required  Marine Pollutant  Land transport (TDG): NO  Air transport (ICAO-JATA  Sea transport (IMDG-Cod  Transport in bulk accord  tot Applicable  SECTION 15 REGULATORY  Safety, health and enviro  This product has been classification of the controlled Pro  National Inventory Status  National Inventory  Australia AICS  Canada DSL  Canada NDSL	of REGULATE  I DGR): NOT  I G G G G See):  Ing to Annex  Y INFORMATIO  On mental reg  ed in accordance  ducts Regulations  Status  Yes  Yes  Yes	REGULATED FOR TRAN NOT REGULATED FOR I I of MARPOL and the ON Gulations / legislation we with the hazard criteria of	SPORT OF DANGEROUS GOODS R TRANSPORT OF DANGEROUS GOOD BIBC code Specific for the substance or mixt	ure	



Chemwatch: 4902-92	Page <b>7</b> of <b>7</b>	Issue Date: 01/09/2018
Version No: <b>14.1.1.1</b>	AMC CR 650™	Print Date: 10/15/2019

Korea - KECI	Yes
New Zealand - NZIoC	Yes
Philippines - PICCS	Yes
USA - TSCA	Yes
Taiwan - TCSI	Yes
Mexico - INSQ	Yes
Vietnam - NCI	Yes
Russia - ARIPS	Yes
Legend:	Yes = All CAS declared ingredients are on the inventory No = One or more of the CAS listed ingredients are not on the inventory and are not exempt from listing(see specific ingredients in brackets)

#### SECTION 16 OTHER INFORMATION

Revision Date	01/09/2018
Initial Date	Not Available

#### **SDS Version Summary**

Version	Issue Date	Sections Updated
13.1.1.1	10/12/2017	Appearance, Environmental, Fire Fighter (fire/explosion hazard), Ingredients, Physical Properties, Supplier Information, Use
14.1.1.1	01/09/2018	Name

#### Other information

Classification of the preparation and its individual components has drawn on official and authoritative sources as well as independent review by the Chemwatch Classification committee using available literature references.

The SDS is a Hazard Communication tool and should be used to assist in the Risk Assessment. Many factors determine whether the reported Hazards are Risks in the workplace or other settings.

#### Definitions and abbreviations

PC-TWA: Permissible Concentration-Time Weighted Average

PC-STEL: Permissible Concentration-Short Term Exposure Limit

IARC: International Agency for Research on Cancer

ACGIH: American Conference of Governmental Industrial Hygienists

STEL: Short Term Exposure Limit

TEEL: Temporary Emergency Exposure Limit,

IDLH: Immediately Dangerous to Life or Health Concentrations

OSF: Odour Safety Factor

NOAEL :No Observed Adverse Effect Level

LOAEL: Lowest Observed Adverse Effect Level

TLV: Threshold Limit Value

LOD: Limit Of Detection

OTV: Odour Threshold Value

BCF: BioConcentration Factors

BEI: Biological Exposure Index

This document is copyright.

Apart from any fair dealing for the purposes of private study, research, review or criticism, as permitted under the Copyright Act, no part may be reproduced by any process without written permission from CHEMWATCH.

The product is with a concentration less than 5% in a drilling fluid as a non-hazardous chemical classified.



# AMC K ION

AMC

Chemwatch: 4751-58 Version No: 4.1.1.1

Safety Data Sheet according to WHMIS 2015 requirements

Chemwatch Hazard Alert Code: 2

Issue Date: 11/08/2017 Print Date: 10/23/2019 L.GHS.CAN.EN

#### **SECTION 1 IDENTIFICATION**

#### **Product Identifier**

Product name	AMC K ION
Synonyms	Not Available
Other means of identification	Not Available

#### Recommended use of the chemical and restrictions on use

Relevant identified uses

Use according to manufacturer's directions.

Drilling fluid additive.

#### Name, address, and telephone number of the chemical manufacturer, importer, or other responsible party

Registered company name	AMC		
Address	1220 N. 2200 W. Suite# 600, Salt Lake City UT 84116 United States		
Telephone	801-364-0233		
Fax	801-364-0278		
Website	www.amcmud.com		
Email	amc@imdexlimited.com		

# **Emergency phone number**

Association / Organisation	AMC	CHEMWATCH EMERGENCY RESPONSE
Emergency telephone numbers	Chemwatch - (1) 877 715 9305	+61 2 9186 1132
Other emergency telephone numbers	×	Not Available

# SECTION 2 HAZARD(S) IDENTIFICATION

#### Classification of the substance or mixture

# NFPA 704 diamond



Note: The hazard category numbers found in GHS classification in section 2 of this SDSs are NOT to be used to fill in the NFPA 704 diamond. Blue = Health Red = Fire Yellow = Reactivity White = Special (Oxidizer or water reactive substances)

#### CANADIAN WHMIS SYMBOLS





Classification

Skin Corrosion/Irritation Category 2, Eye Irritation Category 2A, Specific target organ toxicity - single exposure Category 3 (respiratory tract irritation), Specific target organ toxicity - repeated exposure Category 2

Label elements



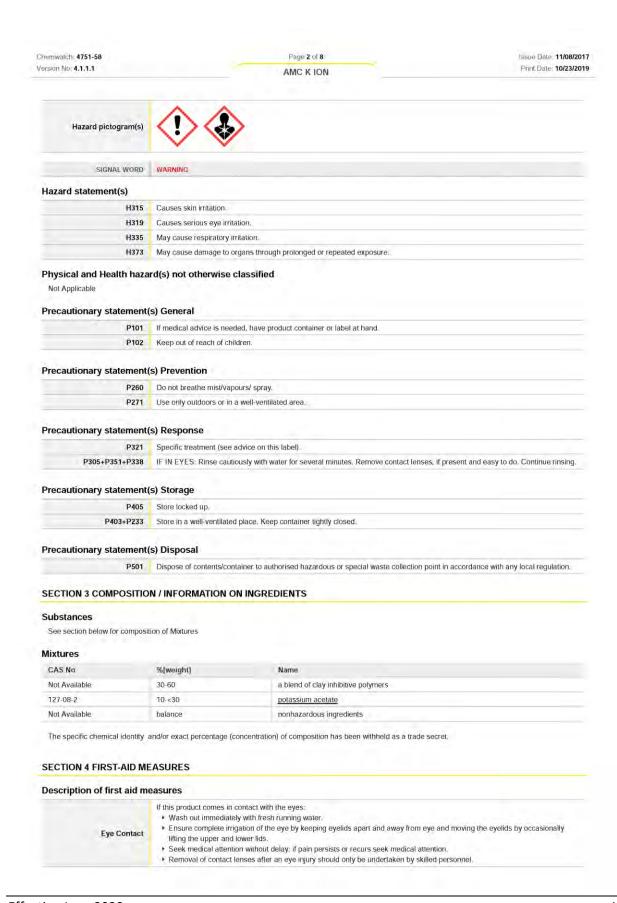

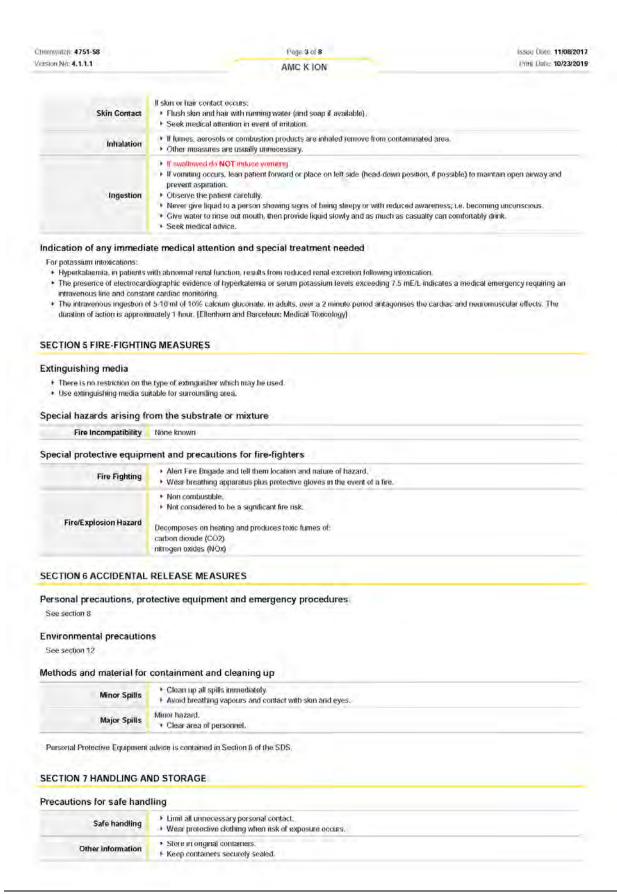










Reactivity See section 7  Chemical stability Product is considered stable and trazardous polymensation will not occur.  Possibility of hazardous reactions  Conditions to avoid Incompatible materials See section 7  Hazardous decomposition products  See section 5  Section 1  See section 5	sion No: 4.1.1.1		AMC K ION	Print Date: 10/23	
Door Parson and Products of Parson and Parso					
Metring port / freading point and point (C) Initial boiling point and point (C) Initial boiling point and point and point and point and point (C) Initial boiling point and point (C) I Blash point (C) I Barb point (C	Odour threshold	Not Available		Not Available	
Initial boiling pasts and   Initial poling pasts and   Initial poling parts ("C)   Not Applicable   Initial poling parts ("C)   Not Available   Initial parts ("C)   Not Available   N	pH (as supplied)	Not Available		Not Available	
boiling range (C) Flash point (**C) Flash point		Not Available	Viscosity (cSt)	Not Available	
Evaporation rate Hammability Not Applicable Oxidising properties Oxidising properties Not Available Dipper Explosive Limit (%) Not Applicable Oxidising properties Oxidising prop		>100	Molecular weight (g/mol)	Not Applicable	
Flammability Upper Explosive Limit (%) Upper Explosive Limit (%) Lower Explosive Limit (%) Vapour pressure (Pa) 31 @ 25C Gas group Net Available Subtitity in water Vapour density (Air = 1) Net Available VOC grt Vapour pressure (Pa) 31 @ 25C Gas group Net Available VOC grt Vapour pressure (Pa) Net Available VOC grt Voc grt Vapour density (Air = 1) Net Available VOC grt Voc grt Reactivity See section 7 Chemical stability Product is considered stable and bazardous polymensation will not occur.  Conditions to avoid Incompatible materials See section 7 See section 7 See section 7 See section 5 Section 1 Incompatible materials See section 7 Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental ingestion of the material may be damaging to the health of the endividual.  Accidental in	Flash point ("C)	Not Applicable	Taste	Not Available	
Upper Explosive Limit (%)  Lower Explosive Limit (%)  Not Applicable  Volatile Component (%)  Solubility in water  Wapour pressure (kPa)  Solubility in water  Wapour density (Air = 1)  Not Available  N	Evaporation rate	Not Available	Explosive properties	Not Available	
Lower Explosive Limit (%) Not Applicable Volatile Component (Swort) Not Available  Vapour pressure (RPa) 3.1 @ 25C Gas group Not Available  Vapour pressure (RPa) 3.1 @ 25C Gas group Not Available Vapour density (Air = 1) Not Available VOC grt. Not Available  VOC grt. Not Available  Chemical stability Product is considered stable and frazindeus polymensation will not occur.  Chemical stability Product is considered stable and frazindeus polymensation will not occur.  Conditions to avoid Incompatible materials See section 7  See section 7  Chemical stability Product is considered stable and frazindeus polymensation will not occur.  Conditions to avoid See section 7  See section 5  See section 5  Section 11 TOXICOLOGICAL INFORMATION Information on toxicological effects  Inhaled Accidental ingestion of the material may be damaging to the health of the individual.  Acute polassium poisoning is following ingestion are rare because large doses usually induce veniting and a healthy kidingy service and accidental ingestion of the material may be damaging to the health of the individual.  Acute polassium poisoning is following ingestion are rare because large doses usually induce veniting and a healthy kidingy service and individual in the polymens heart block) and eventually produces a fall in blood pressure (due to weakened cardiac contractifity).  The noticeal may cause soful initiation after prolonged or repeated apposare and may produce a contractifity.  The noticeal may cause soful initiation after prolonged or repeated apposare and may produce a contractifity.  The noticeal may cause soful initiation of the use of the material and one sure and exposure to the sure and ensure that any enterind damage is suitably produces.  Chronic  Chronic  Chronic  AMC K ION  TOXICTY	Flammability	Not Applicable	Oxidising properties	Not Available	
Lower Explosive Limit (%)  Vapour pressure (RPa)  3.1 @ 26C  3.2 Gas group  Not Available  Vapour density (Air = 1)  Not Available  Possibility in water  Reactivity  Reactivity  Possibility of nazardous  reactions  Conditions to avoid  Incompatible materials  See section 7  Cardinator of the material may be damaging to the feeable of the material may be damaging to the feeable of the material way be materials and possibility of nazardous  products  CECTION 11 TOXICOLOGICAL INFORMATION  Ingestion  Ingestion  Accidental ingestion of the material may be damaging to the feeable of the health of the individual.  Accidental ingestion of the material may be damaging to the feeable of the health of the individual.  Accidental ingestion of the material may be damaging to the feeable of the health of the individual.  Accidental ingestion of the material may be damaging to the free that of the heart (a slow, weak pulse, heightened T waves on the ECG, arrityfinnes heart block) and eventually produces a fail in blood pressure (due to weakered cardiac contractivity).  This form of damastics is often characterised by sken redness (exythema) and swelling epidemis.  Chronic  Experimental effects  Chronic  Legand:  AMC K (N)  Toxical Section  1086:179  Toxical Section of the product or in the produced or product or brain material or seasons. partner we wands or lesions, may produce systemic injury that material may be appeared to the material or seasons. partner we wands or lesions, may produce systemic injury that the material may be undersomed to the material or seasons. partner we wands or lesions, may produce or produced.  The naterial may be undersome through to produce a characterise to that any elemental demage as a material commenced as a material course or material entractive and some produced or produced characters to health (ac classified by ECC Directives using a manula models); nevertheless exposure by all routes should be minimized as a material course.  AMC K (N)  Toxical Ty  Cord (righ) LD50: 3250 mg/kg <sup>21</sup> Not	A second by Common State of	Not Applicable	Surface Tension (dyn/cm	Not Available	
Solubility in water Vapour density (Air = 1) Not Available PH as a solution (1%) See Section 7 Reactivity Reactivity Reactivity Possibility of hazardous See Section 7 Conditions to avoid Incompatible materials See Section 7 Conditions to avoid See Section 5 CONDITION Information on toxicological effects Inhaled Not normally a hazard due to non votatile nature of product Accidental ingestion of the material may be damaging to the feeth of the endividual. Acute potassium posomings following ingestion are rate causes large doses issually induce vomiting and a healtify kidney remainer spad exerction. Potassium posoming disturbs the ritythm of the heart of sow, weak pulse, heightened T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakered cordiac contractivity). The material may be marked by shen reduces (epithema) and swelling upidomis. Open cass, shoulded or initiation after profonged or repeated exposure (due to weakered cardiac contractivity). The material may be marked with the transfer of the susception desired to the susception and eventually produces a contractivity. The material may be marked as an analysis of leasness. Chronic  Chronic  100000000000000000000000000000000000	Lower Explosive Limit (%)	Not Applicable	Donath factors and according	Not Available	
Miscable					
Not Available   Not Available   Not Available   Not Available					
Reactivity  Reactivity  Possibility of hazardous preactions  Conditions to avoid See section 7  See section 5  SECTION 11 TOXICOLOGICAL INFORMATION  Information on toxicological effects  Inhaled  Ingestion  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Actude potassium poisonings following ingestion are rare because targe doses usually induce vomiting and a healthy kidney emainer signed exception. Potassium poisoning disturbs the highlith of the heart (a slow, weak public, highlightened T waves only the material may cause skin initiation after prolonged or repeated exposure and may produce a contact demanities (nonalliery This form of demanities is often characterised by skin redness (crythema) and swelling updemins.  Skin Contact  Skin Contact  Eye  The material may be instating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to instant since any produce recognicity is contact to the material and instant that any external damage is suitably protected.  The material may be instating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to instant since any produce recognicities.  Chronic  AMC K ION  AMC K ION  Topical Y  Not Available  Topical Y  Oral (#a) LDSG: 3250 mg/kg <sup>21</sup> Not Available  Legend:  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2.* Value obtained from immendantures S DS.	The second secon				
Reactivity Chemical stability Product is considered stable and hazardous polymensation will not occur:  See section 7  Conditions to avoid Prossibility of hazardous reactions Conditions to avoid Prossibility of hazardous Reactivity See section 7  See section 7  See section 7  See section 7  See section 5  See Section 6  Inhaled Not normally a hazard due to non volatile nature of product Accidental ingestion of the material may be damaging to the health of the individual. Active polassium poisonings following ingestion are rare because large doses usually induce vomiting and a healthy kidney entainers rapid excretion. Polassium poisoning distubs the highlin of the heart (a stow, weak pulse, heighneind T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakened cardiac contractifity). The material may be arriated skin should not be exposed to this material and produce a contact deminalities (normalling). This form of deminatities is often characterised by skin redness (erythema) and swelling updomins. Open case, abrasided or irriated skin should not be exposed to this material.  Eye  The material may be irritating to this eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to irritation and interest in the skin prior to the use of the material and ensure that any outernal damage is suitably protected.  The material may be irritating to this eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to irritation and produce conjunctivities.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using aromal models); nevertheless expo	vapour density (Air = 1)	(vid. /4vailable	voc gr	TWO Available	
Chemical stability Possibility of hazardous reactions See section 7 See section 5 See Section 5 Sec Section 5 See Section 6 See Section 7 See	ECTION 10 STABILITY A	ND REACTIVITY	Δ		
Possibility of hazardous reactions  Conditions to avoid  See section 7  See section 7  See section 7  See section 5  SECTION 11 TOXICOLOGICAL INFORMATION  Information on toxicological effects  Inhaled  Not normally a hazard due to non, volatife nature of product  Accidential ingestion of the material may be damaging to the health of the individual.  Acute potassium poisoning following ingestion are rare because targe dose susually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the 11tytim of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmas heart block) and eventually produces a fall in blood pressure (due to weakened cardiac contractifity).  The material may cause skiri irritation after prolonged or repeated exposure and may produce a contract demailies (nornallierg). This form of demaities is often characterised by skin redness (erythema) and swelling epidemis.  Chyonic als, shraded or irritating to the eye, with prolonged contract causing inflammation. Repeated or prolonged exposure to irritants may produce conjunctivitis.  Chronic United The material may be irritating to the eye, with prolonged contract causing inflammation. Repeated or prolonged exposure to irritants may produce conjunctivitis.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using animal models); nevertheless exposure by all routes should be minimised as a matter of course.  AMC K ION  TOXICITY  IRRITATION  Not Available  TOXICITY  IRRITATION  Oral fail ) LDSO: 3250 mg/lkg <sup>21</sup> Not Available  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2. *Value obtained from menulacture's SDS.*	Reactivity	See section 7			
Conditions to avoid See section 7  Incompatible materials Hazardous decomposition products  See section 5  SECTION 11 TOXICOLOGICAL INFORMATION  Information on toxicological effects  Inhaled Inhaled Accidental ingestion of the material may be damaging to the health of the individual.  Acute potassium poisoning following ingestion are rare because large doses usually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the highlin of the heart (a slow, weak pulse, heightened T waves on the ECG, arrightmash heart block) and eventually produces a rall in blood pressive (due to weakened cardiac contracting).  The material may cause skin untation after prolonged or repeated exposure and may produce a contact deminative (nonalterg). This form of deminative is often characterised by skin redness (erythena) and swelling epidemis.  Chronic  Eye  Chronic  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using armal models); nevertheless exposure by all routes should be minimised as a matter of course.  **IDAGITY**  IRRITATION  Not Available  TOXICITY*  IRRITATION  Not Available  1 Oxicity*  Oral (not) LIDSO: 3250 mg/kg <sup>21</sup> I Not Available  1 Value obtained from Europe ECHA Feegotened Substances - Acute Loncety 2, * Value obtained knot menutacurer's SDS.*	Chemical stability	Product is considered stable and hazard	lous polymensation will not occur.		
Hazardous decomposition products  See section 5  SECTION 11 TOXICOLOGICAL INFORMATION  Information on toxicological effects  Inbaled	The second secon	See section 7			
Hazardous decomposition products  ECTION 11 TOXICOLOGICAL INFORMATION  Information on toxicological effects  Inhaled  Not normally a hazard due to non-volatile nature of product  Accidental ingestion of the material may be damaging to the health of the individual.  Acute potassium poisonings following ingestion are rare because large doses usually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the rhythm of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakened cardiac contractifity).  The material may cause stin imitation after prolonged or repeated exposure and may produce a contact demailitis (nonallergi This form of dermatitis is often characterised by skin redness (eythema) and swelling epidermis.  Open cuts, abraded or imitated skin should not be exposed to this material and ensure that any external damage is suitably protected.  Eye  Eye  The material may be imitating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to instants may produce cojunctivitis.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using animal models); nevertheless exposure by all routes should be minimised as a matter of course.  TOXICTY  Not Available  1, Value obtained from Europe ECHA Registered Substances - Acute toxicity 2.* Value obtained from menulacturer's SDS.	Conditions to avoid	See section 7			
Hazardous decomposition products  ECTION 11 TOXICOLOGICAL INFORMATION  Information on toxicological effects  Inhaled  Not normally a hazard due to non-volatile nature of product  Accidental ingestion of the material may be damaging to the health of the individual.  Acute potassium poisonings following ingestion are rare because large doses usually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the rhythm of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakened cardiac contractifity).  The material may cause stin imitation after prolonged or repeated exposure and may produce a contact demailitis (nonallergi This form of dermatitis is often characterised by skin redness (eythema) and swelling epidermis.  Open cuts, abraded or imitated skin should not be exposed to this material and ensure that any external damage is suitably protected.  Eye  Eye  The material may be imitating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to instants may produce cojunctivitis.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using animal models); nevertheless exposure by all routes should be minimised as a matter of course.  TOXICTY  Not Available  1, Value obtained from Europe ECHA Registered Substances - Acute toxicity 2.* Value obtained from menulacturer's SDS.	Incompatible materials	See section /			
See Section 5  SECTION 11 TOXICOLOGICAL INFORMATION  Information on toxicological effects  Inhaled Not normally a hazard due to non-volatile nature of product Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be damaging to the health of the individual.  Accidental ingestion of the material may be accident the second of the following ingestion are rare because large doses usually indice vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the thythm of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmas heart block) and eventually produces a fall in blood pressure (due to weakened cardiac contractivity).  The material may accide down initiation after prolonged or repeated exposure and may produce a contact demails (normallerging this form of demails is often characterised by skin redness (enythena) and swelling epidemis.  Open cuts, abraded or initiated skin should not be exposed to this material Ety into the blood-stream through, for example, cuts, abrasions, puncture wounds or lesions, may produce systemic injury of the use of the material and ensure that any external damage is suitably protected.  Eye  The material may be initiating to the eye, with prolonged contact causing inflammation, Repeated or prolonged exposure to initiatist material and ensure that any external damage is suitably protected.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using animal models); neverthe	Hazardous decomposition	2			
Accidental ingestion of the material may be damaging to the health of the individual.  Acute potassium poisonings following ingestion are rare because large doses usually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the rhythm of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakeried cardiac contractifity).  The material may cause skin imitation after prolonged or repeated exposure and may produce a contact dermalitis (nonallerging This form of dermatitis is often characterised by skin redness (erythema) and swelling epidemnis.  Open cuts, abraded or initiated skin should not be exposed to this material. Entry into the blood-stream through, for example, cuts, abrasions, puncture wounds or lesions, may produce systemic injury of harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected.  Eye  The material may be imitating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to initiatis may produce conjunctivitis.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using arimal models); nevertheless exposure by all routes should be minimised as a matter of course.  AMIC K ION  TOXICITY  IRRITATION  Not Available  TOXICITY  IRRITATION  Oral (rat) LD50: 3250 mg/kg/2l  Not Available  1. Vidue obtained from Europe ECHA Registered Substances - Acute toxicity 2. *Value obtained from manufactures's SDS.		See section 5			
Inhaled  Not normally a hazard due to non-volatile nature of product  Accidental ingestion of the material may be damaging to the health of the individual.  Acute potassium poisonings following ingestion are rare because large doses usually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the rhythm of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakeried cardiac contractifity).  The material may cause skiri intation after prolonged or repeated exposure and may produce a contact demailitis (nonallerging This form of demaitis is often characterised by skiri redness (etythema) and swelling epidemis.  Cpenicus, abraded or initiated skiri should not be exposed to this material.  Cpenicus, abraded or initiated skirishould not be exposed to this material.  Eye  The material may be initiating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to initiatis may produce conjunctivitis.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using animal models); nevertheless exposure by all routes should be minimised as a matter of course.  TOXICITY  Not Available  TOXICITY  Not Available  10XICITY	arrest was and				
Accidental ingestion of the material may be damaging to the health of the individual.  Acute potassium poisonings following ingestion are rare because large doses usually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the rhythm of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakeried cardiac contractifity).  The material may cause skin imitation after prolonged or repeated exposure and may produce a contact dermalitis (nonallerging This form of demiatitis is often characterised by skin redness (erythema) and swelling epidemis.  Open cuts, abraded or initiated skin should not be exposed to this material. Entry into the blood-stream through, for example, cuts, abrasions, puncture wounds or lesions, may produce systemic injury or harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected.  Eye  The material may be imitating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to initiatis may produce conjunctivitis.  Long term exposure to the product is not thought to produce chronic effects adverse to health (as classified by EC Directives using animal models); nevertheless exposure by all routes should be minimised as a matter of course.  AMC K ION  TOXICITY  IRRITATION  Not Available  TOXICITY  IRRITATION  Oral (rat) LD50: 3250 mg/kg/21  Not Available  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2. *Value obtained from manufactures's SDS.	07.07	To the second se	. Servero Research		
Acute potassium poisonings following ingestion are rare because large doses usually induce vomiting and a healthy kidney ensures rapid excretion. Potassium poisoning disturbs the rhythm of the heart (a slow, weak pulse, heightened T waves on the ECG, arrhythmias heart block) and eventually produces a fall in blood pressure (due to weakened cardiac contractility).  The material may cause skin imitation after prolonged or repeated exposure and may produce a contact demnalities (nonallerging This form of demantics is often characterised by skin redness (erythema) and swelling epidemis.  Cpen cuts, abraded or imitated skin should not be exposed to this material entry into the blood-stream through, for example, cuts, abrasions, puncture wounds or lesions, may produce systemic injury whamful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected.  The material may be imitating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to initiants may produce conjunctivitis.  Chronic  Chronic  AMC K ION  TOXICITY  INTERTATION  Not Available  TOXICITY  IRRITATION  Not Available  TOXICITY  IRRITATION  Oral (rat) LD50: 3250 mg/kg <sup>(2)</sup> IN Available  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtained from manufacturer's SDS.	Inhaled	place the state of			
This form of dermatitis is often characterised by skin redness (erythema) and swelling epidermis.  Open cuts, abraded or initiated skin should not be exposed to this material.  Entry into the blood-stream through, for example, cuts, abrasions, puncture wounds or lesions, may produce systemic injury or harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected.  The material may be imitating to the eye, with prolonged contact causing inflammation. Repeated or prolonged exposure to initiatis may produce conjunctivitis.  Chronic  Chronic  Chronic  Chronic  Toxicity  IRRITATION  Not Available  Toxicity  IRRITATION  Not Available  Toxicity  IRRITATION  Oral (rat) LD50: 3250 mg/kg <sup>[2]</sup> Not Available  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtained from manufacturer's SDS.	Ingestion	Acute potassium poisonings following in ensures rapid excretion. Potassium pois	ngestion are rare because large doses us coning disturbs the rhythm of the heart (a	ually induce vomiting and a healthy kidney slow, weak pulse, heightened T waves on the	
TOXICITY  Potassium acetate  TOXICITY  IRRITATION  Not Available  TOXICITY  Potal (rat) LD50: 3250 mg/kg <sup>[2]</sup> Legend:  1. Value obtamed from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtamed from manufacturer's SDS.	Skin Contact	This form of dermatitis is often characte Open cuts, abraded or irritated skin sho Entry into the blood-stream through, for	rised by skin redness (erythema) and swo uild not be exposed to this material example, curs, abrasions, puncture wour	alling epidemnis. Ids or lesions, may produce systemic injury with	
AMC K ION  TOXICITY  Not Available  TOXICITY  Not Available  TOXICITY  Not Available  TOXICITY  RRITATION  Not Available  TOXICITY  IRRITATION  Not Available  TOXICITY  Oral (rat) LD50: 3250 mg/kg/21  Legend:  7. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtained from manufactures's SDS.	Eye				
AMC K ION  Not Available  TOXICITY  Oral (rat) LD50: 3250 mg/kg/21  Legend:  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtained from manufacturer's SDS.	Chronic				
AMC K ION  Not Available  TOXICITY  Oral (rat) LD50: 3250 mg/kg/21  Legend:  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtained from manufacturer's SDS.	473.0	TOXICITY	IRRITATION		
potassium acetate  TOXICITY  Oral (rat) LD50: 3250 mg/kg <sup>[2]</sup> Not Available  Legend:  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtained from menulactures's SDS.	AMC K ION		7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7		
potassium acetate  Oral (rat) LD50: 3250 mg/kg <sup>[2]</sup> Not Available  Legend:  1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2,* Value obtained from manufacturer's SDS.		The Fusions :	- GAN CAAGIIGANI		
Oral (rat) LD50: 3250 mg/kg <sup>[2]</sup> Not Available  Legend: 1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2, *Value obtained from manufactures's SDS.	petranting factors	TOXICITY	IRRITATION		
	potassium acerate	Oral (rat) LD50: 3250 mg/kg <sup>[2]</sup>	Not Available		
	Legend:				

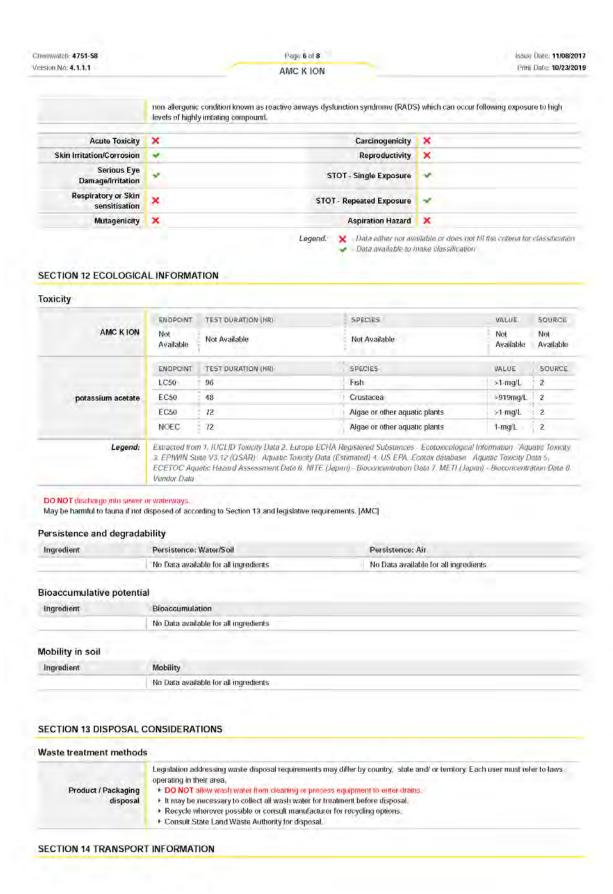









Chernyateh: 4751-58 Page 8 of 8 Issue Date 11/08/2017 Print Date: 10/23/2019 Version No. 4.1.1.1 AMC K ION

The SDS is a Hazard Communication tool and should be used to assist in the Risk Assessment. Many factors determine whether the reported Hazards are Risks in the workplace or other settings.

#### Definitions and abbreviations

PC-TWA: Permissible Concentration-Time Weighted Average

PC-S1EL: Permissible Concentration Short Term Exposure Limit

IARC: International Agency for Research on Cancer

ACGIH: American Conference of Governmental Industrial Hygienists

STEL: Short Term Exposure Limit

TEEL: Temporary Emergency Exposure Limit,

IDLH; Immediately Dangerous to Life or Health Concentrations OSF: Odour Safety Factor

NOAEL :No Observed Adverse Effect Level

LOAEL: Lowest Observed Adverse Effect Level

TLV: Threshold Limit Value

LOD: Limit Of Detection

OTV: Odour Threshold Value

BCF: BioConcentration Factors

BEI: Biological Exposure Index

This document is copyright.

Apart from any fair dealing for the purposes of private study, research, review or criticism, as permitted under the Copyright Act. no part may be reproduced by any process without written pennission from CHEMWATCH.

# MATERIAL SAFETY DATA SHEET



102-17910, 55 Ave, Surrey, BC, Canada V3S 6C8 • Toll Free 1-866-535-6699 Tel: 604-575-6660 Fax: 604-575-5494 e-mail: extreme.ron@telus.net

#### **EXTREME ALKAMER**

# **EMERGENCY PHONE NO. (604) 575-6660**

PAGE 1 OF 5

# WHMIS HAZARD INDEX:

# DEGREE OF HAZARD: HAZARD RATING:

**LEAST** HEALTH 1 0 **FIRE** 1 1 **SLIGHT** REACTIVITY 0 2 **MODERATE** 3 OTHER: B (GLASSES & GLOVES) HIGH **EXTREME** 

# SECTION 1 PRODUCT IDENTIFICATION

PRODUCT NAME: EXTREME ALKAMER

CHEMICAL IDENTIFICATION: Anionic copolymer of acrylamide, and acrylate

emulsion

MATERIAL USE: Viscosifier, clay inhibitor

WHMIS CLASSIFICATION: Class D-2(B)
WORK PLACE HAZARD: Skin, eye irritant

# TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not dangerous goods PACKAGE GROUP: Not applicable

CAS NUMBER: 25085-02-3
MSDS CODE: Not available

# SECTION 2 HAZARDOUS INGREDIENTS

INGREDIENT: MINERAL SPIRITS ALKYL PHENOL ETHOXYLATE PERCENTAGE: 20 -40 3 - 7

CAS NUMBER: 20 - 40 3 - 7
CAS NUMBER: 64742-47-8 9016-45-9
LD (50): 6480 Mg/Kg. 3000 Mg/Kg.
LC (50): Not available Not determined

PAGE 2 OF 5

#### **EXTREME ALKAMER**

# MATERIAL SAFETY DATA SHEET

**SECTION 3 PHYSICAL DATA** 

APPEARANCE AND ODOUR: Off white liquid, mild odour

DENSITY (SPECIFIC GRAVITY): Less than 1.0 **BOILING POINT:** 290°C **MELTING POINT:** Not applicable SOLUBILITY: Soluble EVAPORATION RATE: (EE=1): Not available VAPOUR PRESSURE: (MM HG): Not available VAPOUR DENSITY: (AIR = 1): Not available

**SECTION 4 FIRE AND EXPLOSION** 

FLASHPOINT: > 200°C FLAMMABLE LIMIT: Not available **AUTO IGNITION TEMP:** No data

**EXTINGUISHING MEDIA:** Dry chemical, carbon dioxide, foam, water spray,

water will cause extreme slipperiness

SPECIAL FIRE FIGHTING PROCEDURES: Self-contained respirators for fire fighting

personnel.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Sensitivity to static charge.

**REACTIVITY DATA SECTION 5** 

STABILITY (THERMAL, LIGHT, ETC.): Stable

INCOMPATIBILITY (CONDITIONS TO AVOID): Strong oxidizing and reducing agents

HAZARDOUS POLYMERIZATION: Will not occur HAZARDOUS DECOMPOSITION PRODUCTS: Not available

PAGE 3 OF 5

EXTREME ALKAMER

# MATERIAL SAFETY DATA SHEET

SECTION 6 **HEALTH HAZARDS** 

ROUTE OF ENTRY:

(X) EYE CONTACT ( ) INHALATION (X) INGESTION (X) SKIN

SKIN CONTACT: May be minimally irritating to sensitive skin upon

direct contact.

EYE CONTACT: May cause stinging, burning of eyes and lids,

inflammation and discomfort.

INHALATION: Not available.

INGESTION: May cause nausea, vomiting.

**SECTION 7 PREVENTATIVE MEASURES** 

SKIN PROTECTION: Impervious gloves, protective clothing as required

Chemical goggles. EYE PROTECTION:

None required for normal use. 10 changes per **VENTILATION:** 

hour.

RESPIRATORY PROTECTION: None required for normal use. Otherwise

approved organic vapour-type respirator.

Eliminate sources of ignition. Absorb with earth or LEAK & SPILL PROCEDURE:

sand and dispose with solid waste. Wash site after

collection.

WASTE DISPOSAL: Dispose in compliance with government

regulations and local requirements.

Cool, dry area, away from sources of heat, STORAGE REQUIREMENTS:

oxidizing and reducing agents. Keep containers

closed when not in use.

PAGE 4 OF 5

#### **EXTREME ALKAMER**

# MATERIAL SAFETY DATA SHEET

SECTION 8 FIRST AID MEASURES

SKIN: Wash thoroughly with soap and warm water EYE: Flush with water for at least 15 minutes.

INHALATION: Vapour pressure is negligible. Remove victim from

further exposure.

INGESTION: Do not induce vomiting. If conscious, dilute by

giving two glasses of water. Seek medical

attention.

SECTION 9 PREPARATION DATE

DATE ISSUED: AUGUST 20, 2009
DATE REVISED: JANUARY 1, 2012

BY: PRODUCT SAFETY COMMITTEE

THE DATA REPRESENTED HEREIN IS BELIEVED ACCURATE AND REFLECTS OUR BEST PROFESSIONAL JUDGMENT. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY USE, OR ANY OTHER WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF SUCH DATA, THE RESULTS TO BE OBTAINED FROM THE USE THEREOF, OR THAT ANY SUCH USE DOES NOT INFRINGE ANY PATENT. SINCE THE INFORMATION CONTAINED HEREIN MAY BE APPLIED UNDER CONDITIONS OF USE BEYOND OUR CONTROL AND WITH WHICH WE MAY BE UNFAMILIAR, WE DO NOT ASSUME ANY RESPONSIBILITY FOR THE RESULTS OF SUCH APPLICATION. THIS INFORMATION IS FURNISHED UPON THE CONDITION THAT THE PERSON RECEIVING IT SHALL MAKE HIS OWN DETERMINATION OF THE SUITABILITY OF THE MATERIAL FOR HIS PARTICULAR PURPOSE.

PAGE 5 OF 5

#### **EXTREME ALKAMER**

# MATERIAL SAFETY DATA SHEET

# **ADDENDUM**

#### **SECTION 10 ECOLOGICAL INFORMATION**

This product has very low acute toxicity.

**ACUTE TOXICITY:** 

- Oral: LD50/oral/rat > 5000 mg/kg

The product is not toxic in contact with the skin. - Dermal: - Inhalation:

The product is not expected to be toxic by

inhalation.

**IRRITATION:** 

- Skin: The results obtained using OECD test 404

demonstrated that the product was irritating to the

skin.

Irritating to eyes. - Eyes:

SENSITIZATION: The product is not expected to be sensitizing.

#### **ECOTOXICITY**

The product has very low toxicity to aquatic organisms or to the aquatic environment. However, as with all chemical products, do not introduce directly into the environment.

Fish: LC50 / Fathead minnows / 96 hours > 1000 mg/l EC50 / 72h / Phesodactylum tricournumtum > Algae:

1000 mg/l

LC50 / 48h / Chastogrammus marinus <sup>3</sup> 15 mg/l Daphnie: Bioaccumulation: The product is not expected to bioaccumulate.

Persistence / degradability: Not readily biodegradable.

# **MATERIAL SAFETY DATA SHEET**



102, 17910 – 55 Ave., Surrey, BC, Canada V3S 6C8 • Toll Free 1-866-535-6699 Tel: 604-575-6660 Fax: 604-575-5494 e-mail: extreme.ron@telus.net

#### **EXTREME CLAY SEAM**

# **EMERGENCY PHONE NO. (604) 575-6660**

PAGE 1 OF 4

# WHMIS HAZARD INDEX:

# DEGREE OF HAZARD: HAZARD RATING:

**LEAST** HEALTH 1 0 **FIRE** 1 1 **SLIGHT** REACTIVITY 0 2 **MODERATE** 3 OTHER: B (GLASSES & GLOVES) HIGH **EXTREME** 

# SECTION 1 PRODUCT IDENTIFICATION

PRODUCT NAME: EXTREME CLAY SEAM

CHEMICAL IDENTIFICATION: Polyacrylic Acid

MATERIAL USE: Specialty Clay Dispersant

WHMIS CLASSIFICATION: Class D-2B WORK PLACE HAZARD: Skin, Eye Irritant

# TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not Dangerous Goods

PACKAGE GROUP:

CAS NUMBER:

MSDS CODE:

Not Applicable

Not Applicable

# SECTION 2 HAZARDOUS INGREDIENTS

INGREDIENT:Polyacrylic AcidPERCENTAGE:30 - 60%CAS NUMBER:9003-01-4:2LD (50):Not AvailableLC (50):Not Available



PAGE 2 OF 4

#### **EXTREME CLAY SEAM**

# MATERIAL SAFETY DATA SHEET

**SECTION 3 PHYSICAL DATA** 

APPEARANCE AND ODOUR: Liquid, water white to straw colour, mild odour

DENSITY (SPECIFIC GRAVITY): 1.3 **BOILING POINT:** > 100°C **MELTING POINT:** Not Applicable SOLUBILITY: Soluble

**EVAPORATION RATE: (EE=1):** Slower than butyl acetate

VAPOUR PRESSURE: (MM HG): < 17.5 VAPOUR DENSITY: (AIR = 1): Same as air 5.0 - 7.0pH:

**SECTION 4** FIRE AND EXPLOSION

> 100°C PMCC FLASHPOINT: FLAMMABLE LIMIT: Not available **AUTO IGNITION TEMP:** No data

**EXTINGUISHING MEDIA:** Dry chemical, carbon dioxide, foam, water spray

SPECIAL FIRE FIGHTING PROCEDURES: Self-contained respirators for fire fighting

personnel.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Acrid smoke may be generated while burning.

carbon monoxide, carbon dioxide, and other oxides may be generated as products of

combustion.

**SECTION 5 REACTIVITY DATA** 

STABILITY (THERMAL, LIGHT, ETC.): Stable

INCOMPATIBILITY (CONDITIONS TO AVOID): Strong oxidizing agents and reducing agents,

contamination with reactive substances, excessive

heat

HAZARDOUS POLYMERIZATION: Will not occur

HAZARDOUS DECOMPOSITION PRODUCTS: Acrid smoke, fumes when heated to

decomposition. Oxides of carbon.

PAGE 3 OF 4

**EXTREME CLAY SEAM** 

# MATERIAL SAFETY DATA SHEET

SECTION 6 HEALTH HAZARDS

ROUTE OF ENTRY:

(X) SKIN (X) EYE CONTACT (X) INHALATION (X) INGESTION

SKIN CONTACT: May be minimally irritating to sensitive skin upon

prolonged direct contact.

EYE CONTACT: May be minimally irritating to eyes upon direct

contact.

INHALATION: Product has low vapour pressure and is not

expected to present a hazard at ambient

temperatures. Caution should be taken to avoid

misting.

INGESTION: Product is practically non toxic by ingestion.

SECTION 7 PREVENTATIVE MEASURES

SKIN PROTECTION: Impervious gloves, protective clothing as required

EYE PROTECTION: Chemical goggles.

VENTILATION:

None required for normal use. Adequate ventilation required if mist is generated.

RESPIRATORY PROTECTION: Use NIOSH - Approved air-purifying respirator if

vapours are generated.

LEAK & SPILL PROCEDURE: Absorb with earth or sand and dispose of with

solid waste. Wash site after spilled material has

been collected.

WASTE DISPOSAL: Dispose in compliance with government

regulations and local requirements.

STORAGE REQUIREMENTS: Cool, dry area, away from sources of heat, alkalis,

oxidizing and reducing agents. Keep containers

closed when not in use.

PAGE 4 OF 4

#### **EXTREME CLAY SEAM**

# MATERIAL SAFETY DATA SHEET

SECTION 8 FIRST AID MEASURES

SKIN: Wash thoroughly with soap and warm water EYE: Flush with water for at least 15 minutes.

INHALATION: Vapour pressure is negligible. Remove victim from

further exposure.

INGESTION: Do not induce vomiting. If conscious, dilute by

giving two glasses of water. Seek medical

attention.

SECTION 9 PREPARATION DATE

DATE ISSUED: AUGUST 20, 2009
DATE REVISED: JANUARY 01, 2012

BY: PRODUCT SAFETY COMMITTEE

THE DATA REPRESENTED HEREIN IS BELIEVED ACCURATE AND REFLECTS OUR BEST PROFESSIONAL JUDGMENT. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY USE, OR ANY OTHER WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF SUCH DATA, THE RESULTS TO BE OBTAINED FROM THE USE THEREOF, OR THAT ANY SUCH USE DOES NOT INFRINGE ANY PATENT. SINCE THE INFORMATION CONTAINED HEREIN MAY BE APPLIED UNDER CONDITIONS OF USE BEYOND OUR CONTROL AND WITH WHICH WE MAY BE UNFAMILIAR, WE DO NOT ASSUME ANY RESPONSIBILITY FOR THE RESULTS OF SUCH APPLICATION. THIS INFORMATION IS FURNISHED UPON THE CONDITION THAT THE PERSON RECEIVING IT SHALL MAKE HIS OWN DETERMINATION OF THE SUITABILITY OF THE MATERIAL FOR HIS PARTICULAR PURPOSE.

# MATERIAL SAFETY DATA SHEET



102-17910 55 Ave., Surrey, BC, Canada V3S 6C8 • Toll Free 1-866-535-6699 Tel: 604-575-6660 Fax: 604-575-5494 e-mail: extreme.ron@telus.net

#### **EXTREME ENVIRO COTE**

# **EMERGENCY PHONE NO. (604) 575-6660**

PAGE 1 OF 4

# WHMIS HAZARD INDEX:

# DEGREE OF HAZARD: HAZARD RATING:

0 **LEAST** HEALTH 0 **FIRE** 1 1 **SLIGHT** REACTIVITY 0 2 **MODERATE** 3 OTHER: B (GLASSES & GLOVES) HIGH **EXTREME** 

# SECTION 1 PRODUCT IDENTIFICATION

PRODUCT NAME: EXTREME ENVIRO COTE
CHEMICAL IDENTIFICATION: Base Oil and Additives
MATERIAL USE: Lubricating Grease

WHMIS CLASSIFICATION: N/A WORK PLACE HAZARD: N/A

# TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not Dangerous Goods

PACKAGE GROUP: N/A
CAS NUMBER: N/A
MSDS CODE: N/A

# SECTION 2 HAZARDOUS INGREDIENTS

INGREDIENT: Base Oil and Additives

PERCENTAGE: 100% CAS NUMBER: 471-34-1

LD (50): (Rat) >2000mg/kg MINIMALLY TOXIC LC (50): (Rat) >5000mg/m $^3$  MINIMALLY TOXIC

PAGE 2 OF 4

#### **EXTREME ENVIRO COTE**

# MATERIAL SAFETY DATA SHEET

SECTION 3 PHYSICAL DATA

APPEARANCE AND ODOUR: Semi Fluid, White, Slight Hydrocarbon Odor

DENSITY (SPECIFIC GRAVITY):

BOILING POINT:

MELTING POINT:

SOLUBILITY:

EVAPORATION RATE: (EE=1):

VAPOUR PRESSURE: (MM HG):

VAPOUR DENSITY: (AIR = 1):

Not Available

Not Available

SECTION 4 FIRE AND EXPLOSION

FLASHPOINT: 249°C

FLAMMABLE LIMIT: Not Available AUTO IGNITION TEMP: Not Available

EXTINGUISHING MEDIA: Dry Chemical, Foam, Water Fog, CO<sub>2</sub>, Do Not

Spray with Straight Streams of Water

SPECIAL FIRE FIGHTING PROCEDURES: Prevent runoff from fire control from entering

streams, watercourses and drinking water

sources.

UNUSUAL FIRE AND EXPLOSION HAZARDS: None currently known.

SECTION 5 REACTIVITY DATA

STABILITY (THERMAL, LIGHT, ETC.): Stable under normal conditions

INCOMPATIBILITY (CONDITIONS TO AVOID): Strong Oxidizers HAZARDOUS POLYMERIZATION: Will not occur

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient

temperatures

PAGE 3 OF 4

#### **EXTREME ENVIRO COTE**

# MATERIAL SAFETY DATA SHEET

SECTION 6 HEALTH HAZARDS

ROUTE OF ENTRY:

(X) SKIN (X) EYE CONTACT (X) INHALATION (X) INGESTION

SKIN CONTACT: If product is injected into or under the skin the

individual should be evaluated immediately by a physician as a surgical emergency.

EYE CONTACT: If contact is likely, safety glasses with side shields

are recommended.

INHALATION: No protection is ordinarily required under normal

conditions of use with adequate ventilation.

INGESTION: First Aid is normally not required. Seek medical

attention if discomfort occurs.

SECTION 7 PREVENTATIVE MEASURES

SKIN PROTECTION: Impervious gloves and protective clothing as

required.

EYE PROTECTION:

VENTILATION:

No special requirements under normal conditions.

No special requirements under normal conditions.

RESPIRATORY PROTECTION: None required under normal use.

LEAK & SPILL PROCEDURE: Contain and gather up with use of absorbent

material.

WASTE DISPOSAL: Dispose of in compliance with local and

government regulations.

STORAGE REQUIREMENTS: Store in a cool, dry area. Keep containers closed

when not in use.

PAGE 4 OF 4

#### **EXTREME ENVIRO COTE**

# MATERIAL SAFETY DATA SHEET

INHALATION:

SECTION 8 FIRST AID MEASURES

SKIN: Wipe excess from skin. Wash with mild soap and

water. If product is injected into or under the skin the individual should be evaluated immediately by

a physician as a surgical emergency.

EYE: Flush thoroughly with water for at least 15

minutes. If irritation occurs seek medical attention.

At normal handling temperatures, minimal or no

irritation due to inhalation.

INGESTION: First aid is normally not required. Seek medical

attention if discomfort occurs.

SECTION 9 PREPARATION DATE

DATE ISSUED: AUGUST 20, 1996
DATE REVISED: JANUARY 01, 2012

BY: PRODUCT SAFETY COMMITTEE

THE DATA REPRESENTED HEREIN IS BELIEVED ACCURATE AND REFLECTS OUR BEST PROFESSIONAL JUDGMENT. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY USE, OR ANY OTHER WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF SUCH DATA, THE RESULTS TO BE OBTAINED FROM THE USE THEREOF, OR THAT ANY SUCH USE DOES NOT INFRINGE ANY PATENT. SINCE THE INFORMATION CONTAINED HEREIN MAY BE APPLIED UNDER CONDITIONS OF USE BEYOND OUR CONTROL AND WITH WHICH WE MAY BE UNFAMILIAR, WE DO NOT ASSUME ANY RESPONSIBILITY FOR THE RESULTS OF SUCH APPLICATION. THIS INFORMATION IS FURNISHED UPON THE CONDITION THAT THE PERSON RECEIVING IT SHALL MAKE HIS OWN DETERMINATION OF THE SUITABILITY OF THE MATERIAL FOR HIS PARTICULAR PURPOSE.

Material : LINSEED SOAP MATERIAL SAFETY DATA SHEET SECTION 1 - MATERIAL IDENTIFICATION AND CAS # Manufacturer's Name Suppliers Name **BioCANIubricants** BioCANIubricants a div. of 2125278 Ontario Ltd. a div. of 2125278 Ontario Ltd. Manufacturer's Street Address Suppliers Address 100 Wilkinson Road, Unit 12 100 Wilkinson Road, Unit 12 Manufacturer's City Suppliers City BRAMPTON **BRAMPTON** Manfacturer's Province Suppliers Province **ONTARIO** ONTARIO Manufacturer's Postal Code Suppliers Postal Code L6T 4Y9 L6T 4Y9 Manufacturer's Emergency Telephone No. Suppliers Emergency Telephone No. 905-453-7007 416-884-1635 SECTION 11 - HAZARDOUS INGREDIENTS OF MATERIAL C.A.S. N.A. or U.N. Numbers LD50 Of Material Hazardous Ingredients Approximate % Concentration LC 50 Specify Species and Route Specify Species this is not a WHMIS controlled product SECTION 111 - PHYSICAL DATA FOR MATERIAL Physical State Gas Liq Specific Gravity Odour and Appearan Odour Threshold (ppm) faint soap, brown coloured opaque paste Liquid X Solid not applicable not applicable Vapour Pressure (mm) Vapour Density (Air=1) Evaporation Rate Boiling Point ('C) Pour Point('C) not applicable not applicable not applicable 100' Coeffecient of water/oil distribution % Volatile (by volume) Solubility in Water (20'C) 9.5 to 11.5 not applicable not applicable 100 % SECTION IV - FIRE AND EXPLOSION HAZARD MATERIAL Flammability If yes, under what conditions: Means of Extinction Use extinguishing media appropiate for surrounding fire. Special Procedures not applicable Flashpoint ('C) and method Upper explosion limit (% by volume) Lower explosion limit (% by volume) not applicable not applicable not applicable Auto Ignition Temperature('C) TDG Flammability Classification Hazardous Combustion Products not applicable not applicable not applicable Sensitivity to Static Discharge Explosive Power Explosion Data Rate of Burning not applicable not applicable not applicable Sensitivity to Chemical Impact not applicable SECTION V Chemical Stability If no, under which conditions? X YES NO





Material : LINSEED SOAP			MATERI	AL SAFETY	DATA	SHEET
Incompatibility to other substances YES NO	Х	If so, which	h ones?			
Reactivity and under what conditions not applicable						
Hazardous Decomposition Products ot applicable						
SECTION VI - TOXICOLOGICA	AL PROPERT	IES OF PRO	DUCT			
Route of Entry Skin Contact Skin Absorp	otion Eye	e Contact	Inhalation Acute	Inhalation Chr	onic Inge	stion
Effects of Acute Exposure to Product applicable				<b>'</b>		
Effects to Chronic Exposure to Produc not applicable	t					
LD 50 of Product (Specify Species and not applicable	Route) Irritano	cy of Product		xposure limits of Prod ot applicable	uct (ACGIH TLV	)
LC 50 of Product (Specify Species) not applicable	Sensi	tization to Produ not applica		Synergistic materi	als t applicable	
Carcinogenicity Reprodu	ctive effects	Teratogenic	ity Mutag	gencity		
SECTION VII - PREVENTIVE M	EASURES					
Personal Protective Equipment not applicable						
Gloves (Specify)		r (Specify)	_	(Specify)		e (Specify)
not applicable  Clothing (Specify)	not a	pplicable		applicable r (Specify)	not	pplicable
not applicable			not	applicable		
Engineering Controls (e.g. ventilation, not applicable	enclosed proces	ss, specify)				
Leaks and Spill Procedure Spills are slippery and could cau with foreign substances	se skidding o	f personel and	d or equipmen	t. Material can be	used if not	contaminated
Waste Disposal Incineration or sanitary landfill	in accordanc	e with gover	nment regulat	ions.		
Handling Procedure and Equipment not applicable						
Storage Requirements not applicable						
Special Shipping Information						





Material : LINSEED SOAP	MATERIAL	SAFETY	DATA SHEET
SECTION V111 - FIRST AID MEASURES			
Skin Rinse with water.			
Eye Rinse with water.			
Inhalation not applicable			
Ingestion Drink 2 glasses of water, induce vomiting.			
General advise not applicable			
SECTION IX - PREPARATION OF M.S.D.S.			
Additional Information / Comments not applicable			
Sources Used			
Prepared by A.J. HOOD Phone number	905-453-7007	Date	ARPIL 9, 2010



# **MATERIAL SAFETY DATA SHEET**



102 – 17910 – 55<sup>th</sup> Ave., Surrey, BC, Canada V3S 6C8 • Toll Free 1-866-535-6699 Tel: 604-575-6660 Fax: 604-575-5494 e-mail: extreme.ron@telus.net

#### **EXTREME NUMBER ONE**

# **EMERGENCY PHONE NO. (604) 575-6660**

PAGE 1 OF 5

# WHMIS HAZARD INDEX:

# DEGREE OF HAZARD: HAZARD RATING:

**LEAST** HEALTH 1 0 **FIRE** 0 1 **SLIGHT** REACTIVITY 0 2 **MODERATE** 3 OTHER: B (GLASSES & GLOVES) HIGH **EXTREME** 

# SECTION 1 PRODUCT IDENTIFICATION

PRODUCT NAME: EXTREME NUMBER ONE CHEMICAL IDENTIFICATION: Acrylamide, Acrylate Copolymer

MATERIAL USE:

WHMIS CLASSIFICATION:

WORK PLACE HAZARD:

Drilling Fluid Additive

Not Regulated

Not Applicable

# TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not Dangerous Goods

PACKAGE GROUP:

CAS NUMBER:

MSDS CODE:

Not Applicable

Not Applicable

Not Applicable

# SECTION 2 HAZARDOUS INGREDIENTS

INGREDIENT: None Considered Hazardous

PERCENTAGE: Not Available
CAS NUMBER: Not Available
LD (50): Not Available
LC (50): Not Available



PAGE 2 OF 5

#### **EXTREME NUMBER ONE**

# MATERIAL SAFETY DATA SHEET

**SECTION 3 PHYSICAL DATA** 

APPEARANCE AND ODOUR: Slight, mild odour, white, granular solid

DENSITY (SPECIFIC GRAVITY): .80

**BOILING POINT:** Not Available **MELTING POINT:** Not Available SOLUBILITY: Soluble EVAPORATION RATE: (EE=1): Not Available VAPOUR PRESSURE: (MM HG): Not Available VAPOUR DENSITY: (AIR = 1): Not Available

**SECTION 4 FIRE AND EXPLOSION** 

FLASHPOINT: Not Applicable FLAMMABLE LIMIT: Not Available **AUTO IGNITION TEMP:** No Data

**EXTINGUISHING MEDIA:** Dry Chemical, Carbon Dioxide, Foam Self-Contained Respirators For Fire Fighting SPECIAL FIRE FIGHTING PROCEDURES:

Personnel.

UNUSUAL FIRE AND EXPLOSION HAZARDS: Products of incomplete combustion and oxides of

nitrogen and carbon.

**REACTIVITY DATA SECTION 5** 

STABILITY (THERMAL, LIGHT, ETC.): Stable

INCOMPATIBILITY (CONDITIONS TO AVOID): Strong oxidizing agents and highly alkaline

solutions

HAZARDOUS POLYMERIZATION: Will not occur

HAZARDOUS DECOMPOSITION PRODUCTS:

None

PAGE 3 OF 5

#### **EXTREME NUMBER ONE**

# MATERIAL SAFETY DATA SHEET

SECTION 6 HEALTH HAZARDS

ROUTE OF ENTRY:

(X) SKIN (X) EYE CONTACT (X) INHALATION (X) INGESTION

SKIN CONTACT: May be minimally irritating to sensitive skin upon

prolonged direct contact.

EYE CONTACT: May be minimally irritating to eyes upon direct

contact.

INHALATION: May cause irritation to nose and throat.

SECTION 7 PREVENTATIVE MEASURES

SKIN PROTECTION: Impervious gloves, protective clothing as required

EYE PROTECTION: Goggles.

VENTILATION: General mechanical; 10 changes per hour.

RESPIRATORY PROTECTION: Approved dust mask; MESA type

LEAK & SPILL PROCEDURE: Ventilate area, wear rubber boots, gloves and a

self-contained respirator if ventilation inadequate. Collect into waste container, wash site after pick

up. Water solutions extremely slippery.
Dispose in compliance with government

WASTE DISPOSAL:

Dispose in compliance with governm regulations and local requirements.

STORAGE REQUIREMENTS: Cool, dry area, away from oxidizing and reducing

agents. Keep containers closed when not in use. Avoid prolonged contact when handling. Do not

inhale dust.