



SPILL CONTINGENCY PLAN

TORP LAKE PROJECT, NUNAVUT

Date: June, 2009

TABLE OF CONTENTS

	<u>Page</u>
1. INTRODUCTION	1
1.1 Corporate Details	1
1.2 Term of Spill Contingency Plan	1
1.3 Purpose and Scope.....	1
1.4 North Arrow Minerals Inc. Environmental Policy	1
2. PROJECT AND SITE DESCRIPTION.....	2
2.1 Project Description	2
2.2 Current Permits/Licences	2
2.3 List of Hazardous Materials On-Site.....	2
2.4 Petroleum and Chemical Product Storage and Transport.....	3
2.5 Petroleum Product Transfer	3
2.6 Camp/Exploration Equipment Maintenance	4
2.7 Spill Containment Equipment	4
2.8 Existing Preventative Measures	4
2.9 Copies of Spill Contingency Plan	4
3. RESPONSE ORGANIZATION	5
3.1 Spill Response Team	6
4. REPORTING PROCEDURE.....	7
5. ACTION PLANS	8
5.1 Initial Action	8
5.2 Spill Response Actions – Diesel Fuel, Hydraulic Oil and Lubricating Oil	9
5.3 Spill Response Actions – Gasoline and Jet B Aviation Fuel	10
5.4 Spill Response Actions – Propane	11
6. PROCEDURES FOR TRANSFERRING, STORING, AND MANAGING SPILL-RELATED WASTES	12
7. PROCEDURES FOR RESTORING AFFECTED AREAS	12
8. TRAINING	12

LIST OF TABLES

Table 1	List of hazardous materials stored on-site, type of storage container,	3
	the storage quantities, and storage locations where known	
Table 2	Emergency Contacts	7

LIST OF APPENDICES

Appendix 1	NT/NU Spill Report Form and Instructions
Appendix 2	Immediately Reportable Spill Quantities
Appendix 3	Regional and Detailed Property Location Maps
Appendix 4	MSDS Sheets

1. INTRODUCTION

This Spill Contingency Plan has been prepared specifically for the Torp Lake Project (NTS 76N/3,4,5,6) operated by North Arrow Minerals Inc. ("North Arrow"). The plan demonstrates that North Arrow Minerals Inc. will have appropriate response capabilities and measures in place to effectively address potential spills at its Torp Lake Project site.

1.1 Corporate Details

North Arrow Minerals Inc.
Suite 860, 625 Howe Street
Vancouver, BC V6C 2T6

Attention: Gordon Clarke, Vice-President, Exploration

1.2 Term of Spill Contingency Plan

This version of the North Arrow Minerals Inc. Spill Contingency Plan shall be in effect from date of acceptance of applicable land use permits. Any future changes and/or amendments will be submitted to the Nunavut Water Board, DIAND and the Kitikmeot Inuit Association.

1.3 Purpose and Scope

The purpose of this Spill Contingency Plan is to provide a plan of action for all spills of hazardous materials that may occur on the Torp Lake Project, NU. This plan identifies key response personnel and their roles and responsibilities in the event of a spill, as well as the equipment and other resources available to respond to a spill. It details spill response procedures that will minimize potential health and safety hazards, environmental damage, and clean-up efforts. The plan has been prepared to ensure quick access to all information required in responding to a spill.

1.4 North Arrow Minerals Inc. Environmental Policy

It is the policy of North Arrow Minerals Inc. to comply with all existing laws and regulations to help ensure the protection of the environment. North Arrow Minerals Inc. cooperates with other groups committed to protecting the environment and ensures that employees, government, and the public is informed on the procedures followed to help protect the environment.

North Arrow Minerals Inc. endeavours to take every reasonable precaution toward ensuring the protection and conservation of the natural environment and the safety and health of all employees and contractors from any potential harmful effects of stored materials and operations.

The plan is presented to all staff during their on-site orientation sessions. All employees and contractors are aware of the locations of the plan on site at the Torp Lake Project and in North Arrow's offices.

During the orientation meeting, training sessions are scheduled to ensure employees have an understanding of the steps to be undertaken in the event of a spill. All employees and contractors are shown where spill kits are stored, are aware of their contents and are trained in using spill equipment and responding to spills. The company is committed to keeping personnel up to date on the latest technologies and spill response methods.

2. PROJECT AND SITE DESCRIPTION

2.1 Project Description

This project, located in the West Kitikmeot Region of Nunavut, approximately 245 kilometres east-southeast of Kugluktuk, 86 kilometres northwest of Bathurst Inlet, and 270 kilometres southwest of Cambridge Bay, consists of both Inuit-Owned Lands (surface and subsurface rights) and mineral claims on Crown Lands. Year-round access to the property is via fixed wing plane, equipped with skis or floats, or helicopter. The property is bounded in a general sense by the following minimum and maximum latitudes/longitudes:

Min Lat (degree/minute)	<u>67°11'</u>	Min Long (degree/minute)	<u>-109°10'</u>
Max Lat (degree/minute)	<u>67°30'</u>	Max Long (degree/minute)	<u>-109°54'</u>

If initial program results warrant, a camp may be required. If required it would consist of an exploration tent camp suitable for up to 16 personnel at approximately, 67° 19' 03" N 109° 39' 07" W on Crown land (see attached figure). The exact location will depend upon float plane access along the shoreline. The camp would include 6 sleeping tents, combination cook's tent/first aid station, kitchen, dry, office, core shack, outhouse, generator shack, and a fuel cache. Specifics of the final layout will be dependant upon the topographic conditions encountered during camp construction. A layout plan would be forwarded after camp construction.

Maps illustrating the regional context of the property and the project area are located in Appendix 2.

2.2 Current Permits/Licences

Permit/License No.	Regulatory Body	Type	Expiry
	Nunavut Water Board	Water License Type B	Application Review in Progress
KTL 109C003	Kitikmeot Inuit Association	Staking and Prospecting BB-38	March 16, 2011
	Kitikmeot Inuit Association	Land Use-Staking and prospecting, geophysics-ground/air, diamond drilling	Application Review in Progress
	NIRB		Application Review in Progress

2.3 List of Hazardous Materials On-site

Fuel storage areas at the Torp Lake project will include the main storage site adjacent to the camp helicopter landing pad; in addition small fuel caches will be located adjacent to active drill sites when drilling is underway. All containers of hazardous materials will be marked with North Arrow's name.

Petroleum products and hazardous materials that will be considered in this Spill Contingency Plan include:

- Diesel fuel
- Hydraulic oil

- Lubricating oil
- Gasoline
- Jet “B” fuel
- Antifreeze
- Propane

The drilling company will employ various drilling muds and grease during the drilling operations. This information is included in Appendix 3 (MSDS Sheets).

Table 1 presents a list of hazardous materials anticipated to be located at the Torp Lake site, the type of storage container, the maximum quantities stored, and the general location.

Table 1: List of hazardous materials stored on-site, type of storage container, the storage quantities, and storage locations where known

Material	Storage Container	Maximum on-site	Storage Location and Uses
Diesel fuel	205 litre drums	80 (16,400 litres)	One drum to be located at each tent for heating, one at the generator, two drums at active drilling sites, remainder at camp fuel cache
Jet B fuel	205 litre drums	60 (12,300 litres)	Two drums at each active drilling site, remainder at camp fuel cache
Propane	45 kg cylinders	6 (270 kg)	Two cylinders each to be located at kitchen (heating/cooking) and dry (heating); remainder at camp fuel cache
Gasoline	205 litre drums	4 (820 litres)	Camp fuel cache
Oil (Engine and 2-stroke)	1 litre container	Several cases (24 litres/case)	Generator shed, active drilling sites

2.4 Petroleum and Chemical Product Storage and Transport

All fuel will be stored no closer than the regulated distance from the normal high water mark of any water body (>30 metres). The main fuel cache will be located at the Torp Lake camp.

Other petroleum-based materials found on-site in very small quantities will be located in the drill shack. These include lubricants/oil/grease for the maintenance of the drilling equipment. The drill shack will be located over 30 metres from the normal high water mark of any water body.

All fuel, oil and any chemicals are transported to site by plane and/or helicopter and to any drill sites by helicopter.

2.5 Petroleum Product Transfer

Manual and automatic pumps (and aviation fuel filters for jet fuel) are used for the transfer of all petroleum products. Smoking, sparks, or open flames are **prohibited** in fuel storage and fuelling areas at all times. Portable drip trays and appropriately sized fuel transfer hoses with pumps are

used when refuelling aircraft or other equipment, to avoid any leaks/drips onto the land.

2.6 Camp/Exploration Equipment Maintenance

All maintenance work required for camp or exploration equipment will utilize special procedures including the use of portable drip pans to manage motor fluids and other waste in an effort to contain potential spills.

2.7 Spill Containment Equipment

Equipment available on site to assist in responding to a hazardous materials spill includes various hand held tools including shovels. In addition to these, one spill kit will be situated at each active drill site with additional spill kits located at the Torp Lake camp fuel cache and on the helicopter.

Spill kits are located wherever fuel is stored or used. The typical spill kit has a sorbent capacity of 240 litres and the contents include:

- 1 – 360 litre/79 gallon polyethylene over pack drum
- 4 – oil sorbent booms (5" X 10')
- 100 – oil sorbent sheets (16.5" X 20" X 3/8")
- 1 – drain cover (36" X 36" X 1/16")
- 1 – *Caution* tape (3" X 500')
- 1 – 1 lb plugging compound
- 2 – pair Nitrile gloves
- 2 – pair Safety goggles
- 2 – pair Tyvel coveralls
- 1 – instruction booklet
- 10 – printed disposable bags (24" X 48")
- 1 – empty fuel drum

2.8 Existing Preventative Measures

Planning for an emergency situation is imperative, due to the nature of the materials stored on site as well as the remoteness of the site. Along with the preventative measures outlined below, adequate training of staff and contractors is paramount.

All hazardous materials arrive by air as needed throughout periods of active exploration. They are unloaded by airplane and helicopter pilots and North Arrow staff and contractors and carefully placed in the fuel storage and hazardous materials storage areas.


The designated fuel monitor conducts daily visual inspections to check for leaks or damage to the fuel storage containers, as well as for stained or discoloured soils/snow around the fuel storage areas and adjacent equipment. For example, lids/caps are checked for tight seals. A checklist is used to ensure no areas are missed.

2.9 Copies of Spill Contingency Plan

Several copies of the plan are kept on-site at all times at the Torp Lake camp, the camp fuel cache and at any drill shacks during active drilling periods. As well a copies will also be located at North Arrow offices.

3. **RESPONSE ORGANIZATION**

The following is a flow chart to illustrate the sequence of events in the event of a hazardous material spill occurring at the Torp Lake Project.

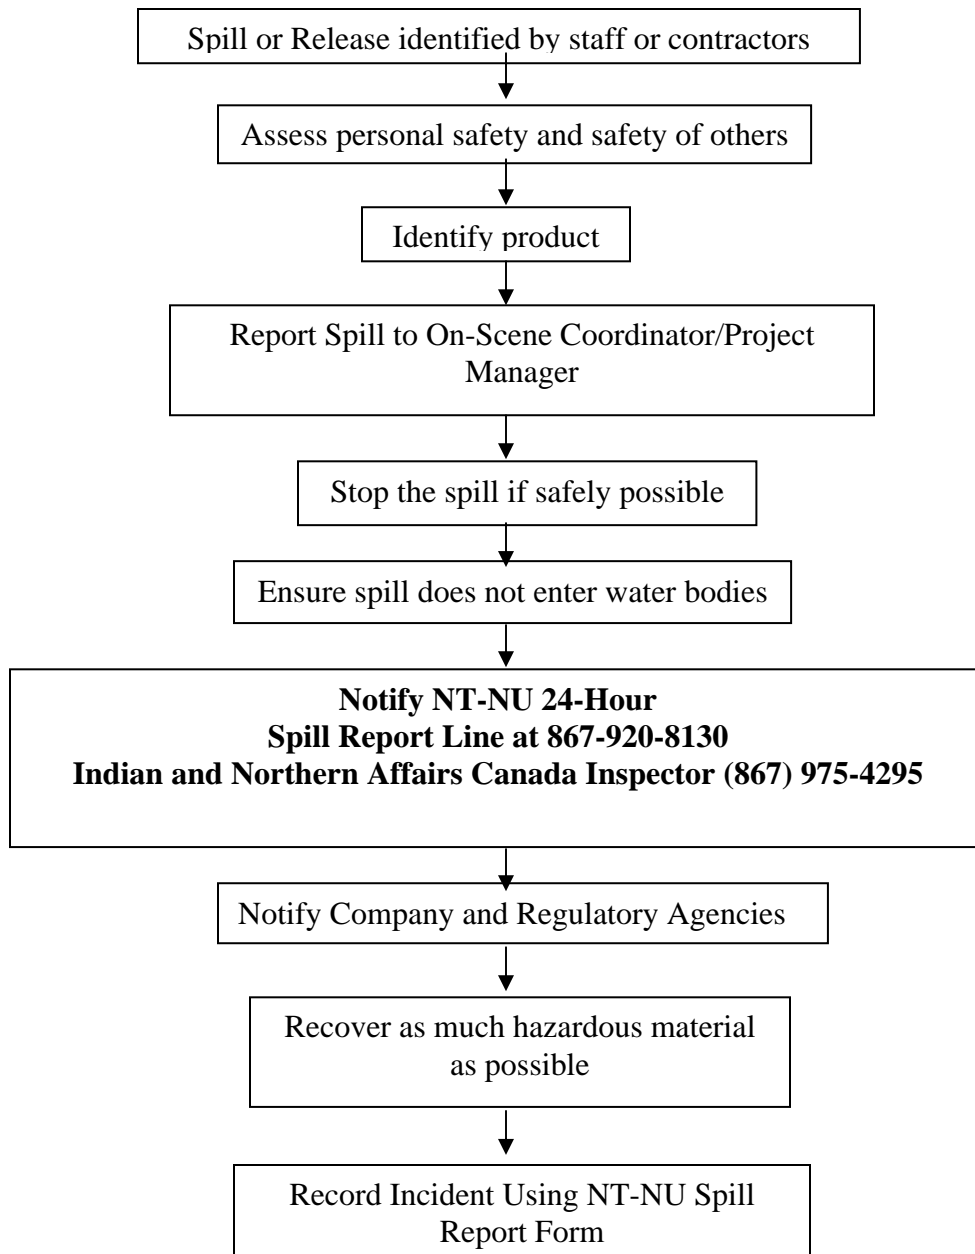

3.1 Spill Response Team

Gordon Clarke will be the On-Scene Coordinator for the Torp Lake Project and will appoint and train appropriate personnel to make up the Torp Lake Spill Response Team for the Torp Lake Project. The key personnel that make up the Torp Lake Spill Response Team are as follows:

On-Scene Coordinator: Gordon Clarke, Vice-President, North Arrow Minerals Inc.

Project Manager Gordon Clarke, Vice-President, North Arrow Minerals Inc.

In addition to the On-Scene Coordinator and the Project Manager, approximately 2 to 15 personnel are available on site to assist in spill response and cleanup activities. The number of personnel on site varies based on the specific exploration activities being conducted at any one time throughout the year.

The responsibilities of the On-Scene Coordinator are as follows:

1. Assume complete authority over the spill scene and coordinate all personnel involved.
2. Evaluate spill situation and develop overall plan of action.
3. Activate the spill contingency plan
4. Immediately report the spill to:
NT-NU 24-Hour Spill Report Line (867) 920-8130
Indian and Northern Affairs Canada Inspector (867) 975-4295
Other regulatory agencies and North Arrow management (see *Table 2 – Emergency Contacts*).
5. Obtain additional manpower, equipment, and material if not available on site for spill response.

The responsibilities of the Project Manager are as follows:

1. Provide regulatory agencies and North Arrow management with information regarding the status of the cleanup activities.
2. Act as a spokesperson on behalf of North Arrow with regulatory agencies as well as the public and media.
3. Prepare and submit a report on the spill incident to regulatory agencies (including the INAC Inspector) within 30 days of the event.

4. **REPORTING PROCEDURE**

The On-Scene Coordinator must be notified immediately of any spill either by phone, radio, or in person.

The following is the spill reporting procedure:

1. Report immediately to the NT-NU 24-Hour Spill Report Line (867) 920-8130
Indian and Northern Affairs Canada Inspector (867) 975-4295
And other regulatory agencies, and North Arrow management
(see *Table 2 – Emergency Contacts*)
2. Complete the NT-NU Spill Report Form and fax the report to the NT-NU 24-Hour Spill Report Line fax (867) 873-6924.

Table 2 – Emergency Contacts

CONTACT	TELEPHONE NUMBER
INAC - Land Use Inspector	(867) 975-4295
North Arrow – Gordon Clarke, Vice-President	(604) 668-8355 (Office); (604) 668-8366 (Fax) (867) 445-6527 (24 hour)
Environment Canada 24 hour Duty Officer	(867) 766-3737, (867) 873-8185 (Fax)
INAC – Water Resource Officers, Kugluktuk and Iqaluit, NU	Kugluktuk (867) 982-4308 Iqaluit (867) 975-4298
Kitikmeot Inuit Association	(867) 983-2458
Nunavut Tunngavik Inc., Cambridge Bay	(867) 983-2517
Air Tindi	(867) 669-8212
Great Slave Helicopters	(867) 873-2081
Yellowknife Fire Department	(867) 873-2222
RCMP, Kugluktuk	(867) 982-4111
Stanton Regional Hospital – Yellowknife	(867) 920-4111
Discovery Mining Services	(867) 920-4600
On-Site Project Geologist	<i>Information to be supplied once phone system is established on the property</i>
Fisheries and Oceans	(867) 979-8007
Nunavut Department of Environment	(867) 975-7700
Robert Eno, Nunavut Department of Environment, Waste Manifests	(867) 975-7748
Manager, Pollution Control and Air Quality, Environmental Protection, Govt of Nunavut	(867) 975-7748; (867) 975-7739 (Fax)

5. ACTION PLANS

5.1 Initial Action

The instructions to be followed by the first person on the spill scene are as follows:

1. Always be alert and consider your safety first.
2. If possible, identify the material that has been spilled. If you are not sure of the material, use caution and consider your safety first.
3. Assess the hazard of people in the vicinity of the spill.
4. If possible, safely try to stop the flow of material to minimize potential for environmental impacts.
5. Immediately report the spill to the On Scene Coordinator.
6. Resume any effective action to contain, mitigate, or terminate the flow of the spilled material.

The following pages include specific instructions to be followed in the response to various types of spills including diesel fuel, hydraulic oil, lubricating oil, gasoline, aviation fuel (Jet “B”), antifreeze, and propane.

5.2 SPILL RESPONSE ACTIONS

DIESEL FUEL, HYDRAULIC OIL, AND LUBRICATING OIL

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources.

Never smoke when dealing with these types of spills.

On Land

Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm for easy capture of the spill after all vapours have dissipated.

Remove the spill by using absorbent pads or excavating the soil, gravel or snow.

Remove spill splashed on vegetation using particulate absorbent material.

On Muskeg

Do not deploy personnel and equipment on marsh or vegetation.

Remove pooled oil with sorbent pads and/or skimmer.

Flush with low pressure water to herd oil to collection point.

Burn only in localized areas, e.g., trenches, piles or windrows.

Do not burn if root systems can be damaged (low water table).

Minimize damage caused by equipment and excavation.

On Water

Contain spill as close to release point as possible.

Use containment boom to capture spill for recovery after vapours have dissipated.

Use absorbent pads to capture small spills.

Use skimmer for larger spills.

On Ice and Snow

Build a containment berm around spill using snow.

Remove spill using absorbent pads or particulate sorbent material.

The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags.

Storage and Transfer

All contaminated water, ice, snow, soil, and clean up supplies will be stored in closed, labelled containers. All containers will be stored in a well ventilated area away from incompatible materials.

Disposal

All contaminated material will be transported to an appropriate disposal facility.

5.3 SPILL RESPONSE ACTIONS GASOLINE AND JET B AVIATION FUEL

Take action only if safety permits – stop the source flow if safe to do so and eliminate all ignition sources.

Never smoke when dealing with these types of spills.

On Land

Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm for easy capture of the spill after all vapours have dissipated.

Remove the spill by using absorbent pads or excavating the soil, gravel or snow.

Remove spill splashed on vegetation using particulate absorbent material.

On Muskeg

Do not deploy personnel and equipment on marsh or vegetation.

Remove pooled gasoline or Jet B with sorbent pads and/or skimmer.

Flush with low pressure water to herd oil to collection point.

On advice from regulatory agencies, burn only in localized areas, e.g., trenches, piles or windrows.

Do not burn if root systems can be damaged (low water table).

Minimize damage caused by equipment and excavation.

On Water

Contain spill as close to release point as possible.

Use containment boom to capture spill for recovery after vapours have dissipated.

Use absorbent pads to capture small spills.

Use skimmer for larger spills.

On Ice and Snow

Build a containment berm around spill using snow.

Remove spill using absorbent pads or particulate sorbent material.

The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags.

Storage and Transfer

All contaminated water, ice, snow, soil, and clean up supplies will be stored in closed, labelled containers. All containers will be stored in a well ventilated area away from incompatible materials.

Disposal

All contaminated material will be transported to an appropriate disposal facility.

5.4 SPILL RESPONSE ACTIONS PROPANE

Take action only if safety permits. Gases stored in cylinders can explode when ignited.
Keep vehicles away from area.

Never smoke when dealing with these types of spills.

On Land

Do not attempt to contain the propane release.

On Water

Do not attempt to contain the propane release.

On Ice and Snow

Do not attempt to contain the propane release.

General

It is not possible to contain vapours when released.

Water spray can be used to knock down vapours if there is no chance of ignition.

Small fires can be extinguished with dry chemical or CO₂.

Personnel should withdraw immediately from area unless a small leak is stopped immediately after it has been detected.

If tanks are damaged, gas should be allowed to disperse and no recovery attempt should be made.

Personnel should avoid touching release point on containers since frost forms very rapidly.

Keep away from tank ends.

Storage and Transfer

It is not possible to contain vapours when released.

Disposal

All contaminated material will be transported to an appropriate disposal facility.

6.0 PROCEDURES FOR TRANSFERRING, STORING, AND MANAGING SPILL-RELATED WASTES

In most cases, spill cleanups are initiated at the far end of the spill and contained moving toward the centre of the spill. Sorbent socks and pads are generally used for small spill cleanup. A pump with attached fuel transfer hose can suction spills from leaking containers or large accumulations on land or ice, and direct these larger quantities into empty drums. Hand tools such as cans, shovels, and rakes are also very effective for small spills or hard to reach areas. Heavy equipment can be used if deemed necessary but may be constrained by transportation to site constraints.

Used sorbent materials are to be placed in plastic bags for future disposal at an approved disposal facility. All materials mentioned in this section are available in the spill kits located on the Torp Lake Property. Following cleanup, any tools or equipment used will be properly washed and decontaminated, or replaced if this is not possible.

For most of the containment procedures outlined in Section 5, spilled petroleum products and materials used for containment will be placed into empty waste oil containers and sealed for proper disposal at an approved disposal facility.

7.0 PROCEDURES FOR RESTORING AFFECTED AREAS

Once a spill has been contained, North Arrow will consult with the Indian and Northern Affairs Canada Inspector assigned to the property to determine the level of cleanup required. The Inspector may require a site-specific study to ensure appropriate cleanup levels are met. Criteria that may be considered include natural biodegradation of oil, replacement of soil and re-vegetation.

8.0 TRAINING

All employees working on the Torp Lake Project will be trained in the safe operation of all machinery and tools to help prevent hazardous material spills. All employees on site will also be required to participate in an orientation session, during which all locations of the spill plan and spill kits will be provided. An overview of the plan will be provided by the On-Scene Coordinator leading the orientation session. Specific training sessions are scheduled for individuals directly involved in handling hazardous materials to ensure they know all steps to be undertaken in handling these materials, as well as the steps involved in the event of a spill, including the proper use of spill kits.


APPENDIX 1

NT/NU Spill Report Instructions and Form

Instructions for Completing the NT-NU Spill Report Form

This form can be filled out electronically and e-mailed as an attachment to spills@gov.nt.ca. Until further notice, please verify receipt of e-mail transmissions with a follow-up telephone call to the spill line. Forms can also be printed and faxed to the spill line at 867-873-6924. Spills can still be phoned in by calling collect at 867-920-8130.

A. Report Date/Time	The actual date and time that the spill was reported to the spill line. If the spill is phoned in, the Spill Line will fill this out. Please do not fill in the Report Number: the spill line will assign a number after the spill is reported.
B. Occurrence Date/Time	Indicate, to the best of your knowledge, the exact date and time that the spill occurred. Not to be confused with the report date and time (see above).
C. Land Use Permit Number /Water Licence Number	This only needs to be filled in if the activity has been licenced by the Nunavut Water Board and/or if a Land Use Permit has been issued. Applies primarily to mines and mineral exploration sites.
D. Geographic Place Name	In most cases, this will be the name of the city or town in which the spill occurred. For remote locations – outside of human habitations – identify the most prominent geographic feature, such as a lake or mountain and/or the distance and direction from the nearest population center. You must include the geographic coordinates (Refer to Section E).
E. Geographic Coordinates	This only needs to be filled out if the spill occurred outside of an established community such as a mine site. Please note that the location should be stated in degrees, minutes and seconds of Latitude and Longitude.
F. Responsible Party Or Vessel Name	This is the person who was in management/control/ownership of the substance at the time that it was spilled. In the case of a spill from a ship/vessel, include the name of the ship/vessel. Please include full address, telephone number and e-mail. Use box K if there is insufficient space. Please note that, the owner of the spilled substance is ultimately responsible for any spills of that substance, regardless of who may have actually caused the spill.
G. Contractor involved?	Were there any other parties/contractors involved? An example would be a construction company who is undertaking work on behalf of the owner of the spilled substance and who may have contributed to, or directly caused the spill and/or is responding to the spill.
H. Product Spilled	Identify the product spilled; most commonly, it is gasoline, diesel fuel or sewage. For other substances, avoid trade names. Wherever possible, use the chemical name of the substance and further, identify the product using the four digit UN number (eg: UN1203 for gasoline; UN1202 for diesel fuel; UN1863 for Jet A & B)
I. Spill Source	Identify the source of the spill: truck, ship, home heating fuel tank and, if known, the cause (eg: fuel tank overfill, leaking tank; ship ran aground; traffic accident, vandalism, storm, etc.). Provide an estimate of the extent of the contaminated/impacted area (eg: 10 m ²)
J. Factors Affecting Spill	Any factors which might make it difficult to clean up the spill: rough terrain, bad weather, remote location, lack of equipment. Do you require advice and/or assistance with the cleanup operation? Identify any hazards to persons, property or environment: for example, a gasoline spill beside a daycare centre would pose a safety hazard to children. Use box K if there is insufficient space.
K. Additional Information	Provide any additional, pertinent details about the spill, such as any peculiar/unique hazards associated with the spilled material. State what action is being taken towards cleaning up the spill; disposal of spilled material; notification of affected parties. If necessary, append additional sheets to the spill report. Number the pages in the same format found in the lower right hand corner of the spill form: eg. "Page 1 of 2", "Page 2 of 2" etc. Please number the pages to ensure that recipients can be certain that they received all pertinent documents. If only the spill report form was filled out, number the form as "Page 1 of 1".
L. Reported to Spill Line by	Include your full name, employer, contact number and the location from which you are reporting the spill. Use box K if there is insufficient space.
M. Alternate Contact	Identify any alternate contacts. This information assists regulatory agencies to obtain additional information if they cannot reach the individual who reported the spill.
N. Report Line Use Only	Leave Blank. This box is for the Spill Line's use only.



Canada

NT-NU SPILL REPORT

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

NT-NU 24-HOUR SPILL REPORT LINE

TEL: (867) 920-8130

FAX: (867) 873-6924

EMAIL: spills@gov.nt.ca

REPORT LINE USE ONLY

A	REPORT DATE: MONTH - DAY - YEAR		REPORT TIME		<input type="checkbox"/> ORIGINAL SPILL REPORT, OR <input type="checkbox"/> UPDATE # _____ TO THE ORIGINAL SPILL REPORT	REPORT NUMBER _____
	OCCURRENCE DATE: MONTH - DAY - YEAR		OCCURRENCE TIME			
C	LAND USE PERMIT NUMBER (IF APPLICABLE)			WATER LICENCE NUMBER (IF APPLICABLE)		
D	GEOGRAPHIC PLACE NAME OR DISTANCE AND DIRECTION FROM NAMED LOCATION				REGION <input type="checkbox"/> NWT <input type="checkbox"/> NUNAVUT <input type="checkbox"/> ADJACENT JURISDICTION OR OCEAN	
E	LATITUDE DEGREES MINUTES SECONDS			LONGITUDE DEGREES MINUTES SECONDS		
F	RESPONSIBLE PARTY OR VESSEL NAME		RESPONSIBLE PARTY ADDRESS OR OFFICE LOCATION			
G	ANY CONTRACTOR INVOLVED		CONTRACTOR ADDRESS OR OFFICE LOCATION			
H	PRODUCT SPILLED		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
	SECOND PRODUCT SPILLED (IF APPLICABLE)		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES		U.N. NUMBER	
I	SPILL SOURCE		SPILL CAUSE		AREA OF CONTAMINATION IN SQUARE METRES	
J	FACTORS AFFECTING SPILL OR RECOVERY		DESCRIBE ANY ASSISTANCE REQUIRED		HAZARDS TO PERSONS, PROPERTY OR EQUIPMENT	
K	ADDITIONAL INFORMATION, COMMENTS, ACTIONS PROPOSED OR TAKEN TO CONTAIN, RECOVER OR DISPOSE OF SPILLED PRODUCT AND CONTAMINATED MATERIALS					
L	REPORTED TO SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLING FROM	TELEPHONE	
M	ANY ALTERNATE CONTACT	POSITION	EMPLOYER	ALTERNATE CONTACT LOCATION	ALTERNATE TELEPHONE	
REPORT LINE USE ONLY						
N	RECEIVED AT SPILL LINE BY	POSITION STATION OPERATOR	EMPLOYER	LOCATION CALLED YELLOWKNIFE, NT	REPORT LINE NUMBER (867) 920-8130	
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> INAC <input type="checkbox"/> NEB <input type="checkbox"/> TC			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED	
AGENCY		CONTACT NAME	CONTACT TIME	REMARKS		
LEAD AGENCY						
FIRST SUPPORT AGENCY						
SECOND SUPPORT AGENCY						
THIRD SUPPORT AGENCY						

APPENDIX 2

**Immediately Reportable
Spill Quantities**

IMMEDIATELY REPORTABLE SPILL QUANTITIES


(Appendix 3 of *Guidelines for Spill Contingency Planning*,
Water Resources Division, Indian & Northern Affairs Canada,
Yellowknife, NT, January 2007)


TDG Class	Substance	Immediately Reportable Quantities for NWT 24 Hour Spill Line
1 2.3 2.4 6.2 7 None	Explosives Compressed gas (toxic) Compressed gas (corrosive) Infectious substances Radioactive Unknown substance	Any amount
2.1 2.2	Compressed gas (flammable) Compressed gas (non-corrosive, non-flammable)	Any amount of gas from containers with a capacity greater than 100 L
3.1 3.2 3.3	Flammable liquids	≥100 L
4.1 4.2 4.3	Flammable solids Spontaneously combustible solids Water reactant	≥25 kg
5.1 9.1	Oxidizing substances Miscellaneous products or substances excluding PCB mixtures	≥50 L or 50 kg
5.2 9.2	Organic peroxides Environmentally hazardous	≥1 L or 1 kg
6.1 8 9.3	Poisonous substances Corrosive substances Dangerous wastes	≥5 L or 5 kg
9.1	PCB mixtures of 5 or more ppm	≥0.5 L or 0.5 kg
None	Other contaminants (e.g. crude oil, drilling fluid, produced water, waste or spent chemicals, used or waste oil, vehicle fluids, waste water, etc.)	≥100 L or 100 kg
None	Sour natural gas (i.e. contains H ₂ S) Sweet natural gas	Uncontrolled release or sustained flow of 10 minutes or more

In addition, all releases of harmful substances, regardless of quantity, are to be reported to the NWT Spill Line if the release is near or into a water body, is near or into a designated sensitive environment or sensitive wildlife habitat, poses imminent threat to human health or safety, poses imminent threat to a listed species at risk or its critical habitat, or is uncontrollable.

APPENDIX 3

Regional and Detailed Property Location Maps

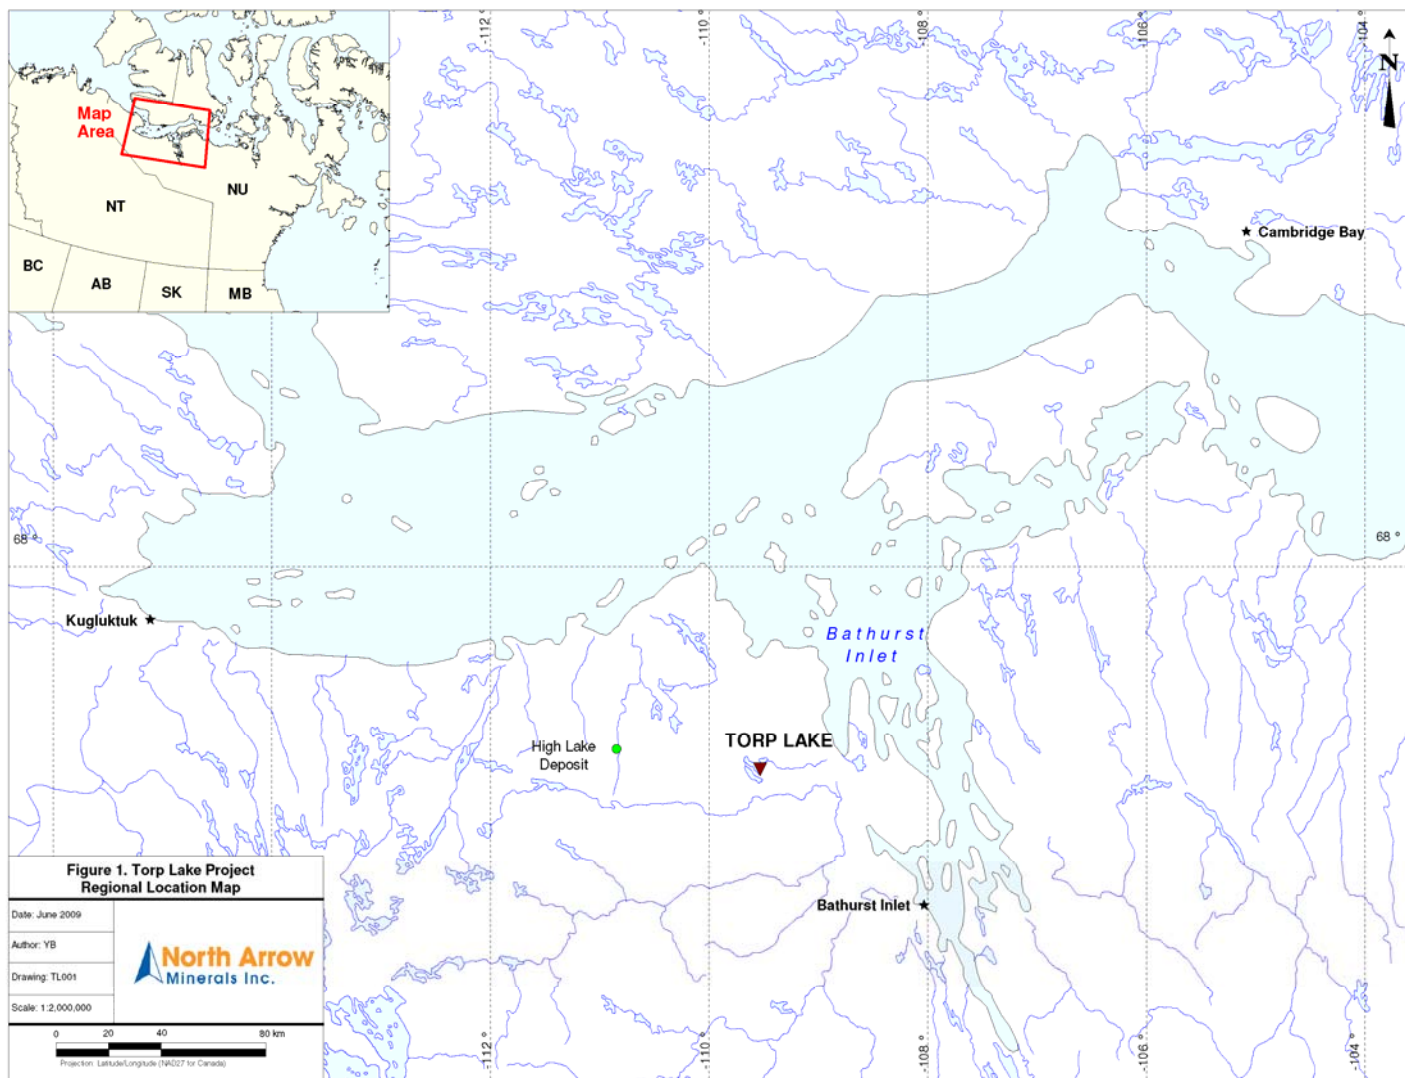

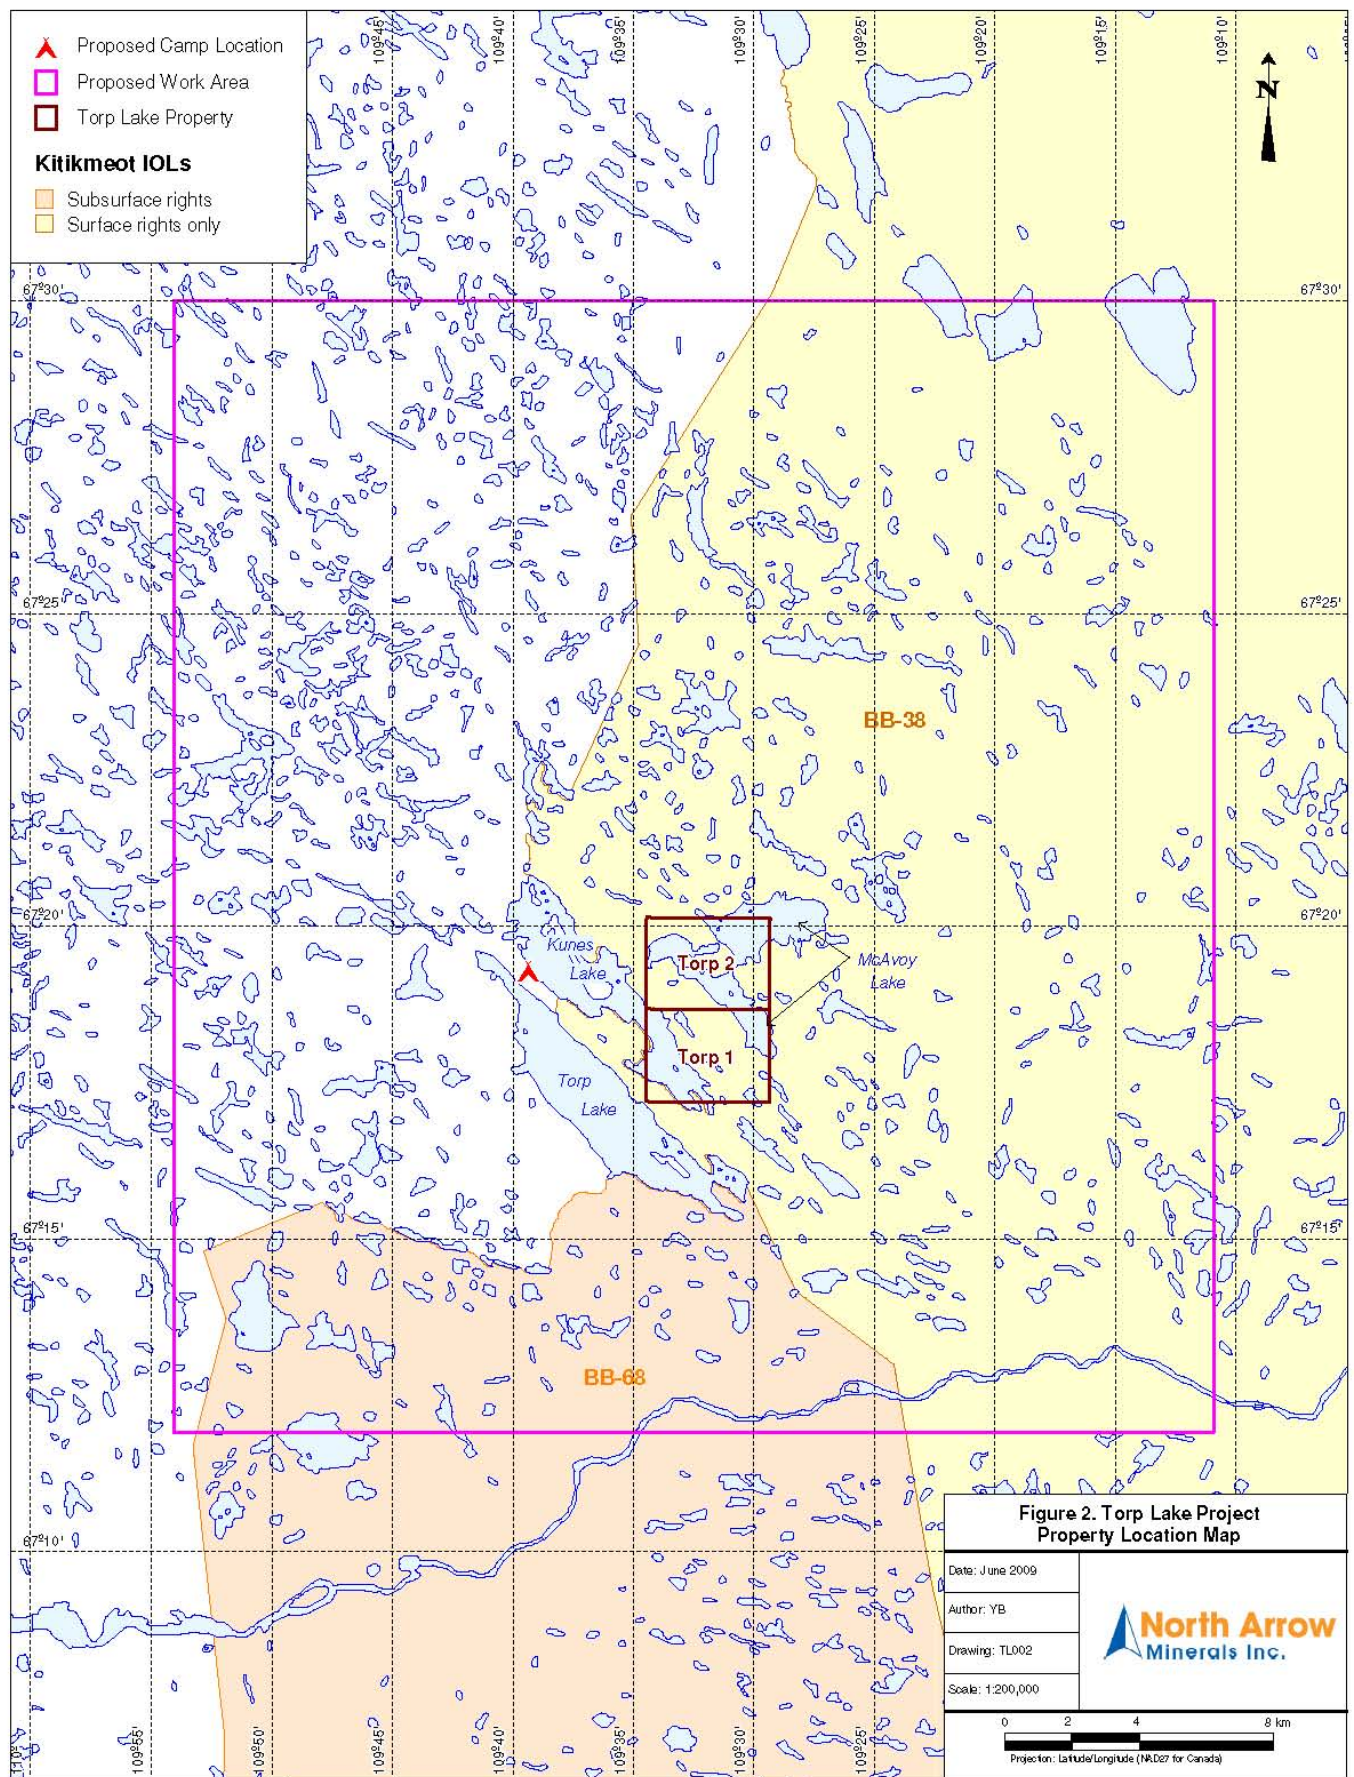

APPENDIX 3

MSDS Sheets

Material Safety Data Sheet

24-Hour Emergency Telephone Numbers

HEALTH : Chevron Emergency Information Center (800) 231-0623 or (510) 231-0623

TRANSPORTATION : CHEMTREC (800) 424-9300 or (703) 527-3887

Emergency Information Centers are located in the U.S.A. International collect calls accepted.

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

TEXACO Havoline DEX-COOL Extended Life Anti-Freeze/Coolant

Product Number(s): CPS227994

Company Identification

ChevronTexaco Global Lubricants
6001 Bollinger Canyon Road
San Ramon, CA 94583

Product Information

Product Information: 800-LUBE-TEK
email : lubemsds@chevron.com

SECTION 2 COMPOSITION/ INFORMATION ON INGREDIENTS

COMPONENTS	CAS NUMBER	AMOUNT
Ethylene Glycol	107-21-1	80 - 96.99 %weight
Diethylene glycol	111-46-6	1 - 4.99 %weight
Potassium 2-ethylhexanoate	3164-85-0	1 - 4.99 %weight
Water	7732-18-5	1 - 2.99 %weight

SECTION 3 HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

Orange liquid. Mild odor.

- HARMFUL OR FATAL IF SWALLOWED
- CAUSES EYE IRRITATION
- MAY CAUSE ADVERSE REPRODUCTIVE EFFECTS BASED ON ANIMAL DATA
- POSSIBLE BIRTH DEFECT HAZARD - CONTAINS MATERIAL THAT MAY CAUSE BIRTH DEFECTS BASED ON ANIMAL DATA
- MAY CAUSE DAMAGE TO:
- KIDNEY

IMMEDIATE HEALTH EFFECTS

Eye: Contact with the eyes causes irritation. Symptoms may include pain, tearing, reddening, swelling and impaired vision.

Skin: Contact with the skin is not expected to cause prolonged or significant irritation. Not expected to be harmful to internal organs if absorbed through the skin.

Ingestion: Toxic; may be harmful or fatal if swallowed.

Inhalation: The vapor or fumes from this material may cause respiratory irritation. Symptoms of

respiratory irritation may include coughing and difficulty breathing.

DELAYED OR OTHER HEALTH EFFECTS:

Reproduction and Birth Defects: May cause adverse reproductive effects based on animal data. Contains material that may be harmful to the developing fetus based on animal data.

Target Organs: Repeated ingestion of this material may cause damage to the following organ(s) based on animal data. Kidney

See Section 11 for additional information. Risk depends on duration and level of exposure.

SECTION 4 FIRST AID MEASURES

Eye: Flush eyes with water immediately while holding the eyelids open. Remove contact lenses, if worn, after initial flushing, and continue flushing for at least 15 minutes. Get medical attention if irritation persists.

Skin: To remove the material from skin, use soap and water. Discard contaminated clothing and shoes or thoroughly clean before reuse.

Ingestion: If swallowed, get immediate medical attention. Do not induce vomiting. Never give anything by mouth to an unconscious person.

Inhalation: Move the exposed person to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention if breathing difficulties continue.

SECTION 5 FIRE FIGHTING MEASURES

FIRE CLASSIFICATION:

OSHA Classification (29 CFR 1910.1200): Not classified by OSHA as flammable or combustible.

NFPA RATINGS: Health: 2 Flammability: 1 Reactivity: 0

FLAMMABLE PROPERTIES:

Flashpoint: (Pensky-Martens Closed Cup) 260 °F (127 °C)

Autoignition: 752 °F (400 °C)

Flammability (Explosive) Limits (% by volume in air): Lower: 3.2 Upper:

EXTINGUISHING MEDIA: Dry Chemical, CO₂, AFFF Foam or alcohol resistant foam.

PROTECTION OF FIRE FIGHTERS:

Fire Fighting Instructions: This material will burn although it is not easily ignited. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus.

Combustion Products: Highly dependent on combustion conditions. A complex mixture of airborne solids, liquids, and gases including carbon monoxide, carbon dioxide, and unidentified organic compounds will be evolved when this material undergoes combustion. Combustion may form oxides of: Potassium .

SECTION 6 ACCIDENTAL RELEASE MEASURES

Protective Measures: Eliminate all sources of ignition in vicinity of spilled material.

Spill Management: Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove

contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable regulations.

Reporting: Report spills to local authorities and/or the U.S. Coast Guard's National Response Center at (800) 424-8802 as appropriate or required.

SECTION 7 HANDLING AND STORAGE

Precautionary Measures: Wash thoroughly after handling. Do not get in eyes. Do not breathe vapor or fumes.

General Handling Information: Do not taste or swallow antifreeze or solution. Keep out of the reach of children and animals.

Static Hazard: Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary but may not, by themselves, be sufficient. Review all operations which have the potential of generating an accumulation of electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures. For more information, refer to OSHA Standard 29 CFR 1910.106, 'Flammable and Combustible Liquids', National Fire Protection Association (NFPA 77, 'Recommended Practice on Static Electricity', and/or the American Petroleum Institute (API) Recommended Practice 2003, 'Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents'.

General Storage Information: Do not store in open or unlabeled containers.

Container Warnings: Container is not designed to contain pressure. Do not use pressure to empty container or it may rupture with explosive force. Empty containers retain product residue (solid, liquid, and/or vapor) and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, static electricity, or other sources of ignition. They may explode and cause injury or death. Empty containers should be completely drained, properly closed, and promptly returned to a drum reconditioner or disposed of properly.

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

GENERAL CONSIDERATIONS:

Consider the potential hazards of this material (see Section 3), applicable exposure limits, job activities, and other substances in the work place when designing engineering controls and selecting personal protective equipment. If engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, the personal protective equipment listed below is recommended. The user should read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances.

ENGINEERING CONTROLS:

Use process enclosures, local exhaust ventilation, or other engineering controls to control airborne levels below the recommended exposure limits.

PERSONAL PROTECTIVE EQUIPMENT

Eye/Face Protection: Wear eye protection such as safety glasses, chemical goggles, or faceshields if engineering controls or work practices are not adequate to prevent eye contact.

Skin Protection: No special protective clothing is normally required. Where splashing is possible, select protective clothing depending on operations conducted, physical requirements and other substances. Suggested materials for protective gloves include: Natural rubber, Neoprene, Nitrile Rubber, Polyvinyl Chloride (PVC or Vinyl).

Respiratory Protection: Determine if airborne concentrations are below the recommended exposure limits. If not, wear an approved respirator that provides adequate protection from measured concentrations of this material, such as: Air-Purifying Respirator for Organic Vapors, Dusts and Mists. Use a positive pressure air-supplying respirator in circumstances where air-purifying respirators may not

provide adequate protection.

Occupational Exposure Limits:

Component	Limit	TWA	STEL	Ceiling	Notation
Ethylene Glycol	ACGIH_TLV			100 mg/m3	
Ethylene Glycol	OSHA_PEL			125 mg/m3	

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Appearance and Odor: Orange liquid. Mild odor.

pH: 8 - 8.6

Vapor Pressure: <0.01 mmHg @ 20 °C

Vapor Density (Air = 1): 2.1

Boiling Point: 228 °F (109 C) (Typical)

Solubility: Miscible

Freezing Point: -34 °F (-37 C)

Melting Point: NDA

Specific Gravity: 1.12 @ 15.6 °C / 15.6 °C

Viscosity: 8 cSt @ 40 °C

SECTION 10 STABILITY AND REACTIVITY

Chemical Stability: This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

Incompatibility With Other Materials: May react with strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

Hazardous Decomposition Products: Aldehydes (Elevated temperatures)

Hazardous Polymerization: Hazardous polymerization will not occur.

SECTION 11 TOXICOLOGICAL INFORMATION

IMMEDIATE HEALTH EFFECTS

Eye Irritation: The eye irritation hazard is based on evaluation of data for similar materials or product components.

Skin Irritation: The skin irritation hazard is based on evaluation of data for similar materials or product components.

Skin Sensitization: No product toxicology data available.

Acute Dermal Toxicity: The acute dermal toxicity hazard is based on evaluation of data for similar materials or product components.

Acute Oral Toxicity: The acute oral toxicity hazard is based on evaluation of data for similar materials or product components.

Acute Inhalation Toxicity: The acute inhalation toxicity hazard is based on evaluation of data for similar materials or product components.

ADDITIONAL TOXICOLOGY INFORMATION:

This product contains ethylene glycol (EG). The toxicity of EG via inhalation or skin contact is expected to be slight at room temperature. The estimated oral lethal dose is about 100 cc (3.3 oz.) for an adult human. Ethylene glycol is oxidized to oxalic acid which results in the deposition of calcium oxalate crystals mainly in the brain and kidneys. Early signs and symptoms of EG poisoning may resemble those of alcohol intoxication. Later, the victim may experience nausea, vomiting, weakness, abdominal and muscle pain, difficulty in breathing and decreased urine output. When EG was heated above the boiling point of water, vapors formed which reportedly caused unconsciousness, increased lymphocyte count,

and a rapid, jerky movement of the eyes in persons chronically exposed. When EG was administered orally to pregnant rats and mice, there was an increase in fetal deaths and birth defects. Some of these effects occurred at doses that had no toxic effects on the mothers. We are not aware of any reports that EG causes reproductive toxicity in human beings.

This product contains diethylene glycol (DEG). The estimated oral lethal dose is about 50 cc (1.6 oz) for an adult human. DEG has caused the following effects in laboratory animals: liver abnormalities, kidney damage and blood abnormalities. It has been suggested as a cause of the following effects in humans: liver abnormalities, kidney damage, lung damage and central nervous system damage.

2-Ethylhexanoic acid (2-EXA) caused an increase in liver size and enzyme levels when repeatedly administered to rats via the diet. When administered to pregnant rats by gavage or in drinking water, 2-EXA caused teratogenicity (birth defects) and delayed postnatal development of the pups. Additionally, 2-EXA impaired female fertility in rats. Birth defects were seen in the offspring of mice who were administered sodium 2-ethylhexanoate via intraperitoneal injection during pregnancy.

SECTION 12 ECOLOGICAL INFORMATION

ECOTOXICITY

The toxicity of this material to aquatic organisms has not been evaluated. Consequently, this material should be kept out of sewage and drainage systems and all bodies of water.

ENVIRONMENTAL FATE

This material is expected to be readily biodegradable.

SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. This material, if it must be discarded, may meet the criteria of a hazardous waste as defined by US EPA under RCRA (40 CFR 261) or other State and local regulations. Measurement of certain physical properties and analysis for regulated components may be necessary to make a correct determination. If this material is classified as a hazardous waste, federal law requires disposal at a licensed hazardous waste disposal facility.

SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

DOT Shipping Name: NOT REGULATED AS A HAZARDOUS MATERIAL FOR TRANSPORTATION UNDER 49 CFR

DOT Hazard Class: NOT APPLICABLE

DOT Identification Number: NOT APPLICABLE

DOT Packing Group: NOT APPLICABLE

SECTION 15 REGULATORY INFORMATION

SARA 311/312 CATEGORIES:

- | | |
|---------------------------------------|-----|
| 1. Immediate (Acute) Health Effects: | YES |
| 2. Delayed (Chronic) Health Effects: | YES |
| 3. Fire Hazard: | NO |
| 4. Sudden Release of Pressure Hazard: | NO |
| 5. Reactivity Hazard: | NO |

REGULATORY LISTS SEARCHED:

4_I1=IARC Group 1	12=TSCA Section 8(a) PAIR	21=TSCA Section 5(a)
4_I2A=IARC Group 2A	13=TSCA Section 8(d)	25=CAA Section 112 HAPs
4_I2B=IARC Group 2B	15=SARA Section 313	26=CWA Section 311
05=NTP Carcinogen	16=CA Proposition 65	28=CWA Section 307
06=OSHA Carcinogen	17=MA RTK	30=RCRA Waste P-List
09=TSCA 12(b)	18=NJ RTK	31=RCRA Waste U-List
10=TSCA Section 4	19=DOT Marine Pollutant	32=RCRA Appendix VIII
11=TSCA Section 8(a) CAIR	20=PA RTK	

The following components of this material are found on the regulatory lists indicated.

Diethylene glycol	25
Ethylene Glycol	15, 17, 18, 20, 25

CERCLA REPORTABLE QUANTITIES(RQ)/SARA 302 THRESHOLD PLANNING QUANTITIES(TPQ):

Component	Component RQ	Component TPQ	Product RQ
Ethylene Glycol	5000 lbs	None	5440 lbs

CHEMICAL INVENTORIES:

AUSTRALIA: All the components of this material are listed on the Australian Inventory of Chemical Substances (AICS).

PEOPLE'S REPUBLIC OF CHINA: All the components of this product are listed on the draft Inventory of Existing Chemical Substances in China.

EUROPEAN UNION: All the components of this material are in compliance with the EU Seventh Amendment Directive 92/32/EEC.

KOREA: All the components of this product are on the Existing Chemicals List (ECL) in Korea.

PHILIPPINES: All the components of this product are listed on the Philippine Inventory of Chemicals and Chemical Substances (PICCS).

UNITED STATES: All of the components of this material are on the Toxic Substances Control Act (TSCA) Chemical Inventory.

NEW JERSEY RTK CLASSIFICATION:

Refer to components listed in Section 2.

WHMIS CLASSIFICATION:

Class D, Division 1, Subdivision B: Toxic Material -
Acute Lethality

Class D, Division 2, Subdivision A: Very Toxic Material -
Chronic Toxic Effects

Reproductive Toxicity

Teratogenicity and Embryotoxicity

Class D, Division 2, Subdivision B: Toxic Material -
Skin or Eye Irritation

SECTION 16 OTHER INFORMATION

NFPA RATINGS: Health: 2 Flammability: 1 Reactivity: 0
HMIS RATINGS: Health: 2* Flammability: 1 Reactivity: 0

(0-Least, 1-Slight, 2-Moderate, 3-High, 4-Extreme, PPE:- Personal Protection Equipment Index recommendation, *- Chronic Effect Indicator). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

REVISION STATEMENT: This revision updates Section 1 (Product Identification), Section 2 (Composition/Ingredient Information), Section 5 (Fire Fighting Measures), Section 11 (Toxicological Information), and Section 15 (Regulatory Information).

ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:

TLV	-	Threshold Limit Value	TWA	-	Time Weighted Average
STEL	-	Short-term Exposure Limit	PEL	-	Permissible Exposure Limit
			CAS	-	Chemical Abstract Service Number
NDA	-	No Data Available	NA	-	Not Applicable
<=	-	Less Than or Equal To	>=	-	Greater Than or Equal To

Prepared according to the OSHA Hazard Communication Standard (29 CFR 1910.1200) and the ANSI MSDS Standard (Z400.1).

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.



Material Safety Data Sheet

Section 1. Product and Company Identification

Product Name	Calcium Chloride, Dihydrate	Product Code	CX0134
Manufacturer	EMD Chemicals Inc. P.O. Box 70 480 Democrat Road Gibbstown, NJ 08027 Prior to January 1, 2003 EMD Chemicals Inc. was EM Industries, Inc. or EM Science, Division of EM Industries, Inc.	Effective Date	8/20/2004
For More Information Call	856-423-6300 Technical Service Monday-Friday: 8:00 AM - 5:00 PM	In Case of Emergency Call	800-424-9300 CHEMTREC (USA) 613-996-6666 CANUTEC (Canada) 24 Hours/Day: 7 Days/Week
Synonym	CALCIUM CHLORIDE		
Material Uses	Analytical reagent.		
Chemical Family	Inorganic salt.		

Section 2. Composition and Information on Ingredients

Component	CAS #	% by Weight
CALCIUM CHLORIDE, DIHYDRATE	10035-04-8	100

Section 3. Hazards Identification

Physical State and Appearance Solid. (Powder or flakes solid. Granular solid.)

Emergency Overview CAUTION!
CAUSES EYE IRRITATION.
MAY CAUSE SKIN IRRITATION.

Routes of Entry Absorbed through skin. Dermal contact. Eye contact. Inhalation. Ingestion.

Potential Acute Health Effects
Eyes Hazardous in case of eye contact (irritant). Inflammation of the eye is characterized by redness, watering, and itching.
Skin May be hazardous in case of skin contact (irritant). Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.
Inhalation No known acute effects of this product resulting from inhalation.
Ingestion Irritating to mouth, throat and stomach. Ingestion can cause nausea and vomiting.

Potential Chronic Health Effects
Carcinogenic Effects This material is not known to cause cancer in animals or humans.

Additional information See Toxicological Information (section 11)

Medical Conditions Aggravated by Overexposure: Repeated or prolonged exposure is not known to aggravate medical condition.

Section 4. First Aid Measures

Eye Contact Check for and remove any contact lenses. In case of contact, immediately flush eyes with plenty of water for at least 15 minutes. Cold water may be used. Get medical attention immediately.

Skin Contact In case of contact, immediately flush skin with plenty of water. Cover the irritated skin with an emollient. Remove contaminated clothing and shoes. Cold water may be used. Wash clothing before reuse. Thoroughly clean shoes before reuse. Get medical attention.

Inhalation If inhaled, remove to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get medical attention.

Ingestion Do NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Loosen tight clothing such as a collar, tie, belt or waistband.

Section 5. Fire Fighting Measures

Flammability of the Product May be combustible at high temperature.
Auto-ignition Temperature Not available.

Flash Points	Not available.
Flammable Limits	Not available.
Products of Combustion	These products are carbon oxides (CO, CO ₂), halogenated compounds. Some metallic oxides.
Fire Hazards in Presence of Various Substances	Not available.
Explosion Hazards in Presence of Various Substances	Risks of explosion of the product in presence of static discharge: No.
Fire Fighting Media and Instructions	Risks of explosion of the product in presence of mechanical impact: No. SMALL FIRE: Use DRY chemical powder. LARGE FIRE: Use water spray, fog or foam. Do not use water jet.
Protective Clothing (Fire)	Be sure to use an approved/certified respirator or equivalent.
Special Remarks on Fire Hazards	Not available.
Special Remarks on Explosion Hazards	Not available.

Section 6. Accidental Release Measures

Small Spill and Leak	Use appropriate tools to put the spilled solid in a convenient waste disposal container.
Large Spill and Leak	Use a shovel to put the material into a convenient waste disposal container.
Spill Kit Information	No specific spill kit required for this product.


Section 7. Handling and Storage

Handling	Avoid contact with eyes, skin and clothing. Wash thoroughly after handling. Do not ingest. Do not breathe dust.
Storage	Keep container tightly closed. Keep container in a cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	Use process enclosures, local exhaust ventilation, or other engineering controls to keep airborne levels below recommended exposure limits. If user operations generate dust, fume or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit.
Personal Protection	<p>Eyes Splash goggles.</p> <p>Body Lab coat.</p> <p>Respiratory Dust respirator. Be sure to use an approved/certified respirator or equivalent. Wear appropriate respirator when ventilation is inadequate.</p> <p>Hands Gloves.</p> <p>Feet Not applicable.</p>

Protective
Clothing
(Pictograms)

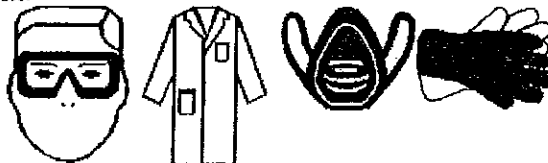

Personal Protection in Case of a Large Spill Splash goggles. Full suit. Dust respirator. Boots. Gloves. A self-contained breathing apparatus should be used to avoid inhalation of the product. Suggested protective clothing might not be sufficient; consult a specialist BEFORE handling this product.

Product Name	Exposure Limits
CALCIUM CHLORIDE, DIHYDRATE	Not available.

Section 9. Physical and Chemical Properties

Odor	Not available.
Color	White.
Physical State and Appearance	Solid. (Powder or flakes solid. Granular solid.)
Molecular Weight	147.02 g/mole
Molecular Formula	CaCl ₂ · 2H ₂ O
pH	Not available.
Boiling/Condensation Point	Not available.
Melting/Freezing Point	Not available.
Specific Gravity	Not available.
Vapor Pressure	Not available.
Vapor Density	Not available.
Odor Threshold	Not available.
Evaporation Rate	Not available.
LogKow	Not available.
Solubility	Soluble in water.

Section 10. Stability and Reactivity

Stability and Reactivity	The product is stable.
Conditions of Instability	Not available.
Incompatibility with Various Substances	Reactive with metals, moisture.
Rem/Incompatibility	Not available.
Hazardous Decomposition Products	These products are halogenated compounds.
Hazardous Polymerization	Will not occur.

Section 11. Toxicological Information

RTECS Number:	Calcium Chloride, Dihydrate	EV9810000
Toxicity	LD50: Not available. LC50: Not available.	
Chronic Effects on Humans	Not available.	
Acute Effects on Humans	Hazardous in case of eye contact (irritant). Inflammation of the eye is characterized by redness, watering, and itching. May be hazardous in case of skin contact (irritant). Skin inflammation is characterized by itching, scaling, reddening, or, occasionally, blistering.	
Synergetic Products (Toxicologically)	Not available.	
Irritancy	Draize Test: Not available.	
Sensitization	Not available.	
Carcinogenic Effects	This material is not known to cause cancer in animals or humans.	
Toxicity to Reproductive System	Not available.	
Teratogenic Effects	Not available.	
Mutagenic Effects	Tests on laboratory animals for mutagenic effects are cited in Registry of Toxic Effects of Chemical Substances (RTECS).	

Section 12. Ecological Information

Ecotoxicity	Not available.
BOD5 and COD	Not available.
Toxicity of the Products of Biodegradation	The products of degradation are more toxic than the product itself.

Section 13. Disposal Considerations

EPA Waste Number	Not available.
Treatment	Material does not have an EPA Waste Number and is not a listed waste, however consultation with a permitted waste disposal site (TSD) should be accomplished. Always contact a permitted waste disposal (TSD) to assure compliance with all current local, state, and Federal Regulations.

Section 14. Transport Information

DOT Classification	Proper Shipping Name: CHEMICALS, N.O.S. RQ: Not applicable.
TDG Classification	Not available.
IMO/IMDG Classification	Proper Shipping Name: CHEMICALS, N.O.S. RQ: Not applicable.
ICAO/IATA Classification	Not available.

+ Section 15. Regulatory Information

U.S. Federal Regulations	TSCA 8(b) inventory: Calcium Chloride, Dihydrate SARA 302/304/311/312 extremely hazardous substances: No products were found. SARA 302/304 emergency planning and notification: No products were found. SARA 302/304/311/312 hazardous chemicals: Calcium Chloride, Dihydrate SARA 311/312 MSDS distribution - chemical inventory - hazard identification: Calcium Chloride, Dihydrate: Immediate (Acute) Health Hazard SARA 313 toxic chemical notification and release reporting: No products were found. Clean Water Act (CWA) 307: No products were found. Clean Water Act (CWA) 311: No products were found. Clean air act (CAA) 112 accidental release prevention: No products were found. Clean air act (CAA) 112 regulated flammable substances: No products were found.
--------------------------	---

WHMIS (Canada)	Clean air act (CAA) 112 regulated toxic substances: No products were found.
	Class D-2B: Material causing other toxic effects (TOXIC).
	CEPA DSL: CALCIUM CHLORIDE
	This product has been classified in accordance with the hazard criteria of the Controlled Product Regulations and the MSDS contains all required information.
International Regulations	
EINECS	Not available.
DSCL (EEC)	R38- Irritating to skin.
	R41- Risk of serious damage to eyes.
International Lists	Australia (NICNAS): Calcium Chloride, Dihydrate
	Japan (MITI): Calcium Chloride, Dihydrate
	Philippines (RA6969): Calcium Chloride, Dihydrate
	China: No products were found.
State Regulations	No products were found.
	California prop. 65: No products were found.

Section 16. Other Information

National Fire	0	Fire Hazard
Protection	0 0	Reactivity
Association		Specific Hazard
(U.S.A.)		

Changed Since Last Revision +

Notice to Reader

The statements contained herein are based upon technical data that EMD Chemicals Inc. believes to be reliable, are offered for information purposes only and as a guide to the appropriate precautionary and emergency handling of the material by a properly trained person having the necessary technical skills. Users should consider these data only as a supplement to other information gathered by them and must make independent determinations of suitability and completeness of information from all sources to assure proper use, storage and disposal of these materials and the safety and health of employees and customers and the protection of the environment. EMD CHEMICALS INC. MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE, WITH RESPECT TO THE INFORMATION HEREIN OR THE PRODUCT TO WHICH THE INFORMATION REFERS.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	B-3, D-2B		

Section 1. Chemical Product and Company Identification

Product Name	DIESEL FUEL	Code	W104, W293 SAP: 120, 121, 122, 287
Synonym	Diesel 50, Diesel 50 LS, #1 Diesel, #1 Diesel LS, Diesel LC, Seasonal Diesel, Seasonal Diesel LS, Diesel AA, Domestic Marine Diesel, International marine Diesel, Seasonal Diesel Locomotive, Domestic Marine diesel LS, diesel -20°C (LS), LSD, Low Sulphur Diesel, dyed diesel, marked diesel, coloured diesel, Naval Distillate, Ultra Low Sulphur Diesel, ULS Diesel, Mining Diesel, Mining Diesel Special, Mining Diesel Special LS, High Flash Mining Diesel, Furnace Oil, Stove Oil.	Validated on	2/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Diesel oil.	68334-30-5	>99.9	100 mg/m ³ (as total hydrocarbons) *	Not established	Not established
2) Proprietary additives.	Not available	<0.1	Not established	Not established	Not established
Aromatic content is 50% maximum (benzene: nil). Sulphur content is 0-0.50%.					
Manufacturer Recommendation	* Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	LOWER: 0.7%, UPPER: 6% (NFPA)
Flash Points	Diesel Fuel: Closed Cup: >40°C (>104°F) Marine Diesel Fuel: Closed Cup: >60°C (>140°F) Mining Diesel: Closed Cup: 52°C (126°F)	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Vapour explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), water vapour (H ₂ O), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible).</p> <p>CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam.</p> <p>LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk.</p> <p>Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Wear proper personal protective equipment (See Section 8).
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Bright oily liquid.	Viscosity	1.3 - 4.1 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown (may be dyed for taxation purposes).	Pour Point	Variable, -50°C to 0°C (-58°F to -32°F)
Odour	Petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150 - 371°C (302-700°F)	Penetration	Not applicable.
Density	0.80 - 0.85 kg/L @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not applicable.
Vapour Pressure	Not available	Dispersion Properties	Not available
Volatility	Semivolatile to volatile.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, H2O, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Acute oral toxicity (LD50): 7500 mg/kg (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at $\geq 1\%$) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations)
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Eye Irritation/Inflammation:	This product contains a component (at $\geq 1\%$) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Diesel oil] (See Other Considerations)
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.

Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			





Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
----------------	--

Section 14. Transport Information

TDG Classification	DIESEL FUEL, 3, UN1202, PGIII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
--------------------	--	----------------------------------	--

Section 15. Regulatory Information

Other Regulations	This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																														
	All components of this formulation are listed on the US EPA-TSCA Inventory.																														
	All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																														
	This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																														
	Please contact Product Safety for more information.																														
DSD/DPD (Europe)	Not evaluated.	HCS (U.S.A.)	CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).																												
ADR (Europe) (Pictograms)	NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A.) (Pictograms)																													
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(2)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>(H)</td></tr></table>	Health Hazard	(2*)	Fire Hazard	(2)	Reactivity	(0)	Personal Protection	(H)	NFPA (U.S.A.)	<table><tr><td rowspan="4">Health</td><td rowspan="4"></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>Reactivity</td><td></td><td>1 Slight</td></tr><tr><td></td><td></td><td>2 Moderate</td></tr><tr><td></td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table> Specific hazard	Health		Fire Hazard	Rating	0 Insignificant	Reactivity		1 Slight			2 Moderate			3 High					4 Extreme	
Health Hazard	(2*)																														
Fire Hazard	(2)																														
Reactivity	(0)																														
Personal Protection	(H)																														
Health		Fire Hazard	Rating	0 Insignificant																											
		Reactivity		1 Slight																											
				2 Moderate																											
				3 High																											
				4 Extreme																											

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
------------	---

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSC - Dangerous Substances Classification and Labeling (Europe)

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)

DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 2/6/2004.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheets

[New Search](#)[Get This Document In](#)

Date Prepared: December 03, 2003
Supersedes: May 31, 2003
MSDS Number: 08524

1. PRODUCT INFORMATION

Product Identifier: TURBINE FUEL AVIATION, WIDE CUT TYPE
ESSO TURBO FUEL B
ESSO JET B
JET B
TURBO FUEL B
TURBO FUEL B F40
TURBO FUEL B JP4
ESSO TURBO FUEL B (FSII)
JET B (FSII)
AVIATION TURBINE FUEL (JP4)
CAN/CGSB-3.22 GRADE F40
ESSO JET B (FSII)

Application and Use:
Aviation turbine fuel

Product Description:

A mixture of aliphatic and aromatic hydrocarbons and additives.

REGULATORY CLASSIFICATION

WHMIS:

Class B, Division 2: Flammable Liquids.
Class D, Division 2, Subdivision A: Very Toxic Material.
Class D, Division 2, Subdivision B: Toxic Material

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):

Shipping Name: FUEL, AVIATION, TURBINE ENGINES
Class: 3
Packing Group: II
PIN Number: UN1863
Marine Pollutant: Not applicable

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

MANUFACTURER/SUPPLIER:

Emergency 24 hr. (519) 339-2145 IMPERIAL OIL
Technical Info. (800) 268-3183 Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Kerosene, straight run	40-70 V/V	8008-20-6 LD50:>5g/kg,oral, rat
Naphtha, full range	30-60 V/V	64741-42-0
Diethylene glycol monomethyl ether	0-0.15 V/V	111-77-3 LD50:7g/kg,orl, rat LD50:>2.0/kg,skn.rbt

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: 0.60 cSt at 40 deg C
Vapour Density: 4
Boiling Point: 40 to 270 deg C
Evaporation rate: <1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -58 deg C ASTM D 2386
Odour Threshold: not available
Vapour Pressure: 21 kPa at 38 deg C
Density: 0.78 g/cc at 15 deg C
Appearance/odour: White or pale yellow liquid, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
High vapour concentrations are irritating to the eyes, nose, throat and lungs; may cause headaches and dizziness; may be anesthetic and may cause other central nervous system effects.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Irritating.

Frequent or prolonged contact may irritate the skin and cause a skin rash (dermatitis).

Low toxicity.

INGESTION:

Low toxicity.

Small amounts of this liquid drawn into the lungs from swallowing or vomiting may cause severe health effects (e.g. bronchopneumonia or pulmonary edema).

CHRONIC:

Contains benzene. Human health studies (epidemiology) indicate that prolonged and/or repeated overexposures to benzene may cause damage to the blood producing system and serious blood disorders, including leukemia.

Animal tests suggest that prolonged and/or repeated overexposures to benzene may damage the embryo/fetus. The relationship of these animal studies to humans has not been fully established.

Contains n-hexane. Prolonged and/or repeated exposures may cause damage to the peripheral nervous system (e.g. fingers, feet, arms etc.).

Contains diethylene glycol monomethyl ether (DIEGME). Prolonged and repeated exposure through inhalation or extensive skin contact with DIEGME may result in toxic effects on the kidneys, the reproductive system and/or the embryo/fetus.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral	:	LD50 > 5000 mg/kg	(Rat)
Dermal	:	LD50 > 2000 mg/kg	(Rabbit)
Inhalation	:	LC50 > 2500 mg/m3	(Rat)

OCCUPATIONAL EXPOSURE LIMIT:

Manufacturer Recommends:

100 ppm based on composition.

ACGIH recommends:

For n-Hexane (skin), 50 ppm (176 mg/m3).

For Benzene, ACGIH recommends a TWA of 0.5 ppm (1.6 mg/m3), (skin), and categorizes it as a confirmed human carcinogen.

Local regulated limits may vary.

5. FIRST AID MEASURES**INHALATION:**

In emergency situations use proper respiratory protection to immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Immediately flush with large amounts of water. Use soap if available. Remove contaminated clothing, including shoes, after flushing has begun. If irritation persists, seek medical attention.

INGESTION:

DO NOT induce vomiting since it is important that no amount of the material should enter the lungs (aspiration). Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES**PERSONAL PROTECTION:**

The selection of personal protective equipment varies, depending upon conditions of use.
In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.
Where only incidental contact is likely, wear safety goggles, long sleeves, and chemical-resistant gloves.
Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces. Use explosion-proof ventilation equipment.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Store and load at normal (up to 38 deg C) temperature and at atmospheric pressure. Material will accumulate static charges which may cause a spark. Static charge build-up could become an ignition source. Use proper relaxation and grounding procedures.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Vapours or dust may be harmful or fatal. Warn occupants of downwind areas.

Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Do not use combustible materials such as sawdust.

Recover by pumping (use an explosion proof motor or hand pump), or by using a suitable absorbent.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Eliminate all sources of ignition. Vapours or dust may be harmful or fatal. Warn occupants and shipping in downwind areas. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: -18 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: 0.6% UEL: 8.0%

GENERAL HAZARDS:

Extremely flammable; material will readily ignite at normal temperatures. Flammable Liquid; may release vapours that form flammable mixtures at or above the flash point.

Decomposes; flammable/toxic gases will form at elevated temperatures (thermal decomposition).

Toxic gases will form upon combustion.

Static Discharge; material may accumulate static charges which may cause a fire.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire if possible to do so without hazard. If a leak or spill has not ignited use water spray to disperse the vapours.

Either allow fire to burn out under controlled conditions or extinguish with foam or dry chemical. Try to cover liquid spills with foam.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

In addition, small amounts of nitrogen oxides will be formed.

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents. Use product with caution around heat, sparks, pilot lights, static electricity and open flames.

HAZARDOUS DECOMPOSITION:

See: Hazardous Combustion Products

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 31 May 2003, this MSDS has been revised in Section(s):

2

10. PREPARATION

Date Prepared: December 03, 2003

Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose

or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

Emergency Numbers

© Copyright 2001 Exxon Mobil Corporation. All Rights Reserved.

P

Material Safety Data Sheet

SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

Chevron Delo ® 300 Motor Oil

Product Use: Engine Oil

Product Number(s): CPS224603, CPS224604

Synonyms: Chevron Delo ® 300 Motor Oil SAE 30, Chevron Delo® 300 Motor Oil SAE 40

Company Identification

ChevronTexaco Global Lubricants

A Division of Texaco Products Inc.

6975-A Pacific Circle

Mississauga, ONT L5T 2H3

Canada

www.chevron-lubricants.com

Transportation Emergency Response

CHEMTREC: (800) 424-9300 or (703) 527-3887

Health Emergency

ChevronTexaco Emergency Information Center: Located in the USA. International collect calls accepted. (800) 231-0623 or (510) 231-0623

Product Information

email : lubemsds@chevrontexaco.com

Product Information: (800) LUBE TEK

MSDS Requests: (800) 414-6737

SECTION 2 COMPOSITION/ INFORMATION ON INGREDIENTS

COMPONENTS	CAS NUMBER	AMOUNT
Highly refined mineral oil (C15 - C50)	Mixture	80 - 100 %weight
Zinc dialkyldithiophosphate	68649-42-3	1 - 5 %weight

Information on ingredients that are considered Controlled Products and/or that appear on the WHMIS Ingredient Disclosure List (IDL) is provided as required by the Canadian Hazardous Products Act (HPA, Sections 13 and 14). Ingredients considered hazardous under the OSHA Hazard Communication Standard, 29 CFR 1910.1200, are also listed. See Section 15 for additional regulatory information.

SECTION 3 HAZARDS IDENTIFICATION

IMMEDIATE HEALTH EFFECTS

Eye: Not expected to cause prolonged or significant eye irritation.

Skin: Contact with the skin is not expected to cause prolonged or significant irritation. Not expected to be harmful to internal organs if absorbed through the skin.

Ingestion: Not expected to be harmful if swallowed.

Inhalation: Not expected to be harmful if inhaled. Contains a petroleum-based mineral oil. May cause respiratory irritation or other pulmonary effects following prolonged or repeated inhalation of oil mist at airborne levels above the recommended mineral oil mist exposure limit. Symptoms of respiratory irritation may include coughing and difficulty breathing.

SECTION 4 FIRST AID MEASURES

Eye: No specific first aid measures are required. As a precaution, remove contact lenses, if worn, and flush eyes with water.

Skin: No specific first aid measures are required. As a precaution, remove clothing and shoes if contaminated. To remove the material from skin, use soap and water. Discard contaminated clothing and shoes or thoroughly clean before reuse.

Ingestion: No specific first aid measures are required. Do not induce vomiting. As a precaution, get medical advice.

Inhalation: No specific first aid measures are required. If exposed to excessive levels of material in the air, move the exposed person to fresh air. Get medical attention if coughing or respiratory discomfort occurs.

SECTION 5 FIRE FIGHTING MEASURES

FLAMMABLE PROPERTIES:

Flashpoint: (Cleveland Open Cup) 215 °C (419 °F) (Min)

Autoignition: No Data Available

Flammability (Explosive) Limits (% by volume in air): Lower: Not Applicable Upper: Not Applicable

EXTINGUISHING MEDIA: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

PROTECTION OF FIRE FIGHTERS:

Fire Fighting Instructions: This material will burn although it is not easily ignited. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus.

Combustion Products: Highly dependent on combustion conditions. A complex mixture of airborne solids, liquids, and gases including carbon monoxide, carbon dioxide, and unidentified organic compounds will be evolved when this material undergoes combustion.

SECTION 6 ACCIDENTAL RELEASE MEASURES

Protective Measures: Eliminate all sources of ignition in vicinity of spilled material.

Spill Management: Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable regulations.

Reporting: Report spills to local authorities as appropriate or required.

SECTION 7 HANDLING AND STORAGE

Precautionary Measures: Keep out of the reach of children.

General Handling Information: Avoid contaminating soil or releasing this material into sewage and drainage systems and bodies of water.

Static Hazard: Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary but may not, by themselves, be sufficient. Review all operations which have the potential of generating and accumulating an electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures. For more information, refer to OSHA Standard 29 CFR 1910.106, 'Flammable and Combustible Liquids', National Fire Protection Association (NFPA 77, 'Recommended Practice on Static Electricity', and/or the American Petroleum Institute (API) Recommended Practice 2003, 'Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents'.

Container Warnings: Container is not designed to contain pressure. Do not use pressure to empty container or it may rupture with explosive force. Empty containers retain product residue (solid, liquid, and/or vapor) and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, static electricity, or other sources of ignition. They may explode and cause injury or death. Empty containers should be completely drained, properly closed, and promptly returned to a drum reconditioner or disposed of properly.

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

GENERAL CONSIDERATIONS:

Consider the potential hazards of this material (see Section 3), applicable exposure limits, job activities, and other substances in the work place when designing engineering controls and selecting personal protective equipment. If

engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, the personal protective equipment listed below is recommended. The user should read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances.

ENGINEERING CONTROLS:

Use in a well-ventilated area.

PERSONAL PROTECTIVE EQUIPMENT

Eye/Face Protection: No special eye protection is normally required. Where splashing is possible, wear safety glasses with side shields as a good safety practice.

Skin Protection: No special protective clothing is normally required. Where splashing is possible, select protective clothing depending on operations conducted, physical requirements and other substances in the workplace. Suggested materials for protective gloves include: 4H (PE/EVAL), Nitrile Rubber, Silver Shield, Viton.

Respiratory Protection: No respiratory protection is normally required.

If user operations generate an oil mist, determine if airborne concentrations are below the occupational exposure limit for mineral oil mist. If not, wear an approved respirator that provides adequate protection from the measured concentrations of this material. For air-purifying respirators use a particulate cartridge.

Use a positive pressure air-supplying respirator in circumstances where air-purifying respirators may not provide adequate protection.

Occupational Exposure Limits:

Component	Agency	TWA	STEL	Ceiling	Notation
Highly refined mineral oil (C15 - C50)	ACGIH	5 mg/m3	10 mg/m3	--	--

NOTE ON OCCUPATIONAL EXPOSURE LIMITS: Consult local authorities for acceptable provincial values in Canada. Consult the Canadian Standards Association Standard 94.4-2002 Selection, Use and Care of Respirators.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Attention: the data below are typical values and do not constitute a specification.

Color: Brown

Physical State: Liquid

Odor: Petroleum odor

pH: Not Applicable

Vapor Pressure: <0.01 mmHg @ 37.8 °C (100 °F)

Vapor Density (Air = 1): >1

Boiling Point: >315 °C (599°F)

Solubility: Soluble in hydrocarbons; insoluble in water

Freezing Point: Not Applicable

Melting Point: Not Applicable

Specific Gravity: 0.89 @ 15.6 °C (60.1°F) / 15.6°C (60.1°F)

Viscosity: 11.7 cSt @ 100 °C (212°F) (Min)

Odor Threshold: No Data Available

Coefficient of Water/Oil Distribution: No Data Available

SECTION 10 STABILITY AND REACTIVITY

Chemical Stability: This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

Incompatibility With Other Materials: May react with strong acids or strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

Hazardous Decomposition Products: None known (None expected)

Hazardous Polymerization: Hazardous polymerization will not occur.

Sensitivity to Mechanical Impact: No.

SECTION 11 TOXICOLOGICAL INFORMATION

IMMEDIATE HEALTH EFFECTS

Eye Irritation: The eye irritation hazard is based on evaluation of data for similar materials or product components.

Skin Irritation: The skin irritation hazard is based on evaluation of data for similar materials or product components.

Skin Sensitization: No product toxicology data available.

Acute Dermal Toxicity: LD50: >5g/kg (rabbit). The acute dermal toxicity hazard is based on evaluation of data for similar materials or product components.

Acute Oral Toxicity: LD50: >5 g/kg (rat) The acute oral toxicity hazard is based on evaluation of data for similar materials or product components.

Acute Inhalation Toxicity: The acute inhalation toxicity hazard is based on evaluation of data for similar materials or product components. For additional information on the acute toxicity of the components, call the technical information center.

ADDITIONAL TOXICOLOGY INFORMATION:

This product contains petroleum base oils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils requires a cancer warning under the OSHA Hazard Communication Standard (29 CFR 1910.1200). These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as; carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A), or possibly carcinogenic to humans (Group 2B). These oils have not been classified by the American Conference of Governmental Industrial Hygienists (ACGIH) as: confirmed human carcinogen (A1), suspected human carcinogen (A2), or confirmed animal carcinogen with unknown relevance to humans (A3).

During use in engines, contamination of oil with low levels of cancer-causing combustion products occurs. Used motor oils have been shown to cause skin cancer in mice following repeated application and continuous exposure. Brief or intermittent skin contact with used motor oil is not expected to have serious effects in humans if the oil is thoroughly removed by washing with soap and water.

SECTION 12 ECOLOGICAL INFORMATION**ECOTOXICITY**

The toxicity of this material to aquatic organisms has not been evaluated. Consequently, this material should be kept out of sewage and drainage systems and all bodies of water.

ENVIRONMENTAL FATE

This material is not expected to be readily biodegradable.

SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. Oil collection services are available for used oil recycling or disposal. Place contaminated materials in containers and dispose of in a manner consistent with applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods. (See B.C. Reg. GY/92 Waste Management Act; R.R.O. 1990, Reg. 347 General-Waste Management; C.C.S.M.c. W40 The Waste Reduction and Prevention Act; N.S. Reg. 51/95 and N.S. Reg. 179/96 for examples of Provincial legislation.)

SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

TC Shipping Description: NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORTATION UNDER TDG REGULATIONS

DOT Shipping Description: PETROLEUM LUBRICATING OIL

SECTION 15 REGULATORY INFORMATION

REGULATORY LISTS SEARCHED:

01-1=IARC Group 1
01-2A=IARC Group 2A
01-2B=IARC Group 2B
35=WHMIS IDL

No components of this material were found on the regulatory lists above.

CHEMICAL INVENTORIES:

All components comply with the following chemical inventory requirements: AICS (Australia), DSL (Canada), EINECS (European Union), ENCS (Japan), KECI (Korea), PICCS (Philippines), TSCA (United States).

One or more components does not comply with the following chemical inventory requirements: IECSC (China).

WHMIS CLASSIFICATION:

This product is not considered a controlled product according to the criteria of the Canadian Controlled Products Regulations.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all of the information required by those regulations. (See Hazardous Products Act (HPA), R.S.C. 1985, c.H-3,s.2).

MSDS PREPARATION:

This Material Safety Data Sheet has been prepared by the Toxicology and Health Risk Assessment Unit, ERTC, P.O. Box 1627, Richmond, CA 94804, (888)676-6183.

Revision Date: 09/30/2004

SECTION 16 OTHER INFORMATION

HMIS RATINGS: Health: 1 Flammability: 1 Reactivity: 0

LABEL RECOMMENDATION:

Label Category : ENGINE OIL 1

REVISION STATEMENT: This is a new Material Safety Data Sheet.

ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:

TLV - Threshold Limit Value	TWA - Time Weighted Average
STEL - Short-term Exposure Limit	PEL - Permissible Exposure Limit
	CAS - Chemical Abstract Service Number
ACGIH - American Conference of Government Industrial Hygienists	IMO/IMDG - International Maritime Dangerous Goods Code
API - American Petroleum Institute	MSDS - Material Safety Data Sheet
CVX - ChevronTexaco	NFPA - National Fire Protection Association (USA)
DOT - Department of Transportation (USA)	NTP - National Toxicology Program (USA)
IARC - International Agency for Research on Cancer	OSHA - Occupational Safety and Health Administration

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and

with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.



MATERIAL SAFETY DATA SHEET

Date Prepared: April 06, 2002
Supersedes: January 08, 1999
MSDS Number: 08259

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 32

Application and Use:
Hydraulic fluid

Product Description:

Mixture of paraffinic and naphthenic hydrocarbons (saturated and unsaturated), and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: 32.00 cSt at 40 deg C
Vapour Density: not available
Boiling Point: 229 to 512 deg C
Evaporation rate: <0.1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -42 deg C ASTM D97
Odour Threshold: not available
Vapour Pressure: <1 kPa at 38 deg C
Density: 0.87 g/cc at 15 deg C
Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use. In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves. Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Recover by pumping or by using a suitable absorbant. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 165 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

THREE YEAR WHMIS REVIEW.

10. PREPARATION

Date Prepared: April 06, 2002

Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario

M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: April 06, 2002
Supersedes: January 08, 1999
MSDS Number: 08258

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 22

Application and Use:
Hydraulic fluid

Product Description:

Mixture of paraffinic and naphthenic hydrocarbons (saturated and unsaturated), and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: 22.00 cSt at 40 deg C
Vapour Density: not available
Boiling Point: 229 to 512 deg C
Evaporation rate: <0.1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -48 deg C ASTM D97
Odour Threshold: not available
Vapour Pressure: <1 kPa at 38 deg C
Density: 0.87 g/cc at 15 deg C
Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. Do not handle or store near an open flame, sources of heat, or sources of ignition.

In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard.

Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth.

Recover by pumping or by using a suitable absorbant.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 150 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide under thermal decomposition.

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

THREE YEAR WHMIS REVIEW.

10. PREPARATION

Date Prepared: April 06, 2002

Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division

111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: November 14, 2003
Supersedes: September 17, 1998
MSDS Number: 08366

1. PRODUCT INFORMATION

Product Identifier: UNIREX LOTEMP MOLY GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL), exempt, or have been notified under CEPA.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: <20.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: not available
 Evaporation rate: <1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: 245 deg C ASTM D97
 Odour Threshold: not available
 Vapour Pressure: 0.002 kPa at 20 deg C
 Density: 0.92 g/cc at 15 deg C
 Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.
 High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.
 Small amounts of this liquid drawn into the lungs from swallowing or vomiting may cause severe health effects (e.g. bronchopneumonia or pulmonary edema).

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For insoluble Molybdenum compounds, 10 mg/m3.

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

DO NOT induce vomiting since it is important that no amount of the material should enter the lungs (aspiration). Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon

conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care.

Store in a cool, well ventilated place away from incompatible materials.

In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Store and load at normal (up to 38 deg C) temperature and at atmospheric pressure.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard.

Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth.

Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately.

Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: >110 deg C COC ASTM D92 est.baseoil

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Decomposes; flammable/toxic gases will form at elevated temperatures (thermal decomposition).

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

Fumes, smoke, carbon monoxide and sulphur oxides in case of incomplete combustion

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 17 September 1998, this MSDS has been revised in Section(s):
1, 7

10. PREPARATION

Date Prepared: November 14, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

SECTION 1 – PRODUCT INFORMATION

Product Name: Propane
Trade Name: LPG (Liquified Petroleum Gas), LP-Gas
Chemical Formula: C₃H₈

WHMIS CLASSIFICATION
 Class A - Compressed Gas
 Class B, Division 1 - Flammable Gas

Supplier: Superior Propane Inc.
 1111 - 49th Avenue N.E.
 Calgary, AB T2E 8V2
Business: (403) 730-7500

Local Market
Emergency Number: _____
 (Non Medical)

Application and Use: Propane is commonly used as a fuel for heating, cooking, automobiles, forklift trucks, crop drying and welding and cutting operations. Propane is used in industry as a refrigerant, solvent and as a chemical feedstock.

SECTION 2 – HAZARDOUS INGREDIENTS

COMPONENTS	CAS NO.	% Volume (v/v)	LD50
Propane	74 -98-6	90% - 99%	Not Applicable
Propylene	115 -07-1	0% - 5%	Not Applicable
Ethane	74 -84-0	0% - 5%	Not Applicable
Butane and heavier hydro carbons	106 -97-8	0% - 2.5%	Not Applicable

Occupational Exposure Limit:

Based upon animal test data, the acute toxicity of this product is expected to be inhalation: 4 hour LC50 = 280,000 ppm (Rat).

Note: Composition is typical for HD-5 Propane per The Canadian General Standard Board CGSB 3.14 National Standard of Canada. Exact composition will vary from shipment to shipment.

SECTION 3 – CHEMICAL AND PHYSICAL DATA

Form: Liquid and vapour while stored under pressure.
Boiling Point: -42°C @ 1 atm.
Freezing Point: -188°C
Evaporation Rate: Rapid (Gas at normal ambient conditions).
Vapour Pressure: 1435 kPa (maximum) @ 37.8°C
Vapour Density: 1.52 (Air = 1)
Coefficient of Water/Oil Distribution: Not available.
pH: Not available.

Solubility in water: Slight, 6.1% by volume @ 17.8°C

Specific Gravity: 0.51 (water = 1)

Appearance/Odour: Colourless liquid and vapour while stored under pressure. Colourless and odourless gas in natural state at any concentration. Commercial propane has an odourant added, ethyl mercaptan, which has an odour similar to boiling cabbage.*

Odour Threshold: 4800 ppm

* With proper handling, transportation and storage, adding a chemical odourant such as eth-merc has proven to be a very effective warning device, but all odourants have certain limitations. The effectiveness of the odourant may be diminished by a person's sense of smell, by competing odours and by oxidation which may cause a potentially dangerous situation.

SECTION 4 – FIRE OR EXPLOSION HAZARD

Flash Point: -103.4°C
Method: Closed cup.
Flammable Limits: Lower 2.4%, Upper 9.5%
Auto Ignition Temperature: 432°C
Products Evolved Due To Heat Or Combustion: Carbon monoxide can be produced when primary air and secondary air are deficient while combustion is taking place.
Fire and Explosive Hazards: Explosive air-vapour mixtures may form if allowed to leak to atmosphere.
Sensitivity To Impact: No.
Sensitivity To Static Discharge: Yes.

Fire Extinguishing Precautions: Use water spray to cool exposed cylinders or tanks. Do not extinguish fire unless the source of the escaping gas that is fueling the fire can be turned off. Fire can be extinguished with carbon dioxide and/or dry chemical (BC). Container metal shells require cooling with water to prevent flame impingement and the weakening of metal. If sufficient water is not available to protect the container shell from weakening, the area will be required to be evacuated. If gas has not ignited, liquid or vapour may be dispersed by water spray or flooding.

Special Fire Fighting Equipment: Protective clothing, hose monitors, fog nozzles, self-contained breathing apparatus.

SECTION 5 – REACTIVITY DATA

Stability: Stable.
Conditions To Avoid: Keep separate from oxidizing agents. Gas explodes spontaneously when mixed with chloride dioxide.
Incompatibility: Remove sources of ignition and observe distance requirements for storage tanks from combustible material, drains and openings to building.

Hazardous Decomposition Products: Deficient primary and secondary air can produce carbon monoxide.

Hazardous Polymerization: Will not occur.

SECTION 6 – TOXICOLOGICAL PROPERTIES OF MATERIAL

ROUTES OF ENTRY:

Inhalation: Simple asphyxiant. No effect at concentrations of 10,000 ppm (peak exposures). Higher concentrations may cause central nervous system disorder and/or damage. Lack of oxygen may cause dizziness, loss of coordination, weakness, fatigue, euphoria, mental confusion, blurred vision, convulsions, breathing failure, coma and death. Breathing high vapour concentrations (saturated vapours) for a few minutes may be fatal. Saturated vapours may be encountered in confined spaces and/or under conditions of poor ventilation. Avoid breathing vapours or mist.

Skin and Eye Contact: Exposure to vapourizing liquid may cause frostbite (cold burns) and permanent eye damage.

Ingestion: Not considered to be a hazard.

Acute Exposure: The acute toxicity of this product is expected to be inhalation: 4 hour LC50=280,000ppm (Rat).

Chronic Exposure: There are no reported effects from long term low level exposure.

Sensitization to Product: Skin–unknown, Respiratory–unknown.

Occupational Exposure Limits: American Conference of Governmental Industrial Hygienists (ACGIH) lists as a simple asphyxiant. ACGIH TLV: 1000 ppm.

Carcinogenicity, Reproductive Toxicity, Teratogenicity, Mutagenicity: No effects reported.

SECTION 7 – PREVENTIVE MEASURES

Eyes: Safety glasses, are recommended when transferring product.

Skin: Insulated gloves required if contact with liquid or liquid cooled equipment is expected. Wear gloves and long sleeves when transferring product.

Inhalation: Where concentration in air would reduce the oxygen level below 18% air or exceed occupational exposure limits in section 6, self-contained breathing apparatus is required.

Ventilation: Explosion proof ventilation equipment required in confined spaces.

SECTION 8 – EMERGENCY AND FIRST AID PROCEDURES

FIRST AID:

Eyes: Should eye contact with liquid occur, flush eyes with lukewarm water for 15 minutes. Obtain immediate medical care.

Skin: In case of “Cold Burn” from contact with liquid, immediately place affected area in lukewarm water and keep at this temperature until circulation returns. If fingers or hands are frostbitten, have the victim hold his hand next to his body such as under the armpit. Obtain immediate medical care.

Ingestion: None considered necessary.

Inhalation: Remove person to fresh air. If breathing is difficult or has stopped, administer artificial respiration. Obtain immediate medical care.

SPILL OR LEAK:

Eliminate leak if possible.

Eliminate source of ignition.

Ensure cylinder is upright.

Disperse vapours with hose streams using fog nozzles. Monitor low areas as propane is heavier than air and can settle into low areas. Remain upwind of leak. Keep people away. Prevent vapour and/or liquid from entering into sewers, basements or confined areas.

SECTION 9 – TRANSPORTATION, HANDLING AND STORAGE

- Transport and store cylinders and tanks secured in an upright position in a ventilated space away from ignition sources (so the pressure relief valve is in contact with the vapour space of the cylinder or tank).
- Cylinders that are not in use must have the valves in the closed position and be equipped with a protective cap or guard.
- Do not store with oxidizing agents, oxygen, or chlorine cylinders.

- Empty cylinders and tanks may contain product residue. Do not pressurize, cut, heat or weld empty containers.
- Transport, handle and store according to applicable federal and provincial codes and regulations.

Transportation of Dangerous Goods (TDG)

- TDG Classification: Flammable Gas 2.1
- TDG Shipping Name: Liquefied Petroleum Gas (Propane)
- TDG Special Provisions: 56, 90, 102
- PIN Number: UN1075

SECTION 10 – PREPARATION

Superior Propane Inc., Regulations & Safety Department. (403) 730-7500 Date prepared: November 2001.
Supersedes: September 1999.

The information contained herein is believed to be accurate. It is provided independently of any sale of the product. It is not intended to constitute performance information concerning the product. No express warranty, implied warranty of merchantability or fitness for a particular purpose is made with respect to the product information contained herein.

MATERIAL SAFETY DATA SHEET

SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product Name: Portland Cement, GU (General use hydraulic cement, formerly Normal Portland Cement), HE (High early-strength hydraulic cement) and HS (High sulphate-resistant hydraulic cement).

CAS #: 65997-15-1

Product Use: Preparation of concrete and mortar.

MSDS Information: This MSDS was produced in November, 2002, and replaces any previous versions. This MSDS covers all types of portland cement. Individual composition of constituents will vary within the range shown in Section 2.

Product Code: Not Applicable.

Chemical Family: Calcium compounds. Calcium silicate compounds and other calcium compounds containing iron and aluminum make up the majority of this product.

Chemical Name And Synonyms: Portland cement. Portland cement is also known as hydraulic cement and/or normal portland cement.

Formula: This product consists of finely ground portland cement clinker, gypsum and limestone (for some products).

Supplier/Manufacturer: Lehigh Inland Cement Limited
P.O. Box 3961, Station D,
12640 - 156 Street
Edmonton, Alberta, Canada, T5L 4P5
Telephone (780) 420 2500

Emergency Contact Information: Lehigh Inland Cement Limited
P.O. Box 3961, Station D,
12640 - 156 Street
Edmonton, Alberta, Canada, T5L 4P5
Telephone (780) 420 2541

SECTION 2 - COMPOSITION/INFORMATION ON INGREDIENTS

Portland Cement Exposure Limits:

ACGIH TLV-TWA	10 mg total dust/m ³
OSHA PEL-TWA	15 mg total dust/m ³
OSHA PEL-TWA	5 mg respirable dust/m ³

Portland Cement Ingredients & Their Exposure Limits:

Ingredient	CAS#	% By Weight	ACGIH TLV-TWA	OSHA PEL-TWA
Calcium Silicates	various	60-80%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Gypsum	7778-18-9	3-7%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Crystalline Silica	14808-60-7	less than 0.1%	0.10 mg respirable quartz/m ³ NIOSH REL (8-hour TWA) = 0.05 mg respirable quartz dust/m ³	(10 mg respirable dust/m ³)/(percent silica+2)
Calcium Carbonate	1317-65-3	0-5%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Magnesium Oxide	1309-48-4	1-4%	10 mg total dust/m ³	10 mg total dust/m ³
Calcium Oxide	1305-78-8	0.5-1.5%	2 mg total dust/m ³	5 mg total dust/m ³

Trace Elements:

Portland cement is made from materials mined from the earth and is processed using energy provided by fuels. Trace amounts of chemicals, some of which may be potentially harmful, might be detected during chemical analysis. For example, in addition to the ingredients listed above, portland cement may contain potassium and sodium sulfate compounds, chromium compounds (including up to 0.003% hexavalent chromium) and nickel compounds.

MATERIAL SAFETY DATA SHEET

SECTION 3 - HAZARDS IDENTIFICATION

Emergency Overview:

Portland cement is a light gray powder that poses little immediate hazard. A single short term exposure to the dry powder is not likely to cause serious harm. However, exposure of sufficient duration to wet portland cement can cause serious, potentially irreversible tissue (skin or eye) destruction in the form of chemical (caustic) burns, including third degree burns. The same type of tissue destruction can occur if wet or moist areas of the body are exposed for sufficient duration to dry portland cement.

Potential Health Effects:

- **Relevant routes of exposure are:**

Eye contact, skin contact, inhalation, and ingestion.

Effects Resulting From EYE CONTACT:

Exposure to airborne dust may cause immediate or delayed irritation or inflammation.

Eye contact by larger amounts of dry powder or splashes of wet portland cement may cause effects ranging from moderate eye irritation to chemical burns and blindness. Such exposures require immediate first aid (see Section 4) and medical attention to prevent significant damage to the eye.

Effects Resulting From SKIN CONTACT:

Discomfort or pain cannot be relied upon to alert a person to a hazardous skin exposure. Consequently, the only effective means of avoiding skin injury or illness involves minimizing skin contact, particularly contact with wet cement. Exposed persons may not feel discomfort until hours after the exposure has ended and significant injury has occurred.

Exposure to dry portland cement may cause drying of the skin with consequent mild irritation or more significant effects attributable to aggravation of other conditions. Dry portland cement contacting wet skin or exposure to moist or wet portland cement may cause more severe skin effects including thickening, cracking, or fissuring of the skin. Prolonged exposure can cause severe skin damage in the form of (caustic) chemical burns.

Some individuals may exhibit an allergic response upon exposure to portland cement, possibly due to trace amounts of chromium. The response may appear in a variety of forms ranging from a mild rash to severe skin ulcers. Persons already sensitized may react to their first contact with the product. Other persons may first experience this effect after years of contact with portland cement products.

Effects Resulting From INHALATION:

Portland cement may contain trace amounts of crystalline silica. Prolonged exposure to respirable free crystalline silica may aggravate other lung conditions. It also may cause delayed lung injury including silicosis, a disabling and potentially fatal lung disease, and/or other diseases. (Also see "Carcinogenic Potential" below.)

Exposure to portland cement may cause irritation to the moist mucous membranes of the nose, throat, and upper respiratory system. It may also leave unpleasant deposits in the nose.

Effects Resulting From INGESTION:

Although small quantities of dust are not known to be harmful, ill effects are possible if larger quantities are consumed. Portland cement should not be eaten.

- **Carcinogenic Potential:**

Portland cement is not listed as a carcinogen by NTP, OSHA, or IARC. It may, however, contain trace amounts of substances listed as carcinogens by these organizations.

Crystalline silica, a potential trace level contaminant in portland cement, is now classified by IARC as a known human carcinogen (Group 1). NTP has characterized respirable silica as "reasonably anticipated to be [a] carcinogen".

- **Medical Conditions That May Be Aggravated By Inhalation Or Dermal Exposure:**

Pre-existing upper respiratory and lung diseases.
Unusual (hyper) sensitivity to hexavalent chromium (chromium⁺⁶) salts.

MATERIAL SAFETY DATA SHEET**SECTION 4 - FIRST-AID MEASURES****Eyes:**

Immediately flush eyes thoroughly with water. Continue flushing for at least 15 minutes, including under lids, to remove all particles. Call physician immediately.

Skin:

Wash skin with cool water and pH-neutral soap or a mild detergent intended for use on skin. Seek medical treatment in all cases of prolonged exposure to wet cement, cement mixtures, liquids from fresh cement products, or prolonged wet skin exposure to dry cement.

Inhalation Of Airborne Dust:

Remove to fresh air. Seek medical help if coughing and other symptoms do not subside. ("Inhalation" of gross amounts of portland cement requires immediate medical attention.)

Ingestion:

Do not induce vomiting. If conscious, have the victim drink plenty of water and call a physician immediately.

SECTION 5 - FIRE-FIGHTING MEASURES

Flammability:	Not Flammable.
Flash Point:	Not Applicable.
Lower Explosive Limit:	Not Applicable.
Upper Explosive Limit:	Not Applicable.
Auto ignition Temperature:	Not Applicable.
Sensitivity To Static Discharge:	Not Applicable.
Sensitivity To Impact:	Not Applicable.
Extinguishing Media:	Not Applicable.
Special Fire-Fighting Procedures:	None.
Hazardous Combustion Products:	Not Applicable.
Unusual Fire And Explosion Hazards:	Not Applicable.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Collect dry material using a scoop. Avoid actions that cause dust to become airborne. Avoid inhalation of dust and contact with skin. Wear appropriate personal protective equipment as described in Section 8.

Scrape up wet material and place in an appropriate container. Allow the material to "dry" before disposal. Do not attempt to wash portland cement down drains.

Dispose of waste material according to local, provincial, state and federal regulations.

SECTION 7 - HANDLING AND STORAGE

Keep portland cement dry until used. Normal temperatures and pressures do not affect the material.

Promptly remove dusty clothing or clothing which is wet with cement fluids and launder before reuse. Wash thoroughly after exposure to dust or wet cement mixtures or fluids.

MATERIAL SAFETY DATA SHEET

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

Eye Protection:

When engaged in activities where cement dust or wet cement or concrete could contact the eye, wear safety glasses with side shields or goggles. In extremely dusty environments and unpredictable environments, wear unvented or indirectly vented goggles to avoid eye irritation or injury. Contact lenses should not be worn when working with portland cement or fresh cement products.

Skin Protection:

Prevention is essential to avoiding potentially severe skin injury. Avoid contact with unhardened (wet) portland cement products. If contact occurs, promptly wash affected area with soap and water. Where prolonged exposure to unhardened portland cement products might occur, wear impervious clothing and gloves to eliminate skin contact. Where required, wear boots that are impervious to water to eliminate foot and ankle exposure.

Do not rely on barrier creams; barrier creams should not be used in place of gloves.

Periodically wash areas contacted by dry portland cement or by wet cement or concrete fluids with a pH-neutral soap. Wash again at the end of work. If irritation occurs, immediately wash the affected area and seek treatment. If clothing becomes saturated with wet concrete, it should be removed and replaced with clean dry clothing.

Respiratory Protection:

Avoid actions that cause dust to become airborne. Use local or general ventilation to control exposures below applicable exposure limits.

Use NIOSH/MSHA-approved (under 30 CFR 11) or NIOSH-approved (under 42 CFR 84 after July 10, 1998) respirators in poorly ventilated areas, if an applicable exposure limit is exceeded, or when dust causes discomfort or irritation.

Ventilation:

Use local exhaust or general dilution ventilation to control exposure within applicable limits.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance:	White to gray powder.
Odor:	No distinct odor.
Odor Threshold:	Not applicable.
Physical State:	Solid (powder).
pH (as a solid):	Not applicable.
pH (in water) (ASTM D 1293-95):	12 to 13
Solubility In Water:	Slightly soluble (0.1 to 1.0 %).
Vapor Pressure:	Not applicable.
Vapor Density:	Not applicable.
Boiling Point:	Not applicable (i.e., >1000°C).
Freezing Point:	Not applicable.
Melting Point:	Not applicable.
Specific Gravity (H₂O = 1.0):	3.15
Evaporation Rate:	Not applicable.
Coeff. Water/Oil Dist.:	Not applicable.

SECTION 10 - STABILITY AND REACTIVITY

Stability:	Stable
Conditions to avoid:	Unintentional contact with water.
Incompatibility:	Portland cement reacts with water to produce a caustic solution, pH 12 to pH 13. Wet portland cement is alkaline. As such it is incompatible with acids, ammonium salts and aluminum metal. Aluminum powder and other alkali and alkaline earth elements will react in wet mortar or concrete, liberating hydrogen gas. Portland cement dissolves in hydrofluoric acid producing corrosive silicon tetrafluoride gas. Silicates react with powerful oxidizers such as fluorine, chlorine, trifluoride and oxygen difluoride.

MATERIAL SAFETY DATA SHEET

SECTION 10 - STABILITY AND REACTIVITY (CONTINUED)

Hazardous Decomposition: Will not spontaneously occur. Adding water results in hydration and produces (caustic) calcium hydroxide.

Hazardous Polymerization: Will not occur.

SECTION 11 - TOXICOLOGICAL INFORMATION

Effects Of Acute Exposure:

Portland cement and wet portland cement mixtures can dry the skin, cause alkali burns and irritate the eyes and upper respiratory tract. Ingestion can cause irritation of the throat.

Effects Of Chronic Exposure:

Portland cement dust can cause inflammation of the tissue lining the interior of the nose and the cornea (white) of the eye.

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: No recognized unusual toxicity to plants or animals.

Relevant Physical And Chemical Properties: See Sections 9 and 10.

SECTION 13 - DISPOSAL CONSIDERATIONS

Dispose of waste material according to local, provincial, state and federal regulations. (Since portland cement is stable, uncontaminated material may be saved for future use.)

Dispose of bags in an approved landfill or incinerator.

SECTION 14 - TRANSPORT INFORMATION

Hazardous materials description/proper shipping name: Portland cement is not hazardous under the TDG Act (Canada) or DOT regulations (USA).

Hazard Class: Not applicable.

Identification Number: Not applicable.

Required Label Text: Not applicable.

Hazardous substances/reportable quantities (RO): Not applicable.

SECTION 15 - REGULATORY INFORMATION

Status under USDOL-OSHA Hazard Communication Rule, 29 CFR 1910.1200:

Portland cement is considered a "hazardous chemical" under this regulation, and should be part of any hazard communication program.

Status under CERCLA/Superfund, 40 CFR 117 and 302:

Not listed.

Hazard Category under SARA (Title III), Sections 311 and 312:

Portland cement qualifies as a "hazardous substance" with delayed health effects.

Status under SARA (Title III), Section 313:

Not subject to reporting requirements under Section 313.

MATERIAL SAFETY DATA SHEET

SECTION 15 - REGULATORY INFORMATION (CONTINUED)

Status under TSCA (as of May 1997):

Some substances in portland cement are on the TSCA inventory list.

Status under the Federal Hazardous Substances Act:

Portland cement is a "hazardous substance" subject to statutes promulgated under the subject act.

Status under California Proposition 65:

This product contains chemicals (trace metals) known to the State of California to cause cancer, birth defects or other reproductive harm. California law requires the manufacturer to give the above warning in the absence of definitive testing to prove the defined risks do not exist.

Status under Canadian Environmental Protection Act:

Not listed.

Status under WHMIS:

Portland cement is considered to be a hazardous material under the Hazardous Products Act as defined by the Controlled Products Regulations and is therefore subject to the labeling and MSDS requirements of the Workplace Hazardous Materials Information System (WHMIS).

This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

SECTION 16 - OTHER INFORMATION

Prepared By:	Robin Cowdrey
Approved By:	Bob Rimes
Approval Date or Revision Date:	September 1, 2004
Date Of Previous MSDS:	November 1, 2002
MSDS Number:	Not Applicable

Other Important Information:

Portland cement should only be used by knowledgeable persons. A key to using the product safely requires the user to recognize that portland cement chemically reacts with water, and that some of the intermediate products of this reaction (that is, those present while a portland cement product is "setting") pose a far more severe hazard than does portland cement itself.

While the information provided in this material safety data sheet is believed to provide a useful summary of the hazards of portland cement as it is commonly used, the sheet cannot anticipate and provide all of the information that might be needed in every situation. Inexperienced product users should obtain proper training before using this product.

In particular, the data furnished in this sheet does not address hazards that may be posed by other materials mixed with portland cement to produce portland cement products. Users should review other relevant material safety data sheets before working with this portland cement or working on portland cement products, for example, portland cement concrete.

No representations or warranties with respect to the accuracy or correctness of this information, or of any kind or nature whatsoever are given, made or intended by Lehigh Inland Cement Limited. No legal responsibility whatsoever is assumed for this information, or for any injuries or damages, however caused which may result from the use of this information. This information is offered solely for informational purposes and is subject to your own independent investigation and verification.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	TOOL JOINT COMPOUND	Code	650-774, TOOL
Synonym	Not available.	DSL	See Section 15
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	TSCA	See Section 15
Material Uses	Tool Joint Compound is used in drilling operations as a thread compound for rotary shouldered pipe connections to prevent galling and to provide a positive seal against drilling mud pressure.	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Proprietary ingredients. 2) Mica	Not available. 12001-26-2	≥90 ≤10	Not available. 3 mg/m ³	Not available. Not established	Not available. Not established

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. High pressure grease gun is capable of injecting grease through the skin. Grease gun injuries require immediate physician assessment. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Lower: 0.9%; Upper: 7%
Flash Points	Mineral Oil Blend: OPEN CUP: 250°C (482°F) (Cleveland)	Auto-Ignition Temperature	>260°C (500°F)
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), hydrocarbons, metal oxides, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.
Exposure Limits	Consult local authorities for acceptable exposure limits. This product is not expected to form a mist based on its properties and expected use.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Smooth buttery paste.	Viscosity	Mineral Oil Blend: 103.3 cSt @ 40°C, 11.5 cSt @ 100°C, VI=98
Colour	Grey.	Pour Point	Mineral Oil Blend: -15°C
Odour	Mild petroleum odour.	Softening Point	Not available.
Odour Threshold	Not available.	Dropping Point	196°C
Boiling Point	<316°C (600°F)	Penetration	280 (60 strokes)
Specific Gravity	Mineral Oil Blend: 0.8741 kg/L @ 15°C (59°F).	Oil / Water Dist. Coeff.	Not available.
Vapor Density	Not available.	Ionicity (in water)	Not available.
Vapor Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available.
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, hydrocarbons, metal oxides, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Not available.
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.

Continued on Next Page

Available in French

Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	Not available.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available.	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		


Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>										
DSD/DPD (Europe)	Not evaluated.										
DSD/DPD (Europe) (Pictograms)	<p>NOT EVALUATED FOR EUROPEAN TRANSPORT</p> <p>NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.</p>	DOT (U.S.A.) (Pictograms)									
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>1</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>	Health Hazard	1	Fire Hazard	1	Reactivity	1	Personal Protection	B	NFPA (U.S.A.)	<div><div><div>Health</div><div>1</div></div><div><div>Fire Hazard</div><div>1</div></div><div><div>Reactivity</div><div>1</div></div><div><div>Specific hazard</div><div>0</div></div></div>
Health Hazard	1										
Fire Hazard	1										
Reactivity	1										
Personal Protection	B										

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials ()
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer




IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLm - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

Information Contact Internet: www.petro-canada.ca**Lubricants:****Western Canada, telephone: 1-800-661-1199;****fax: (780) 464-9564****Ontario & Central Canada, telephone:****1-800-268-5850 and (905) 822-4222; fax:****1-800-201-6285****Quebec & Eastern Canada, telephone:****1-800-576-1686; fax: 800-201-6285****For Product Safety Information: (905) 804-4752****Prepared by Product Safety - JDW on 12/18/2002.****Data entry by Product Safety - JDW.**

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	SNOWMOBILE MOTOR OIL	Code	460-401-8, PSNOL
Synonym	Not available	Validated on	5/28/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Low ash engine oil specifically designed to lubricate two-cycle snowmobile engine		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Severely hydrotreated paraffinic oil and additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: 152°C (305.6°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid inhalation and skin contact especially when handling used oil. Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	21.1 cSt @ 40°C, 4.5 cSt @ 100°C, VI=127.
Colour	Blue-green	Pour Point	<-54°C
Odour	Mild petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.88 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, reducing agents and acids.	Decomposition Products	May release COx, NOx, aldehydes, methacrylate monomers, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.

Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations





Waste Disposal	Spent/used/waste oil may meet the requirements of a hazardous waste. Consult your local or regional authorities. Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations.
-----------------------	---

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>		
DSD/DPD (Europe)	Not classified under the Dangerous Substances or Dangerous Preparations Directives.	HCS (U.S.A.)	Not controlled under the HCS (United States).

ADR (Europe) (Pictograms) 		DOT (U.S.A) (Pictograms) 	
HMIS (U.S.A.)	Health Hazard	NFPA (U.S.A.)	Fire Hazard
			Rating
	Fire Hazard		0 Insignificant
	Reactivity		1 Slight
	Personal Protection		2 Moderate
			3 High
			4 Extreme

Section 16. Other Information

References

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials ()
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - TAR on 5/28/2001.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	DRILL ROD HEAVY GREASE	Code	650-265, DRODH
Synonym	Not available.	DSL	See Section 15
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	TSCA	See Section 15
Material Uses	This product is recommended for the lubrication of diamond drill rods.	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked, and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. High pressure grease gun is capable of injecting grease through the skin. Grease gun injuries require immediate physician assessment. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	Mineral Oil Blend: OPEN CUP: 252°C (485.6°F). (Cleveland).	Auto-Ignition Temperature	Not available.
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.
Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits. This product is not expected to form a mist based on its properties and expected use.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Paste of long fibred texture.	Viscosity	Mineral Oil Blend: 155.5 cSt @ 40°C (104°F), 14.42 cSt @ 100°C (212°F), VI=89
Colour	Dark greenish-brown	Pour Point	Mineral Oil Blend: -15°C (5°F)
Odour	Mild grease like.	Softening Point	Not available
Odour Threshold	Not available.	Dropping Point	201°C (394°F)
Boiling Point	Not available.	Penetration	234 (60 strokes)
Specific Gravity	Mineral Oil Blend: 0.8898 kg/L @ 15°C (59°F).	Oil / Water Dist. Coeff.	Not available.
Vapor Density	Not available.	Ionicity (in water)	Not available
Vapor Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available.
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not corrosive to copper.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids and alkalis.	Decomposition Products	May release COx, NOx, SOx, diphenylamine, alkenes, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available.	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		


Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>								
DSD/DPD (Europe)	Not evaluated.								
DSD/DPD (Europe) (Pictograms)	<p>NOT EVALUATED FOR EUROPEAN TRANSPORT</p> <p>NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.</p> <p>DOT (U.S.A) (Pictograms)</p>								
HMIS (U.S.A.)	<table border="1" data-bbox="402 552 688 676"> <tr><td>Health Hazard</td><td>1</td></tr> <tr><td>Fire Hazard</td><td>1</td></tr> <tr><td>Reactivity</td><td>0</td></tr> <tr><td>Personal Protection</td><td>B</td></tr> </table> <p>NFPA (U.S.A.)</p> <p>Health  Fire Hazard Reactivity Specific hazard</p>	Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B
Health Hazard	1								
Fire Hazard	1								
Reactivity	0								
Personal Protection	B								




Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
Glossary	<p>ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials () BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer</p> <p>IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLm - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System</p>
Information Contact Internet: www.petro-canada.ca	Prepared by Product Safety - JDW on 4/29/2003.
<p>Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564 Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285 Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285</p>	Data entry by Product Safety - JDW.
For Product Safety Information: (905) 804-4752	

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	PETRO-CANADA SUPREME 5W-30, 10W-30, 10W-40, 20W-50 MOTOR OIL	Code	410-344, MOSP53 410-341, MOSP13 410-342, MOSP14 410-343, MOSP25
Synonym	Not available.	Validated on	8/31/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Supreme is designed for the lubrication of all gasoline, propane and CNG engines where the manufacturer recommends the use of API SM quality oils. SAE 5W-30 and 10W-30 grades also meet the requirements of ILSAC GF-4.		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Mixture of severely hydrotreated and hydrocracked base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	OPEN CUP: 223°C (433.4°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.

Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), calcium oxides (CaO _x), phosphorus compounds (PO _x), zinc oxides, boron oxides and molybdenum, smoke and irritating vapours as products of incomplete combustion.
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	5W-30: 62.3 cSt @ 40°C (104°F), 10.6 cSt @ 100°C (212°F). VI=160 10W-30: 67.4 cSt @ 40°C (104°F), 10.5 cSt @ 100°C (212°F). VI=143 10W-40: 97.2 cSt @ 40°C (104°F), 14.1 cSt @ 100°C (212°F). VI=143 20W-50: 170 cSt @ 40°C (104°F), 19.0 cSt @ 100°C (212°F). VI=127
Colour	Light amber.	Pour Point	5W-30: -36°C (-33°F) 10W-30: -36°C (-33°F) 10W-40: -30°C (-22°F) 20W-50: -24°C (-11°F)
Odour	Mild petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available.	Dropping Point	Not applicable.
Boiling Point	Not available.	Penetration	Not applicable.

Density	0.8566 - 0.8775 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available.
Vapour Density	Not available.	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 121°C (ASTM D0130): 1a		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, H2S, methacrylate monomers, alkyl mercaptans, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.		
Acute Lethality	<p>Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below:</p> <p>Acute oral toxicity (LD50): >5000 mg/kg (rat).</p> <p>Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).</p> <p>Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat).</p>		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any.		
Inhalation Route:	With its relatively low vapour pressure, this product is not expected be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation.		
Oral Route:	Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect.		
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.		
Immunotoxicity:	Not available.		
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.		
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.		
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.		
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark.		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		





Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada)	Special Provisions for Transport	Not applicable.
---------------------------	---	---	-----------------

Section 15. Regulatory Information

Other Regulations		<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>																									
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States)																						
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)																							
HMIS (U.S.A.)		<table border="1"><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	<table><tr><td rowspan="3">NFPA (U.S.A.)</td><td rowspan="3"></td><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td colspan="2">Specific hazard</td></tr><tr><td>Health</td><td></td><td></td><td></td></tr></table>		NFPA (U.S.A.)		Fire Hazard	1	Reactivity	0	Specific hazard		Health				Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	1																										
Fire Hazard	1																										
Reactivity	0																										
Personal Protection	B																										
NFPA (U.S.A.)		Fire Hazard	1																								
		Reactivity	0																								
		Specific hazard																									
Health																											

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
-------------------	--

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System
ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%
ASTM - American Society for Testing and Materials	LDLo/LCLo - Lowest Published Lethal Dose/Concentration
BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)
CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association
CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health
CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)
CFR - Code of Federal Regulations	NTP - National Toxicology Program
CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration
COD5 - Chemical Oxygen Demand in 5 days	PEL - Permissible Exposure Limit
CPR - Controlled Products Regulations	RCRA - Resource Conservation and Recovery Act
DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act
DSDL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose
DSD/DPD - Dangerous Substances or Dangerous Preparations	STEL - Short Term Exposure Limit (15 minutes)
	TDG - Transportation Dangerous Goods (Canada)
	TDLo/TCLo - Lowest Published Toxic Dose/Concentration

Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TLM - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564
Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752







Prepared by Product Safety - TLM on 8/31/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	JET B AVIATION TURBINE FUEL	Code	W219 SAP: 150, 151, 152
Synonym	Jet B; Jet B DI; JP-4; Jet F-40; NATO F-40; Turbine Fuel, Aviation, Wide Cut Type (CAN/CGSB-3.22).	Validated on	12/3/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as aviation turbine fuel. May contain a fuel system icing inhibitor.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Complex mixture of petroleum hydrocarbons (C6-C14).	64741-41-9	>99	Not established	Not established	Not established
2) Benzene	71-43-2	<0.5	0.5 ppm	2.5 ppm	Not established
3) Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether	111-77-3	≤0.15	Not established	Not established	Not established
4) Anti-static, antioxidant and metal deactivator additives.	Not applicable	<0.1	Not applicable	Not applicable	Not applicable
* Please note that Jet B DI, JP-4, Jet F-40 and NATO F-40 all contain Fuel System Icing Inhibitor (FSII).					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Skin and eye contact can cause irritation. Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. This product contains a cancer causing agent. For more information, refer to Section 11.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	LOWER: 1.3% UPPER: 8% (NFPA)
Flash Points	CLOSED CUP: -31°C (-24°F) (NFPA)	Auto-Ignition Temperature	240°C (464°F) (NFPA)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.		

**Fire Fighting
Media and
Instructions**

NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible).

CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.

If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.

SMALL FIRES: Dry chemical, CO₂, water spray or regular foam.

LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk.

Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.

Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.

Section 6. Accidental Release Measures**Material Release
or Spill**

NAERG96, GUIDE 128, Flammable Liquids (Non-polar/ Water-immiscible). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.

Section 7. Handling and Storage**Handling**

Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT ingest. Do not breathe gas/vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately. Avoid contact with skin and eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.

Storage

Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles. Ground all equipment containing material. Keep away from direct sunlight.

Section 8. Exposure Controls/Personal Protection**Engineering Controls**

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - *The selection of personal protective equipment varies, depending upon conditions of use.*

Eyes Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available (similar to gasoline)
Colour	Clear and colourless.	Pour Point	Freezing Point: <-51°C (<-60°F) for Jet B/Jet B DI; <-58°C (<-72°F) for Jet Fuel F-40.
Odour	Gasoline like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	50 to 270°C (122 to 518°F)	Penetration	Not applicable.
Density	0.75 to 0.80 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3.5 (Air = 1)	Ionicity (in water)	Not available
Vapour Pressure	21 kPa (158 mmHg) @ 37.8°C (100°F).	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	<p>Based on toxicity of similar product. Acute oral toxicity (LD50): >20000 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >5000 mg/m³/4h (rat).</p> <p>Benzene Acute oral toxicity (LD50): 930 mg/kg (rat). Acute dermal toxicity (LD50): >9400 mg/kg (rabbit). Acute inhalation toxicity (LC50): 13200 ppm/4h (rat).</p> <p>Diethylene Glycol Monomethyl Ether Acute oral toxicity (LD50): 4140-5180 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).</p>		
Chronic or Other Toxic Effects			
Dermal Route:	Skin contact can cause irritation.		
Inhalation Route:	Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death.		
Oral Route:	Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure.		
Eye Irritation/Inflammation:	Eye contact can cause irritation.		
Immunotoxicity:	Not available		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	Benzene is tumorigenic by RTECS criteria.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	Fetotoxicity, embryotoxicity and/or teratogenicity have been observed in rats or rabbits following oral or dermal administration, in the absence of maternal toxicity. [Diethylene Glycol Monomethyl Ether]		
Carcinogenicity (ACGIH):	ACGIH A1: confirmed human carcinogen. [Benzene]		
Carcinogenicity (IARC):	IARC Group 1: carcinogenic to Humans. [Benzene]		
Carcinogenicity (NTP):	NTP Group 1: known to be a carcinogen. [Benzene]		
Carcinogenicity (IRIS):	Not available		
Carcinogenicity (OSHA):	Benzene is an OSHA known carcinogen.		
Other Considerations	No additional remark.		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	Currently: Fuel, aviation, turbine engine, 3, UN1863, PGII As of August 15, 2002: FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII	Special Provisions for Transport	Not applicable.
---------------------------	--	---	-----------------

Section 15. Regulatory Information

Other Regulations		<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>											
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Toxic. CLASS: Irritating substance. CLASS: Target organ effects.									
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 									
HMIS (U.S.A.)		<table border="1"><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>3</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>		Health Hazard	2*	Fire Hazard	3	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard	
Health Hazard	2*												
Fire Hazard	3												
Reactivity	0												
Personal Protection	H												
				Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme									

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
Glossary	<div style="display: flex;"> <div style="flex: 1;"> <p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials (</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCL - Dangerous Substances Classification and Labeling (Europe)</p> <p>DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)</p> <p>DSL - Domestic Substance List</p> <p>EEC/EU - European Economic Community/European Union</p> <p>EINECS - European Inventory of Existing Commercial Chemical Substances</p> <p>EPCRA - Emergency Planning and Community Right to Know Act</p> <p>FDA - Food and Drug Administration</p> <p>FIFRA - Federal Insecticide, Fungicide and Rodenticide Act</p> <p>HCS - Hazardous Communication System</p> <p>HMIS - Hazardous Material Information System</p> <p>IARC - International Agency for Research on Cancer</p> </div> <div style="flex: 1;"> <p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> <p>TDG - Transportation Dangerous Goods (Canada)</p> <p>TDLo/TCLo - Lowest Published Toxic Dose/Concentration</p> <p>TLm - Median Tolerance Limit</p> <p>TLV-TWA - Threshold Limit Value-Time Weighted Average</p> <p>TSCA - Toxic Substances Control Act</p> <p>USEPA - United States Environmental Protection Agency</p> <p>USP - United States Pharmacopoeia</p> <p>WHMIS - Workplace Hazardous Material Information System</p> </div> </div>

For Copy of MSDS**Prepared by Product Safety - TAR on 12/3/2001.**

Western Canada, telephone: 403-296-4158; fax: 403-296-6551
Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228
Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

Data entry by Product Safety - JDW.

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	TRAXON* XL SYNTHETIC BLEND 75W-90, 80W-140	Code	TRXL759, 470-499-0 TRXL814, 470-500-0
Synonym	Not available	Validated on	5/29/2003.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	These products are multipurpose automotive hypoid gear lubricants, suitable for use in lower temperatures in passenger cars, trucks and off-highway vehicles.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum), synthetic hydrocarbons and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: $\geq 183^{\circ}\text{C}$ (361.4°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO2. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.
---	--

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	75W90: 106.7 cSt @ 40°C (104°F), 16.52 cSt @ 100°C (212°F), VI=168 80W140: 254.8 cSt @ 40°C (104°F), 25.24 cSt @ 100°C (212°F), VI=127
Colour	Colourless to pale yellow.	Pour Point	75W90: -42°C (-44°F) 80W140: -36°C (-33°F)
Odour	No odour or slight petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.8699 - 0.878 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 121°C (ASTM D0130): 1b		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents.	Decomposition Products	May release COx, NOx, SOx, H2S, POx, SiOx, methacrylate monomers, aldehydes, alkyl mercaptans, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat).		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.		
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.		
Oral Route:	Low toxicity; has laxative effect.		
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.		
Immunotoxicity:	Not available		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark.		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.		
-----------------------	--	--	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

<div>Other Regulations</div> <div>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</div> <div>All components of this formulation are listed on the US EPA-TSCA Inventory.</div> <div>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</div> <div>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</div> <div>Please contact Product Safety for more information.</div>											
<div>DSD/DPD (Europe)</div> <div>Not classified under the Dangerous Substances or Dangerous Preparations Directives.</div>		<div>HCS (U.S.A.)</div> <div>Not controlled under the HCS (United States).</div>									
<div>ADR (Europe) (Pictograms)</div> <div>NOT EVALUATED FOR EUROPEAN TRANSPORT</div> <div>NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.</div>		<div>DOT (U.S.A) (Pictograms)</div> <div></div>									
<div>HMIS (U.S.A.)</div> <table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	<div>NFPA (U.S.A.)</div> <div><div><div>Health</div><div></div></div><div><div>Fire Hazard</div><div>Reactivity</div><div>Specific hazard</div></div></div> <div><div>Rating</div><div><div>0 Insignificant</div><div>1 Slight</div><div>2 Moderate</div><div>3 High</div><div>4 Extreme</div></div></div>	
Health Hazard	1										
Fire Hazard	1										
Reactivity	0										
Personal Protection	B										

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
Glossary ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials () BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLm - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System	
For Copy of MSDS The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact: Internet: www.petro-canada.ca Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564	Prepared by Product Safety - JDW on 5/29/2003. Data entry by Product Safety - JDW.








Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax:
1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	   	

Section 1. Chemical Product and Company Identification

Product Name	GASOLINE, UNLEADED	Code	W102E
Synonym	Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, Super Premium (94 RO)	Validated on	6/9/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Gasoline	8006-61-9	85-100	300 ppm (890 mg/m ³)	500 ppm (1480 mg/m ³)	Not established
Methyl tert-butyl ether	1634-04-4	0-15	40 ppm (144mg/m ³)	Not established	Not established
Note: Petro-Canada does not use MTBE in the manufacturing of its gasoline, however MTBE can be introduced from time to time through the use of external gasoline blendstocks.					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Possible cancer hazard. Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Skin and eye contact can cause irritation. Toxic if ingested. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention if irritation persists.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	Lower: 1.3%; Upper: 7.6% (NFPA).
Flash Points	Closed Cup: -50 to -38°C (-58 to -36°F), ASTM D56 Standard Test Method for Flash Point by Tag Closed Tester.	Auto-Ignition Temperature	257°C (495°F) (NFPA).
Fire Hazards in Presence of Various Substances	Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). CAUTION: This product has a very low flash point, use of water spray when fighting fire may be inefficient. SMALL FIRE: Use DRY chemicals, CO ₂ , water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. Avoid flushing spilled material into sewers, streams or other bodies of water. Self-contained breathing apparatus (SCBA) will be required if approaching the fire from downwind, or to enter enclosed areas or buildings.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). Evacuate in a downwind direction for at least 300 meters (1000 feet). ELIMINATE ALL IGNITION SOURCES. Ventilate closed spaces before entering. By forced ventilation, maintain concentration of vapour below the range of explosive mixture. Avoid contact, fully-encapsulating, vapour-protective clothing should be worn for spills and leaks with no fire. Stop leak if without risk. Use vapour suppressing foam or water spray to reduce vapours; it may reduce vapour, but it may not prevent ignition in closed spaces; isolate area until vapour has dispersed. Contain spill. Absorb with inert absorbents such as dry clay, or diatomaceous earth, or recover using electrically grounded explosion-proof pumps. Avoid inhaling dust of diatomaceous earth for it may contain silica (very fine particle size), making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Keep away from heat, spark and other sources of ignition. Empty container may contain flammable/explosive residues or vapours. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT USE AS CLEANING FLUID OR SIPHON BY MOUTH. Wear proper protective equipment. Avoid inhalation and contact with skin or eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in cool, dry, isolated, well-ventilated area, and away from direct sunlight, sources of ignition and incompatibles. Flammable materials should be stored in a separate safety storage cabinet or room. Ground all equipment containing material.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available
Colour	Clear to slightly yellow, undyed liquid. May be dyed red for taxation purposes.	Pour Point	Not applicable.
Odour	Gasoline. MTBE has a terpene-like odour.	Softening Point	Not applicable.
Odour Threshold	Less than 1 ppm.	Dropping Point	Not applicable.
Boiling Point	25 to 220°C (77 to 428°F) Initial boiling point by ASTM D86 Standard Test Method.	Penetration	Not applicable.
Density	0.7 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3 to 4 (Air = 1) (NFPA).	Ionicity (in water)	Insoluble in water.
Vapour Pressure	<107 kPa @ 37.8°C (100°F)	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins.

Section 10. Stability and Reactivity

Corrosivity	Non corrosive.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids.	Decomposition Products	May release COx, NOx, phenols, polynuclear aromatic hydrocarbons, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Gasoline: Acute oral toxicity (LD50): 13 600 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >300 000 mg/m ³ /4h (rat). MTBE: Acute oral toxicity (LD50): 29630 mg/kg (rat). Acute dermal toxicity (LD50): >6800 mg/kg (rabbit). Acute inhalation toxicity (LC50): 23 576 ppm/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product can cause skin irritation. Prolonged or repeated contact with skin may cause dermatitis.
Inhalation Route:	Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death.
Oral Route:	Swallowing or vomiting of the liquid may result in aspiration into the lungs. Can cause CNS depression. (See Inhalation Route for symptoms).
Eye Irritation/Inflammation:	Can cause irritation to the eyes.
Immunotoxicity:	Not available

Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not considered to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not considered to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not considered to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Gasoline, MTBE]
Carcinogenicity (IARC):	IARC Group 2B: possibly carcinogenic to humans. [Gasoline]
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Unleaded gasoline caused kidney effects in male rats and liver effects in female mice.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	Not available		


Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	GASOLINE, 3, UN1203, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	------------------------------------	---	--

Section 15. Regulatory Information

Other Regulations		CEPA: This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). EPA: All components of this formulation are listed on the US EPA-TSCA Inventory.																	
This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. Please contact Product Safety for more information.																			
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Irritating substance. CLASS: Target organ effects.															
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 															
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(4)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr></table>		Health Hazard	(2*)	Fire Hazard	(4)	Reactivity	(0)	<table><tr><td colspan="2">NFPA (U.S.A.)</td></tr><tr><td>Health</td><td><table><tr><td>4</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr></table></td></tr></table>		NFPA (U.S.A.)		Health	<table><tr><td>4</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr></table>	4	Fire Hazard	2	Reactivity
Health Hazard	(2*)																		
Fire Hazard	(4)																		
Reactivity	(0)																		
NFPA (U.S.A.)																			
Health	<table><tr><td>4</td><td>Fire Hazard</td></tr><tr><td>2</td><td>Reactivity</td></tr></table>	4	Fire Hazard	2	Reactivity														
4	Fire Hazard																		
2	Reactivity																		
				Rating 0 Insignificant 1 Slight 2 Moderate															

Personal Protection

(H)

Specific hazard

3 High

4 Extreme

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCl - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS**Fuels & Solvents:**

Western Canada, telephone: 403-296-4158; fax: 403-296-6551

Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752







Prepared by Product Safety - JDW on 6/9/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	FUEL SYSTEM TREATMENT	Code	FST
Synonym	Not available	Validated on	5/12/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	A fuel system treatment that cleans fuel systems to improve performance in gasoline engines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Stoddard Solvent	8052-41-3	30-60%	100ppm	Not established	Not established
2) Isopropanol	67-63-0	30-60%	200ppm	400ppm	Not established
3) 1, 2, 4-Trimethylbenzene	95-63-6	0.01-0.1%	Not established	Not established	Not established
4) Xylene (mixed isomers)	1330-20-7	0.01-0.1%	100ppm	150ppm	Not established
Manufacturer	Not applicable				
Recommendation					
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Flammable liquid. Exercise caution when handling this material. Contact with this product may cause skin irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. May cause teratogenicity/embryotoxicity. For more information refer to Section 11 of this MSDS.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 5 minutes or until the chemical is removed, while holding the eyelid(s) open. Obtain medical attention immediately.
Skin Contact	Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 5 minutes or until the chemical is removed. Remove contaminated clothing, shoes, and leather goods (e.g. watchbands, belts, etc.). If breathing is stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Inhalation	If breathing is stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz.) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. If breathing is stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable.	Flammable Limits	LOWER: 0.9% UPPER: 12%
Flash Points	CLOSED CUP: 13°C (55.4°F) (TCC)	Auto-Ignition Temperature	Unknown

Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air. Sensitive to static discharge.
Products of Combustion	Carbon oxides (CO, CO ₂), acrid smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	<p>NAERG2000, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Evacuate non-essential personnel. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Extinguish all ignition sources. Stop leak if safe to do so. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	FLAMMABLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid contact with any incompatible or reactive materials. Wear proper personal protective equipment (See Section 8). Avoid confined spaces and areas with poor ventilation. Remove severely contaminated clothing. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Exercise caution when washing/drying clothing contaminated with flammable materials. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Avoid generating mists. Ensure container is securely closed when not in use. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning.
Storage	Store as flammable material. Store away from heat and sources of ignition. Avoid direct sunlight. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. Store in a dry, cool and well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Use explosion-proof ventilation equipment. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	Chemical splash goggles should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).
Respiratory	A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with particulate filter (R and/or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator or self contained breathing apparatus if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Polyvinyl alcohol (PVA), or Fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Liquid.	Viscosity	Not available
Colour	Yellow.	Pour Point	Not applicable.
Odour	Alcohol like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	83°C (181.4°F)	Penetration	Not applicable.
Density	0.79 @ 15°C	Oil / Water Dist. Coefficient	Not available
Vapour Density	>1	Ionicity (in water)	Not available
Vapour Pressure	Not available Evaporation rate: <1 (Ether=1)	Dispersion Properties	Not available
Volatility	>95% (VOCs)	Solubility	Negligible.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, peroxides, nitric acid, strong alkalis, strong mineral acids, and oleum.	Decomposition Products	May release COx, acrid smoke, and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<p>Acute toxicity information is not available for the product as a whole, therefore, data for the hazardous ingredient is provided below:</p> <p><u>Stoddard Solvent (8052-41-3):</u> Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >3000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >1300 ppm/4h (rat)</p> <p><u>Isopropanol (67-63-0):</u> Acute Oral toxicity (LD50): 5000 mg/kg (rat) Acute Dermal toxicity (LD50): 12,800 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 17,000 ppm/4h (rat)</p> <p><u>1, 2, 4-Trimethylbenzene (95-63-6):</u> Acute Oral toxicity (LD50): 5000 mg/kg (rat) Acute Inhalation toxicity (LC50): 18,000 mg/m³/4h (rat)</p> <p><u>Xylene (mixed isomers) (1330-20-7):</u> Acute Oral toxicity (LD50): 1590 mg/kg (rat) Acute Dermal toxicity (LD50): >1,700 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 4785 ppm/4h (mouse)</p>
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant.
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Frequent or prolonged inhalation of this product may lead to absorption of this product in harmful amounts which may have adverse effects on the: kidneys.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs).
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.

Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product contains a component(s) at $\geq 0.1\%$ that has been shown to cause teratogenicity and/or embryotoxicity in some laboratory tests at non-maternally toxic doses. Therefore, this product is considered to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1, A2, or A3 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		





Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	FLAMMABLE LIQUIDS, N.O.S. (Isopropanol), Class 3, UN 1993, PGII (CL-TDG)	Special Provisions for Transport	This product may be shipped as a Limited Quantity if the volume is $\leq 1\text{L}$ and in accordance with the Limited Quantity Provisions, (CL-TDG).
---------------------------	--	---	---

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																				
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																				
		Please contact Product Safety for more information.																				
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	CLASS: Combustible liquid. CLASS: Irritating substance. CLASS: Target organ effects.																	
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)																		
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(3)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>n, p, u</td></tr></table>		Health Hazard	(2*)	Fire Hazard	(3)	Reactivity	(0)	Personal Protection	n, p, u	NFPA (U.S.A.)										
Health Hazard	(2*)																					
Fire Hazard	(3)																					
Reactivity	(0)																					
Personal Protection	n, p, u																					
		<table><tr><td rowspan="4">Health</td><td rowspan="4"></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>Reactivity</td><td></td><td>1 Slight</td></tr><tr><td></td><td></td><td>2 Moderate</td></tr><tr><td>Specific hazard</td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table>		Health		Fire Hazard	Rating	0 Insignificant	Reactivity		1 Slight			2 Moderate	Specific hazard		3 High					4 Extreme
Health		Fire Hazard	Rating			0 Insignificant																
		Reactivity				1 Slight																
						2 Moderate																
		Specific hazard		3 High																		
				4 Extreme																		

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLm - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDSInternet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax:
 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752







Prepared by Product Safety - TLM on 5/12/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	DIESEL FUEL	Code	W104, W293 SAP: 120, 121, 122, 287
Synonym	Diesel 50, Diesel 50 LS, #1 Diesel, #1 Diesel LS, Diesel LC, Seasonal Diesel, Seasonal Diesel LS, Diesel AA, Domestic Marine Diesel, International marine Diesel, Seasonal Diesel Locomotive, Domestic Marine diesel LS, diesel -20°C (LS), LSD, Low Sulphur Diesel, dyed diesel, marked diesel, coloured diesel, Naval Distillate, Ultra Low Sulphur Diesel, ULS Diesel, Mining Diesel, Mining Diesel Special, Mining Diesel Special LS, High Flash Mining Diesel, Furnace Oil, Stove Oil.	Validated on	2/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Diesel oil.	68334-30-5	>99.9	100 mg/m ³ (as total hydrocarbons) *	Not established	Not established
2) Proprietary additives.	Not available	<0.1	Not established	Not established	Not established
Aromatic content is 50% maximum (benzene: nil). Sulphur content is 0-0.50%.					
Manufacturer Recommendation	* Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	LOWER: 0.7%, UPPER: 6% (NFPA)
Flash Points	Diesel Fuel: Closed Cup: >40°C (>104°F) Marine Diesel Fuel: Closed Cup: >60°C (>140°F) Mining Diesel: Closed Cup: 52°C (126°F)	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Vapour explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), water vapour (H ₂ O), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Wear proper personal protective equipment (See Section 8).
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Bright oily liquid.	Viscosity	1.3 - 4.1 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown (may be dyed for taxation purposes).	Pour Point	Variable, -50°C to 0°C (-58°F to -32°F)
Odour	Petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150 - 371°C (302-700°F)	Penetration	Not applicable.
Density	0.80 - 0.85 kg/L @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not applicable.
Vapour Pressure	Not available	Dispersion Properties	Not available
Volatility	Semivolatile to volatile.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, H2O, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Acute oral toxicity (LD50): 7500 mg/kg (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations)
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Diesel oil] (See Other Considerations)
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.

Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	DIESEL FUEL, 3, UN1202, PGIII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	--	---	--

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).												
		All components of this formulation are listed on the US EPA-TSCA Inventory.												
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).												
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.												
		Please contact Product Safety for more information.												
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).										
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 										
HMIS (U.S.A.)		<table border="1"><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>2</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>		Health Hazard	2*	Fire Hazard	2	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard		Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	2*													
Fire Hazard	2													
Reactivity	0													
Personal Protection	H													

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
Glossary	<div> <p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials (</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCL - Dangerous Substances Classification and Labeling (Europe)</p> </div> <div> <p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> </div>

DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 2/6/2004.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	CHAIN OIL (SUMMER, WINTER)	Code	CHAS, 490-431 CHAW, 490-430
Synonym	Not available	Validated on	5/6/2003.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	These products are designed for lubrication of chain saw chains in both high and low ambient temperatures.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: $\geq 168^{\circ}\text{C}$ (334.4°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), phosphorus compounds (PO _x), smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO2. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.
---	--

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Stringy liquid.	Viscosity	CHAS: 155 cSt @ 40°C (104°F), 16.2 cSt @ 100°C (212°F), VI=109 CHAW: 32 @ 40°C (104°F), 6.29 cSt @ 100°C (212°F), VI=151
Colour	Dark red.	Pour Point	CHAS: -21°C (-6°F) CHAW: -42°C (-44°F)
Odour	Slight petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.831 - 0.88 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 100°C (ASTM D0130): 1a		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, reducing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, POx, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	Not available		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.		
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.		
Oral Route:	Low toxicity; has laxative effect.		
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.		
Immunotoxicity:	Not available		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	Not available		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		






Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.		
-----------------------	--	--	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																						
		All components of this formulation are listed on the US EPA-TSCA Inventory.																						
		All components of this formulation are listed on EINECS or are exempt.																						
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																						
		Please contact Product Safety for more information.																						
DSD/DPD (Europe)		Not classified under the Dangerous Substances or Dangerous Preparations Directives.		HCS (U.S.A.)		Not controlled under the HCS (United States).																		
ADR (Europe) (Pictograms)				DOT (U.S.A) (Pictograms)																				
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	NFPA (U.S.A.)		<table><tr><td rowspan="3">Health</td><td></td><td>Fire Hazard</td></tr><tr><td></td><td>Reactivity</td></tr><tr><td></td><td>Specific hazard</td></tr></table>		Health		Fire Hazard		Reactivity		Specific hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	1																							
Fire Hazard	1																							
Reactivity	0																							
Personal Protection	B																							
Health		Fire Hazard																						
		Reactivity																						
		Specific hazard																						

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
-------------------	---

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials ()
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS
Internet: www.petro-canada.ca

Lubricants:
Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564
Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 5/6/2003.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	D-2A, D-2B		

Section 1. Chemical Product and Company Identification

Product Name	ANTIFREEZE	Code	W269
Synonym	Universal Antifreeze, Radiator Antifreeze, Diesel Antifreeze, Petro-Canada Antifreeze-Coolant, Petro-Canada Heavy Duty Antifreeze-Coolant, Pre-Mix Antifreeze, Petro-Canada Premium Radiator Antifreeze, Diesel Engine Coolant.	Validated on	7/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as an engine antifreeze coolant.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Ethylene glycol	107-21-1	≥90	Not established	Not established	100 mg/m ³ (aerosol)
Sodium tetraborate pentahydrate (Diesel Engine Coolant only)	12179-04-3	≤5	1 mg/m ³	Not established	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Contact with this product may cause eye irritation. Not expected to cause more than slight skin irritation. Inhalation of this product may cause respiratory tract irritation. Ingestion may be extremely hazardous. May cause teratogenicity/embryotoxicity. May cause damage to reproductive organs. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Lower: 3.2%, Upper: 15.3%
Flash Points	Closed Cup: 116°C (241°F) (Tagliabue) Open Cup: 116°C (241°F) (Cleveland)	Auto-Ignition Temperature	413°C (775°F)

Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Store away from heat and sources of ignition. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	- The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Chemical splash goggles should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).
Respiratory	A minimum of NIOSH-approved air-purifying respirator with a organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Polyvinyl chloride (PVC). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear viscous liquid.	Viscosity	Not available
Colour	Green.	Pour Point	Not available
Odour	Odourless.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	129 to 197°C (264 to 387°F)	Penetration	Not applicable.
Density	1.115 to 1.145 (Water = 1)	Oil / Water Dist. Coefficient	Not available
Vapour Density	2.1 (Air=1).	Ionicity (in water)	Not available
Vapour Pressure	0.06 mmHg @ 20°C (68°F).	Dispersion Properties	Not available
Volatility	0% (w/w)	Solubility	Soluble in water, methanol and diethyl ether.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids, alkalis, perchloric acid, phosphorus, silvered copper wires carrying DC current, aliphatic amines, isocyanates, chlorosulfonic acid and oluem.	Decomposition Products	May release COx, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<u>Ethylene glycol (107-21-1):</u> LD50: 4700 mg/kg (oral/rat). LD50: 9530 mg/kg (dermal/rabbit). <u>Sodium tetraborate pentahydrate (12179-04-3):</u> LD50: 3200-3500 mg/kg (oral/rat) (Boric acid). [Sodium tetraborate pentahydrate]
Chronic or Other Toxic Effects	
Dermal Route:	Short-term exposure is expected to cause only slight irritation, if any.
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation.
Oral Route:	Extremely dangerous in case of ingestion.
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	Borates are possible reproductive toxins based upon available animal ingestion studies in several species. These studies usually involved high doses, over prolonged periods of time. A human study following occupational exposure to borate by inhalation concluded that, no adverse effects to reproduction were found in this population, under the conditions of this study.
Teratogenicity/Embryotoxicity:	This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin (Ethylene glycol).

Carcinogenicity (ACGIH):	ACGIH A4: not classifiable as a human carcinogen (Ethylene glycol). This product is not known to contain any chemicals at reportable quantities that are listed as Group A1, A2, or A3 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	The substance may be toxic to kidneys and liver. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			


Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada)	Special Provisions for Transport	Not applicable.
---------------------------	---	---	-----------------

Section 15. Regulatory Information

Other Regulations		All of the components of this product are on the Domestic Substances List (DSL), are considered to be on the DSL, or are exempt from the New Substance Notification (NSN) requirements.																																		
		All components of this formulation are listed on the US EPA-TSCA Inventory.																																		
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																																		
		Please contact Product Safety for more information.																																		
DSD/DPD (Europe)		Not evaluated.	HCS (U.S.A.)		CLASS: Target organ effects. CLASS: Irritating substance.																															
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms)																																	
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>	Health Hazard	2*	Fire Hazard	1	Reactivity	0	Personal Protection	H	NFPA (U.S.A.)		<table><tr><td rowspan="2">Health</td><td>1</td><td>Fire Hazard</td><td rowspan="2">Rating</td><td>0 Insignificant</td></tr><tr><td>2</td><td>0</td><td>1 Slight</td></tr><tr><td></td><td></td><td>Reactivity</td><td></td><td>2 Moderate</td></tr><tr><td></td><td></td><td>Specific hazard</td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table>	Health	1	Fire Hazard	Rating	0 Insignificant	2	0	1 Slight			Reactivity		2 Moderate			Specific hazard		3 High					4 Extreme
Health Hazard	2*																																			
Fire Hazard	1																																			
Reactivity	0																																			
Personal Protection	H																																			
Health	1	Fire Hazard	Rating	0 Insignificant																																
	2	0		1 Slight																																
		Reactivity		2 Moderate																																
		Specific hazard		3 High																																
				4 Extreme																																

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDSInternet: www.petro-canada.ca/msds**Fuels & Solvents:**

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax:
 1-800-837-1228


Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - TLM on 7/6/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-OA8
(403) 259-5112 FAX (403) 255-7185
email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME(S): Poly Drill O.B.X.

WHMIS CLASSIFICATION: Non-regulated

TDG Classification: Non dangerous goods

DATE: January 17, 2004

A liquid polymer containing guar gum, mineral oil, vegetable oil, acrylamide copolymer and a surfactant: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations.

2. PHYSICAL DATA

Boiling Point: Not available

Specific Gravity: 0.9 g/cm

Solubility in Water: disperses in water(forms viscous, slippery solution).

pH: 3.8 (1% concentration)

Density (g/ml): Not available

Physical State: Liquid

Appearance and Odor: Brown. Odor slight.

3. FIRE AND EXPLOSION DATA

Flash Point (method used): (PMCC) greater than 100 C.

Conditions of flammability: Very low risk.

Hazardous combustion products: None known.

Upper and Lower flammable limits: Not available.

Extinguishing media: Carbon dioxide, dry chemicals, foam, in preference to water spray

4. REACTIVITY

Chemical stability: Stable under normal conditions.

Hazardous Polymerization: Will not occur.

Incompatible substances: Avoid strong oxidants such as liquid chlorine, concentrated oxygen, sodium or calcium hypo chloride.

Hazardous decomposition products: None known

5. HEALTH HAZARD DATA

TOXICITY RATING: Practically non-harmful.

Routes of Exposure and Effects:

SKIN: Slight irritant: prolonged contact may cause skin irritation or dermatitis in some individuals

EYE: No effects of exposure expected with the exception of possible irritation.

INHALATION: Due to low volatility of mineral distillates a small inhalation hazard exists.

INGESTION: can cause nausea, vomiting, cramps, diarrhea
Chronic exposure limits: None
Sensitization of product: Not suspected to be a sensitizer.
Teratogenicity: Not available.
Mutagenicity: Not available.
Carcinogenicity: None of the components of this product are listed as carcinogens by IARC and ACGIH

6. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. Remove contaminated clothing. Launder contaminated clothing before re-use. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, lifting upper and lower lids occasionally. Get medical attention.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.

8. INDUSTRIAL HYGIENE CONTROL MEASURES

Respiratory Protection: None normally required.

Ventilation: If mist and/or vapors are present, use air purifying respirator or self-contained breathing apparatus, but this is rarely required.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference.

7. HANDLING AND USE PRECTIONS

Storage requirements: keep container closed when no in use. Store in a cool dry location away from oxidizing and reducing agents.

Waste Disposal: product should be disposed of in accordance with applicable local, Provincial and Federal regulations.

Steps must be taken if product is released or spilled: clean spill areas thoroughly to avoid hazardous slippery conditions.

8. TOXICOLOGICAL PROPERTIES

G50 Microtox Analysis prepared by HydroQual Laboratories, Calgary, AB--97/6/26 Test#970978:

Test Description	EC20	EC50	Pass/Fail
MTX	>91	>91	PASS

9. DEPARTMENT OF TRANSPORTATION INFORMATION

Shipping Name: Liquid Drilling Additive


Hazard Class: Not hazardous

Hazardous Substances: None

Cautionary Labeling: None required

KLEEN-FLO TUMBLER INDUSTRIES LIMITED		MATERIAL SAFETY DATA SHEET		PAGE 1
SECTION I-MATERIAL IDENTIFICATION AND USE				
Material Name/Identifier:	Supreme Fuel Injector G.L.A.F. & Conditioner	Stock No.	409/412/414/415/418	
Manufacturer's Name:	Kleen-Flo Tumbler Industries Ltd	Street Address:	75 Advance Blvd.	
City:	Brampton	Province:	Ontario	
Postal Code:	L6T 4N1	Emergency Phone #:	(905) 793-4311	
Chemical Name:	N/A (mixture)	Chemical Family:	Blend of aliphatic alcohol	
Chemical Formula:	N/A	Trade Names & Synonyms:	& aromatic hydrocarbons	
Material Use:	Solvent/Cleaner	Molecular Weight:	N/A	
SECTION II-HAZARDOUS INGREDIENTS OF MATERIAL				
Hazardous Ingredients	C.A.S.	Approximate Concentration	LD50 Species & Route	LC50 Species & Route
2-propanol	67-63-0	60-90%	4.72 g/kg rat-oral	>12000 ppm (8hr) rat-inh.
xylene	1330-20-7	10-30%	4300 mg/kg rabbit-derma	> 6700 ppm (4hr) rat-inh.
ethyl benzene	100-41-4	1-5%	3.5 g/kg rat-oral	N/A
SECTION III-PHYSICAL DATA FOR MATERIAL				
Physical State:	Liquid	Odour/Appearance:	Alcohol odour; clear, red liquid	
Specific Gravity:	0.8 @15°C	Odour Threshold(p.p.m.):	N/A	
Boiling Point:	82-137°C	Evaporation Rate:	N/A	
Freezing Point:	N/A	Solubility in Water:	40%	
% Volatile(by volume):	100%	Vapour Pressure(mm)Hg:	4.4 kPa @ 20°C	
Vapour Density(Air=1):	2.2	Coefficient of Water/Oil Distribut:	N/E	
pH	N.Ap.			
SECTION IV-FIRE AND EXPLOSION HAZARD OF MATERIAL				
Flammability Yes/No	Yes	If yes under which conditions: heat, open flame and sparks		
Auto Ignition Temperature:	N/A	Means of Extinction: carbon dioxide, alcohol foam		
Flashpoint and Method:	11°C TCC	Carbon dioxide or dry chemical for small fires.		
		Hazardous Combustion Products:carbon monoxide and carbon dioxide		
Upper Flammable limit		Lower Flammable Limit(% by volume): 2%		
(% by volume):	12%			
Explosion Data:	Sensitivity ot mechanical impact: Yes	Sensitivity to Static Discharge: Electrical & mechanical		
		equipment should be explosion proof.		
SECTION V-REACTIVITY DATA				
Chemical Stability Yes/No:	Yes	If NO under which conditions? N.Ap.		
Incompatibility to Other Substances Yes/No:	Yes	If so which ones? strong oxidizing compounds. May react		
		with aluminum at high temperature.		
Reactivity and under what conditions?	Normally stable, but can become unstable at elevated temperatures & pressure			
Hazardous Decomposition Products:	Carbon monoxide, carbon dioxide produced upon combustion.			
N/E: not established				
		N.Ap.: not applicable		N/A: not available

Material Name/Identifier: Supreme Fuel Injector G.L.A.F. & Conditioner		Stock No. 409/412/414/415/418	PAGE 2
SECTION VI-TOXICOLOGICAL PROPERTIES OF PRODUCT			
Route of Entry: ALL Routes	--SKIN CONTACT --SKIN ABSORPTION --EYE CONTACT --INHALATION --INGESTION		
Effects of Acute Exposure:	Slight eye irritation. May cause headache, dizziness, nausea, drowsiness and central nervous system depression.		
Effects of Chronic Exposure:	High exposure to dimethylbenzene in some animal studies have been reported to cause health effects on developing embryo/fetus. Their effects were often at levels toxic to the mother. The significance of these findings to humans has not been determined.		
LD 50 of Product:	5840 mg/kg rat-oral	LC 50 of Product:	> 12000 ppm (8hr) rat
Irritancy of Product:	Skin and eye irritant	Exposure Limits of Product:	400 ppm- I.P.A.
Sensitization of Product:	N/A	2-propanol- 100 ppm, xylene- 100 ppm	
		Toxicologically Synergistic Materials:	N/A
--CARCINOGENICITY --REPRODUCTIVE EFFECTS --TERATOGENICITY --MUTAGENICITY			none known
SECTION VII-PREVENTIVE MEASURES			
Personal Protective Equipment to be used:			
Gloves(specify):	Nitrile, Viton, Polyethylene	Eye(specify):	Chemical safety glasses
Respiratory(specify):	Organic canister mask	Clothing:	Not required
Respiratory Protection:	If used indoors or on a continuous basis, use of cartridge type respirator is recommended		
Engineering Controls:	To maintain TLV; electrical and mechanical equipment should be spark proof.		
Leak and Spill Procedure:	Dry and contain spill. Soak residue with natural absorbent.		
Waste Disposal:	Incinerate or dispose of at an approved waste disposal facility.		
Storage Requirements:	Keep in a cool place.		
Handling Procedures and Equipment:	Handle with care. Keep away from children. Do not inhale or ingest.		
TDG Classification:	#409 & 412: Consumer commodity		
	#414 & 415 & 418: Flammable liquids, N.O.S.(2-propanol solution), Class 3, UN1993,Pkg. Grp. II		
WHMIS Classification:	Consumer Commodity #409/412; Class B2, D2B & D2A for #414, 415 &418		
Domestic substance list:	All components of this product are either on the DSL or exempt.		
SECTION VIII-FIRST AID MEASURES			
Eye:	Wash with water for at least 15 minutes.		
Skin:	Wash with soap and water.		
Inhalation:	Move patient to fresh air and restore breathing if required. Call a physician.		
Ingestion:	Contains petroleum distillate. Do NOT induce vomiting. Guard against aspiration. Seek medical help.		
SECTION IX-PREPARATION DATE OF M.S.D.S.			
Additional Info/Comments:		Sources Used: NOISH Registry of Toxic Effects of Chemical Substances	
Phone Number:	(905) 793-4311	Prepared By: Quality Control Laboratory	
Date:	March 3, 2003	Kleen-Flo Tumbler Industries Limited	
THIS SHEET SUPERSEDES ANY OTHER M.S.D.S. PREVIOUSLY PREPARED			
N/A: not available		N/E: not established	



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-OA8
(403) 259-5112 FAX (403) 255-7185
email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME: Poly-Drill 133-X
PRODUCT DESCRIPTION: LIQUID ANIONIC POLYMER
CHEMICAL DESCRIPTION: Polymer, Surfactant(s), Water, Hydrocarbon solvent
UPDATED: March 15, 2004

NFPA704M/HMIS RATING

HEALTH: 0/1 FLAMMABILITY: 1/1 REACTIVITY: 0/0 OTHER:
0=Insignificant 1=Slight 2=Moderate 3=High 4=Extreme

2. COMPOSITION

A liquid polymer: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations. None of the substances in this product are hazardous.

3. PHYSICAL DATA

Flash Point: >100°C (PMCC)
Specific Gravity (@ 25°C.): 1.08
Solubility in Water: Emulsifiable
pH: 8.1 (1.0% solution)
Freeze Point: -10 °C (14 Degrees F)
Density (g/ml): 1.08 at 25 °C
Physical State: Liquid
Appearance: Blue liquid
Odor: Hydrocarbon

Note: These physical properties are typical values for this product.

4. FIRE AND EXPLOSION DATA

INCOMPATIBILITY: Avoid contact with strong oxidizers (eg. Chlorine, peroxides, chromates, nitric acid, perchlorates, concentrated oxygen, permanganates) which can generate heat, fires, explosions and the release of toxic fumes.

THERMAL DECOMPOSITION PRODUCTS: In the event of combustion CO, oxides of carbon (COx), oxides of nitrogen (NOx) may be formed. Do not breathe smoke or fumes. Wear suitable protective equipment.

5. FIRE FIGHTING MEASURES

FLASH POINT: >100°C (PMCC)

EXTINGUISHING MEDIA: Based on the NFPA guide, use dry chemical, foam, carbon dioxide or other extinguishing agent suitable for Class B fires. Use water to cool containers exposed to fire. For larger fires, use water spray or fog, thoroughly drenching the burning material.

UNSUITABLE EXTINGUISHING MEDIA:
Do not use water unless flooding amounts are available.

UNUSUAL FIRE AND EXPLOSION HAZARD: May evolve oxides of nitrogen (NO_x) under fire conditions.

6. HEALTH HAZARD DATA

EMERGENCY OVERVIEW:

CAUTION: May cause irritation to skin and eyes. Avoid contact with skin, eyes and clothing. Do not take internally.

Empty containers may contain residual product. Do not reuse container unless properly reconditioned.

PRIMARY ROUTE(S) OF EXPOSURE: Eye & Skin

EYE CONTACT: Can cause mild to moderate irritation

SKIN CONTACT: Can cause mild, short-lasting irritation

SYMPTOMS OF EXPOSURE: A review of available data does not identify any symptoms from exposure not previously mentioned.

AGGRAVATION OF EXISTING CONDITIONS: A review of available data does not identify any worsening of existing conditions.

7. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, if irritation or abnormalities persist, call a physician.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately.

CAUTION: If unconscious, having trouble breathing or in convulsions, do not induce vomiting or give water. Call for medical assistance immediately.

8. HANDLING, ACCIDENTAL RELEASE MEASURES & DISPOSAL CONSIDERATIONS

Storage: Keep container tightly closed when not in use.

DISPOSAL:

In Ontario, the waste class under Regulation 347 is: 233L

SMALL SPILLS:

Soak up spill with absorbent material. Place residues in a suitable, covered, properly labeled container. Wash affected area.

LARGE SPILLS:

Contain liquid using absorbent material, by digging trenches or by dyking. Reclaim into recovery or salvage drums or tank truck for proper disposal. Contact approved waste hauler for disposal of contaminated recovered material. Dispose of material in compliance with regulations indicated.

Dispose of wastes in an approved incinerator or waste treatment/disposal site, in accordance with all applicable regulations. Do not dispose of wastes in local sewer or with normal garbage.

ENVIRONMENTAL PRECAUTIONS

This product should NOT be directly discharged into lakes, ponds, streams, waterways or public water supplies.

As a non-hazardous liquid waste, it should be solidified with stabilizing agents (such as sand, fly ash, or cement) so that no free liquid remains before disposal to an industrial waste landfill. A non-hazardous liquid waste can also be incinerated in accordance with local, state, provincial and federal regulations.

9. INDUSTRIAL HYGIENE CONTROL MEASURES

OCCUPATIONAL EXPOSURE LIMITS:

This product does not contain any substance that has an established exposure limit.

Respiratory Protection: None normally required.

For large spills, entry into large tanks, vessels or enclosed small spaces with inadequate ventilation, a positive pressure, self-contained breathing apparatus is recommended.

Ventilation: General ventilation is recommended.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference. Examples of impermeable gloves available on the market are neoprene, nitrile, PVC, natural rubber, viton, and butyl (compatibility studies have not been performed).

If clothing is contaminated, remove clothing and thoroughly wash the affected area. Launder contaminated clothing before reuse.

10. TOXICOLOGICAL PROPERTIES

SENSITIZATION:

This product is not expected to be a sensitizer.

A "LC50-96" Pass/Fail Bioassay test. This test determines the lethality of a fluid on young aquatic organisms. The fluid fails if 50% or more of the animals are dead after 96 hours in the fluid.

96 hour static acute LC50 to Rainbow Trout = Greater than 1,000 mg/L

96 hour no observed effect concentration = 125 mg/L based on no mortality or abnormal effects

96 hour static acute LC50 to Sheepshead Minnow = Greater than 1,000 mg/L

96 hour no observed effect concentration = 1,000 mg/L (highest concentration tested) based on no mortality or abnormal effects.

96 hour static acute LC50 to Mysid Shrimp = 400 mg/L

96 hour no observed effect concentration = 180 mg/L based on no mortality or abnormal effects.

96 hour static acute LC50 to Daphnia Magna - 400 mg/L

96 hour no observed effect concentration = 56 mg/L (lowest concentration tested) based on no mortality or abnormal effects.

Microtoxicity

The Microtox bioassay has been established as the reference test for mud additive toxicity testing.

Test Method: Luminescent Bacteria, IC50@ 15 min

Reference: Appendix 1: Microtox Bioassay Procedure, Drilling Waste Management, Guide G50. 1993. Alberta Energy and Utilities Board, Calgary, AB, Canada.

Sample: Poly Drill 1330, sample #97324-1 for test #970723, 97/05/09 by D. Lintott

Preparation: Sample was diluted to 2 g/L, which formed thick, slightly cloudy liquid. The sample was then centrifuged for 1 hour.

Test Results:

SAMPLE	TREATMENT	%CTL	IC20%	IC50	RESULT
97324-1	None	N/A	14 (9-22)	>91	PASS

The following results are for a 1% aqueous solution of product.

CARCINOGENICITY:

None of the substances in this product are listed as carcinogens by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP) or the American Conference of Government Industrial Hygienists (ACGIH).

HUMAN HAZARD CHARACTERIZATION:

Based on our Hazard Characterization, the potential human hazard is: LOW

ENVIRONMENTAL HAZARD AND EXPOSURE CHARACTERIZATION:

Based on our Hazard Characterization, the potential environmental hazard is: LOW.

11. DEPARTMENT OF TRANSPORTATION INFORMATION

PROPER SHIPPING NAME/HAZARD CLASS MAY VARY BY PACKAGING, PROPERTIES, AND MODE OF TRANSPORTATION. TYPICAL PROPER SHIPPING NAMES FOR THIS PRODUCT ARE:

ALL TRANSPORTATION MODES: PRODUCT IS NOT REGULATED DURING TRANSPORTATION

Shipping Name: Liquid Drilling Additive

Hazard Class: Not hazardous

Cautionary Labeling: None required

14. OTHER INFORMATION

This information contained herein is given in good faith, but no warranty, expressed or implied is made



MATERIAL SAFETY DATA SHEET

Date Prepared: November 14, 2003
Supersedes: April 12, 2001
MSDS Number: 12232

1. PRODUCT INFORMATION

Product Identifier: EPIC EP MOLY GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:

Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL), exempt, or have been notified under CEPA.

TDG INFORMATION (RAIL/ROAD):

Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: 0.930 at 15.6 deg C/15.6 deg C
Viscosity: >20.00 cSt at 40 deg C
Vapour Density: not available
Boiling Point: 249 deg C
Evaporation rate: 0.1 (1= n-butylacetate)
Solubility in water: NEGLIGIBLE
Freezing/Pour Point: 230 deg C DROP
Odour Threshold: not available
Vapour Pressure: <0.01 kPa at 20 deg C
Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.
High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products,

the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For insoluble Molybdenum compounds, 10 mg/m3.
For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.
In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.
Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye

contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 145 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel.

Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Fumes, smoke, carbon monoxide, sulfur oxides, nitrogen oxides, phosphorus oxides, aldehydes and other decomposition products, in the case of incomplete combustion

Various metal oxides

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 12 April 2001, this MSDS has been revised in Section(s):

1

10. PREPARATION

Date Prepared: November 14, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: November 14, 2003
Supersedes: May 31, 2000
MSDS Number: 08509

1. PRODUCT INFORMATION

Product Identifier: MARVELUBE WR2 GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:

Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):

Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: >20.00 cSt at 40 deg C
 Vapour Density: >5
 Boiling Point: not available
 Evaporation rate: <1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: 182 deg C DROP
 Odour Threshold: not available
 Vapour Pressure: <1 kPa at 38 deg C
 Density: 0.91 g/cc at 15 deg C
 Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.
 High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.
In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.
Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye

contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 204 deg C COC ASTM D92

Autoignition: 227 deg C Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 31 May 2000, this MSDS has been revised in Section(s):

3, 7

10. PREPARATION

Date Prepared: November 14, 2003

Prepared by: Lubricants & Specialties

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: November 06, 2002
Supersedes: November 01, 2002
MSDS Number: 00826

1. PRODUCT INFORMATION

Product Identifier: MIDDLE DISTILLATE

- ESSO MARINE GAS OIL (DYED OR CLEAR)
- ESSO RAILROAD DIESEL (DYED OR CLEAR)
- HEATING OIL (DYED OR CLEAR)
- DIESEL (DYED OR CLEAR)
- DIESEL QUALITY FURNACE FUEL (DYED OR CLEAR)
- DIESEL QUALITY HEATING OIL (DYED OR CLEAR)
- ESSO DIESEL (DYED OR CLEAR)
- ESSO DIESEL QUALITY COMMERCIAL FUEL (DYED OR CLEAR)
- ESSO DIESEL QUALITY FURNACE FUEL
- ESSO DIESEL QUALITY HEATING OIL
- ESSO FURNACE FUEL (DYED OR CLEAR)
- ESSO HEATING OIL (DYED OR CLEAR)
- ESSO MARINE DIESEL FUEL (DYED OR CLEAR)
- ESSO RAILROAD DIESEL FUEL #3 (DYED OR CLEAR)
- ESSO TOBACCO CURING OIL
- FUEL OIL 75
- FUEL OIL 76
- DIESEL MARINE (DYED OR CLEAR)
- DIESEL MARINE GAS OIL (DYED OR CLEAR)
- FURNACE (DYED OR CLEAR)
- DIESEL MARINE - POUR DEPRESSED (DYED OR CLEAR)
- NO.2 FUEL OIL
- NAVAL FUEL OIL 3-GP-11M (DYED)
- ESSO DIESEL FUEL LS
- DIESEL LOW SULFUR (DYED OR CLEAR)
- NO.2 FUEL OIL FOR EXPORT
- DIESEL FOR EXPORT (DYED OR CLEAR)
- FURNACE TOBACCO CURING OIL
- DIESEL NAVAL 3GP-11 (DYED OR CLEAR)
- DIESEL NAVAL 3GP-15 (DYED OR CLEAR)
- DIESEL LOW SULFUR RAIL (DYED OR CLEAR)
- DIESEL LOW SULFUR DYED EP
- DIESEL RAIL (DYED OR CLEAR)
- DIESEL RAIL #3 (DYED OR CLEAR)
- DIESEL RAIL #3 (HD) (DYED OR CLEAR)
- DIESEL LOW SULFUR (032) (DYED OR CLEAR)

FURNACE URBAN (DYED OR CLEAR)
DIESEL (032) (DYED OR CLEAR)
DIESEL LOW SULFUR (EXP DYED)
FURNACE FUEL (032) DYED
DIESEL LOW SULFUR (EXPORT)
MARINE GAS OIL
MDO - MARINE DIESEL OIL 3 CST (CLEAR)

Application and Use:
Multi-purpose fuel

Product Description:

A complex mixture of aliphatic, olefinic, naphthenic and aromatic hydrocarbons.

REGULATORY CLASSIFICATION

WHMIS:

Class B, Division 3: Combustible Liquids.

Class D, Division 2, Subdivision B: Toxic Material

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):

Shipping Name: FUEL OIL
Class: 3
Packing Group: III
PIN Number: UN1202
Marine Pollutant:N

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
------	---	-------

Fuel Oil No.2

>99.9 V/V 68476-30-2

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: 0.820 to 0.900 at 15.5 deg C
Viscosity: 1.30 cSt at 40 deg C
to 11.00 cSt at 40 deg C
Vapour Density: 4
Boiling Point: 150 to 370 deg C
Evaporation rate: <1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -4 deg C -39 (RANGE)
Odour Threshold: not available
Vapour Pressure: 4 kPa at 38 deg C
Appearance/odour: White or pale yellow liquid, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
High vapour concentrations are irritating to the eyes, nose, throat and lungs; may cause headaches and dizziness; may be anesthetic and may cause other central nervous system effects.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Irritating.

INGESTION:

Low toxicity.
Small amounts of this liquid drawn into the lungs from swallowing or vomiting may cause severe health effects (e.g. bronchopneumonia or pulmonary edema).

CHRONIC:

Lifetime skin painting tests indicate that materials of similar composition have produced skin cancer in experimental animals. The relationship of these results to humans has not been fully established.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 2000 mg/kg (Rabbit)
Inhalation : LC50 > 2500 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

Manufacturer Recommends:
100 ppm based on composition.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In emergency situations use proper respiratory protection to immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Immediately flush with large amounts of water. Use soap if available. Remove contaminated clothing, including shoes, after flushing has begun. If irritation persists, seek medical attention.

INGESTION:

DO NOT induce vomiting since it is important that no amount of the material should enter the lungs (aspiration). Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety goggles, long sleeves, and chemical-resistant gloves.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Do not handle or store near an open flame, sources of heat, or sources of ignition. Material will accumulate static charges which may cause a spark. Static charge build-up could become an ignition source. Use proper relaxation and grounding procedures. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Do not use combustible materials such as sawdust. Recover by pumping (use an explosion proof motor or hand pump), or by using a suitable absorbent. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: >40 deg C PMCT ASTM D93

Autoignition: NA Flammable Limits: LEL: 0.7% UEL: 6.5%

GENERAL HAZARDS:

Combustible Liquid; may form combustible mixtures at or above the flash point.

Toxic gases will form upon combustion.

Static Discharge; material may accumulate static charges which may cause a fire.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

REVISED.

10. PREPARATION

Date Prepared: November 06, 2002
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**MATERIAL SAFETY DATA SHEET**

Date Prepared: May 13, 2003
Supersedes: April 12, 2000
MSDS Number: 08265

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 68

Application and Use:
Hydraulic fluid

Product Description:

A lubricating oil consisting of a mixture of saturated and unsaturated hydrocarbons derived from paraffinic distillate, and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: 68.00 cSt at 40 deg C
Vapour Density: not available
Boiling Point: not available
Evaporation rate: <0.1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -36 deg C ASTM D97
Odour Threshold: not available
Vapour Pressure: <0.1 kPa at 20 deg C
Density: 0.88 g/cc at 15 deg C
Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products,

the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits

given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Store and load at normal (up to 38 deg C) temperature and at atmospheric pressure. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Recover by pumping or by using a suitable absorbant. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 190 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.
Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel.
Shut off fuel to fire.
Use foam, dry chemical or water spray to extinguish fire.
Respiratory and eye protection required for fire fighting personnel.
A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:


Since 12 April 2000, this MSDS has been revised in Section(s):
3, 7

10. PREPARATION

Date Prepared: May 13, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL

Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**Poly-Drill Drilling Systems**

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-0A8
(403) 259-5112 FAX (403) 255-7185
email: polydrill@telus.net
www.poly-drill.com

poly-drill.com**MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE****1. PRODUCT IDENTIFICATION**

PRODUCT TRADE NAME: Poly-Drill 133-X
PRODUCT DESCRIPTION: LIQUID ANIONIC POLYMER
CHEMICAL DESCRIPTION: Polymer, Surfactant(s), Water, Hydrocarbon solvent
UPDATED: March 15, 2004

NFPA704M/HMIS RATING

HEALTH: 0/1	FLAMMABILITY: 1/1	REACTIVITY: 0/0	OTHER:	
0=Insignificant	1=Slight	2=Moderate	3=High	4=Extreme

2. COMPOSITION

A liquid polymer: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations. None of the substances in this product are hazardous.

3. PHYSICAL DATA

Flash Point: >100°C (PMCC)
Specific Gravity (@ 25°C.): 1.08
Solubility in Water: Emulsifiable
pH: 8.1 (1.0% solution)
Freeze Point: -10 °C (14 Degrees F)
Density (g/ml): 1.08 at 25 °C
Physical State: Liquid
Appearance: Blue liquid
Odor: Hydrocarbon

Note: These physical properties are typical values for this product.

4. FIRE AND EXPLOSION DATA

INCOMPATIBILITY: Avoid contact with strong oxidizers (eg. Chlorine, peroxides, chromates, nitric acid, perchlorates, concentrated oxygen, permanganates) which can generate heat, fires, explosions and the release of toxic fumes.

THERMAL DECOMPOSITION PRODUCTS: In the event of combustion CO, oxides of carbon (COx), oxides of nitrogen (NOx) may be formed. Do not breathe smoke or fumes. Wear suitable protective equipment.

5. FIRE FIGHTING MEASURES

FLASH POINT: >100°C (PMCC)

EXTINGUISHING MEDIA: Based on the NFPA guide, use dry chemical, foam, carbon dioxide or other extinguishing agent suitable for Class B fires. Use water to cool containers exposed to fire. For larger fires, use water spray or fog, thoroughly drenching the burning material.

UNSUITABLE EXTINGUISHING MEDIA:

Do not use water unless flooding amounts are available.

UNUSUAL FIRE AND EXPLOSION HAZARD: May evolve oxides of nitrogen (NOx) under fire conditions.

6. HEALTH HAZARD DATA

EMERGENCY OVERVIEW:

CAUTION: May cause irritation to skin and eyes. Avoid contact with skin, eyes and clothing. Do not take internally.

Empty containers may contain residual product. Do not reuse container unless properly reconditioned.

PRIMARY ROUTE(S) OF EXPOSURE: Eye & Skin

EYE CONTACT: Can cause mild to moderate irritation

SKIN CONTACT: Can cause mild, short-lasting irritation

SYMPTOMS OF EXPOSURE: A review of available data does not identify any symptoms from exposure not previously mentioned.

AGGRAVATION OF EXISTING CONDITIONS: A review of available data does not identify any worsening of existing conditions.

7. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, if irritation or abnormalities persist, call a physician.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately.

CAUTION: If unconscious, having trouble breathing or in convulsions, do not induce vomiting or give water. Call for medical assistance immediately.

8. HANDLING, ACCIDENTAL RELEASE MEASURES & DISPOSAL CONSIDERATIONS

Storage: Keep container tightly closed when not in use.

DISPOSAL:

In Ontario, the waste class under Regulation 347 is: 233L

SMALL SPILLS:

Soak up spill with absorbent material. Place residues in a suitable, covered, properly labeled container. Wash affected area.

LARGE SPILLS:

Contain liquid using absorbent material, by digging trenches or by dyking. Reclaim into recovery or salvage drums or tank truck for proper disposal. Contact approved waste hauler for disposal of contaminated recovered material. Dispose of material in compliance with regulations indicated.

Dispose of wastes in an approved incinerator or waste treatment/disposal site, in accordance with all applicable regulations. Do not dispose of wastes in local sewer or with normal garbage.

ENVIRONMENTAL PRECAUTIONS

This product should NOT be directly discharged into lakes, ponds, streams, waterways or public water supplies.

As a non-hazardous liquid waste, it should be solidified with stabilizing agents (such as sand, fly ash, or cement) so that no free liquid remains before disposal to an industrial waste landfill. A non-hazardous liquid waste can also be incinerated in accordance with local, state, provincial and federal regulations.

9. INDUSTRIAL HYGIENE CONTROL MEASURES**OCCUPATIONAL EXPOSURE LIMITS:**

This product does not contain any substance that has an established exposure limit.

Respiratory Protection: None normally required.

For large spills, entry into large tanks, vessels or enclosed small spaces with inadequate ventilation, a positive pressure, self-contained breathing apparatus is recommended.

Ventilation: General ventilation is recommended.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference. Examples of impermeable gloves available on the market are neoprene, nitrile, PVC, natural rubber, viton, and butyl (compatibility studies have not been performed).

If clothing is contaminated, remove clothing and thoroughly wash the affected area. Launder contaminated clothing before reuse.

10. TOXICOLOGICAL PROPERTIES**SENSITIZATION:**

This product is not expected to be a sensitizer.

A "LC50-96" Pass/Fail Bioassay test. This test determines the lethality of a fluid on young aquatic organisms. The fluid fails if 50% or more of the animals are dead after 96 hours in the fluid.

96 hour static acute LC50 to Rainbow Trout = Greater than 1,000 mg/L

96 hour no observed effect concentration = 125 mg/L based on no mortality or abnormal effects

96 hour static acute LC50 to Sheepshead Minnow = Greater than 1,000 mg/L

96 hour no observed effect concentration = 1,000 mg/L (highest concentration tested) based on no mortality or abnormal effects.

96 hour static acute LC50 to Mysid Shrimp = 400 mg/L

96 hour no observed effect concentration = 180 mg/L based on no mortality or abnormal effects.

96 hour static acute LC50 to Daphnia Magna = 400 mg/L

96 hour no observed effect concentration = 56 mg/L (lowest concentration tested) based on no mortality or abnormal effects.

Microtoxicity

The Microtox bioassay has been established as the reference test for mud additive toxicity testing.

Test Method: Luminescent Bacteria, IC50@ 15 min

Reference: Appendix 1: Microtox Bioassay Procedure, Drilling Waste Management, Guide G50, 1993, Alberta Energy and Utilities Board, Calgary, AB, Canada.

Sample: Poly Drill 1330, sample #97324-1 for test #970723, 97/05/09 by D. Lintott

Preparation: Sample was diluted to 2 g/L, which formed thick, slightly cloudy liquid. The sample was then centrifuged for 1 hour.

Test Results:

SAMPLE	TREATMENT	%CTL	IC20%	IC50	RESULT
97324-1	None	N/A	14 (9-22)	>91	PASS

The following results are for a 1% aqueous solution of product.

CARCINOGENICITY:

None of the substances in this product are listed as carcinogens by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP) or the American Conference of Government Industrial Hygienists (ACGIH).

HUMAN HAZARD CHARACTERIZATION:

Based on our Hazard Characterization, the potential human hazard is: LOW

ENVIRONMENTAL HAZARD AND EXPOSURE CHARACTERIZATION:

Based on our Hazard Characterization, the potential environmental hazard is: LOW.

11. DEPARTMENT OF TRANSPORTATION INFORMATION

PROPER SHIPPING NAME/HAZARD CLASS MAY VARY BY PACKAGING, PROPERTIES, AND MODE OF TRANSPORTATION. TYPICAL PROPER SHIPPING NAMES FOR THIS PRODUCT ARE:

ALL TRANSPORTATION MODES: PRODUCT IS NOT REGULATED DURING TRANSPORTATION

Shipping Name: Liquid Drilling Additive

Hazard Class: Not hazardous

Cautionary Labeling: None required

14. OTHER INFORMATION

This information contained herein is given in good faith, but no warranty, expressed or implied is made



Material Safety Data Sheet

MSDS ID NO.: 0133SPE012

Revision date: 01/30/2004

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND THE COMPANY/UNDERTAKING

Product name: SSA Propane
Synonyms: Liquified Petroleum Gas, SSA; LPG, SSA; Propane, SSA; SSA Liquified Petroleum Gas
Chemical Family: Aliphatic Hydrocarbon
Formula: CH₃CH₂CH₃

Supplier:
Speedway/Superamerica LLC
P O BOX 1500
ENON OH 45501

Other information: 419-421-3070
Emergency telephone number: 877-627-5463

2. COMPOSITION/INFORMATION ON INGREDIENTS

Propane is an aliphatic petroleum hydrocarbon. Ethyl mercaptan (15-25 ppm) is added as an odorant. The odor threshold of the mercaptan is 1 ppb.

Product information

Name	CAS Number	Weight %	ACGIH Exposure Limits:	OSHA - Vacated PELs - Time Weighted Ave	Other:
SSA Propane	74-98-6	100	= 2500 ppm TWA	= 1000 ppm TWA = 1800 mg/m ³ TWA	

Component Information

Name	CAS Number	Weight %	ACGIH Exposure Limits:	OSHA - Vacated PELs - Time Weighted Ave	Other:
Propane	74-98-6	90-100	= 2500 ppm TWA	= 1000 ppm TWA = 1800 mg/m ³ TWA	
Propylene	115-07-1	1-5			ACGIH Simple asphyxiant
Ethane	74-84-0	000.5000 - 003.0000			ACGIH Simple asphyxiant
Butane & Heavier	Mixture	0-2.5			
Sulfur	7704-34-9	< 000.0100			

Notes: The manufacturer has voluntarily elected to reflect exposure limits contained in OSHA's 1989 air contaminants standard in its MSDS's, even though certain of those exposure limits were vacated in 1992.

3. HAZARDS IDENTIFICATION

EMERGENCY OVERVIEW

PROPANE IS A COLORLESS GAS OR LIQUID STENCHED WITH A FOUL SULFUR SMELLING ODORANT. IT IS SHIPPED OR TRANSPORTED AS A LIQUIFIED GAS UNDER PRESSURE. THIS PRODUCT IS EXTREMELY FLAMMABLE AND EXPLOSIVE. AT HIGH CONCENTRATIONS THIS PRODUCT IS A SIMPLE ASPHYXIAN, WHICH DISPLACES OXYGEN FROM THE BREATHNG ATMOSPHERE. MAY CAUSE SKIN AND EYE BURNS UPON LIQUID CONTACT. LARGE RELEASES CAN CREATE A FLAMMABLE VAPOR CLOUD.

OSHA WARNING LABEL:

DANGER!
EXTREMELY FLAMMABLE.
LIQUID AND GAS UNDER PRESSURE.
LIQUID CAN CAUSE FROST BURNS.

CONSUMER WARNING LABEL:

A CONSUMER WARNING LABEL IS NOT APPLICABLE FOR THIS PRODUCT.

Inhalation: Product is an anesthetic at high concentrations, producing dizziness, headache, incoordination and narcosis; extremely high concentrations can cause asphyxiation and death by displacement of oxygen from the breathing atmosphere.

Ingestion: Ingestion not likely.

Skin contact: Vapor is generally non-irritating to skin. Direct contact with liquified product can cause "cold burn" or frostbite.

Eye contact: Vapor is generally non-irritating to eyes. Direct contact with liquified product can cause "cold burn" or frostbite.

Carcinogenic Evaluation:

Product information

Name	IARC:	NTP:	ACGIH - Carcinogens:	OSHA - Select Carcinogens:
SSA Propane 74-98-6	NE			

Notes: The International Agency for Research on Cancer (IARC) has not evaluated this product.

Component Information

Name	IARC:	NTP:	ACGIH - Carcinogens:	OSHA - Select Carcinogens:
Propylene 115-07-1			A4 - Not Classifiable as a Human Carcinogen	

Notes: The International Agency for Research on Cancer (IARC) has concluded that propylene is not classifiable as to its carcinogenicity to humans (Group 3).

4. FIRST AID MEASURES

Inhalation: If affected, move person to fresh air. If breathing is difficult, administer oxygen. If not breathing or if no heartbeat, give artificial respiration or cardiopulmonary resuscitation (CPR). Immediately call a physician.

Skin contact: If liquified product has caused a "frost burn", remove contaminated clothing. Thaw frostbitten areas slowly with lukewarm water or by wrapping affected areas with blankets. Do not rub affected areas. Let circulation reestablish itself naturally, exercising area if possible. Call a physician.

Ingestion: Ingestion not likely. If swallowed, immediately call a physician.

Eye contact: Liquid: Flush with large amounts of tepid water for at least 15 minutes. Immediately call a physician.
Gas: Call a physician if symptoms or irritation occur.

Medical conditions aggravated by exposure: Inhalation of high vapor concentrations of components of this product in animals has produced cardiac sensitization. Such sensitization may cause changes in heart rhythms. This latter effect was shown to be enhanced by oxygen deficiency or the injection of adrenalin-like agents.

5. FIRE FIGHTING MEASURES

Suitable extinguishing media: For small fires, Class B fire extinguishing media such as CO₂, dry chemical, foam (AFFF/ATC) or water spray can be used. For large fires, water spray, fog or foam (AFFF/ATC) can be used. Fire fighting should be attempted only by those who are adequately trained and equipped with proper protective equipment.

Specific hazards: This product has been determined to be a flammable gas/liquid per the OSHA Hazard Communication Standard, and should be handled accordingly. For additional fire related information see NFPA 30 or North American Emergency Response Guide 115.

Special protective equipment for firefighters: BLEVE's (boiling liquid expanding vapor explosions) can occur when a liquid in a pressurized container in close proximity to a fire reaches a temperature well above its boiling point. Its effect could lead to a catastrophic failure of the vessel resulting in flying equipment fragments, a shock wave and a fireball causing serious damage and death. Isolate hazard area. If safe to do so, stop the flow of gas and allow fire to burn out. Extinguishing the flame before shutting off the supply can cause the formation of explosive mixtures. In some cases it may be preferred to allow the flame to continue to burn. Use extreme caution when fighting liquefied petroleum gas fires. Keep surrounding area cool with water spray from a distance and prevent further ignition of combustible material. Avoid use of solid water streams. Contact with water and liquified product can cause increased vaporization.

Flash point: -156 F

Autoignition temperature: 871 F

Flammable limits in air - lower (%): 2.1

Flammable limits in air - upper (%): 9.5

NFPA rating:

Health: 1
Flammability: 4
Reactivity: 0
Other: -

HMIS classification:

Health: 1
Flammability: 4
Reactivity: 0
Special: *See Section 8 for guidance in selection of personal protective equipment.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions: Keep public away. Isolate and evacuate area. Shut off source if safe to do so. Leaking containers should be moved outdoors or to well-ventilated area and contents transferred to a suitable container. Product vapor is heavier than air and can collect in low areas that are without sufficient ventilation. Advise authorities and National Response Center (800-424-8802) if substance has entered a watercourse or sewer.

7. HANDLING AND STORAGE

Handling:

Product is stored as a liquid but used in the gaseous state. Comply with all applicable EPA, OSHA, NFPA and consistent state and local requirements. Use appropriate grounding and bonding practices. Store in properly closed containers that are appropriately labeled and in a cool well-ventilated area. Do not expose to heat, open flames, strong oxidizers or other sources of ignition. Avoid overpressurizing or overfilling cylinders. Do not cut, drill, grind or weld on empty containers since they may contain explosive residues.

Avoid repeated and prolonged skin contact. Exercise good personal hygiene including removal of soiled clothing and prompt washing with soap and water.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

PERSONAL PROTECTIVE EQUIPMENT

Engineering measures:	Local or general exhaust required in an enclosed area or with inadequate ventilation.
Respiratory protection:	Use atmosphere supplying respirators in the event of oxygen deficiency, when material produces vapors that exceed permissible limits or when excessive vapors are generated. Observe respirator protection factor criteria cited in ANSI Z88.2. Self-contained breathing apparatus should be used for fire fighting.
Skin and body protection:	Wear insulated gloves to prevent skin contact and frostbite.
Eye protection:	Use goggles or face-shield if there is a potential for splashing.
Hygiene measures:	Use mechanical ventilation equipment that is explosion-proof.

9. PHYSICAL AND CHEMICAL PROPERTIES:

Appearance:	Colorless Liquified Gas
Physical state (Solid/Liquid/Gas):	Liquid
Substance type (Pure/Mixture):	Pure
Color:	Colorless
Odor:	Rotten-egg.
Molecular weight:	Not determined.
pH:	No data available.
Boiling point/range:	-43.7 F
Melting point/range:	-305.8 F
Decomposition temperature:	Not applicable.
Specific gravity:	.51 Liquid
Density:	4.4 lbs/gal @ 32 F
Bulk density:	No data available.
Vapor density:	1.56
Vapor pressure:	7600 mm Hg @ 80 F 147 PSI @ 80 F
Evaporation rate:	No data available.
Solubility:	Moderate 6.5%
Solubility in other solvents:	No data available.
Partition coefficient (n-octanol/water):	No data available.
VOC content(%):	No data available.
Viscosity:	No data available.

10. STABILITY AND REACTIVITY

Stability: The material is stable at 70 F, 760 mm pressure.

Polymerization: Will not occur.

Hazardous decomposition products: Combustion produces carbon monoxide.

Materials to avoid: Strong oxidizers such as nitrates, perchlorates, chlorine, fluorine.

Conditions to avoid: Sources of heat or ignition.

11. TOXICOLOGICAL INFORMATION

Acute toxicity:

Product information

Name	CAS Number	Inhalation:	Dermal:	Oral:
SSA Propane	74-98-6	>4000,000 ppm for 6 hr [Rat]	n/a	n/a

Some of the major components of this product are considered to be simple asphyxiant gases without significant potential for systemic toxicity. At high concentrations these gases act as asphyxiants by diluting and displacing oxygen. Symptoms of persons exposed to oxygen deficient atmospheres include headache, dizziness, incoordination, cyanosis and narcosis. Extremely high concentrations can produce unconsciousness followed by death.

At extremely high concentrations and excessive exposure conditions components of this product may produce cardiac sensitization.

12. ECOLOGICAL INFORMATION

Ecotoxicity effects: Liquid product is not toxic to aquatic life or waterfowl. The aquatic 96 hour TLM for propane is >100 ppm.

13. DISPOSAL CONSIDERATIONS

Cleanup Considerations: This product as produced is not specifically listed as an EPA RCRA hazardous waste according to federal regulations (40 CFR 261). However, when discarded or disposed of, it may meet the criteria of an "ignitable" hazardous waste (D001). This material could become a hazardous waste if mixed or contaminated with a hazardous waste or other substance(s). It is the responsibility of the user to determine if disposal material is hazardous according to federal, state and local regulations. Bleeding off small amounts of this product into the atmosphere or controlled incineration of large amounts are potential disposal methods provided all regulatory requirements are met.

14. TRANSPORT INFORMATION

49 CFR 172.101:

DOT:

Transport Information: This material when transported via US commerce would be regulated by DOT Regulations.

Proper shipping name: Propane
UN/identification No: UN 1978
Hazard Class: 2.1

Packing group: Not applicable.
DOT reportable quantity (lbs): Not applicable.

TDG (Canada):
Proper shipping name: Propane
UN/Identification No: UN 1978
Hazard Class: 2.1
Packing group: Not applicable.
Regulated substances: Not applicable.

15. REGULATORY INFORMATION

Federal Regulatory Information:

US TSCA Chemical Inventory Section 8(b): This product and/or its components are listed on the TSCA Chemical Inventory.

OSHA Hazard Communication Standard: This product has been evaluated and determined to be hazardous as defined in OSHA's Hazard Communication Standard.

EPA Superfund Amendment & Reauthorization Act (SARA):

SARA Section 302: This product contains the following component(s) that have been listed on EPA's Extremely Hazardous Substance (EHS) List:

Name	CERCLA/SARA - Section 302 Extremely Hazardous Substances and TPQs
Propane	NA
Propylene	NA
Ethane	NA
Butane & Heavier	NA
Sulfur	NA

SARA Section 304: This product contains the following component(s) identified either as an EHS or a CERCLA Hazardous substance which in case of a spill or release may be subject to SARA reporting requirements:

Name	CERCLA/SARA - Hazardous Substances and their Reportable Quantities
Propane	NA
Propylene	NA
Ethane	NA
Butane & Heavier	NA
Sulfur	NA

SARA Section 311/312: The following EPA hazard categories apply to this product:

Acute Health Hazard.
Fire Hazard.
Sudden Release Of Pressure.

SARA Section 313: This product contains the following component(s) that may be subject to reporting on the Toxic Release Inventory (TRI) From R:

Name	CERCLA/SARA 313 Emission reporting:
Propane	None
Propylene	= 1.0 percent de minimis concentration
Ethane	None
Butane & Heavier	None
Sulfur	None

State and Community Right-To-Know Regulations:

The following component(s) of this material are identified on the regulatory lists below:

MSDS ID NO.: 0133SPE012

Product name: SSA Propane

Page 6 of 9

Propane

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	sn 1594
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic, Flammable
Michigan critical materials register list:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	flammable - fourth degree
New Jersey - Environmental Hazardous Substances List:	SN 1594
Illinois - Toxic Air Contaminants	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

Propylene

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	sn 1609
Pennsylvania Right-To-Know:	environmental hazard
Massachusetts Right-To Know:	Present
Florida substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic, Flammable
Michigan critical materials register list:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	flammable - fourth degree
New Jersey - Environmental Hazardous Substances List:	SN 1609
Illinois - Toxic Air Contaminants	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

Ethane

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	sn 0834
Pennsylvania Right-To-Know:	Present
Massachusetts Right-To Know:	Present
Florida substance List:	Not Listed.
Rhode Island Right-To-Know:	Toxic
Michigan critical materials register list:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	flammable - fourth degree

SN 0834; NJ uses UN1035 for reporting purposes

Not Listed

Not Listed

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	Not Listed.
Pennsylvania Right-To-Know:	Not Listed.
Massachusetts Right-To Know:	Not Listed.
Florida substance List:	Not Listed.
Rhode Island Right-To-Know:	Not Listed
Michigan critical materials register list:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Not Listed
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

Louisiana Right-To-Know:	Not Listed
California Proposition 65:	Not Listed
New Jersey Right-To-Know:	sn 1757
Pennsylvania Right-To-Know:	[present]
Massachusetts Right-To Know:	Present
Florida substance List:	Not Listed.
Rhode Island Right-To-Know:	Flammable
Michigan critical materials register list:	Not Listed.
Massachusetts Extraordinarily Hazardous Substances:	Not Listed
California - Regulated Carcinogens:	Not Listed
Pennsylvania RTK - Special Hazardous Substances:	Not Listed
New Jersey - Special Hazardous Substances:	Not Listed
New Jersey - Environmental Hazardous Substances List:	Not Listed
Illinois - Toxic Air Contaminants	Not Listed
New York - Reporting of Releases Part 597 - List of Hazardous Substances:	Not Listed

Canada DSL/NDSL Inventory: This product and/or its components are listed either on the Domestic Substances List (DSL) or the Non Domestic Substance List (NDSL).

Name	Canada - WHMIS: Classifications of Substances:	Canada - WHMIS: Ingredient Disclosure:
Propane	A; B1	
Propylene	A; B1	
Ethane	A; B1	
Sulfur	B4	

16. OTHER INFORMATION

Additional Information: No data available.

Prepared by: Craig M. Parker Manager, Toxicology and Product Safety

The information and recommendations contained herein are based upon tests believed to be reliable. However, Speedway SuperAmerica (SSA) does not guarantee their accuracy or completeness nor shall any of this information constitute a warranty, whether expressed or implied, as to the safety of the goods, the merchantability of the goods, or the fitness of the goods for a particular purpose. Adjustment to conform to actual conditions of usage maybe required. SSA assumes no responsibility for results obtained or for incidental or consequential damages, including lost profits arising from the use of these data. No warranty against infringement of any patent, copyright or trademark is made or implied.

End of Safety Data Sheet

Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 1 Chemical Product and Company Information

SUPPLIER'S NAME..... NOCO ENERGY CORP
 SUPPLIER'S ADDRESS..... 700 Grand Island Blvd., Tonawanda, NY 14150
 SUPPLIER NUMBER..... 1-800-500-6626
 SUPPLIER IDENTIFIER..... Conventional Gasoline
 EMERGENCY PHONE NUMBER 1-800-424-9300 Chemtrec
 SYNONYM..... 87 Octane, 89 Octane, 93 Octane
 PRODUCT USE..... Motor Fuel

Section 2 Composition/Information on Ingredients

Component	CAS No.	Amount (Vol%)
LIGHT PETROLEUM DISTILLATE	8006-61-9	0 - 99.9
TOLUENE	108-88-3	0 - 30
XYLENE	1330-20-7	0 - 25
CYCLOHEXANE	110-82-7	0 - 9
ETHYL BENZENE	100-41-4	0 - 5
N-HEXANE	110-54-3	0 - 5
NAPHTHALENE	91-20-3	0 - 5
1,2,4-TRIMETHYLBENZENE	95-63-6	0 - 5
BENZENE	71-43-2	0.1 - 4.9
CUMENE	98-82-8	0 - 1

EXPOSURE GUIDELINES

	CAS No.	Governing Body	Exposure Limits		
BENZENE	71-43-2	ACGIH	STEL	2.5	ppm
BENZENE	71-43-2	OSHA	STEL	5	ppm
BENZENE	71-43-2	ACGIH	TWA	0.5	ppm
BENZENE	71-43-2	OSHA	TWA	1	ppm
CUMENE	98-82-8	ACGIH	TWA	50	ppm
CUMENE	98-82-8	OSHA	TWA	50	ppm
CYCLOHEXANE	110-82-7	ACGIH	TWA	100	ppm
CYCLOHEXANE	110-82-7	OSHA	TWA	300	ppm
ETHYL BENZENE	100-41-4	ACGIH	STEL	125	ppm
ETHYL BENZENE	100-41-4	ACGIH	TWA	100	ppm
ETHYL BENZENE	100-41-4	OSHA	TWA	100	ppm
N-HEXANE	110-54-3	ACGIH	TWA	50	ppm
N-HEXANE	110-54-3	OSHA	TWA	500	ppm
NAPHTHALENE	91-20-3	ACGIH	STEL	15	ppm
NAPHTHALENE	91-20-3	ACGIH	TWA	10	ppm
NAPHTHALENE	91-20-3	OSHA	TWA	10	ppm
TOLUENE	108-88-3	OSHA	C	300	ppm
TOLUENE	108-88-3	NIOSH	STEL	150	ppm
TOLUENE	108-88-3	ACGIH	TWA	50	ppm
TOLUENE	108-88-3	OSHA	TWA	200	ppm
XYLENE	1330-20-7	ACGIH	STEL	150	ppm
XYLENE	1330-20-7	ACGIH	TWA	100	ppm
XYLENE	1330-20-7	OSHA	TWA	100	ppm
LIGHT PETROLEUM DISTILLATE	8006-61-9	ACGIH	STEL	500	ppm
LIGHT PETROLEUM DISTILLATE	8006-61-9	ACGIH	TWA	300	ppm



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 3 Fire and Explosion Hazard of Product

CONDITIONS OF FLAMMABILITY.....	Danger! Extremely flammable liquid! Vapors may explode!
MEANS OF EXTINCTION.....	Use dry chemical, foam or carbon dioxide to extinguish fire. Use water spray to disperse gas or vapor and to protect personnel attempting to stop a leak. Use water to flush spills away from sources of ignition. Do not flush down public sewers.
FLASHPOINT & METHOD OF DETERMINATION.....	-37.00°C (-35°F) TCC
UPPER EXPLOSION LIMIT (% BY VOL.).....	7.6
LOWER EXPLOSION LIMIT (% BY VOL.).....	1.4
AUTO-IGNITION TEMPERATURE.....	444.00°C (833°F)
HAZARDOUS COMBUSTION PRODUCTS.....	Smoke or combustion.
EXPLOSION DATA.....	Irritating or toxic substances may be emitted upon thermal decomposition. Dangerous when exposed to heat or explosion hazard. Runoff to sewer may cause fire or explosion. Containers may explode in heat of fire.
SENSITIVITY TO STATIC DISCHARGE.....	N/A.

Hazards Ratings:

Key: 0 = least, 1 = slight, 2 = moderate, 3 = high, 4 = extreme

	<u>Health</u>	<u>Fire</u>	<u>Reactivity</u>	<u>PPI</u>
NFPA	1	3	0	
HMIS	2	3	0	X

Section 4 First Aid Measures

SPECIFIC FIRST AID PROCEDURES

SKIN CONTACT.....	Remove contaminated clothing immediately. Wash area of contact thoroughly with soap and water. Get medical attention if irritation persists. High pressure injections are serious medical emergencies. Get immediate medical attention.
INGESTION.....	<u>DO NOT INDUCE VOMITING BECAUSE OF DANGER OF ASPIRATING LIQUID INTO LUNGS.</u> Get immediate medical attention. If spontaneous vomiting occurs, monitor for breathing difficulty.
INHALATION.....	Remove affected person from source of exposure. If not breathing ensure open airway and institute CPR. If breathing is difficult, administer oxygen if available. Get medical attention.
EYE CONTACT.....	Flush immediately with large amounts of water for at least 15 minutes. Eyelids should be held away from eyeball to ensure thorough rinsing. Get medical attention if irritation persists.

Section 5 Fire Fighting Measures

• EXTINGUISHING MEDIA

The following media may be used to extinguish a fire involving this material: Water spray; Regular foam; Dry chemical; Carbon dioxide;

• FIRE FIGHTING INSTRUCTIONS

Use water spray to cool fire exposed tanks and containers. Wear structural fire fighting gear. As in any fire, wear self-contained breathing apparatus pressure-demand, MSHA/NIOSH (approved or equivalent) and full protective gear.



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 5 Fire Fighting Measures (continued)

FLAMMABLE PROPERTIES

	Typical	Minimum	Maximum	Text Result	Units	Method
<i>Flash Point</i>				-40 ESTIMATED	F	N/A
<i>Autoignition Temperature</i>				750 ESTIMATED	F	N/A
<i>Lower Explosion Limit</i>	1.5				%	N/A
<i>Upper Explosion Limit</i>	7.6				%	N/A

Section 6 Accidental Release Measures

ACTIVATE FACILITY SPILL CONTINGENCY or EMERGENCY PLAN

Evacuate nonessential personnel and remove or secure all ignition sources. Consider wind direction: stay upwind and uphill, if possible. Evaluate the direction of product travel, diking, sewers, etc. to confirm spill areas. Spills may infiltrate subsurface soil and groundwater. Professional assistance may be necessary to determine the extent of subsurface impact.

Carefully contain and stop the source of the spill, if it is safe to do so. Protect bodies of water by diking, absorbents or absorbent boom. Do not flush down sewer or drainage system. The use of fire fighting foam may be useful in certain situations to reduce vapors. The proper use of water spray may effectively disperse product vapors or the liquid itself, preventing contact with ignition sources or area/equipment that require protection.

Take up with sand or other absorbent materials. Carefully shovel or sweep up into a waste container for reclamation or disposal – use caution because flammable vapors may accumulate in closed containers.

Response and clean-up crews must be properly trained and must utilize proper protective equipment (see section 8)

Section 7 Handling and Storage

• HANDLING

Use only in a well-ventilated area. Ground and bond containers when transferring material. NFPA class IA storage. Flash point is less than 73 degrees F and boiling point is less than 100 degrees F. Avoid breathing (dust, vapor, mist, gas). Avoid prolonged or repeated contact with skin. Avoid contact with eyes. Wash thoroughly after handling. Never siphon by mouth.

• STORAGE

Keep away from heat, sparks, and flame. Keep container closed when not in use. Consult NFPA and / or OSHA codes for additional information.

Section 8 Exposure Controls and Personal Protection

Consult With a Health and Safety Professional for Specific Selections

• ENGINEERING CONTROLS

Use with adequate ventilation. Use explosion-proof ventilation equipment.

• PERSONAL PROTECTION

▪ EYE PROTECTION

Use chemical splash goggles and face shield (ANSI Z87.1 or approved equivalent).



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 8 Exposure Controls and Personal Protection (continued)

■ GLOVES or HAND PROTECTION

The glove(s) listed below may provide protection against permeation. Gloves of other chemically resistant materials may not provide adequate protection. Protective gloves are recommended to protect against contact with product.

Polyethylene; Neoprene; Nitrile; Polyvinyl alcohol; Viton;

■ RESPIRATORY PROTECTION

Concentration in air determines the level of respiratory protection needed. Use only NIOSH certified respiratory equipment. Half-mask air purifying respirator with organic vapor cartridges is acceptable for exposures to ten (10) times the exposure limit. Full-face air purifying respirator with organic vapor cartridges is acceptable for exposures to fifty (50) times the exposure limit. Exposure should not exceed the cartridge limit of 1000 ppm. Protection by air purifying respirators is limited. Use a positive pressure-demand full-face supplied air respirator or SCBA for exposures greater than fifty (50) times the exposure limit. If exposure is above the IDLH (Immediately Dangerous to Life and Health) or there is the possibility of an uncontrolled release, or exposure levels are unknown, then use a positive pressure-demand full-face supplied air respirator with escape bottle or SCBA. Wear a NIOSH-approved (or equivalent) full-facepiece airline respirator in the positive pressure mode with emergency escape provisions.

■ OTHER

Where splashing is possible, full chemically resistant protective clothing (e.g., acid suit) and boots are required. The following materials are acceptable for use as protective clothing: Polyvinyl alcohol (PVA); Polyethylene; Neoprene; Nitrile; Viton; Polyurethane; Facilities storing or utilizing this material should be equipped with an eyewash facility and a safety shower. Remove contaminated clothing and wash before reuse. For non-fire emergencies, positive pressure SCBA and structural firefighter's protective clothing will provide only limited protection.

Section 9 Physical /Chemical Properties

PHYSICAL STATE.....	Not determined
ODOUR AND APPEARANCE.....	Clear liquid with a strong hydrocarbon odor
ODOUR THRESHOLD.....	Not Determined
SPECIFIC GRAVITY.....	0.72 - 0.74 @ 60°F
VAPOUR PRESSURE.....	760.00 MM HG @ 100°F
VAPOUR DENSITY (air=1).....	1.2 as Vapor
EVAPORATION RATE.....	(Water = 1); >1
BOILING POINT.....	13.0°C (55°F)
FREEZING POINT.....	Not determined
pH.....	Not determined
COEFFICIENT OF WATER/OIL DISTRIBUTION.....	Negligible
% VOLATILE.....	100 % by weight

Section 10 Stability and Reactivity Data

CHEMICAL STABILITY.....	Stable
INCOMPATIBLE MATERIALS.....	Avoid contact with strong oxidizers.
CONDITIONS TO AVOID.....	Avoid heat, sparks, and open flame
CONDITIONS OF REACTIVITY.....	Stable under normal conditions.
HAZARDOUS DECOMPOSITION PRODUCTS.....	Combustion may produce CO, CO ² and reactive hydrocarbons

Section 11 Toxicological Information

• POTENTIAL HEALTH EFFECTS

■ PRE-EXISTING MEDICAL CONDITIONS

The following diseases or disorders may be aggravated by exposure to this product: Skin; Eye; Blood forming organs; Nervous system, Respiratory system; Lung (asthma-like conditions); Cardiovascular system,



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 11 Toxicological Information (continued)

■ INHALATION

High concentrations may lead to central nervous system effects (drowsiness, dizziness, nausea, headaches, paralysis and loss of consciousness and even death). Excessive exposure to mists or vapors generated by heat may cause irritation to eyes, nose, throat, lungs and respiratory tract. Repeated excessive exposures may cause blood disorders such as anemia and leukemia. Contains a material that has been related to cancer in humans.

LC50 (mg/l): no data

LC50 (mg/m3): no data

LC50 (ppm): no data

■ SKIN

Moderately irritating to the skin. Skin absorption of material may produce systemic toxicity. Prolonged or repeated contact can result in defatting and drying of the skin which may result in skin irritation and dermatitis (rash).

Draize Skin Score: 4.8 Out of 8.0

LD50 (mg/kg): no data

■ EYES

Moderately irritating to the eyes.

■ INGESTION

Product may be harmful or fatal if swallowed. Pulmonary aspiration hazard. After ingestion, may enter lungs and produce damage. Irritating to mouth, throat, and stomach.

LD50 (g/kg): no data

Section 12 Ecological Information

Keep out of sewers, drainage areas, and waterways. Report spills and releases under Federal and State regulations.

Section 13 Disposal Considerations

This substance, when discarded or disposed of, is not specifically listed as a hazardous waste in Federal regulations; however it could be hazardous if it is considered toxic, corrosive, ignitable, or reactive according to Federal definitions.

Section 14 Transportation Information

SPECIAL SHIPPING INFORMATION.....	Ground lines and equipment used during transfer to reduce the possibility of static soaked-initiated fire or explosion
HAZARD CLASS.....	3, flammable liquid
DOT SHIPPING NAME.....	Gasoline
DOT IDENTIFICATION NUMBER.....	UN 1203
PACKING GROUP.....	PG II

Section 15 Regulatory Information

US FEDERAL, STATE, and LOCAL REGULATORY INFORMATION

This product and it's constituents listed herein are on the EPA TSCA Inventory. Any spill or uncontrolled release of this product, including any substantial threat of release, may be subject to federal, state and or local reporting requirements. This product and/or it's constituents may also be subject to other federal, state, or local regulations. Consult the regulations applicable to your facility/operation.

CLEAN WATER ACT (OIL SPILLS)

Any spill or release of this product to navigable waters or adjoining shorelines sufficient to cause any visible sheen or deposit of a sludge or emulsion must be reported immediately to the National Resource Center (1-800-424-8802) or, if not practical, the U.S.



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 15 Regulatory Information (continued)

Coast Guard with follow-up to the National Response Center as required by U.S. Federal Law. Also contact appropriate state and local regulatory agencies as required.

CERCLA SECTION 103 and SARA SECTION 304 (RELEASE TO THE ENVIRONMENT)

The CERCLA definition of hazardous substances contains a "petroleum exclusion" clause which exempts crude oil, refined, and unrefined petroleum products and any indigenous components of such. However, other federal reporting requirements (e.g. SARA Section 304 as well as the Clean Water Act, if the spill occurs on navigable waters) may still apply.

SARA SECTION 311/312 – HAZARD CLASSES

<u>ACUTE HEALTH</u>	<u>CHRONIC HEALTH</u>	<u>FIRE</u>	<u>SUDDEN RELEASE OF PRESSURE</u>	<u>REACTIVE</u>
X	X	X	---	---

Regulatory List	Component	CAS No.
ACGIH - Occupational Exposure Limits - Carcinogens	BENZENE	71-43-2
ACGIH - Occupational Exposure Limits - Carcinogens	ETHYL BENZENE	100-41-4
ACGIH - Occupational Exposure Limits - Carcinogens	NAPHTHALENE	91-20-3
ACGIH - Occupational Exposure Limits - Carcinogens	TOLUENE	108-88-3
ACGIH - Occupational Exposure Limits - Carcinogens	XYLENE	1330-20-7
ACGIH - Occupational Exposure Limits - TWAs	BENZENE	71-43-2
ACGIH - Occupational Exposure Limits - TWAs	CUMENE	98-82-8
ACGIH - Occupational Exposure Limits - TWAs	CYCLOHEXANE	110-82-7
ACGIH - Occupational Exposure Limits - TWAs	ETHYL BENZENE	100-41-4
ACGIH - Occupational Exposure Limits - TWAs	N-HEXANE	110-54-3
ACGIH - Occupational Exposure Limits - TWAs	NAPHTHALENE	91-20-3
ACGIH - Occupational Exposure Limits - TWAs	TOLUENE	108-88-3
ACGIH - Occupational Exposure Limits - TWAs	XYLENE	1330-20-7
ACGIH - Short Term Exposure Limits	BENZENE	71-43-2
ACGIH - Short Term Exposure Limits	ETHYL BENZENE	100-41-4
ACGIH - Short Term Exposure Limits	LIGHT PETROLEUM	8006-61-9
	DISTILLATE	
ACGIH - Short Term Exposure Limits	NAPHTHALENE	91-20-3
ACGIH - Short Term Exposure Limits	XYLENE	1330-20-7
ACGIH - Skin Absorption Designation	BENZENE	71-43-2
ACGIH - Skin Absorption Designation	N-HEXANE	110-54-3
ACGIH - Skin Absorption Designation	NAPHTHALENE	91-20-3
ACGIH - Skin Absorption Designation	TOLUENE	108-88-3
CAA (Clean Air Act) - HON Rule - Organic HAPs	BENZENE	71-43-2
CAA (Clean Air Act) - HON Rule - Organic HAPs	CUMENE	98-82-8
CAA (Clean Air Act) - HON Rule - Organic HAPs	ETHYL BENZENE	100-41-4
CAA (Clean Air Act) - HON Rule - Organic HAPs	N-HEXANE	110-54-3
CAA (Clean Air Act) - HON Rule - Organic HAPs	NAPHTHALENE	91-20-3
CAA (Clean Air Act) - HON Rule - Organic HAPs	TOLUENE	108-88-3
CAA (Clean Air Act) - HON Rule - Organic HAPs	XYLENE	1330-20-7
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	BENZENE	71-43-2
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	CUMENE	98-82-8
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	CYCLOHEXANE	110-82-7
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	ETHYL BENZENE	100-41-4
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	N-HEXANE	110-54-3
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	NAPHTHALENE	91-20-3
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	TOLUENE	108-88-3
CAA (Clean Air Act) - HON Rule - SOCM Chemicals	XYLENE	1330-20-7



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 15 Regulatory Information (continued)

CAA - 1990 Hazardous Air Pollutants	BENZENE	71-43-2
CAA - 1990 Hazardous Air Pollutants	CUMENE	98-82-8
CAA - 1990 Hazardous Air Pollutants	ETHYL BENZENE	100-41-4
CAA - 1990 Hazardous Air Pollutants	N-HEXANE	110-54-3
CAA - 1990 Hazardous Air Pollutants	NAPHTHALENE	91-20-3
CAA - 1990 Hazardous Air Pollutants	TOLUENE	108-88-3
CAA - 1990 Hazardous Air Pollutants	XYLENE	1330-20-7
Canada - WHMIS - Ingredient Disclosure	1,2,4-TRIMETHYLBENZENE	95-63-6
Canada - WHMIS - Ingredient Disclosure	BENZENE	71-43-2
Canada - WHMIS - Ingredient Disclosure	CUMENE	98-82-8
Canada - WHMIS - Ingredient Disclosure	CYCLOHEXANE	110-82-7
Canada - WHMIS - Ingredient Disclosure	ETHYL BENZENE	100-41-4
Canada - WHMIS - Ingredient Disclosure	LIGHT PETROLEUM	8006-61-9
	DISTILLATE	
Canada - WHMIS - Ingredient Disclosure	N-HEXANE	110-54-3
Canada - WHMIS - Ingredient Disclosure	NAPHTHALENE	91-20-3
Canada - WHMIS - Ingredient Disclosure	TOLUENE	108-88-3
CERCLA/SARA - Haz Substances and their RQs	BENZENE	71-43-2
CERCLA/SARA - Haz Substances and their RQs	BENZENE	71-43-2
CERCLA/SARA - Haz Substances and their RQs	CUMENE	98-82-8
CERCLA/SARA - Haz Substances and their RQs	CUMENE	98-82-8
CERCLA/SARA - Haz Substances and their RQs	CYCLOHEXANE	110-82-7
CERCLA/SARA - Haz Substances and their RQs	CYCLOHEXANE	110-82-7
CERCLA/SARA - Haz Substances and their RQs	ETHYL BENZENE	100-41-4
CERCLA/SARA - Haz Substances and their RQs	ETHYL BENZENE	100-41-4
CERCLA/SARA - Haz Substances and their RQs	N-HEXANE	110-54-3
CERCLA/SARA - Haz Substances and their RQs	N-HEXANE	110-54-3
CERCLA/SARA - Haz Substances and their RQs	NAPHTHALENE	91-20-3
CERCLA/SARA - Haz Substances and their RQs	NAPHTHALENE	91-20-3
CERCLA/SARA - Haz Substances and their RQs	TOLUENE	108-88-3
CERCLA/SARA - Haz Substances and their RQs	TOLUENE	108-88-3
CERCLA/SARA - Haz Substances and their RQs	XYLENE	1330-20-7
CERCLA/SARA - Haz Substances and their RQs	XYLENE	1330-20-7
CERCLA/SARA - Section 313 - Emission Reporting	1,2,4-TRIMETHYLBENZENE	95-63-6
CERCLA/SARA - Section 313 - Emission Reporting	BENZENE	71-43-2
CERCLA/SARA - Section 313 - Emission Reporting	CUMENE	98-82-8
CERCLA/SARA - Section 313 - Emission Reporting	CYCLOHEXANE	110-82-7
CERCLA/SARA - Section 313 - Emission Reporting	ETHYL BENZENE	100-41-4
CERCLA/SARA - Section 313 - Emission Reporting	N-HEXANE	110-54-3
CERCLA/SARA - Section 313 - Emission Reporting	NAPHTHALENE	91-20-3
CERCLA/SARA - Section 313 - Emission Reporting	TOLUENE	108-88-3
CERCLA/SARA - Section 313 - Emission Reporting	XYLENE	1330-20-7
CWA (Clean Water Act) - Hazardous Substances	BENZENE	71-43-2
CWA (Clean Water Act) - Hazardous Substances	CYCLOHEXANE	110-82-7
CWA (Clean Water Act) - Hazardous Substances	ETHYL BENZENE	100-41-4
CWA (Clean Water Act) - Hazardous Substances	NAPHTHALENE	91-20-3
CWA (Clean Water Act) - Hazardous Substances	TOLUENE	108-88-3
CWA (Clean Water Act) - Hazardous Substances	XYLENE	1330-20-7
CWA (Clean Water Act) - Priority Pollutants	BENZENE	71-43-2
CWA (Clean Water Act) - Priority Pollutants	ETHYL BENZENE	100-41-4
CWA (Clean Water Act) - Priority Pollutants	NAPHTHALENE	91-20-3
CWA (Clean Water Act) - Priority Pollutants	TOLUENE	108-88-3



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 15 Regulatory Information (continued)

CWA (Clean Water Act) - Toxic Pollutants	BENZENE	71-43-2
CWA (Clean Water Act) - Toxic Pollutants	ETHYL BENZENE	100-41-4
CWA (Clean Water Act) - Toxic Pollutants	NAPHTHALENE	91-20-3
CWA (Clean Water Act) - Toxic Pollutants	TOLUENE	108-88-3
IARC - Group 1 (carcinogenic to humans)	BENZENE	71-43-2
IARC - Group 2B (Possibly carcinogenic to humans)	ETHYL BENZENE	100-41-4
IARC - Group 2B (Possibly carcinogenic to humans)	LIGHT PETROLEUM	8006-61-9
	DISTILLATE	
IARC - Group 2B (Possibly carcinogenic to humans)	NAPHTHALENE	91-20-3
IARC - Group 3 (not classifiable)	TOLUENE	108-88-3
IARC - Group 3 (not classifiable)	XYLENE	1330-20-7
Inventory - Canada - Domestic Substances List	1,2,4-TRIMETHYLBENZENE	95-63-6
Inventory - Canada - Domestic Substances List	BENZENE	71-43-2
Inventory - Canada - Domestic Substances List	CUMENE	98-82-8
Inventory - Canada - Domestic Substances List	CYCLOHEXANE	110-82-7
Inventory - Canada - Domestic Substances List	ETHYL BENZENE	100-41-4
Inventory - Canada - Domestic Substances List	LIGHT PETROLEUM	8006-61-9
	DISTILLATE	
Inventory - Canada - Domestic Substances List	N-HEXANE	110-54-3
Inventory - Canada - Domestic Substances List	NAPHTHALENE	91-20-3
Inventory - Canada - Domestic Substances List	TOLUENE	108-88-3
Inventory - Canada - Domestic Substances List	XYLENE	1330-20-7
Inventory - TSCA - Sect. 8(b) Inventory	1,2,4-TRIMETHYLBENZENE	95-63-6
Inventory - TSCA - Sect. 8(b) Inventory	BENZENE	71-43-2
Inventory - TSCA - Sect. 8(b) Inventory	CUMENE	98-82-8
Inventory - TSCA - Sect. 8(b) Inventory	CYCLOHEXANE	110-82-7
Inventory - TSCA - Sect. 8(b) Inventory	ETHYL BENZENE	100-41-4
Inventory - TSCA - Sect. 8(b) Inventory	LIGHT PETROLEUM	8006-61-9
	DISTILLATE	
Inventory - TSCA - Sect. 8(b) Inventory	N-HEXANE	110-54-3
Inventory - TSCA - Sect. 8(b) Inventory	NAPHTHALENE	91-20-3
Inventory - TSCA - Sect. 8(b) Inventory	TOLUENE	108-88-3
Inventory - TSCA - Sect. 8(b) Inventory	XYLENE	1330-20-7
OSHA - Final PELs - Ceiling Limits	BENZENE	71-43-2
OSHA - Final PELs - Ceiling Limits	TOLUENE	108-88-3
OSHA - Final PELs - Skin Notations	CUMENE	98-82-8
OSHA - Final PELs - Time Weighted Averages	BENZENE	71-43-2
OSHA - Final PELs - Time Weighted Averages	CUMENE	98-82-8
OSHA - Final PELs - Time Weighted Averages	CYCLOHEXANE	110-82-7
OSHA - Final PELs - Time Weighted Averages	ETHYL BENZENE	100-41-4
OSHA - Final PELs - Time Weighted Averages	N-HEXANE	110-54-3
OSHA - Final PELs - Time Weighted Averages	NAPHTHALENE	91-20-3
OSHA - Final PELs - Time Weighted Averages	TOLUENE	108-88-3
OSHA - Final PELs - Time Weighted Averages	XYLENE	1330-20-7
OSHA - Regulated Carcinogens	BENZENE	71-43-2
OSHA - Select Carcinogens	BENZENE	71-43-2
Pennsylvania - RTK (Right to Know) List	1,2,4-TRIMETHYLBENZENE	95-63-6
Pennsylvania - RTK (Right to Know) List	BENZENE	71-43-2
Pennsylvania - RTK (Right to Know) List	CUMENE	98-82-8
Pennsylvania - RTK (Right to Know) List	CYCLOHEXANE	110-82-7



Material Safety Data Sheet

REGULAR UNLEADED GASOLINE

Section 15 Regulatory Information (continued)

Pennsylvania - RTK (Right to Know) List	THYL BENZENE	100-41-4
Pennsylvania - RTK (Right to Know) List	N-HEXANE	110-54-3
Pennsylvania - RTK (Right to Know) List	NAPHTHALENE	91-20-3
Pennsylvania - RTK (Right to Know) List	TOLUENE	108-88-3
Pennsylvania - RTK (Right to Know) List	XYLENE	1330-20-7
Pennsylvania - RTK - Special Hazardous Substances	BENZENE	71-43-2
TSCA - Sect. 12(b) - Export Notification	CYCLOHEXANE	110-82-7
TSCA - Sect. 12(b) - Export Notification	N-HEXANE	110-54-3
TSCA - Section 8(a) - PAIR Reporting List	NAPHTHALENE	91-20-3

Section 16 Other Information

Precautionary labeling for pumps, portable containers, and drums is required. A "hazardous when empty" pictogram and D.O.T. flammable liquid label are also required for drums. Details available upon request. Because benzene is present in this product above 0.1%, the OSHA Standard for benzene is applicable to work locations upstream of final discharge from terminals. Consult 29CFR1910.1028 for details. Prolonged and repeated excessive exposures to benzene can result in blood disorders ranging from anemia to leukemia. Sun recommends that exposures to benzene be kept below 1.0 ppm for 8-hours; 5.0 ppm for 15-min. Normal service station operations are below these values. For use as motor fuel only. Do not use for any other purpose. Catecholamines and similar adrenergic drugs are generally contraindicated because of potential for increased sensitivity of the heart from hydrocarbon overexposure and subsequent ventricular fibrillation. EKG monitoring may be indicated and bronchodilators should be selected with care. Following injection, prompt debridement of the wound is necessary to minimize necrosis and tissue loss. COMPONENT TOXICITY: Overexposure to naphthalene, a minor component of this product, may cause skin, eye and respiratory tract irritation, anemia, loss of vision, nervous system effects and kidney and thymus damage. Also, exposure to naphthalene has produced "respiratory tract" tumors in laboratory animals.

Preparation Date of Material Safety Data Sheet

DATE PREPARED..... 03/06/96
REVISION DATE 08/20/04

DISCLAIMER: Information presented herein has been compiled from information provided to us by our suppliers and other sources considered to be dependable and is accurate and reliable to the best of our knowledge and belief but is not guaranteed to be so. Nothing here in is to be construed as recommending any practice or the use of any product in violation of any patent or in violation of any law or regulation. It is the users' responsibility to determine the suitability of any material for a specific purpose and to adopt such safety precautions as may be necessary. We make no warranty as to the results to be obtained by using any material and since conditions of use are not under our control, we must necessarily disclaim all liability with respect to the use of material supplied by us.



MATERIAL SAFETY DATA SHEET

Date Prepared: April 06, 2002
Supersedes: January 08, 1999
MSDS Number: 08259

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 32

Application and Use:
Hydraulic fluid

Product Description:

Mixture of paraffinic and naphthenic hydrocarbons (saturated and unsaturated), and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: 32.00 cSt at 40 deg C
Vapour Density: not available
Boiling Point: 229 to 512 deg C
Evaporation rate: <0.1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -42 deg C ASTM D97
Odour Threshold: not available
Vapour Pressure: <1 kPa at 38 deg C
Density: 0.87 g/cc at 15 deg C
Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use. In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves. Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Recover by pumping or by using a suitable absorbant. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 165 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

THREE YEAR WHMIS REVIEW.

10. PREPARATION

Date Prepared: April 06, 2002

Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario

M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: April 06, 2002
Supersedes: January 08, 1999
MSDS Number: 08258

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 22

Application and Use:
Hydraulic fluid

Product Description:

Mixture of paraffinic and naphthenic hydrocarbons (saturated and unsaturated), and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: 22.00 cSt at 40 deg C
Vapour Density: not available
Boiling Point: 229 to 512 deg C
Evaporation rate: <0.1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -48 deg C ASTM D97
Odour Threshold: not available
Vapour Pressure: <1 kPa at 38 deg C
Density: 0.87 g/cc at 15 deg C
Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. Do not handle or store near an open flame, sources of heat, or sources of ignition.

In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard.

Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth.

Recover by pumping or by using a suitable absorbant.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 150 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide under thermal decomposition.

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

THREE YEAR WHMIS REVIEW.

10. PREPARATION

Date Prepared: April 06, 2002

Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division

111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: November 14, 2003
Supersedes: September 17, 1998
MSDS Number: 08366

1. PRODUCT INFORMATION

Product Identifier: UNIREX LOTEMP MOLY GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL), exempt, or have been notified under CEPA.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: not available
 Viscosity: <20.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: not available
 Evaporation rate: <1 (1= n-butylacetate)
 Solubility in water: negligible
 Freezing/Pour Point: 245 deg C ASTM D97
 Odour Threshold: not available
 Vapour Pressure: 0.002 kPa at 20 deg C
 Density: 0.92 g/cc at 15 deg C
 Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.
 High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.
 Small amounts of this liquid drawn into the lungs from swallowing or vomiting may cause severe health effects (e.g. bronchopneumonia or pulmonary edema).

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For insoluble Molybdenum compounds, 10 mg/m3.

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

DO NOT induce vomiting since it is important that no amount of the material should enter the lungs (aspiration). Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon

conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care.

Store in a cool, well ventilated place away from incompatible materials.

In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Store and load at normal (up to 38 deg C) temperature and at atmospheric pressure.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard.

Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth.

Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately.

Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters.

Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: >110 deg C COC ASTM D92 est.baseoil

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Decomposes; flammable/toxic gases will form at elevated temperatures (thermal decomposition).

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

Fumes, smoke, carbon monoxide and sulphur oxides in case of incomplete combustion

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 17 September 1998, this MSDS has been revised in Section(s):
1, 7

10. PREPARATION

Date Prepared: November 14, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

SECTION 1 – PRODUCT INFORMATION

Product Name: Propane
Trade Name: LPG (Liquified Petroleum Gas), LP-Gas
Chemical Formula: C₃H₈

WHMIS CLASSIFICATION
 Class A - Compressed Gas
 Class B, Division 1 - Flammable Gas

Supplier: Superior Propane Inc.
 1111 - 49th Avenue N.E.
 Calgary, AB T2E 8V2
Business: (403) 730-7500

Local Market
Emergency Number: _____
 (Non Medical)

Application and Use: Propane is commonly used as a fuel for heating, cooking, automobiles, forklift trucks, crop drying and welding and cutting operations. Propane is used in industry as a refrigerant, solvent and as a chemical feedstock.

SECTION 2 – HAZARDOUS INGREDIENTS

COMPONENTS	CAS NO.	% Volume (v/v)	LD50
Propane	74 -98-6	90% - 99%	Not Applicable
Propylene	115 -07-1	0% - 5%	Not Applicable
Ethane	74 -84-0	0% - 5%	Not Applicable
Butane and heavier hydro carbons	106 -97-8	0% - 2.5%	Not Applicable

Occupational Exposure Limit:

Based upon animal test data, the acute toxicity of this product is expected to be inhalation: 4 hour LC50 = 280,000 ppm (Rat).

Note: Composition is typical for HD-5 Propane per The Canadian General Standard Board CGSB 3.14 National Standard of Canada. Exact composition will vary from shipment to shipment.

SECTION 3 – CHEMICAL AND PHYSICAL DATA

Form: Liquid and vapour while stored under pressure.
Boiling Point: -42°C @ 1 atm.
Freezing Point: -188°C
Evaporation Rate: Rapid (Gas at normal ambient conditions).
Vapour Pressure: 1435 kPa (maximum) @ 37.8°C
Vapour Density: 1.52 (Air = 1)
Coefficient of Water/Oil Distribution: Not available.
pH: Not available.

Solubility in water: Slight, 6.1% by volume @ 17.8°C

Specific Gravity: 0.51 (water = 1)

Appearance/Odour: Colourless liquid and vapour while stored under pressure. Colourless and odourless gas in natural state at any concentration. Commercial propane has an odourant added, ethyl mercaptan, which has an odour similar to boiling cabbage.*

Odour Threshold: 4800 ppm

* With proper handling, transportation and storage, adding a chemical odourant such as eth-merc has proven to be a very effective warning device, but all odourants have certain limitations. The effectiveness of the odourant may be diminished by a person's sense of smell, by competing odours and by oxidation which may cause a potentially dangerous situation.

SECTION 4 – FIRE OR EXPLOSION HAZARD

Flash Point: -103.4°C
Method: Closed cup.
Flammable Limits: Lower 2.4%, Upper 9.5%
Auto Ignition Temperature: 432°C
Products Evolved Due To Heat Or Combustion: Carbon monoxide can be produced when primary air and secondary air are deficient while combustion is taking place.
Fire and Explosive Hazards: Explosive air-vapour mixtures may form if allowed to leak to atmosphere.
Sensitivity To Impact: No.
Sensitivity To Static Discharge: Yes.

Fire Extinguishing Precautions: Use water spray to cool exposed cylinders or tanks. Do not extinguish fire unless the source of the escaping gas that is fueling the fire can be turned off. Fire can be extinguished with carbon dioxide and/or dry chemical (BC). Container metal shells require cooling with water to prevent flame impingement and the weakening of metal. If sufficient water is not available to protect the container shell from weakening, the area will be required to be evacuated. If gas has not ignited, liquid or vapour may be dispersed by water spray or flooding.

Special Fire Fighting Equipment: Protective clothing, hose monitors, fog nozzles, self-contained breathing apparatus.

SECTION 5 – REACTIVITY DATA

Stability: Stable.
Conditions To Avoid: Keep separate from oxidizing agents. Gas explodes spontaneously when mixed with chloride dioxide.
Incompatibility: Remove sources of ignition and observe distance requirements for storage tanks from combustible material, drains and openings to building.

Hazardous Decomposition Products: Deficient primary and secondary air can produce carbon monoxide.

Hazardous Polymerization: Will not occur.

SECTION 6 – TOXICOLOGICAL PROPERTIES OF MATERIAL

ROUTES OF ENTRY:

Inhalation: Simple asphyxiant. No effect at concentrations of 10,000 ppm (peak exposures). Higher concentrations may cause central nervous system disorder and/or damage. Lack of oxygen may cause dizziness, loss of coordination, weakness, fatigue, euphoria, mental confusion, blurred vision, convulsions, breathing failure, coma and death. Breathing high vapour concentrations (saturated vapours) for a few minutes may be fatal. Saturated vapours may be encountered in confined spaces and/or under conditions of poor ventilation. Avoid breathing vapours or mist.

Skin and Eye Contact: Exposure to vapourizing liquid may cause frostbite (cold burns) and permanent eye damage.

Ingestion: Not considered to be a hazard.

Acute Exposure: The acute toxicity of this product is expected to be inhalation: 4 hour LC50=280,000ppm (Rat).

Chronic Exposure: There are no reported effects from long term low level exposure.

Sensitization to Product: Skin–unknown, Respiratory–unknown.

Occupational Exposure Limits: American Conference of Governmental Industrial Hygienists (ACGIH) lists as a simple asphyxiant. ACGIH TLV: 1000 ppm.

Carcinogenicity, Reproductive Toxicity, Teratogenicity, Mutagenicity: No effects reported.

SECTION 7 – PREVENTIVE MEASURES

Eyes: Safety glasses, are recommended when transferring product.

Skin: Insulated gloves required if contact with liquid or liquid cooled equipment is expected. Wear gloves and long sleeves when transferring product.

Inhalation: Where concentration in air would reduce the oxygen level below 18% air or exceed occupational exposure limits in section 6, self-contained breathing apparatus is required.

Ventilation: Explosion proof ventilation equipment required in confined spaces.

SECTION 8 – EMERGENCY AND FIRST AID PROCEDURES

FIRST AID:

Eyes: Should eye contact with liquid occur, flush eyes with lukewarm water for 15 minutes. Obtain immediate medical care.

Skin: In case of “Cold Burn” from contact with liquid, immediately place affected area in lukewarm water and keep at this temperature until circulation returns. If fingers or hands are frostbitten, have the victim hold his hand next to his body such as under the armpit. Obtain immediate medical care.

Ingestion: None considered necessary.

Inhalation: Remove person to fresh air. If breathing is difficult or has stopped, administer artificial respiration. Obtain immediate medical care.

SPILL OR LEAK:

Eliminate leak if possible.

Eliminate source of ignition.

Ensure cylinder is upright.

Disperse vapours with hose streams using fog nozzles. Monitor low areas as propane is heavier than air and can settle into low areas. Remain upwind of leak. Keep people away. Prevent vapour and/or liquid from entering into sewers, basements or confined areas.

SECTION 9 – TRANSPORTATION, HANDLING AND STORAGE

- Transport and store cylinders and tanks secured in an upright position in a ventilated space away from ignition sources (so the pressure relief valve is in contact with the vapour space of the cylinder or tank).
- Cylinders that are not in use must have the valves in the closed position and be equipped with a protective cap or guard.
- Do not store with oxidizing agents, oxygen, or chlorine cylinders.

- Empty cylinders and tanks may contain product residue. Do not pressurize, cut, heat or weld empty containers.
- Transport, handle and store according to applicable federal and provincial codes and regulations.

Transportation of Dangerous Goods (TDG)

- TDG Classification: Flammable Gas 2.1
- TDG Shipping Name: Liquefied Petroleum Gas (Propane)
- TDG Special Provisions: 56, 90, 102
- PIN Number: UN1075

SECTION 10 – PREPARATION

Superior Propane Inc., Regulations & Safety Department. (403) 730-7500 Date prepared: November 2001.
Supersedes: September 1999.

The information contained herein is believed to be accurate. It is provided independently of any sale of the product. It is not intended to constitute performance information concerning the product. No express warranty, implied warranty of merchantability or fitness for a particular purpose is made with respect to the product information contained herein.

MATERIAL SAFETY DATA SHEET

SECTION 1 - CHEMICAL PRODUCT AND COMPANY IDENTIFICATION

Product Name: Portland Cement, GU (General use hydraulic cement, formerly Normal Portland Cement), HE (High early-strength hydraulic cement) and HS (High sulphate-resistant hydraulic cement).

CAS #: 65997-15-1

Product Use: Preparation of concrete and mortar.

MSDS Information: This MSDS was produced in November, 2002, and replaces any previous versions. This MSDS covers all types of portland cement. Individual composition of constituents will vary within the range shown in Section 2.

Product Code: Not Applicable.

Chemical Family: Calcium compounds. Calcium silicate compounds and other calcium compounds containing iron and aluminum make up the majority of this product.

Chemical Name And Synonyms: Portland cement. Portland cement is also known as hydraulic cement and/or normal portland cement.

Formula: This product consists of finely ground portland cement clinker, gypsum and limestone (for some products).

Supplier/Manufacturer: Lehigh Inland Cement Limited
P.O. Box 3961, Station D,
12640 - 156 Street
Edmonton, Alberta, Canada, T5L 4P5
Telephone (780) 420 2500

Emergency Contact Information: Lehigh Inland Cement Limited
P.O. Box 3961, Station D,
12640 - 156 Street
Edmonton, Alberta, Canada, T5L 4P5
Telephone (780) 420 2541

SECTION 2 - COMPOSITION/INFORMATION ON INGREDIENTS

Portland Cement Exposure Limits:

ACGIH TLV-TWA	10 mg total dust/m ³
OSHA PEL-TWA	15 mg total dust/m ³
OSHA PEL-TWA	5 mg respirable dust/m ³

Portland Cement Ingredients & Their Exposure Limits:

Ingredient	CAS#	% By Weight	ACGIH TLV-TWA	OSHA PEL-TWA
Calcium Silicates	various	60-80%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Gypsum	7778-18-9	3-7%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Crystalline Silica	14808-60-7	less than 0.1%	0.10 mg respirable quartz/m ³ NIOSH REL (8-hour TWA) = 0.05 mg respirable quartz dust/m ³	(10 mg respirable dust/m ³)/(percent silica+2)
Calcium Carbonate	1317-65-3	0-5%	10 mg total dust/m ³	15 mg total dust/m ³ 5 mg respirable dust/m ³
Magnesium Oxide	1309-48-4	1-4%	10 mg total dust/m ³	10 mg total dust/m ³
Calcium Oxide	1305-78-8	0.5-1.5%	2 mg total dust/m ³	5 mg total dust/m ³

Trace Elements:

Portland cement is made from materials mined from the earth and is processed using energy provided by fuels. Trace amounts of chemicals, some of which may be potentially harmful, might be detected during chemical analysis. For example, in addition to the ingredients listed above, portland cement may contain potassium and sodium sulfate compounds, chromium compounds (including up to 0.003% hexavalent chromium) and nickel compounds.

MATERIAL SAFETY DATA SHEET

SECTION 3 - HAZARDS IDENTIFICATION

Emergency Overview:

Portland cement is a light gray powder that poses little immediate hazard. A single short term exposure to the dry powder is not likely to cause serious harm. However, exposure of sufficient duration to wet portland cement can cause serious, potentially irreversible tissue (skin or eye) destruction in the form of chemical (caustic) burns, including third degree burns. The same type of tissue destruction can occur if wet or moist areas of the body are exposed for sufficient duration to dry portland cement.

Potential Health Effects:

- **Relevant routes of exposure are:**

Eye contact, skin contact, inhalation, and ingestion.

Effects Resulting From EYE CONTACT:

Exposure to airborne dust may cause immediate or delayed irritation or inflammation.

Eye contact by larger amounts of dry powder or splashes of wet portland cement may cause effects ranging from moderate eye irritation to chemical burns and blindness. Such exposures require immediate first aid (see Section 4) and medical attention to prevent significant damage to the eye.

Effects Resulting From SKIN CONTACT:

Discomfort or pain cannot be relied upon to alert a person to a hazardous skin exposure. Consequently, the only effective means of avoiding skin injury or illness involves minimizing skin contact, particularly contact with wet cement. Exposed persons may not feel discomfort until hours after the exposure has ended and significant injury has occurred.

Exposure to dry portland cement may cause drying of the skin with consequent mild irritation or more significant effects attributable to aggravation of other conditions. Dry portland cement contacting wet skin or exposure to moist or wet portland cement may cause more severe skin effects including thickening, cracking, or fissuring of the skin. Prolonged exposure can cause severe skin damage in the form of (caustic) chemical burns.

Some individuals may exhibit an allergic response upon exposure to portland cement, possibly due to trace amounts of chromium. The response may appear in a variety of forms ranging from a mild rash to severe skin ulcers. Persons already sensitized may react to their first contact with the product. Other persons may first experience this effect after years of contact with portland cement products.

Effects Resulting From INHALATION:

Portland cement may contain trace amounts of crystalline silica. Prolonged exposure to respirable free crystalline silica may aggravate other lung conditions. It also may cause delayed lung injury including silicosis, a disabling and potentially fatal lung disease, and/or other diseases. (Also see "Carcinogenic Potential" below.)

Exposure to portland cement may cause irritation to the moist mucous membranes of the nose, throat, and upper respiratory system. It may also leave unpleasant deposits in the nose.

Effects Resulting From INGESTION:

Although small quantities of dust are not known to be harmful, ill effects are possible if larger quantities are consumed. Portland cement should not be eaten.

- **Carcinogenic Potential:**

Portland cement is not listed as a carcinogen by NTP, OSHA, or IARC. It may, however, contain trace amounts of substances listed as carcinogens by these organizations.

Crystalline silica, a potential trace level contaminant in portland cement, is now classified by IARC as a known human carcinogen (Group 1). NTP has characterized respirable silica as "reasonably anticipated to be [a] carcinogen".

- **Medical Conditions That May Be Aggravated By Inhalation Or Dermal Exposure:**

Pre-existing upper respiratory and lung diseases.
Unusual (hyper) sensitivity to hexavalent chromium (chromium⁺⁶) salts.

MATERIAL SAFETY DATA SHEET**SECTION 4 - FIRST-AID MEASURES****Eyes:**

Immediately flush eyes thoroughly with water. Continue flushing for at least 15 minutes, including under lids, to remove all particles. Call physician immediately.

Skin:

Wash skin with cool water and pH-neutral soap or a mild detergent intended for use on skin. Seek medical treatment in all cases of prolonged exposure to wet cement, cement mixtures, liquids from fresh cement products, or prolonged wet skin exposure to dry cement.

Inhalation Of Airborne Dust:

Remove to fresh air. Seek medical help if coughing and other symptoms do not subside. ("Inhalation" of gross amounts of portland cement requires immediate medical attention.)

Ingestion:

Do not induce vomiting. If conscious, have the victim drink plenty of water and call a physician immediately.

SECTION 5 - FIRE-FIGHTING MEASURES

Flammability:	Not Flammable.
Flash Point:	Not Applicable.
Lower Explosive Limit:	Not Applicable.
Upper Explosive Limit:	Not Applicable.
Auto ignition Temperature:	Not Applicable.
Sensitivity To Static Discharge:	Not Applicable.
Sensitivity To Impact:	Not Applicable.
Extinguishing Media:	Not Applicable.
Special Fire-Fighting Procedures:	None.
Hazardous Combustion Products:	Not Applicable.
Unusual Fire And Explosion Hazards:	Not Applicable.

SECTION 6 - ACCIDENTAL RELEASE MEASURES

Collect dry material using a scoop. Avoid actions that cause dust to become airborne. Avoid inhalation of dust and contact with skin. Wear appropriate personal protective equipment as described in Section 8.

Scrape up wet material and place in an appropriate container. Allow the material to "dry" before disposal. Do not attempt to wash portland cement down drains.

Dispose of waste material according to local, provincial, state and federal regulations.

SECTION 7 - HANDLING AND STORAGE

Keep portland cement dry until used. Normal temperatures and pressures do not affect the material.

Promptly remove dusty clothing or clothing which is wet with cement fluids and launder before reuse. Wash thoroughly after exposure to dust or wet cement mixtures or fluids.

MATERIAL SAFETY DATA SHEET

SECTION 8 - EXPOSURE CONTROLS/PERSONAL PROTECTION

Eye Protection:

When engaged in activities where cement dust or wet cement or concrete could contact the eye, wear safety glasses with side shields or goggles. In extremely dusty environments and unpredictable environments, wear unvented or indirectly vented goggles to avoid eye irritation or injury. Contact lenses should not be worn when working with portland cement or fresh cement products.

Skin Protection:

Prevention is essential to avoiding potentially severe skin injury. Avoid contact with unhardened (wet) portland cement products. If contact occurs, promptly wash affected area with soap and water. Where prolonged exposure to unhardened portland cement products might occur, wear impervious clothing and gloves to eliminate skin contact. Where required, wear boots that are impervious to water to eliminate foot and ankle exposure.

Do not rely on barrier creams; barrier creams should not be used in place of gloves.

Periodically wash areas contacted by dry portland cement or by wet cement or concrete fluids with a pH-neutral soap. Wash again at the end of work. If irritation occurs, immediately wash the affected area and seek treatment. If clothing becomes saturated with wet concrete, it should be removed and replaced with clean dry clothing.

Respiratory Protection:

Avoid actions that cause dust to become airborne. Use local or general ventilation to control exposures below applicable exposure limits.

Use NIOSH/MSHA-approved (under 30 CFR 11) or NIOSH-approved (under 42 CFR 84 after July 10, 1998) respirators in poorly ventilated areas, if an applicable exposure limit is exceeded, or when dust causes discomfort or irritation.

Ventilation:

Use local exhaust or general dilution ventilation to control exposure within applicable limits.

SECTION 9 - PHYSICAL AND CHEMICAL PROPERTIES

Appearance:	White to gray powder.
Odor:	No distinct odor.
Odor Threshold:	Not applicable.
Physical State:	Solid (powder).
pH (as a solid):	Not applicable.
pH (in water) (ASTM D 1293-95):	12 to 13
Solubility In Water:	Slightly soluble (0.1 to 1.0 %).
Vapor Pressure:	Not applicable.
Vapor Density:	Not applicable.
Boiling Point:	Not applicable (i.e., >1000°C).
Freezing Point:	Not applicable.
Melting Point:	Not applicable.
Specific Gravity (H₂O = 1.0):	3.15
Evaporation Rate:	Not applicable.
Coeff. Water/Oil Dist.:	Not applicable.

SECTION 10 - STABILITY AND REACTIVITY

Stability:	Stable
Conditions to avoid:	Unintentional contact with water.
Incompatibility:	Portland cement reacts with water to produce a caustic solution, pH 12 to pH 13. Wet portland cement is alkaline. As such it is incompatible with acids, ammonium salts and aluminum metal. Aluminum powder and other alkali and alkaline earth elements will react in wet mortar or concrete, liberating hydrogen gas. Portland cement dissolves in hydrofluoric acid producing corrosive silicon tetrafluoride gas. Silicates react with powerful oxidizers such as fluorine, chlorine, trifluoride and oxygen difluoride.

MATERIAL SAFETY DATA SHEET

SECTION 10 - STABILITY AND REACTIVITY (CONTINUED)

Hazardous Decomposition: Will not spontaneously occur. Adding water results in hydration and produces (caustic) calcium hydroxide.

Hazardous Polymerization: Will not occur.

SECTION 11 - TOXICOLOGICAL INFORMATION

Effects Of Acute Exposure:

Portland cement and wet portland cement mixtures can dry the skin, cause alkali burns and irritate the eyes and upper respiratory tract. Ingestion can cause irritation of the throat.

Effects Of Chronic Exposure:

Portland cement dust can cause inflammation of the tissue lining the interior of the nose and the cornea (white) of the eye.

SECTION 12 - ECOLOGICAL INFORMATION

Ecotoxicity: No recognized unusual toxicity to plants or animals.

Relevant Physical And Chemical Properties: See Sections 9 and 10.

SECTION 13 - DISPOSAL CONSIDERATIONS

Dispose of waste material according to local, provincial, state and federal regulations. (Since portland cement is stable, uncontaminated material may be saved for future use.)

Dispose of bags in an approved landfill or incinerator.

SECTION 14 - TRANSPORT INFORMATION

Hazardous materials description/proper shipping name: Portland cement is not hazardous under the TDG Act (Canada) or DOT regulations (USA).

Hazard Class: Not applicable.

Identification Number: Not applicable.

Required Label Text: Not applicable.

Hazardous substances/reportable quantities (RO): Not applicable.

SECTION 15 - REGULATORY INFORMATION

Status under USDOL-OSHA Hazard Communication Rule, 29 CFR 1910.1200:

Portland cement is considered a "hazardous chemical" under this regulation, and should be part of any hazard communication program.

Status under CERCLA/Superfund, 40 CFR 117 and 302:

Not listed.

Hazard Category under SARA (Title III), Sections 311 and 312:

Portland cement qualifies as a "hazardous substance" with delayed health effects.

Status under SARA (Title III), Section 313:

Not subject to reporting requirements under Section 313.

MATERIAL SAFETY DATA SHEET

SECTION 15 - REGULATORY INFORMATION (CONTINUED)

Status under TSCA (as of May 1997):

Some substances in portland cement are on the TSCA inventory list.

Status under the Federal Hazardous Substances Act:

Portland cement is a "hazardous substance" subject to statutes promulgated under the subject act.

Status under California Proposition 65:

This product contains chemicals (trace metals) known to the State of California to cause cancer, birth defects or other reproductive harm. California law requires the manufacturer to give the above warning in the absence of definitive testing to prove the defined risks do not exist.

Status under Canadian Environmental Protection Act:

Not listed.

Status under WHMIS:

Portland cement is considered to be a hazardous material under the Hazardous Products Act as defined by the Controlled Products Regulations and is therefore subject to the labeling and MSDS requirements of the Workplace Hazardous Materials Information System (WHMIS).

This product has been classified in accordance with the hazard criteria of the CPR and the MSDS contains all the information required by the CPR.

SECTION 16 - OTHER INFORMATION

Prepared By:	Robin Cowdrey
Approved By:	Bob Rimes
Approval Date or Revision Date:	September 1, 2004
Date Of Previous MSDS:	November 1, 2002
MSDS Number:	Not Applicable

Other Important Information:

Portland cement should only be used by knowledgeable persons. A key to using the product safely requires the user to recognize that portland cement chemically reacts with water, and that some of the intermediate products of this reaction (that is, those present while a portland cement product is "setting") pose a far more severe hazard than does portland cement itself.

While the information provided in this material safety data sheet is believed to provide a useful summary of the hazards of portland cement as it is commonly used, the sheet cannot anticipate and provide all of the information that might be needed in every situation. Inexperienced product users should obtain proper training before using this product.

In particular, the data furnished in this sheet does not address hazards that may be posed by other materials mixed with portland cement to produce portland cement products. Users should review other relevant material safety data sheets before working with this portland cement or working on portland cement products, for example, portland cement concrete.

No representations or warranties with respect to the accuracy or correctness of this information, or of any kind or nature whatsoever are given, made or intended by Lehigh Inland Cement Limited. No legal responsibility whatsoever is assumed for this information, or for any injuries or damages, however caused which may result from the use of this information. This information is offered solely for informational purposes and is subject to your own independent investigation and verification.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	TOOL JOINT COMPOUND	Code	650-774, TOOL
Synonym	Not available.	DSL	See Section 15
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	TSCA	See Section 15
Material Uses	Tool Joint Compound is used in drilling operations as a thread compound for rotary shouldered pipe connections to prevent galling and to provide a positive seal against drilling mud pressure.	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Proprietary ingredients. 2) Mica	Not available. 12001-26-2	≥90 ≤10	Not available. 3 mg/m ³	Not available. Not established	Not available. Not established

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. High pressure grease gun is capable of injecting grease through the skin. Grease gun injuries require immediate physician assessment. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Lower: 0.9%; Upper: 7%
Flash Points	Mineral Oil Blend: OPEN CUP: 250°C (482°F) (Cleveland)	Auto-Ignition Temperature	>260°C (500°F)
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), hydrocarbons, metal oxides, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.
Exposure Limits	Consult local authorities for acceptable exposure limits. This product is not expected to form a mist based on its properties and expected use.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Smooth buttery paste.	Viscosity	Mineral Oil Blend: 103.3 cSt @ 40°C, 11.5 cSt @ 100°C, VI=98
Colour	Grey.	Pour Point	Mineral Oil Blend: -15°C
Odour	Mild petroleum odour.	Softening Point	Not available.
Odour Threshold	Not available.	Dropping Point	196°C
Boiling Point	<316°C (600°F)	Penetration	280 (60 strokes)
Specific Gravity	Mineral Oil Blend: 0.8741 kg/L @ 15°C (59°F).	Oil / Water Dist. Coeff.	Not available.
Vapor Density	Not available.	Ionicity (in water)	Not available.
Vapor Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available.
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, hydrocarbons, metal oxides, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Not available.
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.

Continued on Next Page

Available in French

Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	Not available.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available.	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>										
DSD/DPD (Europe)	Not evaluated.										
DSD/DPD (Europe) (Pictograms)	<p>NOT EVALUATED FOR EUROPEAN TRANSPORT</p> <p>NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.</p>	DOT (U.S.A) (Pictograms)									
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>1</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>	Health Hazard	1	Fire Hazard	1	Reactivity	1	Personal Protection	B	NFPA (U.S.A.)	<div><div>Health</div><div></div><div>Fire Hazard</div><div>Reactivity</div><div>Specific hazard</div></div>
Health Hazard	1										
Fire Hazard	1										
Reactivity	1										
Personal Protection	B										

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials ()
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer




IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLm - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

Information Contact Internet: www.petro-canada.ca**Lubricants:****Western Canada, telephone: 1-800-661-1199;****fax: (780) 464-9564****Ontario & Central Canada, telephone:****1-800-268-5850 and (905) 822-4222; fax:****1-800-201-6285****Quebec & Eastern Canada, telephone:****1-800-576-1686; fax: 800-201-6285****For Product Safety Information: (905) 804-4752****Prepared by Product Safety - JDW on 12/18/2002.****Data entry by Product Safety - JDW.**

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	SNOWMOBILE MOTOR OIL	Code	460-401-8, PSNOL
Synonym	Not available	Validated on	5/28/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Low ash engine oil specifically designed to lubricate two-cycle snowmobile engine		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Severely hydrotreated paraffinic oil and additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: 152°C (305.6°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid inhalation and skin contact especially when handling used oil. Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	21.1 cSt @ 40°C, 4.5 cSt @ 100°C, VI=127.
Colour	Blue-green	Pour Point	<-54°C
Odour	Mild petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.88 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, reducing agents and acids.	Decomposition Products	May release COx, NOx, aldehydes, methacrylate monomers, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.

Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations




Waste Disposal	Spent/used/waste oil may meet the requirements of a hazardous waste. Consult your local or regional authorities. Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations.
-----------------------	---

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>		
DSD/DPD (Europe)	Not classified under the Dangerous Substances or Dangerous Preparations Directives.	HCS (U.S.A.)	Not controlled under the HCS (United States).

ADR (Europe) (Pictograms)		DOT (U.S.A) (Pictograms)					
							
HMIS (U.S.A.)	Health Hazard	1	NFPA (U.S.A.)		Fire Hazard Reactivity Specific hazard	Rating	0 Insignificant
	Fire Hazard	1					1 Slight
	Reactivity	0					2 Moderate
	Personal Protection	B					3 High
							4 Extreme

Section 16. Other Information

References

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System
ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%
ASTM - American Society for Testing and Materials (LDLo/LCLo - Lowest Published Lethal Dose/Concentration
BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)
CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association
CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health
CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)
CFR - Code of Federal Regulations	NTP - National Toxicology Program
CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration
COD5 - Chemical Oxygen Demand in 5 days	PEL - Permissible Exposure Limit
CPR - Controlled Products Regulations	RCRA - Resource Conservation and Recovery Act
DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act
DSCL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)	STEL - Short Term Exposure Limit (15 minutes)
DSL - Domestic Substance List	TDG - Transportation Dangerous Goods (Canada)
EEC/EU - European Economic Community/European Union	TDLo/TCLo - Lowest Published Toxic Dose/Concentration
EINECS - European Inventory of Existing Commercial Chemical Substances	TLm - Median Tolerance Limit
EPCRA - Emergency Planning and Community Right to Know Act	TLV-TWA - Threshold Limit Value-Time Weighted Average
FDA - Food and Drug Administration	TSCA - Toxic Substances Control Act
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act	USEPA - United States Environmental Protection Agency
HCS - Hazardous Communication System	USP - United States Pharmacopoeia
HMIS - Hazardous Material Information System	WHMIS - Workplace Hazardous Material Information System
IARC - International Agency for Research on Cancer	

For Copy of MSDS

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564

Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - TAR on 5/28/2001.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	DRILL ROD HEAVY GREASE	Code	650-265, DRODH
Synonym	Not available.	DSL	See Section 15
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	TSCA	See Section 15
Material Uses	This product is recommended for the lubrication of diamond drill rods.	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked, and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. High pressure grease gun is capable of injecting grease through the skin. Grease gun injuries require immediate physician assessment. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	Mineral Oil Blend: OPEN CUP: 252°C (485.6°F). (Cleveland).	Auto-Ignition Temperature	Not available.
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.
Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits. This product is not expected to form a mist based on its properties and expected use.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Paste of long fibred texture.	Viscosity	Mineral Oil Blend: 155.5 cSt @ 40°C (104°F), 14.42 cSt @ 100°C (212°F), VI=89
Colour	Dark greenish-brown	Pour Point	Mineral Oil Blend: -15°C (5°F)
Odour	Mild grease like.	Softening Point	Not available
Odour Threshold	Not available.	Dropping Point	201°C (394°F)
Boiling Point	Not available.	Penetration	234 (60 strokes)
Specific Gravity	Mineral Oil Blend: 0.8898 kg/L @ 15°C (59°F).	Oil / Water Dist. Coeff.	Not available.
Vapor Density	Not available.	Ionicity (in water)	Not available
Vapor Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available.
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Not corrosive to copper.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids and alkalis.	Decomposition Products	May release COx, NOx, SOx, diphenylamine, alkenes, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).
Chronic or Other Toxic Effects	
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.
Oral Route:	Low toxicity; has laxative effect.
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.
Immunotoxicity:	Not available.
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available.	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		

Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information**Other Regulations**

This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).

All components of this formulation are listed on the US EPA-TSCA Inventory.

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.

Please contact Product Safety for more information.

DSD/DPD (Europe) Not evaluated.

DSD/DPD (Europe) (Pictograms)

NOT EVALUATED FOR EUROPEAN TRANSPORT

NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.

DOT (U.S.A) (Pictograms)



HMIS (U.S.A.)

Health Hazard	1
Fire Hazard	1
Reactivity	0
Personal Protection	B

NFPA (U.S.A.)

**Section 16. Other Information****References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials ()
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLm - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

Information Contact Internet: www.petro-canada.ca

Lubricants:
Western Canada, telephone: 1-800-661-1199;
fax: (780) 464-9564
Ontario & Central Canada, telephone:
1-800-268-5850 and (905) 822-4222; fax:
1-800-201-6285
Quebec & Eastern Canada, telephone:
1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 4/29/2003.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	PETRO-CANADA SUPREME 5W-30, 10W-30, 10W-40, 20W-50 MOTOR OIL	Code	410-344, MOSP53 410-341, MOSP13 410-342, MOSP14 410-343, MOSP25
Synonym	Not available.	Validated on	8/31/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Supreme is designed for the lubrication of all gasoline, propane and CNG engines where the manufacturer recommends the use of API SM quality oils. SAE 5W-30 and 10W-30 grades also meet the requirements of ILSAC GF-4.		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Mixture of severely hydrotreated and hydrocracked base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Not expected to cause more than slight skin or eye irritation. With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation. Ingestion may produce a laxative effect. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	OPEN CUP: 223°C (433.4°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.

Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), calcium oxides (CaO _x), phosphorus compounds (PO _x), zinc oxides, boron oxides and molybdenum, smoke and irritating vapours as products of incomplete combustion.
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store away from incompatible and reactive materials (See section 5 and 10). Keep container tightly closed. Store in dry, cool, well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	5W-30: 62.3 cSt @ 40°C (104°F), 10.6 cSt @ 100°C (212°F). VI=160 10W-30: 67.4 cSt @ 40°C (104°F), 10.5 cSt @ 100°C (212°F). VI=143 10W-40: 97.2 cSt @ 40°C (104°F), 14.1 cSt @ 100°C (212°F). VI=143 20W-50: 170 cSt @ 40°C (104°F), 19.0 cSt @ 100°C (212°F). VI=127
Colour	Light amber.	Pour Point	5W-30: -36°C (-33°F) 10W-30: -36°C (-33°F) 10W-40: -30°C (-22°F) 20W-50: -24°C (-11°F)
Odour	Mild petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available.	Dropping Point	Not applicable.
Boiling Point	Not available.	Penetration	Not applicable.

Density	0.8566 - 0.8775 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available.
Vapour Density	Not available.	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 121°C (ASTM D0130): 1a		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, H2S, methacrylate monomers, alkyl mercaptans, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.		
Acute Lethality	<p>Acute toxicity information is not available for the product as a whole, therefore, data for some of the ingredients is provided below:</p> <p>Acute oral toxicity (LD50): >5000 mg/kg (rat).</p> <p>Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).</p> <p>Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat).</p>		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may defat and dry skin, and cause dermatitis. Short-term exposure is expected to cause only slight irritation, if any.		
Inhalation Route:	With its relatively low vapour pressure, this product is not expected to be inhaled in any appreciable quantity at ambient conditions. If heated to high temperatures or subjected to mechanical actions which produce vapours or mists, inhalation may cause respiratory tract irritation.		
Oral Route:	Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs). May produce a laxative effect.		
Eye Irritation/Inflammation:	Short-term exposure is expected to cause only slight irritation, if any.		
Immunotoxicity:	Not available.		
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.		
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.		
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.		
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark.		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available.	Products of Biodegradation	Not available.
Additional Remarks	No additional remark.		





Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada)	Special Provisions for Transport	Not applicable.
---------------------------	---	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																																				
		All components of this formulation are listed on the US EPA-TSCA Inventory.																																				
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).																																				
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																																				
		Please contact Product Safety for more information.																																				
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	Does not meet the definitions of a health or physical hazard according to the OSHA - Hazard Communication Standard. (United States)																																	
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)																																		
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	<table><tr><td>NFPA (U.S.A.)</td><td></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>Health</td><td></td><td>Reactivity</td><td></td><td>1 Slight</td></tr><tr><td></td><td></td><td>Specific hazard</td><td></td><td>2 Moderate</td></tr><tr><td></td><td></td><td></td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table>		NFPA (U.S.A.)		Fire Hazard	Rating	0 Insignificant	Health		Reactivity		1 Slight			Specific hazard		2 Moderate					3 High					4 Extreme
Health Hazard	1																																					
Fire Hazard	1																																					
Reactivity	0																																					
Personal Protection	B																																					
NFPA (U.S.A.)		Fire Hazard	Rating	0 Insignificant																																		
Health		Reactivity		1 Slight																																		
		Specific hazard		2 Moderate																																		
				3 High																																		
				4 Extreme																																		

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
-------------------	--

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System
ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%
ASTM - American Society for Testing and Materials	LDLo/LCLo - Lowest Published Lethal Dose/Concentration
BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)
CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association
CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health
CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)
CFR - Code of Federal Regulations	NTP - National Toxicology Program
CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration
COD5 - Chemical Oxygen Demand in 5 days	PEL - Permissible Exposure Limit
CPR - Controlled Products Regulations	RCRA - Resource Conservation and Recovery Act
DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act
DSDL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose
DSD/DPD - Dangerous Substances or Dangerous Preparations	STEL - Short Term Exposure Limit (15 minutes)
	TDG - Transportation Dangerous Goods (Canada)
	TDLo/TCLo - Lowest Published Toxic Dose/Concentration

Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazard Communication Standard
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TLM - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: www.petro-canada.ca

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564
Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752







Prepared by Product Safety - TLM on 8/31/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	JET B AVIATION TURBINE FUEL	Code	W219 SAP: 150, 151, 152
Synonym	Jet B; Jet B DI; JP-4; Jet F-40; NATO F-40; Turbine Fuel, Aviation, Wide Cut Type (CAN/CGSB-3.22).	Validated on	12/3/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as aviation turbine fuel. May contain a fuel system icing inhibitor.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Complex mixture of petroleum hydrocarbons (C6-C14).	64741-41-9	>99	Not established	Not established	Not established
2) Benzene	71-43-2	<0.5	0.5 ppm	2.5 ppm	Not established
3) Fuel System Icing Inhibitor (FSII) (if added*): Diethylene Glycol Monomethyl Ether	111-77-3	≤0.15	Not established	Not established	Not established
4) Anti-static, antioxidant and metal deactivator additives.	Not applicable	<0.1	Not applicable	Not applicable	Not applicable
* Please note that Jet B DI, JP-4, Jet F-40 and NATO F-40 all contain Fuel System Icing Inhibitor (FSII).					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Skin and eye contact can cause irritation. Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure. This product contains a cancer causing agent. For more information, refer to Section 11.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	LOWER: 1.3% UPPER: 8% (NFPA)
Flash Points	CLOSED CUP: -31°C (-24°F) (NFPA)	Auto-Ignition Temperature	240°C (464°F) (NFPA)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.		

**Fire Fighting
Media and
Instructions**

NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible).

CAUTION: This product has a very low flash point: Use of water spray when fighting fire may be inefficient.

If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.

SMALL FIRES: Dry chemical, CO₂, water spray or regular foam.

LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk.

Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.

Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.

Section 6. Accidental Release Measures**Material Release
or Spill**

NAERG96, GUIDE 128, Flammable Liquids (Non-polar/ Water-immiscible). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.

Section 7. Handling and Storage**Handling**

Keep away from heat. Keep away from sources of ignition. Empty containers pose a fire risk. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT ingest. Do not breathe gas/vapour/spray. In case of insufficient ventilation, wear suitable respiratory equipment. If ingested, seek medical advice immediately. Avoid contact with skin and eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.

Storage

Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles. Ground all equipment containing material. Keep away from direct sunlight.

Section 8. Exposure Controls/Personal Protection**Engineering Controls**

For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.

Personal Protection - *The selection of personal protective equipment varies, depending upon conditions of use.*

Eyes Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.

Body Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available (similar to gasoline)
Colour	Clear and colourless.	Pour Point	Freezing Point: <-51°C (<-60°F) for Jet B/Jet B DI; <-58°C (<-72°F) for Jet Fuel F-40.
Odour	Gasoline like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	50 to 270°C (122 to 518°F)	Penetration	Not applicable.
Density	0.75 to 0.80 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3.5 (Air = 1)	Ionicity (in water)	Not available
Vapour Pressure	21 kPa (158 mmHg) @ 37.8°C (100°F).	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Insoluble in water. Partially miscible in some alcohols. Miscible in other petroleum solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	<p>Based on toxicity of similar product. Acute oral toxicity (LD50): >20000 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >5000 mg/m³/4h (rat).</p> <p>Benzene Acute oral toxicity (LD50): 930 mg/kg (rat). Acute dermal toxicity (LD50): >9400 mg/kg (rabbit). Acute inhalation toxicity (LC50): 13200 ppm/4h (rat).</p> <p>Diethylene Glycol Monomethyl Ether Acute oral toxicity (LD50): 4140-5180 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >50000 mg/m³/4h (rat).</p>		
Chronic or Other Toxic Effects			
Dermal Route:	Skin contact can cause irritation.		
Inhalation Route:	Inhalation of vapours can cause irritation of the respiratory tract and CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death.		
Oral Route:	Aspiration into the lungs may produce potentially fatal chemical pneumonitis (fluid in the lungs), severe lung damage, or respiratory failure.		
Eye Irritation/Inflammation:	Eye contact can cause irritation.		
Immunotoxicity:	Not available		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	Benzene is tumorigenic by RTECS criteria.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	Fetotoxicity, embryotoxicity and/or teratogenicity have been observed in rats or rabbits following oral or dermal administration, in the absence of maternal toxicity. [Diethylene Glycol Monomethyl Ether]		
Carcinogenicity (ACGIH):	ACGIH A1: confirmed human carcinogen. [Benzene]		
Carcinogenicity (IARC):	IARC Group 1: carcinogenic to Humans. [Benzene]		
Carcinogenicity (NTP):	NTP Group 1: known to be a carcinogen. [Benzene]		
Carcinogenicity (IRIS):	Not available		
Carcinogenicity (OSHA):	Benzene is an OSHA known carcinogen.		
Other Considerations	No additional remark.		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	Currently: Fuel, aviation, turbine engine, 3, UN1863, PGII As of August 15, 2002: FUEL, AVIATION, TURBINE ENGINE, 3, UN1863, PGII	Special Provisions for Transport	Not applicable.
---------------------------	--	---	-----------------

Section 15. Regulatory Information

Other Regulations		<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>													
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Toxic. CLASS: Irritating substance. CLASS: Target organ effects.											
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 											
HMIS (U.S.A.)		<table border="1"><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>3</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>		Health Hazard	2*	Fire Hazard	3	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard			
Health Hazard	2*														
Fire Hazard	3														
Reactivity	0														
Personal Protection	H														
				Rating <table><tr><td>0</td><td>Insignificant</td></tr><tr><td>1</td><td>Slight</td></tr><tr><td>2</td><td>Moderate</td></tr><tr><td>3</td><td>High</td></tr><tr><td>4</td><td>Extreme</td></tr></table>		0	Insignificant	1	Slight	2	Moderate	3	High	4	Extreme
0	Insignificant														
1	Slight														
2	Moderate														
3	High														
4	Extreme														

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
Glossary	<div style="display: flex;"> <div style="flex: 1;"> <p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials (</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCL - Dangerous Substances Classification and Labeling (Europe)</p> <p>DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)</p> <p>DSL - Domestic Substance List</p> <p>EEC/EU - European Economic Community/European Union</p> <p>EINECS - European Inventory of Existing Commercial Chemical Substances</p> <p>EPCRA - Emergency Planning and Community Right to Know Act</p> <p>FDA - Food and Drug Administration</p> <p>FIFRA - Federal Insecticide, Fungicide and Rodenticide Act</p> <p>HCS - Hazardous Communication System</p> <p>HMIS - Hazardous Material Information System</p> <p>IARC - International Agency for Research on Cancer</p> </div> <div style="flex: 1;"> <p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety & Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety & Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> <p>TDG - Transportation Dangerous Goods (Canada)</p> <p>TDLo/TCLo - Lowest Published Toxic Dose/Concentration</p> <p>TLm - Median Tolerance Limit</p> <p>TLV-TWA - Threshold Limit Value-Time Weighted Average</p> <p>TSCA - Toxic Substances Control Act</p> <p>USEPA - United States Environmental Protection Agency</p> <p>USP - United States Pharmacopoeia</p> <p>WHMIS - Workplace Hazardous Material Information System</p> </div> </div>

For Copy of MSDS**Prepared by Product Safety - TAR on 12/3/2001.**

Western Canada, telephone: 403-296-4158; fax: 403-296-6551
Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228
Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385




Data entry by Product Safety - JDW.

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	TRAXON* XL SYNTHETIC BLEND 75W-90, 80W-140	Code	TRXL759, 470-499-0 TRXL814, 470-500-0
Synonym	Not available	Validated on	5/29/2003.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	These products are multipurpose automotive hypoid gear lubricants, suitable for use in lower temperatures in passenger cars, trucks and off-highway vehicles.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum), synthetic hydrocarbons and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: $\geq 183^{\circ}\text{C}$ (361.4°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO2. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.
---	--

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Viscous liquid.	Viscosity	75W90: 106.7 cSt @ 40°C (104°F), 16.52 cSt @ 100°C (212°F), VI=168 80W140: 254.8 cSt @ 40°C (104°F), 25.24 cSt @ 100°C (212°F), VI=127
Colour	Colourless to pale yellow.	Pour Point	75W90: -42°C (-44°F) 80W140: -36°C (-33°F)
Odour	No odour or slight petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.8699 - 0.878 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 121°C (ASTM D0130): 1b		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents.	Decomposition Products	May release COx, NOx, SOx, H2S, POx, SiOx, methacrylate monomers, aldehydes, alkyl mercaptans, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >2500 mg/m³/4h (rat).		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.		
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.		
Oral Route:	Low toxicity; has laxative effect.		
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.		
Immunotoxicity:	Not available		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark.		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.		
-----------------------	--	--	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).												
		All components of this formulation are listed on the US EPA-TSCA Inventory.												
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).												
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.												
		Please contact Product Safety for more information.												
DSD/DPD (Europe)		Not classified under the Dangerous Substances or Dangerous Preparations Directives.		HCS (U.S.A.) Not controlled under the HCS (United States).										
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 										
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard		Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	1													
Fire Hazard	1													
Reactivity	0													
Personal Protection	B													

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
Glossary ACGIH - American Conference of Governmental Industrial Hygienists ADR - Agreement on Dangerous goods by Road (Europe) ASTM - American Society for Testing and Materials () BOD5 - Biological Oxygen Demand in 5 days CAN/CGA B149.2 Propane Installation Code CAS - Chemical Abstract Services CEPA - Canadian Environmental Protection Act CERCLA - Comprehensive Environmental Response, Compensation and Liability Act CFR - Code of Federal Regulations CHIP - Chemicals Hazard Information and Packaging Approved Supply List COD5 - Chemical Oxygen Demand in 5 days CPR - Controlled Products Regulations DOT - Department of Transport DSCL - Dangerous Substances Classification and Labeling (Europe) DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe) DSL - Domestic Substance List EEC/EU - European Economic Community/European Union EINECS - European Inventory of Existing Commercial Chemical Substances EPCRA - Emergency Planning and Community Right to Know Act FDA - Food and Drug Administration FIFRA - Federal Insecticide, Fungicide and Rodenticide Act HCS - Hazardous Communication System HMIS - Hazardous Material Information System IARC - International Agency for Research on Cancer IRIS - Integrated Risk Information System LD50/LC50 - Lethal Dose/Concentration kill 50% LDLo/LCLo - Lowest Published Lethal Dose/Concentration NAERG'96 - North American Emergency Response Guide Book (1996) NFPA - National Fire Prevention Association NIOSH - National Institute for Occupational Safety & Health NPRI - National Pollutant Release Inventory NSNR - New Substances Notification Regulations (Canada) NTP - National Toxicology Program OSHA - Occupational Safety & Health Administration PEL - Permissible Exposure Limit RCRA - Resource Conservation and Recovery Act SARA - Superfund Amendments and Reorganization Act SD - Single Dose STEL - Short Term Exposure Limit (15 minutes) TDG - Transportation Dangerous Goods (Canada) TDLo/TCLo - Lowest Published Toxic Dose/Concentration TLm - Median Tolerance Limit TLV-TWA - Threshold Limit Value-Time Weighted Average TSCA - Toxic Substances Control Act USEPA - United States Environmental Protection Agency USP - United States Pharmacopoeia WHMIS - Workplace Hazardous Material Information System	
For Copy of MSDS	Prepared by Product Safety - JDW on 5/29/2003.
The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact: Internet: www.petro-canada.ca Lubricants: Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564	Data entry by Product Safety - JDW.







Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax:
1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	GASOLINE, UNLEADED	Code	W102E
Synonym	Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean WinterGas, RegularClean, PlusClean, Premium, marked or dyed gasoline, Super Premium (94 RO)	Validated on	6/9/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
Gasoline	8006-61-9	85-100	300 ppm (890 mg/m ³)	500 ppm (1480 mg/m ³)	Not established
Methyl tert-butyl ether	1634-04-4	0-15	40 ppm (144mg/m ³)	Not established	Not established
Note: Petro-Canada does not use MTBE in the manufacturing of its gasoline, however MTBE can be introduced from time to time through the use of external gasoline blendstocks.					
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Possible cancer hazard. Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death. Skin and eye contact can cause irritation. Toxic if ingested. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention if irritation persists.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable liquid (NFPA).	Flammable Limits	Lower: 1.3%; Upper: 7.6% (NFPA).
Flash Points	Closed Cup: -50 to -38°C (-58 to -36°F), ASTM D56 Standard Test Method for Flash Point by Tag Closed Tester.	Auto-Ignition Temperature	257°C (495°F) (NFPA).
Fire Hazards in Presence of Various Substances	Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). CAUTION: This product has a very low flash point, use of water spray when fighting fire may be inefficient. SMALL FIRE: Use DRY chemicals, CO ₂ , water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet. If tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions. DO NOT extinguish a leaking gas flame unless leak can be stopped. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. Avoid flushing spilled material into sewers, streams or other bodies of water. Self-contained breathing apparatus (SCBA) will be required if approaching the fire from downwind, or to enter enclosed areas or buildings.		

Section 6. Accidental Release Measures

Material Release or Spill	NAERG96, GUIDE 128, flammable/combustible liquid (non-polar/water-immiscible). Evacuate in a downwind direction for at least 300 meters (1000 feet). ELIMINATE ALL IGNITION SOURCES. Ventilate closed spaces before entering. By forced ventilation, maintain concentration of vapour below the range of explosive mixture. Avoid contact, fully-encapsulating, vapour-protective clothing should be worn for spills and leaks with no fire. Stop leak if without risk. Use vapour suppressing foam or water spray to reduce vapours; it may reduce vapour, but it may not prevent ignition in closed spaces; isolate area until vapour has dispersed. Contain spill. Absorb with inert absorbents such as dry clay, or diatomaceous earth, or recover using electrically grounded explosion-proof pumps. Avoid inhaling dust of diatomaceous earth for it may contain silica (very fine particle size), making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Keep away from heat, spark and other sources of ignition. Empty container may contain flammable/explosive residues or vapours. DO NOT reuse empty containers without commercial cleaning or reconditioning. Ground/bond line and equipment during pumping or transfer to avoid accumulation of static charge. DO NOT USE AS CLEANING FLUID OR SIPHON BY MOUTH. Wear proper protective equipment. Avoid inhalation and contact with skin or eyes. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
Storage	Store in cool, dry, isolated, well-ventilated area, and away from direct sunlight, sources of ignition and incompatibles. Flammable materials should be stored in a separate safety storage cabinet or room. Ground all equipment containing material.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - The selection of personal protective equipment varies, depending upon conditions of use.	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.

Respiratory Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.

Hands Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.

Feet Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear liquid.	Viscosity	Not available
Colour	Clear to slightly yellow, undyed liquid. May be dyed red for taxation purposes.	Pour Point	Not applicable.
Odour	Gasoline. MTBE has a terpene-like odour.	Softening Point	Not applicable.
Odour Threshold	Less than 1 ppm.	Dropping Point	Not applicable.
Boiling Point	25 to 220°C (77 to 428°F) Initial boiling point by ASTM D86 Standard Test Method.	Penetration	Not applicable.
Density	0.7 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	3 to 4 (Air = 1) (NFPA).	Ionicity (in water)	Insoluble in water.
Vapour Pressure	<107 kPa @ 37.8°C (100°F)	Dispersion Properties	Not available
Volatility	Volatile.	Solubility	Hydrocarbon components virtually insoluble in water. Soluble in alcohol, ether, chloroform, and benzene. Dissolves fats, oils and natural resins.

Section 10. Stability and Reactivity

Corrosivity	Non corrosive.		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids.	Decomposition Products	May release COx, NOx, phenols, polynuclear aromatic hydrocarbons, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Gasoline: Acute oral toxicity (LD50): 13 600 mg/kg (rat). Acute dermal toxicity (LD50): >5000 mg/kg (rabbit). Acute inhalation toxicity (LC50): >300 000 mg/m ³ /4h (rat). MTBE: Acute oral toxicity (LD50): 29630 mg/kg (rat). Acute dermal toxicity (LD50): >6800 mg/kg (rabbit). Acute inhalation toxicity (LC50): 23 576 ppm/4h (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product can cause skin irritation. Prolonged or repeated contact with skin may cause dermatitis.
Inhalation Route:	Inhalation of vapours can be irritating to respiratory tract and cause CNS depression with symptoms of nausea, headaches, vomiting, dizziness, fatigue, light-headedness, reduced coordination, unconsciousness and possibly death.
Oral Route:	Swallowing or vomiting of the liquid may result in aspiration into the lungs. Can cause CNS depression. (See Inhalation Route for symptoms).
Eye Irritation/Inflammation:	Can cause irritation to the eyes.
Immunotoxicity:	Not available

Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.
Mutagenic:	This product is not considered to be a mutagen, based on the available data and the known hazards of the components.
Reproductive Toxicity:	This product is not considered to be a reproductive hazard, based on the available data and the known hazards of the components.
Teratogenicity/Embryotoxicity:	This product is not considered to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Gasoline, MTBE]
Carcinogenicity (IARC):	IARC Group 2B: possibly carcinogenic to humans. [Gasoline]
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Unleaded gasoline caused kidney effects in male rats and liver effects in female mice.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	Not available		


Section 13. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section 14. Transport Information

TDG Classification	GASOLINE, 3, UN1203, PGII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	------------------------------------	---	--

Section 15. Regulatory Information

Other Regulations		CEPA: This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List). EPA: All components of this formulation are listed on the US EPA-TSCA Inventory.																					
This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR. Please contact Product Safety for more information.																							
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	CLASS: Contains material which may cause cancer. CLASS: Flammable liquid having a flash point lower than 37.8°C (100°F). CLASS: Irritating substance. CLASS: Target organ effects.																		
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)																			
HMIS (U.S.A.)	<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(4)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr></table>	Health Hazard	(2*)	Fire Hazard	(4)	Reactivity	(0)	NFPA (U.S.A.)		<table><tr><td rowspan="2">Health</td><td>4</td><td rowspan="2">Fire Hazard</td><td rowspan="2">2</td></tr><tr><td>2</td><td>0</td></tr></table>	Health	4	Fire Hazard	2	2	0	<table><tr><td>Rating</td><td>0 Insignificant</td></tr><tr><td></td><td>1 Slight</td></tr><tr><td></td><td>2 Moderate</td></tr></table>	Rating	0 Insignificant		1 Slight		2 Moderate
Health Hazard	(2*)																						
Fire Hazard	(4)																						
Reactivity	(0)																						
Health	4	Fire Hazard	2																				
	2			0																			
Rating	0 Insignificant																						
	1 Slight																						
	2 Moderate																						

Personal Protection

(H)

Specific hazard

3 High

4 Extreme

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCl - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS**Fuels & Solvents:**

Western Canada, telephone: 403-296-4158; fax: 403-296-6551

Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752







Prepared by Product Safety - JDW on 6/9/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-2, D-2A, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	FUEL SYSTEM TREATMENT	Code	FST
Synonym	Not available	Validated on	5/12/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	A fuel system treatment that cleans fuel systems to improve performance in gasoline engines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
1) Stoddard Solvent	8052-41-3	30-60%	100ppm	Not established	Not established
2) Isopropanol	67-63-0	30-60%	200ppm	400ppm	Not established
3) 1, 2, 4-Trimethylbenzene	95-63-6	0.01-0.1%	Not established	Not established	Not established
4) Xylene (mixed isomers)	1330-20-7	0.01-0.1%	100ppm	150ppm	Not established
Manufacturer	Not applicable				
Recommendation					
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Flammable liquid. Exercise caution when handling this material. Contact with this product may cause skin irritation. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. May cause teratogenicity/embryotoxicity. For more information refer to Section 11 of this MSDS.
--------------------------	--

Section 4. First Aid Measures

Eye Contact	Quickly and gently blot or brush away chemical. Immediately flush the contaminated eye(s) with lukewarm, gently flowing water for 5 minutes or until the chemical is removed, while holding the eyelid(s) open. Obtain medical attention immediately.
Skin Contact	Quickly and gently, blot or brush away excess chemical. Wash gently and thoroughly with warm water and non-abrasive soap for 5 minutes or until the chemical is removed. Remove contaminated clothing, shoes, and leather goods (e.g. watchbands, belts, etc.). If breathing is stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Inhalation	If breathing is stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Ingestion	NEVER give anything by mouth if victim is rapidly losing consciousness, or is unconscious or convulsing. Have victim rinse mouth thoroughly with water. DO NOT INDUCE VOMITING. Have victim drink 240 to 300 mL (8 to 10 oz.) of water to dilute material in stomach. If vomiting occurs naturally, have victim lean forward to reduce risk of aspiration. If breathing is stopped, trained personnel should begin artificial respiration (AR) or, if the heart has stopped, cardiopulmonary resuscitation (CPR) immediately. Immediately transport victim to an emergency care facility.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Flammable.	Flammable Limits	LOWER: 0.9% UPPER: 12%
Flash Points	CLOSED CUP: 13°C (55.4°F) (TCC)	Auto-Ignition Temperature	Unknown

Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire. Vapours may form explosive mixtures with air. Sensitive to static discharge.
Products of Combustion	Carbon oxides (CO, CO ₂), acrid smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	<p>NAERG2000, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Evacuate non-essential personnel. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. If spilled in a confined space, ensure appropriate confined space entry protocols are followed. Extinguish all ignition sources. Stop leak if safe to do so. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Use appropriate inert absorbent material to absorb spilled product. Do not use paper or other flammable materials to absorb product. Collect used absorbent for later disposal. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Do not allow spilled material to enter sewer systems as vapours may accumulate and may cause an explosion/fire hazard. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	FLAMMABLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Ensure all equipment is grounded/bonded. Avoid contact with any incompatible or reactive materials. Wear proper personal protective equipment (See Section 8). Avoid confined spaces and areas with poor ventilation. Remove severely contaminated clothing. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Exercise caution when washing/drying clothing contaminated with flammable materials. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Avoid generating mists. Ensure container is securely closed when not in use. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning.
Storage	Store as flammable material. Store away from heat and sources of ignition. Avoid direct sunlight. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded. Store in a dry, cool and well-ventilated area.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Use explosion-proof ventilation equipment. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	Chemical splash goggles should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).
Respiratory	A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister with particulate filter (R and/or P series) may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator or self contained breathing apparatus if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Polyvinyl alcohol (PVA), or Fluoro-elastomer. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Liquid.	Viscosity	Not available
Colour	Yellow.	Pour Point	Not applicable.
Odour	Alcohol like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	83°C (181.4°F)	Penetration	Not applicable.
Density	0.79 @ 15°C	Oil / Water Dist. Coefficient	Not available
Vapour Density	>1	Ionicity (in water)	Not available
Vapour Pressure	Not available Evaporation rate: <1 (Ether=1)	Dispersion Properties	Not available
Volatility	>95% (VOCs)	Solubility	Negligible.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, peroxides, nitric acid, strong alkalis, strong mineral acids, and oleum.	Decomposition Products	May release COx, acrid smoke, and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<p>Acute toxicity information is not available for the product as a whole, therefore, data for the hazardous ingredient is provided below:</p> <p><u>Stoddard Solvent (8052-41-3):</u> Acute Oral toxicity (LD50): >5000 mg/kg (rat) Acute Dermal toxicity (LD50): >3000 mg/kg (rabbit) Acute Inhalation toxicity (LC50): >1300 ppm/4h (rat)</p> <p><u>Isopropanol (67-63-0):</u> Acute Oral toxicity (LD50): 5000 mg/kg (rat) Acute Dermal toxicity (LD50): 12,800 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 17,000 ppm/4h (rat)</p> <p><u>1, 2, 4-Trimethylbenzene (95-63-6):</u> Acute Oral toxicity (LD50): 5000 mg/kg (rat) Acute Inhalation toxicity (LC50): 18,000 mg/m³/4h (rat)</p> <p><u>Xylene (mixed isomers) (1330-20-7):</u> Acute Oral toxicity (LD50): 1590 mg/kg (rat) Acute Dermal toxicity (LD50): >1,700 mg/kg (rabbit) Acute Inhalation toxicity (LC50): 4785 ppm/4h (mouse)</p>
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant.
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Frequent or prolonged inhalation of this product may lead to absorption of this product in harmful amounts which may have adverse effects on the: kidneys.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may lead to aspiration of the liquid, especially if vomiting occurs. This may result in chemical pneumonitis (inflammation of the lungs) and/or pulmonary edema (an accumulation of fluid in the lungs).
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.

Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at $\geq 0.1\%$ that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product contains a component(s) at $\geq 0.1\%$ that has been shown to cause teratogenicity and/or embryotoxicity in some laboratory tests at non-maternally toxic doses. Therefore, this product is considered to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as Group A1, A2, or A3 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	No additional remark.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		





Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	FLAMMABLE LIQUIDS, N.O.S. (Isopropanol), Class 3, UN 1993, PGII (CL-TDG)	Special Provisions for Transport	This product may be shipped as a Limited Quantity if the volume is $\leq 1\text{L}$ and in accordance with the Limited Quantity Provisions, (CL-TDG).
---------------------------	--	---	---

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																				
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																				
		Please contact Product Safety for more information.																				
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.)	CLASS: Combustible liquid. CLASS: Irritating substance. CLASS: Target organ effects.																	
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms)																		
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>(2*)</td></tr><tr><td>Fire Hazard</td><td>(3)</td></tr><tr><td>Reactivity</td><td>(0)</td></tr><tr><td>Personal Protection</td><td>n, p, u</td></tr></table>		Health Hazard	(2*)	Fire Hazard	(3)	Reactivity	(0)	Personal Protection	n, p, u	NFPA (U.S.A.)										
Health Hazard	(2*)																					
Fire Hazard	(3)																					
Reactivity	(0)																					
Personal Protection	n, p, u																					
		<table><tr><td rowspan="4">Health</td><td rowspan="4"></td><td>Fire Hazard</td><td>Rating</td><td>0 Insignificant</td></tr><tr><td>Reactivity</td><td></td><td>1 Slight</td></tr><tr><td></td><td></td><td>2 Moderate</td></tr><tr><td>Specific hazard</td><td></td><td>3 High</td></tr><tr><td></td><td></td><td></td><td></td><td>4 Extreme</td></tr></table>		Health		Fire Hazard	Rating	0 Insignificant	Reactivity		1 Slight			2 Moderate	Specific hazard		3 High					4 Extreme
Health		Fire Hazard	Rating			0 Insignificant																
		Reactivity				1 Slight																
						2 Moderate																
		Specific hazard		3 High																		
				4 Extreme																		

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLm - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDSInternet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax:
 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752







Prepared by Product Safety - TLM on 5/12/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
 	B-3, D-2B	  	

Section 1. Chemical Product and Company Identification

Product Name	DIESEL FUEL	Code	W104, W293 SAP: 120, 121, 122, 287
Synonym	Diesel 50, Diesel 50 LS, #1 Diesel, #1 Diesel LS, Diesel LC, Seasonal Diesel, Seasonal Diesel LS, Diesel AA, Domestic Marine Diesel, International marine Diesel, Seasonal Diesel Locomotive, Domestic Marine diesel LS, diesel -20°C (LS), LSD, Low Sulphur Diesel, dyed diesel, marked diesel, coloured diesel, Naval Distillate, Ultra Low Sulphur Diesel, ULS Diesel, Mining Diesel, Mining Diesel Special, Mining Diesel Special LS, High Flash Mining Diesel, Furnace Oil, Stove Oil.	Validated on	2/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining Diesel has a higher flash point requirement, for safe use in underground mines.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Diesel oil.	68334-30-5	>99.9	100 mg/m ³ (as total hydrocarbons) *	Not established	Not established
2) Proprietary additives.	Not available	<0.1	Not established	Not established	Not established
Aromatic content is 50% maximum (benzene: nil). Sulphur content is 0-0.50%.					
Manufacturer Recommendation	* Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer.				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Combustible liquid. Exercise caution when handling this material. Contact with this product may cause skin and eye irritation. Prolonged or repeated contact may cause skin irritation, defatting, drying and dermatitis. Inhalation of this product may cause respiratory tract irritation and Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death. Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. For more information refer to Section 11 of this MSDS.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	Class II - combustible liquid (NFPA).	Flammable Limits	LOWER: 0.7%, UPPER: 6% (NFPA)
Flash Points	Diesel Fuel: Closed Cup: >40°C (>104°F) Marine Diesel Fuel: Closed Cup: >60°C (>140°F) Mining Diesel: Closed Cup: 52°C (126°F)	Auto-Ignition Temperature	225°C (437°F)
Fire Hazards in Presence of Various Substances	Flammable in presence of open flames, sparks, or heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container. Vapour explosion hazard indoors, outdoors or in sewers. Runoff to sewer may create fire or explosion hazard.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), water vapour (H ₂ O), smoke and irritating vapours as products of incomplete combustion. See Section 11 (Other Considerations) for information regarding the toxicity of the combustion products.		
Fire Fighting Media and Instructions	<p>NAERG96, GUIDE 128, Flammable liquids (Non-polar/Water-immiscible). CAUTION: This product has a moderate flash point above 40°C: Use of water spray when fighting fire may be inefficient.</p> <p>If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (1/2 mile) in all directions; also consider initial evacuation for 800 meters (1/2 mile) in all directions.</p> <p>SMALL FIRES: Dry chemical, CO₂, water spray or regular foam. LARGE FIRES: Water spray, fog or regular foam. Do not use straight streams. Move containers from fire area if you can do it without risk. Fires Involving Tanks or Car/Trailer Loads: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles.</p> <p>Cool containers with flooding quantities of water until well after fire is out. Withdraw immediately in case of rising sound from venting devices or any discolouration of tank. ALWAYS stay away from the ends of tanks. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible withdraw from area and let fire burn. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection.</p>		

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Extinguish all ignition sources. Stop leak if safe to do so. Ventilate area. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid breathing vapours or mists of material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Evacuate non-essential personnel. Ensure clean-up personnel wear appropriate personal protective equipment. Ground and bond all equipment used to clean up the spilled material, as it may be a static accumulator. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	COMBUSTIBLE MATERIAL. Handle with care. Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated. Avoid confined spaces and areas with poor ventilation. Ensure all equipment is grounded/bonded. Wear proper personal protective equipment (See Section 8).
Storage	Store away from heat and sources of ignition. Store in dry, cool, well-ventilated area. Store away from incompatible and reactive materials (See section 5 and 10). Ensure the storage containers are grounded/bonded.

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Bright oily liquid.	Viscosity	1.3 - 4.1 cSt @ 40°C (104°F)
Colour	Clear to yellow / brown (may be dyed for taxation purposes).	Pour Point	Variable, -50°C to 0°C (-58°F to -32°F)
Odour	Petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	150 - 371°C (302-700°F)	Penetration	Not applicable.
Density	0.80 - 0.85 kg/L @ 15°C (59°F)	Oil / Water Dist. Coefficient	Not available
Vapour Density	4.5 (Air = 1)	Ionicity (in water)	Not applicable.
Vapour Pressure	Not available	Dispersion Properties	Not available
Volatility	Semivolatile to volatile.	Solubility	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, H2O, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation, and ingestion.
Acute Lethality	Acute oral toxicity (LD50): 7500 mg/kg (rat).
Chronic or Other Toxic Effects	
Dermal Route:	This product contains a component (at >= 1%) that can cause skin irritation. Therefore, this product is considered to be a skin irritant. Prolonged or repeated contact may defat and dry skin, and cause dermatitis. (See Other Considerations)
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation. Inhalation of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Oral Route:	Ingestion of this product may cause gastro-intestinal irritation. Aspiration of this product may result in severe irritation or burns to the respiratory tract. Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause reproductive toxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a reproductive toxin.
Teratogenicity/Embryotoxicity:	This product is not known to contain any components at >= 0.1% that have been shown to cause teratogenicity and/or embryotoxicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a teratogen/embryotoxin.
Carcinogenicity (ACGIH):	ACGIH A3: animal carcinogen. [Diesel oil] (See Other Considerations)
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.

Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	Avoid prolonged or repeated skin contact to diesel fuels which can lead to dermal irritation and may be associated with an increased risk of skin cancer. Diesel engine exhaust particulate is probably carcinogenic to humans (IARC Group 2A).

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		



Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	DIESEL FUEL, 3, UN1202, PGIII (CL-TDG)	Special Provisions for Transport	See Transportation of Dangerous Goods Regulations.
---------------------------	--	---	--

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).												
		All components of this formulation are listed on the US EPA-TSCA Inventory.												
		All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).												
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.												
		Please contact Product Safety for more information.												
DSD/DPD (Europe)		Not evaluated.		HCS (U.S.A.) CLASS: Irritating substance. CLASS: Target organ effects. CLASS: Combustible liquid having a flash point between 37.8°C (100°F) and 93.3°C (200°F).										
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.		DOT (U.S.A) (Pictograms) 										
HMIS (U.S.A.)		<table border="1"><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>2</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>		Health Hazard	2*	Fire Hazard	2	Reactivity	0	Personal Protection	H	NFPA (U.S.A.) Health  Fire Hazard Reactivity Specific hazard		Rating 0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	2*													
Fire Hazard	2													
Reactivity	0													
Personal Protection	H													

Section 16. Other Information

References	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>																														
Glossary	<table border="0"> <tr> <td>ACGIH - American Conference of Governmental Industrial Hygienists</td><td>IRIS - Integrated Risk Information System</td></tr> <tr> <td>ADR - Agreement on Dangerous goods by Road (Europe)</td><td>LD50/LC50 - Lethal Dose/Concentration kill 50%</td></tr> <tr> <td>ASTM - American Society for Testing and Materials (</td><td>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</td></tr> <tr> <td>BOD5 - Biological Oxygen Demand in 5 days</td><td>NAERG'96 - North American Emergency Response Guide Book (1996)</td></tr> <tr> <td>CAN/CGA B149.2 Propane Installation Code</td><td>NFPA - National Fire Prevention Association</td></tr> <tr> <td>CAS - Chemical Abstract Services</td><td>NIOSH - National Institute for Occupational Safety & Health</td></tr> <tr> <td>CEPA - Canadian Environmental Protection Act</td><td>NPRI - National Pollutant Release Inventory</td></tr> <tr> <td>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</td><td>NSNR - New Substances Notification Regulations (Canada)</td></tr> <tr> <td>CFR - Code of Federal Regulations</td><td>NTP - National Toxicology Program</td></tr> <tr> <td>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</td><td>OSHA - Occupational Safety & Health Administration</td></tr> <tr> <td>COD5 - Chemical Oxygen Demand in 5 days</td><td>PEL - Permissible Exposure Limit</td></tr> <tr> <td>CPR - Controlled Products Regulations</td><td>RCRA - Resource Conservation and Recovery Act</td></tr> <tr> <td>DOT - Department of Transport</td><td>SARA - Superfund Amendments and Reorganization Act</td></tr> <tr> <td>DSCL - Dangerous Substances Classification and Labeling (Europe)</td><td>SD - Single Dose</td></tr> <tr> <td></td><td>STEL - Short Term Exposure Limit (15 minutes)</td></tr> </table>	ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System	ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%	ASTM - American Society for Testing and Materials (LDLo/LCLo - Lowest Published Lethal Dose/Concentration	BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)	CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association	CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health	CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory	CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)	CFR - Code of Federal Regulations	NTP - National Toxicology Program	CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration	COD5 - Chemical Oxygen Demand in 5 days	PEL - Permissible Exposure Limit	CPR - Controlled Products Regulations	RCRA - Resource Conservation and Recovery Act	DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act	DSCL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose		STEL - Short Term Exposure Limit (15 minutes)
ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System																														
ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%																														
ASTM - American Society for Testing and Materials (LDLo/LCLo - Lowest Published Lethal Dose/Concentration																														
BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)																														
CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association																														
CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health																														
CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory																														
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)																														
CFR - Code of Federal Regulations	NTP - National Toxicology Program																														
CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration																														
COD5 - Chemical Oxygen Demand in 5 days	PEL - Permissible Exposure Limit																														
CPR - Controlled Products Regulations	RCRA - Resource Conservation and Recovery Act																														
DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act																														
DSCL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose																														
	STEL - Short Term Exposure Limit (15 minutes)																														

DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS

Internet: www.petro-canada.ca/msds

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228

Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - JDW on 2/6/2004.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

Section 1. Chemical Product and Company Identification

Product Name	CHAIN OIL (SUMMER, WINTER)	Code	CHAS, 490-431 CHAW, 490-430
Synonym	Not available	Validated on	5/6/2003.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	These products are designed for lubrication of chain saw chains in both high and low ambient temperatures.		

Section 2. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum) and other proprietary, non-hazardous additives.	Mixture	100	5 mg/m ³ (oil mist)	10 mg/m ³ (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.
---------------------------------	--

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Not available
Flash Points	OPEN CUP: $\geq 168^{\circ}\text{C}$ (334.4°F) (Cleveland)	Auto-Ignition Temperature	Not available
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container. Containers may explode in heat of fire.
Products of Combustion	Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), sulphur oxides (SO _x), sulphur compounds (H ₂ S), phosphorus compounds (PO _x), smoke and irritating vapours as products of incomplete combustion.		

Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO2. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.
---	--

Section 6. Accidental Release Measures

Material Release or Spill	Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	--

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection -	<i>The selection of personal protective equipment varies, depending upon conditions of use.</i>
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Stringy liquid.	Viscosity	CHAS: 155 cSt @ 40°C (104°F), 16.2 cSt @ 100°C (212°F), VI=109 CHAW: 32 @ 40°C (104°F), 6.29 cSt @ 100°C (212°F), VI=151
Colour	Dark red.	Pour Point	CHAS: -21°C (-6°F) CHAW: -42°C (-44°F)
Odour	Slight petroleum oil like.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	Not available	Penetration	Not applicable.
Density	0.831 - 0.88 kg/L @ 15°C (59°F).	Oil / Water Dist. Coefficient	Not available
Vapour Density	Not available	Ionicity (in water)	Not available
Vapour Pressure	Negligible at ambient temperature and pressure.	Dispersion Properties	Not available
Volatility	Non-volatile.	Solubility	Insoluble in water.

Section 10. Stability and Reactivity

Corrosivity	Copper corrosion, 3h, 100°C (ASTM D0130): 1a		
Stability	The product is stable under normal handling and storage conditions.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, reducing agents and acids.	Decomposition Products	May release COx, NOx, SOx, H2S, POx, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.		
Acute Lethality	Not available		
Chronic or Other Toxic Effects			
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.		
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.		
Oral Route:	Low toxicity; has laxative effect.		
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.		
Immunotoxicity:	Not available		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	This product is not expected to be a mutagen, based on the available data and the known hazards of the components.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	Not available		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
Other Considerations	No additional remark		

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		






Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.		
-----------------------	--	--	--

Section 14. Transport Information

TDG Classification	Not controlled under TDG (Canada).	Special Provisions for Transport	Not applicable.
---------------------------	------------------------------------	---	-----------------

Section 15. Regulatory Information

Other Regulations		This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).																									
		All components of this formulation are listed on the US EPA-TSCA Inventory.																									
		All components of this formulation are listed on EINECS or are exempt.																									
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																									
		Please contact Product Safety for more information.																									
DSD/DPD (Europe)		Not classified under the Dangerous Substances or Dangerous Preparations Directives.		HCS (U.S.A.)		Not controlled under the HCS (United States).																					
ADR (Europe) (Pictograms)				DOT (U.S.A) (Pictograms)																							
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>1</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>B</td></tr></table>		Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	NFPA (U.S.A.)		<table><tr><td rowspan="3">Health</td><td></td><td>Fire Hazard</td><td>0</td></tr><tr><td></td><td>Reactivity</td><td>0</td></tr><tr><td></td><td>Specific hazard</td><td></td></tr></table>		Health		Fire Hazard	0		Reactivity	0		Specific hazard		Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme
Health Hazard	1																										
Fire Hazard	1																										
Reactivity	0																										
Personal Protection	B																										
Health		Fire Hazard	0																								
		Reactivity	0																								
		Specific hazard																									

Section 16. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
-------------------	---

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
ADR - Agreement on Dangerous goods by Road (Europe)
ASTM - American Society for Testing and Materials ()
BOD5 - Biological Oxygen Demand in 5 days
CAN/CGA B149.2 Propane Installation Code
CAS - Chemical Abstract Services
CEPA - Canadian Environmental Protection Act
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
CFR - Code of Federal Regulations
CHIP - Chemicals Hazard Information and Packaging Approved Supply List
COD5 - Chemical Oxygen Demand in 5 days
CPR - Controlled Products Regulations
DOT - Department of Transport
DSCL - Dangerous Substances Classification and Labeling (Europe)
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
DSL - Domestic Substance List
EEC/EU - European Economic Community/European Union
EINECS - European Inventory of Existing Commercial Chemical Substances
EPCRA - Emergency Planning and Community Right to Know Act
FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
LD50/LC50 - Lethal Dose/Concentration kill 50%
LDLo/LCLo - Lowest Published Lethal Dose/Concentration
NAERG'96 - North American Emergency Response Guide Book (1996)
NFPA - National Fire Prevention Association
NIOSH - National Institute for Occupational Safety & Health
NPRI - National Pollutant Release Inventory
NSNR - New Substances Notification Regulations (Canada)
NTP - National Toxicology Program
OSHA - Occupational Safety & Health Administration
PEL - Permissible Exposure Limit
RCRA - Resource Conservation and Recovery Act
SARA - Superfund Amendments and Reorganization Act
SD - Single Dose
STEL - Short Term Exposure Limit (15 minutes)
TDG - Transportation Dangerous Goods (Canada)
TDLo/TCLo - Lowest Published Toxic Dose/Concentration
TLm - Median Tolerance Limit
TLV-TWA - Threshold Limit Value-Time Weighted Average
TSCA - Toxic Substances Control Act
USEPA - United States Environmental Protection Agency
USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS
Internet: www.petro-canada.ca

Lubricants:
Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564
Ontario & Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285
Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285

For Product Safety Information: (905) 804-4752




Prepared by Product Safety - JDW on 5/6/2003.

Data entry by Product Safety - JDW.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Material Safety Data Sheet

WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	D-2A, D-2B		

Section 1. Chemical Product and Company Identification

Product Name	ANTIFREEZE	Code	W269
Synonym	Universal Antifreeze, Radiator Antifreeze, Diesel Antifreeze, Petro-Canada Antifreeze-Coolant, Petro-Canada Heavy Duty Antifreeze-Coolant, Pre-Mix Antifreeze, Petro-Canada Premium Radiator Antifreeze, Diesel Engine Coolant.	Validated on	7/6/2004.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	Used as an engine antifreeze coolant.		

Section 2. Composition and Information on Ingredients

			<i>Exposure Limits (ACGIH)</i>		
Name	CAS #	% (W/W)	TLV-TWA(8 h)	STEL	CEILING
Ethylene glycol	107-21-1	≥90	Not established	Not established	100 mg/m ³ (aerosol)
Sodium tetraborate pentahydrate (Diesel Engine Coolant only)	12179-04-3	≤5	1 mg/m ³	Not established	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section 3. Hazards Identification.

Potential Health Effects	Contact with this product may cause eye irritation. Not expected to cause more than slight skin irritation. Inhalation of this product may cause respiratory tract irritation. Ingestion may be extremely hazardous. May cause teratogenicity/embryotoxicity. May cause damage to reproductive organs. For more information refer to Section 11 of this MSDS.
---------------------------------	---

Section 4. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section 5. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Lower: 3.2%, Upper: 15.3%
Flash Points	Closed Cup: 116°C (241°F) (Tagliabue) Open Cup: 116°C (241°F) (Cleveland)	Auto-Ignition Temperature	413°C (775°F)

Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discolouration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO ₂ . LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.		

Section 6. Accidental Release Measures

Material Release or Spill	IN THE EVENT OF A LARGE SPILL CONSIDER THE FOLLOWING CONTROL MEASURES: Consult current National Emergency Response Guide Book (NAERG) for appropriate spill measures if necessary. Extinguish all ignition sources. Stop leak if safe to do so. Dike spilled material. Use appropriate inert absorbent material to absorb spilled product. Collect used absorbent for later disposal. Ventilate area. Ensure clean-up personnel wear appropriate personal protective equipment. Avoid breathing vapours or mists of material. Avoid contact with spilled material. Avoid contaminating sewers, streams, rivers and other water courses with spilled material. Notify appropriate authorities immediately.
----------------------------------	---

Section 7. Handling and Storage

Handling	Avoid contact with any sources of ignition, flames, heat, and sparks. Avoid confined spaces and areas with poor ventilation. Avoid skin contact. Avoid eye contact. Avoid inhalation of product vapours or mists. Do not ingest this product. Wear proper personal protective equipment (See Section 8). Empty containers may contain product residue. Do not pressurize, cut, heat, or weld empty containers. Do not reuse containers without commercial cleaning and/or reconditioning. Personnel who handle this material should practice good personal hygiene during and after handling to help prevent accidental ingestion of this product. Properly dispose of contaminated leather articles including shoes that cannot be decontaminated.
Storage	Store in dry, cool, well-ventilated area. Store away from heat and sources of ignition. Keep container tightly closed. Store away from incompatible and reactive materials (See section 5 and 10).

Section 8. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection	- The selection of personal protective equipment varies, depending upon conditions of use.
Eyes	Chemical splash goggles should be worn when handling this material.
Body	If this material may come into contact with the body during handling and use, we recommend wearing appropriate protective clothing to prevent contact with the skin. (Contact your PPE provider for more information).
Respiratory	A minimum of NIOSH-approved air-purifying respirator with a organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hands	If this material may come in contact with the hands during handling and use, we recommend wearing gloves of the following material(s): Neoprene, Polyvinyl chloride (PVC). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section 9. Physical and Chemical Properties

Physical State and Appearance	Clear viscous liquid.	Viscosity	Not available
Colour	Green.	Pour Point	Not available
Odour	Odourless.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	129 to 197°C (264 to 387°F)	Penetration	Not applicable.
Density	1.115 to 1.145 (Water = 1)	Oil / Water Dist. Coefficient	Not available
Vapour Density	2.1 (Air=1).	Ionicity (in water)	Not available
Vapour Pressure	0.06 mmHg @ 20°C (68°F).	Dispersion Properties	Not available
Volatility	0% (w/w)	Solubility	Soluble in water, methanol and diethyl ether.

Section 10. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids, alkalis, perchloric acid, phosphorus, silvered copper wires carrying DC current, aliphatic amines, isocyanates, chlorosulfonic acid and oluem.	Decomposition Products	May release COx, smoke and irritating vapours when heated to decomposition.

Section 11. Toxicological Information

Routes of Entry	Skin contact, eye contact, inhalation and ingestion.
Acute Lethality	<u>Ethylene glycol (107-21-1):</u> LD50: 4700 mg/kg (oral/rat). LD50: 9530 mg/kg (dermal/rabbit). <u>Sodium tetraborate pentahydrate (12179-04-3):</u> LD50: 3200-3500 mg/kg (oral/rat) (Boric acid). [Sodium tetraborate pentahydrate]
Chronic or Other Toxic Effects	
Dermal Route:	Short-term exposure is expected to cause only slight irritation, if any.
Inhalation Route:	Inhalation of this product may cause respiratory tract irritation.
Oral Route:	Extremely dangerous in case of ingestion.
Eye Irritation/Inflammation:	This product contains a component (at >= 1%) that can cause eye irritation. Therefore, this product is considered to be an eye irritant.
Immunotoxicity:	Not available
Skin Sensitization:	Contact with this product is not expected to cause skin sensitization, based upon the available data and the known hazards of the components.
Respiratory Tract Sensitization:	Contact with this product is not expected to cause respiratory tract sensitization, based upon the available data and the known hazards of the components.
Mutagenic:	This product is not known to contain any components at >= 0.1% that have been shown to cause mutagenicity. Therefore, based upon the available data and the known hazards of the components, this product is not expected to be a mutagen.
Reproductive Toxicity:	Borates are possible reproductive toxins based upon available animal ingestion studies in several species. These studies usually involved high doses, over prolonged periods of time. A human study following occupational exposure to borate by inhalation concluded that, no adverse effects to reproduction were found in this population, under the conditions of this study.
Teratogenicity/Embryotoxicity:	This product contains a component(s) at >= 0.1% that has been shown to cause teratogenicity and/or embryotoxicity in laboratory tests. Therefore, this product is considered to be a teratogen/embryotoxin (Ethylene glycol).

Carcinogenicity (ACGIH):	ACGIH A4: not classifiable as a human carcinogen (Ethylene glycol). This product is not known to contain any chemicals at reportable quantities that are listed as Group A1, A2, or A3 carcinogens by ACGIH.
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as Group 1, 2A, or 2B carcinogens by IARC.
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.
Carcinogenicity (IRIS):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by IRIS.
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.
Other Considerations	The substance may be toxic to kidneys and liver. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section 12. Ecological Information

Environmental Fate	Not available	Persistence/Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks No additional remark.			


Section 13. Disposal Considerations

Waste Disposal	Spent/ used/ waste product may meet the requirements of a hazardous waste. Consult your local or regional authorities. Ensure that waste management processes are in compliance with government requirements and local disposal regulations.
-----------------------	--

Section 14. Transport Information

TDG Classification	Not a hazardous material for transport according to the TDG Regulations. (Canada)	Special Provisions for Transport	Not applicable.
---------------------------	---	---	-----------------

Section 15. Regulatory Information

Other Regulations		All of the components of this product are on the Domestic Substances List (DSL), are considered to be on the DSL, or are exempt from the New Substance Notification (NSN) requirements.																						
		All components of this formulation are listed on the US EPA-TSCA Inventory.																						
		This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.																						
		Please contact Product Safety for more information.																						
DSD/DPD (Europe)		Not evaluated.	HCS (U.S.A.)		CLASS: Target organ effects. CLASS: Irritating substance.																			
ADR (Europe) (Pictograms)		NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.	DOT (U.S.A) (Pictograms)																					
HMIS (U.S.A.)		<table><tr><td>Health Hazard</td><td>2*</td></tr><tr><td>Fire Hazard</td><td>1</td></tr><tr><td>Reactivity</td><td>0</td></tr><tr><td>Personal Protection</td><td>H</td></tr></table>	Health Hazard	2*	Fire Hazard	1	Reactivity	0	Personal Protection	H	NFPA (U.S.A.)		<table><tr><td rowspan="2">Health</td><td>1</td><td>Fire Hazard</td><td rowspan="2">Rating</td><td rowspan="5">0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme</td></tr><tr><td>2</td><td>0</td><td>Reactivity</td></tr><tr><td colspan="3">Specific hazard</td></tr></table>	Health	1	Fire Hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme	2	0	Reactivity	Specific hazard		
Health Hazard	2*																							
Fire Hazard	1																							
Reactivity	0																							
Personal Protection	H																							
Health	1	Fire Hazard	Rating	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme																				
	2	0			Reactivity																			
Specific hazard																								

Section 16. Other Information**References**

Available upon request.

* Marque de commerce de Petro-Canada - Trademark

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists
 ADR - Agreement on Dangerous goods by Road (Europe)
 ASTM - American Society for Testing and Materials
 BOD5 - Biological Oxygen Demand in 5 days
 CAN/CGA B149.2 Propane Installation Code
 CAS - Chemical Abstract Services
 CEPA - Canadian Environmental Protection Act
 CERCLA - Comprehensive Environmental Response, Compensation and Liability Act
 CFR - Code of Federal Regulations
 CHIP - Chemicals Hazard Information and Packaging Approved Supply List
 COD5 - Chemical Oxygen Demand in 5 days
 CPR - Controlled Products Regulations
 DOT - Department of Transport
 DSCL - Dangerous Substances Classification and Labeling (Europe)
 DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)
 DSL - Domestic Substance List
 EEC/EU - European Economic Community/European Union
 EINECS - European Inventory of Existing Commercial Chemical Substances
 EPCRA - Emergency Planning and Community Right to Know Act
 FDA - Food and Drug Administration
 FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
 HCS - Hazardous Communication System
 HMIS - Hazardous Material Information System
 IARC - International Agency for Research on Cancer

IRIS - Integrated Risk Information System
 LD50/LC50 - Lethal Dose/Concentration kill 50%
 LDLo/LCLo - Lowest Published Lethal Dose/Concentration
 NAERG'96 - North American Emergency Response Guide Book (1996)
 NFPA - National Fire Prevention Association
 NIOSH - National Institute for Occupational Safety & Health
 NPRI - National Pollutant Release Inventory
 NSNR - New Substances Notification Regulations (Canada)
 NTP - National Toxicology Program
 OSHA - Occupational Safety & Health Administration
 PEL - Permissible Exposure Limit
 RCRA - Resource Conservation and Recovery Act
 SARA - Superfund Amendments and Reorganization Act
 SD - Single Dose
 STEL - Short Term Exposure Limit (15 minutes)
 TDG - Transportation Dangerous Goods (Canada)
 TDLo/TCLo - Lowest Published Toxic Dose/Concentration
 TLM - Median Tolerance Limit
 TLV-TWA - Threshold Limit Value-Time Weighted Average
 TSCA - Toxic Substances Control Act
 USEPA - United States Environmental Protection Agency
 USP - United States Pharmacopoeia
 WHMIS - Workplace Hazardous Material Information System

For Copy of MSDSInternet: www.petro-canada.ca/msds**Fuels & Solvents:**

Western Canada, Ontario & Central Canada, telephone: 1-800-668-0220; fax:
 1-800-837-1228


Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

For Product Safety Information: (905) 804-4752

Prepared by Product Safety - TLM on 7/6/2004.

Data entry by Product Safety - RS.

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-OA8
(403) 259-5112 FAX (403) 255-7185
email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME(S): Poly Drill O.B.X.

WHMIS CLASSIFICATION: Non-regulated

TDG Classification: Non dangerous goods

DATE: January 17, 2004

A liquid polymer containing guar gum, mineral oil, vegetable oil, acrylamide copolymer and a surfactant: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations.

2. PHYSICAL DATA

Boiling Point: Not available

Specific Gravity: 0.9 g/cm

Solubility in Water: disperses in water(forms viscous, slippery solution).

pH: 3.8 (1% concentration)

Density (g/ml): Not available

Physical State: Liquid

Appearance and Odor: Brown. Odor slight.

3. FIRE AND EXPLOSION DATA

Flash Point (method used): (PMCC) greater than 100 C.

Conditions of flammability: Very low risk.

Hazardous combustion products: None known.

Upper and Lower flammable limits: Not available.

Extinguishing media: Carbon dioxide, dry chemicals, foam, in preference to water spray

4. REACTIVITY

Chemical stability: Stable under normal conditions.

Hazardous Polymerization: Will not occur.

Incompatible substances: Avoid strong oxidants such as liquid chlorine, concentrated oxygen, sodium or calcium hypo chloride.

Hazardous decomposition products: None known

5. HEALTH HAZARD DATA

TOXICITY RATING: Practically non-harmful.

Routes of Exposure and Effects:

SKIN: Slight irritant: prolonged contact may cause skin irritation or dermatitis in some individuals

EYE: No effects of exposure expected with the exception of possible irritation.

INHALATION: Due to low volatility of mineral distillates a small inhalation hazard exists.

INGESTION: can cause nausea, vomiting, cramps, diarrhea
Chronic exposure limits: None
Sensitization of product: Not suspected to be a sensitizer.
Teratogenicity: Not available.
Mutagenicity: Not available.
Carcinogenicity: None of the components of this product are listed as carcinogens by IARC and ACGIH

6. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. Remove contaminated clothing. Launder contaminated clothing before re-use. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, lifting upper and lower lids occasionally. Get medical attention.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.

8. INDUSTRIAL HYGIENE CONTROL MEASURES

Respiratory Protection: None normally required.

Ventilation: If mist and/or vapors are present, use air purifying respirator or self-contained breathing apparatus, but this is rarely required.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference.

7. HANDLING AND USE PRECTIONS

Storage requirements: keep container closed when no in use. Store in a cool dry location away from oxidizing and reducing agents.

Waste Disposal: product should be disposed of in accordance with applicable local, Provincial and Federal regulations.

Steps must be taken if product is released or spilled: clean spill areas thoroughly to avoid hazardous slippery conditions.

8. TOXICOLOGICAL PROPERTIES

G50 Microtox Analysis prepared by HydroQual Laboratories, Calgary, AB--97/6/26 Test#970978:

Test Description	EC20	EC50	Pass/Fail
MTX	>91	>91	PASS

9. DEPARTMENT OF TRANSPORTATION INFORMATION

Shipping Name: Liquid Drilling Additive


Hazard Class: Not hazardous

Hazardous Substances: None

Cautionary Labeling: None required

KLEEN-FLO TUMBLER INDUSTRIES LIMITED		MATERIAL SAFETY DATA SHEET		PAGE 1
SECTION I-MATERIAL IDENTIFICATION AND USE				
Material Name/Identifier:	Supreme Fuel Injector G.L.A.F. & Conditioner	Stock No.	409/412/414/415/418	
Manufacturer's Name:	Kleen-Flo Tumbler Industries Ltd	Street Address:	75 Advance Blvd.	
City:	Brampton	Province:	Ontario	
Postal Code:	L6T 4N1	Emergency Phone #:	(905) 793-4311	
Chemical Name:	N/A (mixture)	Chemical Family:	Blend of aliphatic alcohol	
Chemical Formula:	N/A	Trade Names & Synonyms:	& aromatic hydrocarbons	
Material Use:	Solvent/Cleaner	Molecular Weight:	N/A	
SECTION II-HAZARDOUS INGREDIENTS OF MATERIAL				
Hazardous Ingredients	C.A.S.	Approximate Concentration	LD50 Species & Route	LC50 Species & Route
2-propanol	67-63-0	60-90%	4.72 g/kg rat-oral	>12000 ppm (8hr) rat-inh.
xylene	1330-20-7	10-30%	4300 mg/kg rabbit-derma	> 6700 ppm (4hr) rat-inh.
ethyl benzene	100-41-4	1-5%	3.5 g/kg rat-oral	N/A
SECTION III-PHYSICAL DATA FOR MATERIAL				
Physical State:	Liquid	Odour/Appearance:	Alcohol odour; clear, red liquid	
Specific Gravity:	0.8 @15°C	Odour Threshold(p.p.m.):	N/A	
Boiling Point:	82-137°C	Evaporation Rate:	N/A	
Freezing Point:	N/A	Solubility in Water:	40%	
% Volatile(by volume):	100%	Vapour Pressure(mm)Hg:	4.4 kPa @ 20°C	
Vapour Density(Air=1):	2.2	Coefficient of Water/Oil Distribut:	N/E	
pH	N.Ap.			
SECTION IV-FIRE AND EXPLOSION HAZARD OF MATERIAL				
Flammability Yes/No	Yes	If yes under which conditions: heat, open flame and sparks		
Auto Ignition Temperature:	N/A	Means of Extinction: carbon dioxide, alcohol foam		
Flashpoint and Method:	11°C TCC	Carbon dioxide or dry chemical for small fires.		
		Hazardous Combustion Products:carbon monoxide and carbon dioxide		
Upper Flammable limit		Lower Flammable Limit(% by volume): 2%		
(% by volume):	12%			
Explosion Data:	Sensitivity ot mechanical impact: Yes	Sensitivity to Static Discharge: Electrical & mechanical		
		equipment should be explosion proof.		
SECTION V-REACTIVITY DATA				
Chemical Stability Yes/No:	Yes	If NO under which conditions? N.Ap.		
Incompatibility to Other Substances Yes/No:	Yes	If so which ones? strong oxidizing compounds. May react		
		with aluminum at high temperature.		
Reactivity and under what conditions?	Normally stable, but can become unstable at elevated temperatures & pressure			
Hazardous Decomposition Products:	Carbon monoxide, carbon dioxide produced upon combustion.			
N/E: not established				
		N.Ap.: not applicable		N/A: not available

Material Name/Identifier: Supreme Fuel Injector G.L.A.F. & Conditioner		Stock No. 409/412/414/415/418	PAGE 2
SECTION VI-TOXICOLOGICAL PROPERTIES OF PRODUCT			
Route of Entry: ALL Routes	--SKIN CONTACT --SKIN ABSORPTION --EYE CONTACT --INHALATION --INGESTION		
Effects of Acute Exposure:	Slight eye irritation. May cause headache, dizziness, nausea, drowsiness and central nervous system depression.		
Effects of Chronic Exposure:	High exposure to dimethylbenzene in some animal studies have been reported to cause health effects on developing embryo/fetus. Their effects were often at levels toxic to the mother. The significance of these findings to humans has not been determined.		
LD 50 of Product:	5840 mg/kg rat-oral	LC 50 of Product:	> 12000 ppm (8hr) rat
Irritancy of Product:	Skin and eye irritant	Exposure Limits of Product:	400 ppm- I.P.A.
Sensitization of Product:	N/A	2-propanol- 100 ppm, xylene- 100 ppm	
		Toxicologically Synergistic Materials:	N/A
--CARCINOGENICITY --REPRODUCTIVE EFFECTS --TERATOGENICITY --MUTAGENICITY			none known
SECTION VII-PREVENTIVE MEASURES			
Personal Protective Equipment to be used:			
Gloves(specify):	Nitrile, Viton, Polyethylene	Eye(specify):	Chemical safety glasses
Respiratory(specify):	Organic canister mask	Clothing:	Not required
Respiratory Protection:	If used indoors or on a continuous basis, use of cartridge type respirator is recommended		
Engineering Controls:	To maintain TLV; electrical and mechanical equipment should be spark proof.		
Leak and Spill Procedure:	Dry and contain spill. Soak residue with natural absorbent.		
Waste Disposal:	Incinerate or dispose of at an approved waste disposal facility.		
Storage Requirements:	Keep in a cool place.		
Handling Procedures and Equipment:	Handle with care. Keep away from children. Do not inhale or ingest.		
TDG Classification:	#409 & 412: Consumer commodity		
	#414 & 415 & 418: Flammable liquids, N.O.S.(2-propanol solution), Class 3, UN1993,Pkg. Grp. II		
WHMIS Classification:	Consumer Commodity #409/412; Class B2, D2B & D2A for #414, 415 &418		
Domestic substance list:	All components of this product are either on the DSL or exempt.		
SECTION VIII-FIRST AID MEASURES			
Eye:	Wash with water for at least 15 minutes.		
Skin:	Wash with soap and water.		
Inhalation:	Move patient to fresh air and restore breathing if required. Call a physician.		
Ingestion:	Contains petroleum distillate. Do NOT induce vomiting. Guard against aspiration. Seek medical help.		
SECTION IX-PREPARATION DATE OF M.S.D.S.			
Additional Info/Comments:		Sources Used: NOISH Registry of Toxic Effects of Chemical Substances	
Phone Number:	(905) 793-4311	Prepared By: Quality Control Laboratory	
Date:	March 3, 2003	Kleen-Flo Tumbler Industries Limited	
THIS SHEET SUPERSEDES ANY OTHER M.S.D.S. PREVIOUSLY PREPARED			
N/A: not available		N/E: not established	



Poly-Drill Drilling Systems

1824 - 104 Avenue, S.W.
Calgary, Alberta, Canada T2W-OA8
(403) 259-5112 FAX (403) 255-7185
email: polydril@telus.net
www.poly-drill.com

poly-drill.com



MATERIAL SAFETY DATA SHEET/FICHE SIGNALÉTIQUE

1. PRODUCT IDENTIFICATION

PRODUCT TRADE NAME: Poly-Drill 133-X
PRODUCT DESCRIPTION: LIQUID ANIONIC POLYMER
CHEMICAL DESCRIPTION: Polymer, Surfactant(s), Water, Hydrocarbon solvent
UPDATED: March 15, 2004

NFPA704M/HMIS RATING

HEALTH: 0/1	FLAMMABILITY: 1/1	REACTIVITY: 0/0	OTHER:	
0=Insignificant	1=Slight	2=Moderate	3=High	4=Extreme

2. COMPOSITION

A liquid polymer: Evaluation of the ingredient(s) has found no ingredient(s) hazardous as per WHMIS regulations. None of the substances in this product are hazardous.

3. PHYSICAL DATA

Flash Point: >100°C (PMCC)
Specific Gravity (@ 25°C.): 1.08
Solubility in Water: Emulsifiable
pH: 8.1 (1.0% solution)
Freeze Point: -10 °C (14 Degrees F)
Density (g/ml): 1.08 at 25 °C
Physical State: Liquid
Appearance: Blue liquid
Odor: Hydrocarbon

Note: These physical properties are typical values for this product.

4. FIRE AND EXPLOSION DATA

INCOMPATIBILITY: Avoid contact with strong oxidizers (eg. Chlorine, peroxides, chromates, nitric acid, perchlorates, concentrated oxygen, permanganates) which can generate heat, fires, explosions and the release of toxic fumes.

THERMAL DECOMPOSITION PRODUCTS: In the event of combustion CO, oxides of carbon (COx), oxides of nitrogen (NOx) may be formed. Do not breathe smoke or fumes. Wear suitable protective equipment.

5. FIRE FIGHTING MEASURES

FLASH POINT: >100°C (PMCC)

EXTINGUISHING MEDIA: Based on the NFPA guide, use dry chemical, foam, carbon dioxide or other extinguishing agent suitable for Class B fires. Use water to cool containers exposed to fire. For larger fires, use water spray or fog, thoroughly drenching the burning material.

UNSUITABLE EXTINGUISHING MEDIA:
Do not use water unless flooding amounts are available.

UNUSUAL FIRE AND EXPLOSION HAZARD: May evolve oxides of nitrogen (NOx) under fire conditions.

6. HEALTH HAZARD DATA

EMERGENCY OVERVIEW:

CAUTION: May cause irritation to skin and eyes. Avoid contact with skin, eyes and clothing. Do not take internally.

Empty containers may contain residual product. Do not reuse container unless properly reconditioned.

PRIMARY ROUTE(S) OF EXPOSURE: Eye & Skin

EYE CONTACT: Can cause mild to moderate irritation

SKIN CONTACT: Can cause mild, short-lasting irritation

SYMPTOMS OF EXPOSURE: A review of available data does not identify any symptoms from exposure not previously mentioned.

AGGRAVATION OF EXISTING CONDITIONS: A review of available data does not identify any worsening of existing conditions.

7. EMERGENCY AND FIRST AID PROCEDURES

SKIN: Wash exposed area with soap and water. If irritation or abnormalities persist, call a physician.

EYE: Immediately flush eyes with water for 15 minutes, if irritation or abnormalities persist, call a physician.

INHALATION: Remove to fresh air. If breathing becomes difficult, give oxygen and call a physician.

INGESTION: Do not induce vomiting: Call a physician immediately.

CAUTION: If unconscious, having trouble breathing or in convulsions, do not induce vomiting or give water. Call for medical assistance immediately.

8. HANDLING, ACCIDENTAL RELEASE MEASURES & DISPOSAL CONSIDERATIONS

Storage: Keep container tightly closed when not in use.

DISPOSAL:

In Ontario, the waste class under Regulation 347 is: 233L

SMALL SPILLS:

Soak up spill with absorbent material. Place residues in a suitable, covered, properly labeled container. Wash affected area.

LARGE SPILLS:

Contain liquid using absorbent material, by digging trenches or by dyking. Reclaim into recovery or salvage drums or tank truck for proper disposal. Contact approved waste hauler for disposal of contaminated recovered material. Dispose of material in compliance with regulations indicated.

Dispose of wastes in an approved incinerator or waste treatment/disposal site, in accordance with all applicable regulations. Do not dispose of wastes in local sewer or with normal garbage.

ENVIRONMENTAL PRECAUTIONS

This product should NOT be directly discharged into lakes, ponds, streams, waterways or public water supplies.

As a non-hazardous liquid waste, it should be solidified with stabilizing agents (such as sand, fly ash, or cement) so that no free liquid remains before disposal to an industrial waste landfill. A non-hazardous liquid waste can also be incinerated in accordance with local, state, provincial and federal regulations.

9. INDUSTRIAL HYGIENE CONTROL MEASURES

OCCUPATIONAL EXPOSURE LIMITS:

This product does not contain any substance that has an established exposure limit.

Respiratory Protection: None normally required.

For large spills, entry into large tanks, vessels or enclosed small spaces with inadequate ventilation, a positive pressure, self-contained breathing apparatus is recommended.

Ventilation: General ventilation is recommended.

Eye Protection: Safety glasses, if personally preferred

Gloves: Generally not necessary. Personal preference. Examples of impermeable gloves available on the market are neoprene, nitrile, PVC, natural rubber, viton, and butyl (compatibility studies have not been performed).

If clothing is contaminated, remove clothing and thoroughly wash the affected area. Launder contaminated clothing before reuse.

10. TOXICOLOGICAL PROPERTIES

SENSITIZATION:

This product is not expected to be a sensitizer.

A "LC50-96" Pass/Fail Bioassay test. This test determines the lethality of a fluid on young aquatic organisms. The fluid fails if 50% or more of the animals are dead after 96 hours in the fluid.

96 hour static acute LC50 to Rainbow Trout = Greater than 1,000 mg/L

96 hour no observed effect concentration = 125 mg/L based on no mortality or abnormal effects

96 hour static acute LC50 to Sheepshead Minnow = Greater than 1,000 mg/L

96 hour no observed effect concentration = 1,000 mg/L (highest concentration tested) based on no mortality or abnormal effects.

96 hour static acute LC50 to Mysid Shrimp = 400 mg/L

96 hour no observed effect concentration = 180 mg/L based on no mortality or abnormal effects.

96 hour static acute LC50 to Daphnia Magna - 400 mg/L

96 hour no observed effect concentration = 56 mg/L (lowest concentration tested) based on no mortality or abnormal effects.

Microtoxicity

The Microtox bioassay has been established as the reference test for mud additive toxicity testing.

Test Method: Luminescent Bacteria, IC50@ 15 min

Reference: Appendix 1: Microtox Bioassay Procedure, Drilling Waste Management, Guide G50. 1993. Alberta Energy and Utilities Board, Calgary, AB, Canada.

Sample: Poly Drill 1330, sample #97324-1 for test #970723, 97/05/09 by D. Lintott

Preparation: Sample was diluted to 2 g/L, which formed thick, slightly cloudy liquid. The sample was then centrifuged for 1 hour.

Test Results:

SAMPLE	TREATMENT	%CTL	IC20%	IC50	RESULT
97324-1	None	N/A	14 (9-22)	>91	PASS

The following results are for a 1% aqueous solution of product.

CARCINOGENICITY:

None of the substances in this product are listed as carcinogens by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP) or the American Conference of Government Industrial Hygienists (ACGIH).

HUMAN HAZARD CHARACTERIZATION:

Based on our Hazard Characterization, the potential human hazard is: LOW

ENVIRONMENTAL HAZARD AND EXPOSURE CHARACTERIZATION:

Based on our Hazard Characterization, the potential environmental hazard is: LOW.

11. DEPARTMENT OF TRANSPORTATION INFORMATION

PROPER SHIPPING NAME/HAZARD CLASS MAY VARY BY PACKAGING, PROPERTIES, AND MODE OF TRANSPORTATION. TYPICAL PROPER SHIPPING NAMES FOR THIS PRODUCT ARE:

ALL TRANSPORTATION MODES: PRODUCT IS NOT REGULATED DURING TRANSPORTATION

Shipping Name: Liquid Drilling Additive

Hazard Class: Not hazardous

Cautionary Labeling: None required

14. OTHER INFORMATION

This information contained herein is given in good faith, but no warranty, expressed or implied is made



MATERIAL SAFETY DATA SHEET

Date Prepared: November 14, 2003
Supersedes: April 12, 2001
MSDS Number: 12232

1. PRODUCT INFORMATION

Product Identifier: EPIC EP MOLY GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:

Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL), exempt, or have been notified under CEPA.

TDG INFORMATION (RAIL/ROAD):

Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
 Specific gravity: 0.930 at 15.6 deg C/15.6 deg C
 Viscosity: >20.00 cSt at 40 deg C
 Vapour Density: not available
 Boiling Point: 249 deg C
 Evaporation rate: 0.1 (1= n-butylacetate)
 Solubility in water: NEGLIGIBLE
 Freezing/Pour Point: 230 deg C DROP
 Odour Threshold: not available
 Vapour Pressure: <0.01 kPa at 20 deg C
 Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
 Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
 Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
 Frequent or prolonged contact may irritate the skin.
 High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products,

the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For insoluble Molybdenum compounds, 10 mg/m3.
For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.
In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.
Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye

contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 145 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel.

Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Fumes, smoke, carbon monoxide, sulfur oxides, nitrogen oxides, phosphorus oxides, aldehydes and other decomposition products, in the case of incomplete combustion

Various metal oxides

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 12 April 2001, this MSDS has been revised in Section(s):

1

10. PREPARATION

Date Prepared: November 14, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: November 14, 2003
Supersedes: May 31, 2000
MSDS Number: 08509

1. PRODUCT INFORMATION

Product Identifier: MARVELUBE WR2 GREASE

Application and Use:
Lubricating grease

Product Description:

A grease, a mixture of lubricating oil, soap and additives.

REGULATORY CLASSIFICATION

WHMIS:

Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):

Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: >20.00 cSt at 40 deg C
Vapour Density: >5
Boiling Point: not available
Evaporation rate: <1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: 182 deg C DROP
Odour Threshold: not available
Vapour Pressure: <1 kPa at 38 deg C
Density: 0.91 g/cc at 15 deg C
Appearance/odour: Black paste, petroleum odour.

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.
High pressure greasing equipment is capable of injecting grease under the skin which may have severe health consequences.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In case of adverse exposure to vapours, mists and/or fumes formed at elevated temperature, or by mechanical action, immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available.
Remove severely contaminated clothing (including shoes) and launder before reuse.
If irritation persists, seek medical attention.
Consult a physician immediately if the material is injected under the skin from the misuse of high pressure greasing equipment.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.
In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.
Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye

contact is avoided.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material.

Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Allow material to solidify and scrape up. Place material in suitable containers for recycle or disposal. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 204 deg C COC ASTM D92

Autoignition: 227 deg C Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.

Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 31 May 2000, this MSDS has been revised in Section(s):

3, 7

10. PREPARATION

Date Prepared: November 14, 2003

Prepared by: Lubricants & Specialties

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."



MATERIAL SAFETY DATA SHEET

Date Prepared: November 06, 2002
Supersedes: November 01, 2002
MSDS Number: 00826

1. PRODUCT INFORMATION

Product Identifier: MIDDLE DISTILLATE

- ESSO MARINE GAS OIL (DYED OR CLEAR)
- ESSO RAILROAD DIESEL (DYED OR CLEAR)
- HEATING OIL (DYED OR CLEAR)
- DIESEL (DYED OR CLEAR)
- DIESEL QUALITY FURNACE FUEL (DYED OR CLEAR)
- DIESEL QUALITY HEATING OIL (DYED OR CLEAR)
- ESSO DIESEL (DYED OR CLEAR)
- ESSO DIESEL QUALITY COMMERCIAL FUEL (DYED OR CLEAR)
- ESSO DIESEL QUALITY FURNACE FUEL
- ESSO DIESEL QUALITY HEATING OIL
- ESSO FURNACE FUEL (DYED OR CLEAR)
- ESSO HEATING OIL (DYED OR CLEAR)
- ESSO MARINE DIESEL FUEL (DYED OR CLEAR)
- ESSO RAILROAD DIESEL FUEL #3 (DYED OR CLEAR)
- ESSO TOBACCO CURING OIL
- FUEL OIL 75
- FUEL OIL 76
- DIESEL MARINE (DYED OR CLEAR)
- DIESEL MARINE GAS OIL (DYED OR CLEAR)
- FURNACE (DYED OR CLEAR)
- DIESEL MARINE - POUR DEPRESSED (DYED OR CLEAR)
- NO.2 FUEL OIL
- NAVAL FUEL OIL 3-GP-11M (DYED)
- ESSO DIESEL FUEL LS
- DIESEL LOW SULFUR (DYED OR CLEAR)
- NO.2 FUEL OIL FOR EXPORT
- DIESEL FOR EXPORT (DYED OR CLEAR)
- FURNACE TOBACCO CURING OIL
- DIESEL NAVAL 3GP-11 (DYED OR CLEAR)
- DIESEL NAVAL 3GP-15 (DYED OR CLEAR)
- DIESEL LOW SULFUR RAIL (DYED OR CLEAR)
- DIESEL LOW SULFUR DYED EP
- DIESEL RAIL (DYED OR CLEAR)
- DIESEL RAIL #3 (DYED OR CLEAR)
- DIESEL RAIL #3 (HD) (DYED OR CLEAR)
- DIESEL LOW SULFUR (032) (DYED OR CLEAR)

FURNACE URBAN (DYED OR CLEAR)
DIESEL (032) (DYED OR CLEAR)
DIESEL LOW SULFUR (EXP DYED)
FURNACE FUEL (032) DYED
DIESEL LOW SULFUR (EXPORT)
MARINE GAS OIL
MDO - MARINE DIESEL OIL 3 CST (CLEAR)

Application and Use:
Multi-purpose fuel

Product Description:

A complex mixture of aliphatic, olefinic, naphthenic and aromatic hydrocarbons.

REGULATORY CLASSIFICATION

WHMIS:

Class B, Division 3: Combustible Liquids.

Class D, Division 2, Subdivision B: Toxic Material

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT

All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):

Shipping Name: FUEL OIL
Class: 3
Packing Group: III
PIN Number: UN1202
Marine Pollutant:N

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
------	---	-------

Fuel Oil No.2

>99.9 V/V 68476-30-2

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: 0.820 to 0.900 at 15.5 deg C
Viscosity: 1.30 cSt at 40 deg C
to 11.00 cSt at 40 deg C
Vapour Density: 4
Boiling Point: 150 to 370 deg C
Evaporation rate: <1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -4 deg C -39 (RANGE)
Odour Threshold: not available
Vapour Pressure: 4 kPa at 38 deg C
Appearance/odour: White or pale yellow liquid, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
High vapour concentrations are irritating to the eyes, nose, throat and lungs; may cause headaches and dizziness; may be anesthetic and may cause other central nervous system effects.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Irritating.

INGESTION:

Low toxicity.
Small amounts of this liquid drawn into the lungs from swallowing or vomiting may cause severe health effects (e.g. bronchopneumonia or pulmonary edema).

CHRONIC:

Lifetime skin painting tests indicate that materials of similar composition have produced skin cancer in experimental animals. The relationship of these results to humans has not been fully established.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products, the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 2000 mg/kg (Rabbit)
Inhalation : LC50 > 2500 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

Manufacturer Recommends:
100 ppm based on composition.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

In emergency situations use proper respiratory protection to immediately remove the affected victim from exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Immediately flush with large amounts of water. Use soap if available. Remove contaminated clothing, including shoes, after flushing has begun. If irritation persists, seek medical attention.

INGESTION:

DO NOT induce vomiting since it is important that no amount of the material should enter the lungs (aspiration). Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety goggles, long sleeves, and chemical-resistant gloves.

Where concentrations in air may exceed the occupational exposure limits given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Do not handle or store near an open flame, sources of heat, or sources of ignition. Material will accumulate static charges which may cause a spark. Static charge build-up could become an ignition source. Use proper relaxation and grounding procedures. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Do not use combustible materials such as sawdust. Recover by pumping (use an explosion proof motor or hand pump), or by using a suitable absorbent. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: >40 deg C PMCT ASTM D93

Autoignition: NA Flammable Limits: LEL: 0.7% UEL: 6.5%

GENERAL HAZARDS:

Combustible Liquid; may form combustible mixtures at or above the flash point.

Toxic gases will form upon combustion.

Static Discharge; material may accumulate static charges which may cause a fire.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel. Shut off fuel to fire.

Use foam, dry chemical or water spray to extinguish fire.

Respiratory and eye protection required for fire fighting personnel.

Avoid spraying water directly into storage containers due to danger of boilover.

A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

REVISED.

10. PREPARATION

Date Prepared: November 06, 2002
Prepared by: Lubricants & Specialties
IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."

**MATERIAL SAFETY DATA SHEET**

Date Prepared: May 13, 2003
Supersedes: April 12, 2000
MSDS Number: 08265

1. PRODUCT INFORMATION

Product Identifier: UNIVIS N 68

Application and Use:
Hydraulic fluid

Product Description:

A lubricating oil consisting of a mixture of saturated and unsaturated hydrocarbons derived from paraffinic distillate, and additives.

REGULATORY CLASSIFICATION

WHMIS:
Not a controlled product

CEPA: CANADIAN ENVIRONMENTAL PROTECTION ACT
All components of this product are either on the Domestic Substances List (DSL) or are exempt.

TDG INFORMATION (RAIL/ROAD):
Not Regulated in Canada.

Please be aware that other regulations may apply.

TELEPHONE NUMBERS

Emergency 24 hr. (519) 339-2145
Technical Info. (800) 268-3183

MANUFACTURER/SUPPLIER:

IMPERIAL OIL
Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(416) 968-4441

2. REGULATED COMPONENTS

The following components are defined in accordance with sub-paragraph 13(a) (i) to (iv) or paragraph 14(a) of the Hazardous Products Act:

NAME	%	CAS #
Not applicable		

3. TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Physical State: Liquid
Specific gravity: not available
Viscosity: 68.00 cSt at 40 deg C
Vapour Density: not available
Boiling Point: not available
Evaporation rate: <0.1 (1= n-butylacetate)
Solubility in water: negligible
Freezing/Pour Point: -36 deg C ASTM D97
Odour Threshold: not available
Vapour Pressure: <0.1 kPa at 20 deg C
Density: 0.88 g/cc at 15 deg C
Appearance/odour: Yellow oil, petroleum odour

4. HEALTH HAZARD INFORMATION

NATURE OF HAZARD

INHALATION:

Negligible hazard at normal temperatures (up to 38 deg C).
Elevated temperatures or mechanical action may form vapours, mists or fumes which may be irritating to the eyes, nose, throat and lungs.
Avoid breathing vapours or mists.

EYE CONTACT:

Slightly irritating, but will not injure eye tissue.

SKIN CONTACT:

Low toxicity.
Frequent or prolonged contact may irritate the skin.

INGESTION:

Low toxicity.

ACUTE TOXICITY DATA:

Based on animal testing data from similar materials and products,

the acute toxicity of this product is expected to be:

Oral : LD50 > 5000 mg/kg (Rat)
Dermal : LD50 > 3160 mg/kg (Rabbit)
Inhalation : LC50 > 5000 mg/m3 (Rat)

OCCUPATIONAL EXPOSURE LIMIT:

ACGIH recommends:

For oil mists, 5 mg/m3.

Local regulated limits may vary.

5. FIRST AID MEASURES

INHALATION:

Vapour pressure of this material is low and as such inhalation under normal conditions is usually not a problem. If overexposed to oil mist, remove from further exposure. Administer artificial respiration if breathing has stopped. Keep at rest. Call for prompt medical attention.

EYE CONTACT:

Flush eyes with large amounts of water until irritation subsides. If irritation persists, get medical attention.

SKIN CONTACT:

Flush with large amounts of water. Use soap if available. Remove severely contaminated clothing (including shoes) and launder before reuse. If irritation persists, seek medical attention.

INGESTION:

If swallowed, DO NOT induce vomiting. Keep at rest. Get prompt medical attention.

6. PREVENTIVE AND CORRECTIVE MEASURES

PERSONAL PROTECTION:

The selection of personal protective equipment varies, depending upon conditions of use.

In open systems where contact is likely, wear safety goggles, chemical-resistant overalls, and chemically impervious gloves.

Where only incidental contact is likely, wear safety glasses with side shields. No other special precautions are necessary provided skin/eye contact is avoided.

Where concentrations in air may exceed the occupational exposure limits

given in Section 4 and where engineering, work practices or other means of exposure reduction are not adequate, approved respirators may be necessary to prevent overexposure by inhalation.

ENGINEERING CONTROLS:

The use of local exhaust ventilation is recommended to control emissions near the source. Laboratory samples should be handled in a fumehood. Provide mechanical ventilation of confined spaces.

HANDLING, STORAGE AND SHIPPING:

Keep containers closed. Handle and open containers with care. Store in a cool, well ventilated place away from incompatible materials. In keeping with good personal hygiene practices, wash hands thoroughly after handling the material. Store and load at normal (up to 38 deg C) temperature and at atmospheric pressure. Empty containers may contain product residue. Do not pressurize cut, heat, or weld empty containers. Do not reuse empty containers without commercial cleaning or reconditioning.

LAND SPILL:

Eliminate source of ignition. Keep public away. Prevent additional discharge of material, if possible to do so without hazard. Prevent spills from entering sewers, watercourses or low areas. Contain spilled liquid with sand or earth. Recover by pumping or by using a suitable absorbant. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

WATER SPILL:

Remove from surface by skimming or with suitable absorbents. If allowed by local authorities and environmental agencies, sinking and/or suitable dispersants may be used in unconfined waters. Consult an expert on disposal of recovered material. Ensure disposal in compliance with government requirements and ensure conformity to local disposal regulations. Notify the appropriate authorities immediately. Take all additional action necessary to prevent and remedy the adverse effects of the spill.

7. FIRE AND EXPLOSION HAZARD

Flashpoint and method: 190 deg C COC ASTM D92

Autoignition: NA Flammable Limits: LEL: NA UEL: NA

GENERAL HAZARDS:

Low Hazard; liquids may burn upon heating to temperatures at or above the flash point.
Toxic gases will form upon combustion.

FIRE FIGHTING:

Use water spray to cool fire exposed surfaces and to protect personnel.
Shut off fuel to fire.
Use foam, dry chemical or water spray to extinguish fire.
Respiratory and eye protection required for fire fighting personnel.
A self-contained breathing apparatus (SCBA) should be used for all indoor fires and any significant outdoor fires. For small outdoor fires, which may easily be extinguished with a portable fire extinguisher, use of an SCBA may not be required.

HAZARDOUS COMBUSTION PRODUCTS:

Smoke, carbon monoxide, carbon dioxide and traces of oxides of sulphur

8. REACTIVITY DATA

STABILITY:

This product is stable. Hazardous polymerization will not occur.

INCOMPATIBLE MATERIALS AND CONDITIONS TO AVOID:

Strong oxidizing agents

HAZARDOUS DECOMPOSITION:

none

9. NOTES

All components of this product are listed on the U.S. TSCA inventory.

.

REVISION SUMMARY:

Since 12 April 2000, this MSDS has been revised in Section(s):
3, 7

10. PREPARATION

Date Prepared: May 13, 2003
Prepared by: Lubricants & Specialties
IMPERIAL OIL

Products Division
111 St Clair Avenue West
Toronto, Ontario
M5W 1K3
(800) 268-3183

CAUTION: " The information contained herein relates only to this product or material and may not be valid when used in combination with any other product or material or in any process. If the product is not to be used for a purpose or under conditions which are normal or reasonably foreseeable, this information cannot be relied upon as complete or applicable. For greater certainty, uses other than those described in Section 1 must be reviewed with the supplier. The information contained herein is based on the information available at the indicated date of preparation. This MSDS is for the use of Imperial Oil customers and their employees and agents only. Any further distribution of this MSDS by Imperial Oil customers is prohibited without the written consent of Imperial Oil."