
Nonmetallic Light Fixtures



Nonmetallic Light Fixtures



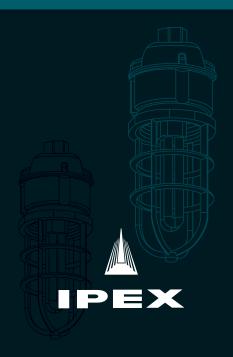

- Wet Locations
- · Hazardous Locations
- Utility Light Fixtures

www.ipexelectrical.com


We build tough products for tough environments®


SCEPTALIGHT": THE LIGHT THAT LASTS

hether you're looking for economical outdoor lighting solutions or corrosion-resistant fixtures for punishing industrial environments, Sceptalight fixtures from IPEX prove themselves to be all-round performers in a variety of indoor and outdoor applications. Sceptalight fixtures are made from a glass-reinforced thermoplastic polyester resin, which enable them to stand up better to corrosive elements than metal. This thermoplastic design marries an unrivaled balance of strength, stiffness and toughness with all the benefits users appreciate of Scepter rigid PVC conduit and fittings – long life, easy servicing and high impact-resistance.

Sceptalight's thermoplastic construction offers outstanding corrosion and chemical resistance. And its interior and exterior silicone gaskets create a watertight seal, the reason it performs equally well indoors and outside.

Wherever you need a lighting fixture that can withstand exposure to chemicals, fluids or harsh physical conditions, you'll find a home for Sceptalight.

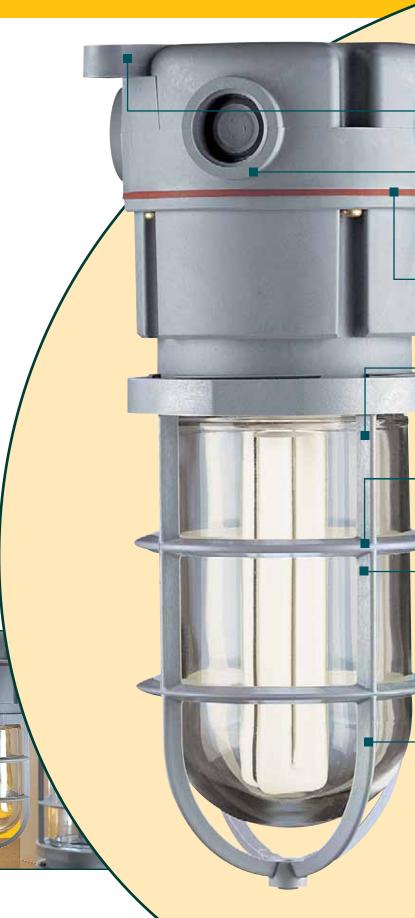



STABLE CONSTRUCTION

Reinforced support feet offer secure mounting.

ADAPTABLE

Threaded conduit hubs permit connection to nonmetallic and metallic raceways.

WATERTIGHT SEAL

Temperature and weather-resistant silicone gaskets protect fixture from moisture penetration.

LONG LIFE

Sceptalight nonmetallic fixtures provide long life and easy servicing—unlike metal fixtures and guards that can corrode and seize together.

INDOOR/OUTDOOR USE

UV-resistant material makes Sceptalight fixtures suitable for both indoor and outdoor use.

CORROSION RESISTANT

Thermoplastic construction resists attack from acids, alcohols, alkalis, organic solvents, detergents/ cleaners, greases and oils as well as many other types of chemicals.

Withstands exposure to direct sunlight, heat, and extreme weather.

DURABLE, IMPACT RESISTANT

High-impact nonmetallic guard resists physical impact, chemical attack and heat-induced deformation.

TYPICAL APPLICATIONS



Chemical Plant



Food Processing



Marine



Industrial / Commercial



Agricultural

SCEPTALIGHT™: OPTIONS FOR EVERY APPLICATION

TYPICAL APPLICATIONS



Highway Tunnel



Waste Water



Mine Tunnels



Greenhouses



Walk-in Freezers



WET LOCATIONS

C22.2 No. 250

UI 1598

Minimum 60°C supply conductors

Silicone gaskets in all Sceptalight fixtures – mounted at the base of the globe and within the ceiling box – provide a waterand vapour-tight seal which protects the electrical connections inside. CSA certified for wet locations, Sceptalight fixtures are built to withstand any environment where liquids drip, splash or flow against electrical equipment. For this reason, Sceptalight offers the perfect solution for a wide range of lighting applications including water treatment centres and food processing plants. And our polycarbonate globes are an excellent alternative to glass in punishing environments where high impact resistance is important.

Sceptalight's tough construction makes it equally well-suited for outdoor use. Manufactured with thermoplastic polyester resin, a material that endures -40°C to +150°C, Sceptalight fixtures operate in extreme temperatures and are resistant to damaging ultraviolet rays. For years, our fixtures have been proven performers on docks, wharfs, decks, walkways, shipyards and a variety of other applications where exposed to the elements.

For light to medium duty applications that do not require the same level of ruggedness, Sceptalight has a low-cost ceiling-mounted Utility Light Fixture available (Incandescent only).



HAZARDOUS LOCATIONS

CLASS I, DIV 2 Groups A, B, C & D CLASS II, DIV 2 Groups F & G

Minimum 90°C supply conductors

Sceptalight offers fixtures that are CSA certified for hazardous locations, making them the ideal choice for specific harsh industrial environments involving flammable or explosive gases, vapours or dusts. In addition to their sturdy construction, all our fixtures rated for hazardous locations include a heat-treated globe designed to endure drastic temperature changes such as direct spray of cool water on a hot fixture. Sceptalight fixtures are equipped with brass screws and inserts to ensure performance in punishing industrial conditions.

From petrochemical plants to pulp and paper mills, walk-in freezers to greenhouses, Sceptalight fixtures are designed to work long and reliably in the most extreme and demanding industrial environments.

& ENVIRONMENT

MOUNTING OPTIONS



CEILING MOUNT

Box with four ³/4" threaded hubs and integral mounting feet.

GLOBE OPTIONS

Sceptalight offers a variety of globe options to suit a wide range of applications and environments. Our standard clear glass globes are ideal for general purpose area lighting for either indoor or outdoor use. Polycarbonate globes offer impact resistance in case of accidental contact and the assurance that work areas are not contaminated by broken glass.

Coloured globes — available in red, blue, green or amber — can transform the light to an indicator or warning light.



Clear Polycarbonate



Standard or Heat-treated Clear Glass



Heat-treated Red Glass



Heat-treated Blue Glass



Heat-treated Green Glass



Heat-treated Amber Glass

LIGHT OPTIONS

Sceptalight offers the choice of energy-efficient compact fluorescents or costeffective incandescents.

FLUORESCENTS

Our compact fluorescent fixtures work four to five times more efficiently per watt than incandescents and provide 10-20 times the lamp life, yet use approximately 75% less energy. In this way, Sceptalight fluorescents lower energy and maintenance costs without sacrificing light levels.

INCANDESCENTS

With their low initial cost, Sceptalight incandescent fixtures make the most practical choice to meet the daily needs of commercial, industrial, marine and agricultural applications. Our incandescents are ideal for short burn times as well as flashing and dimming applications.

SUGGESTED SPECIFICATION

Light fixtures shall be nonmetallic and constructed of 30% glass filled polyester material exhibiting a maximum linear expansion of 1.4×10^{-5} in./in./°F. Fixtures shall be assembled with high temperature silicone gaskets, brass inserts and screws.

Incandescent light fixtures shall be rated for use with a Maximum 150 Watt incandescent lamp. Compact fluorescent light fixtures shall be of the wattage specified and be supplied complete with lamp and ballast (high power factor, low harmonic electronic for 18 & 26 Watt fixtures and magnetic for 7, 9 & 13 Watt fixtures).

Light fixtures shall be third-party certified to CSA C22.2 No. 9 and C22.2 No. 250 for indoor/outdoor wet location use and where the specified installation requires; Class I Div 2 and Class II Div 2 hazardous location use.

APPROVED PRODUCTS:

Sceptalight[™] LVPF/LVPL/LBPE/LPMF/LPPL series light fixtures manufactured by IPEX.






PRODUCT CATALOGUE



DIMENSIONS








Ceiling Mount


Ceiling Mount













Pendant Mount








Wall Mount





Ceiling Mount Utility Fixtures

WET LOCATIONS

| | with Sto | Ceiling Mount andard Clear Glass Globe | Part Number | Product Code |
|---|----------------|---|----------------|-----------------|
| | 150W | Incandescent | LVPF150C | 077225 |
| | 150W | Incandescent less guard | LVPF150LG | 077237 |
| | 26W | Compact Fluorescent | LVPL26C | 077170 |
| | 18W | Compact Fluorescent | LVPL18C | 077210 |
| Q | 13W | Compact Fluorescent | LVPL13C | 077122 |
| Z | 9W | Compact Fluorescent | LVPL9C | 077121 |
| | 7W | Compact Fluorescent | LVPL7C | 077120 |
| C | Ceil Polyca | ling Mount with Clear rbonate Globe (no guard) | Part Number | Product Code |
| | 26W | Compact Fluorescent | LVPL26PCC | 077176 |
| | 18W | Compact Fluorescent | LVPL18PCC | 077211 |
| | 13W | Compact Fluorescent | LVPL13PCC | 077165 |
| | 9W | Compact Fluorescent | LVPL9PCC | 077155 |
| | 7W | Compact Fluorescent | LVPL7PCC | 077145 |

| | with St | Pendant Mount andard Clear Glass Globe | Part Number | Product Code |
|----------|---------|--|----------------|-----------------|
| | 150W | Incandescent | LPMF150C | 077231 |
| | 26W | Compact Fluorescent | LPPL26C | 077184 |
| | 18W | Compact Fluorescent | LPPL18C | 077212 |
| 5 | 13W | Compact Fluorescent | LPPL13C | 077185 |
| 4 | 9W | Compact Fluorescent | LPPL9C | 077183 |
| | 7W | Compact Fluorescent | LPPL7C | 077182 |
| PENDANT | | dant Mount with Clear irbonate Globe (no guard) | Part Number | Product Code |
| | 26W | Compact Fluorescent | LPPL26PCC | 077375 |
| | 18W | Compact Fluorescent | LPPL18PCC | 077273 |
| | 13W | Compact Fluorescent | LPPL13PCC | 077365 |
| | 9W | Compact Fluorescent | LPPL9PCC | 077355 |
| | 7W | Compact Fluorescent | LPPL7PCC | 077345 |

| | Description | Part Number | Product Code |
|------|---|----------------|-----------------|
| WALL | For wall mount fixtures select and order the appropriate style (wattage and globe) ceiling mount fixture from above and add LWB150. Wall Mount bracket | LWB150 | 077233 |

| | Utility Light Fixture 150 Watt Incandescent | Part Number | Product Code |
|----------|--|----------------|-----------------|
| | w/ Standard Glass Globe | LVPE150-10/15 | 077493 |
| <u>0</u> | w/ Polycarbonate Globe | LVPE150-PCC | 077181 |
| Z | *w/ Standard glass globe & guard | LVPE150-10/15G | 077402 |
| | w/ Heat resistant glass globe clear | LVPE150HRC | 077578 |
| | w/ Heat resistant glass globe red | LVPE150HRR | 077599 |
| | w/ Heat resistant glass globe blue | LVPE150HRB | 077579 |
| | w/ Heat resistant glass globe green | LVPE150HRG | 077597 |
| | w/ Heat resistant glass globe amber | LVPE150HRA | 077598 |
| | Clamp-on guard for LVPE | LVPUG150 | 077558 |

^{*}Maximum 60W incandescent lamp with polycarbonate globe





HAZARDOUS LOCATIONS

| | with He | Ceiling Mount at Resistant Glass Globe | Part Number | Product Code |
|---------|---------|---|----------------|-----------------|
| | 150W | Incandescent clear | LVPF150HRC-HAZ | 077414 |
| | 150W | Incandescent red | LVPF150HRR-HAZ | 077415 |
| | 150W | Incandescent blue | LVPF150HRB-HAZ | 077416 |
| | 150W | Incandescent green | LVPF150HRG-HAZ | 077417 |
| | 150W | Incandescent amber | LVPF150HRA-HAZ | 077494 |
| ch | | | | |
| Z | 26W | Compact Fluorescent clear | LVPL26HRC-HAZ | 077377 |
| Ħ | 26W | Compact Fluorescent red | LVPL26HRR-HAZ | 077378 |
| CEILING | 26W | Compact Fluorescent blue | LVPL26HRB-HAZ | 077379 |
| J | 26W | Compact Fluorescent green | LVPL26HRG-HAZ | 077399 |
| | 26W | Compact Fluorescent amber | LVPL26HRA-HAZ | 077400 |
| | | | | |
| | 18W | Compact Fluorescent clear | LVPL18HRC-HAZ | 077347 |
| | 18W | Compact Fluorescent red | LVPL18HRR-HAZ | 077348 |
| | 18W | Compact Fluorescent blue | LVPL18HRB-HAZ | 077349 |
| | 18W | Compact Fluorescent green | LVPL18HRG-HAZ | 077353 |
| | 18W | Compact Fluorescent amber | LVPL18HRA-HAZ | 077354 |


| | with He | Pendant Mount eat Resistant Glass Globe | Part Number | Product Code |
|----------|---------|--|----------------|-----------------|
| | 150W | Incandescent clear | LPMF150HRC-HAZ | 077495 |
| Z | 150W | Incandescent red | LPMF150HRR-HAZ | 077496 |
| ◂ | | | | |
| Z | 26W | Compact Fluorescent clear | LPPL26HRC-HAZ | 077407 |
| <u>_</u> | 26W | Compact Fluorescent red | LPPL26HRR-HAZ | 077409 |
| Q | | | | |
| | 18W | Compact Fluorescent clear | LPPL18HRC-HAZ | 077500 |
| | 18W | Compact Fluorescent red | LPPL18HRR-HAZ | 077498 |

| | Description | Part Number | Product Code | |
|-----|---|----------------|-----------------|--|
| WAL | For wall mount fixtures select and order the appropriate style (wattage and globe) ceiling mount fixture from above and add LWB150. | | | |
| | Wall Mount bracket | LWB150 | 077233 | |


Sceptalight compact fluorescent light fixtures are supplied complete with lamp and ballast.




PHOTOMETRIC DATA




26W Quad Compact Fluorescent




18W Quad Compact Fluorescent



13W Twin-Tube Compact Fluorescent



100W 120V Coated A19 Incandescent



150W 120V Coated A21 Incandescent

For detailed technical and photometric information please consult our Technical Guide

CUSTOMER SERVICE CENTRES

Tel (905) 670-7676

Fax (905) 670-5295

Tel (514) 337-2624

Fax (514) 337-7886

Fax (506) 633-8720

Fax (709) 368-9111

Tel (506) 633-7473 (PIPE)

Tel (709) 747-7473 (PIPE)

Montreal

Saint John

Vancouve

Tel (604) 534-8631 Fax (604) 534-7616

Calgary

Tel (403) 236-8333 Fax (403) 279-8443

Edmonton

Tel (780) 415-5300 Fax (780) 415-5358

Winnipeg

Tel (204) 633-3111 Fax (204) 633-3075

Toll free in Canada (866) 473-9462 (IPEX INC)

www.ipexelectrical.com

About the IPEX Group of Companies

As leading suppliers of thermoplastic piping systems, the IPEX Group of Companies provides our customers with some of the world's largest and most comprehensive product lines. All IPEX products are backed by more than 50 years of experience. With state-of-the-art manufacturing facilities and distribution centers across North America, we have established a reputation for product innovation, quality, end-user focus and performance.

Markets served by IPEX group products are:

- Electrical systems
- Telecommunications and utility piping systems
- PVC, CPVC, PP, ABS, FR-PVDF, PEX and PE pipe and fittings (1/4" to 48")
- Industrial process piping systems
- Municipal pressure and gravity piping systems
- Plumbing and mechanical piping systems
- · PE Electrofusion systems for gas and water
- Industrial, plumbing and electrical cements
- Irrigation systems

Products manufactured by IPEX Electrical Inc.
Sceptalight™ is a trademark of IPEX Branding Inc.

This literature is published in good faith and is believed to be reliable. However, it does not represent and/or warrant in any manner the information and suggestions contained in this brochure. Data presented is the result of laboratory tests and field experience.

A policy of ongoing product improvement is maintained. This may result in modifications of features and/or specifications without notice.



BRELLFIP060407R © 2009 IPEX EL0028C





DISTRIBUTED BY