



**WEST
KITIKMEOT
RESOURCES
CORP**

GRAYS BAY ROAD AND PORT PROJECT

SPILL CONTINGENCY PLAN

EARLY PERMITTING/IMPACT ASSESSMENT PHASE

WKR MP 04

Version 1.2

Organization	Contact	Location	Telephone/Radio
West Kitikmeot Resources Corp	Environment Manager Gavin Law	Calgary	403-837-5677
Akokli Construction	Logistics, Field Program Management Peter Cullinane	British Columbia	250-9775264
NT-NU Spill Centre	24 hour Spill Report Line	Yellowknife	867-920-8130
Kitikmeot Inuit Association	Lands Administrator Tannis Bolt	Kugluktuk	867-982-3310
Crown-Indigenous Relations and Northern Affairs Canada	Inspector James Bolt	Kugluktuk	343 597-9472
	Lands Administration, Engineer	Iqaluit	867-975-4283
Nunavut Water Board		Gjoa Haven	867-360-6338
Fisheries and Oceans Canada	General	Yellowknife	867-669-4900
Environment and Climate Change Canada	Enforcement Branch	Iqaluit	867-975-4644
Government of Nunavut-Department of Environment	Manager of Environmental Protection	Iqaluit	867-975-7748
National Environmental Emergencies Centre (NEEC)			866-283-2333
Stanton Territorial Hospital		Yellowknife	867-767-9200
RCMP		Kugluktuk	867-982-0123 867-982-1111
WSCC	Mines Inspector	Yellowknife	800-661-0792
	General	Yellowknife	867-669-4418
KBL Environmental	24 hr Emergency Response	Yellowknife	855-354-5263
Medivac (Keewatin Air)	OCC	Winnipeg	800-913-4352 204-784-6568
Air Tindi	OCC	Yellowknife	867-669-8218
Acasta Heliflight	OCC	Yellowknife	867-873-3306

Summary

This *Spill Contingency Plan* describes how people are trained and what needs to be done to respond safely to a spill of fuel or other hazardous material at West Kitikmeot Resources Corp.'s field work sites.

Revision Table

Version	Author/Reviewer	Notes	Date	Sent To
1.0	SHC	Internal. First draft sent to WKR	September 26, 2024	WKR
1.1	SHC	Revised format, minor edits throughout	October 15, 2024	WKR
1.2	SHC	Updated Appendices B&C Revised Contact List in response to party comments to include GN-DOE and ECCC	March 31 2025	WKR

Table of Contents

1	Introduction.....	1
1.1	Purpose	1
1.2	Scope	2
1.3	Plan Management	2
1.4	Roles and Responsibilities	3
1.5	Site Description	4
2	Spill Prevention	6
2.1	Product Inventory.....	6
2.2	Material Storage and Inspection.....	6
2.3	Material Handling and Disposal.....	8
3	Spill Response.....	8
3.1	Spills to Land	9
3.2	Spills to Snow	10
3.3	Spills to Ice	10
3.4	Spills to Water.....	11
3.5	Spill Kits	11
4	Restoration	12
4.1	Potential Impacts.....	12
5	Reporting and Documentation.....	12
5.1	Safety Data Sheet.....	12
5.2	Spill Reporting.....	13
6	Training	13
7	References.....	14
Appendix A. Reportable Spill Volumes		A1
Appendix B. Spill Response Procedure.....		B1
Appendix C. Safety Data Sheets.....		C1
Appendix D. Spill Report Form		D1

List of Tables

Table 1.1	Related Project documents and authorizations	2
Table 1.2	Proponent Contacts and Information	4
Table 2.1	Petroleum and chemical products typically stored on site	7

List of Figures

Figure 2.1	Grays Bay Road and Port Project.....	5
------------	--------------------------------------	---

Abbreviations

FIBC	Flexible Intermediate Bulk Containers
KIA	Kitikmeot Inuit Association
km.....	kilometer
NT	Northwest Territories
NU.....	Nunavut
PPE	Personal Protective Equipment
SDS	Safety Data Sheets
The Company	West Kitikmeot Resources Corp
The Plan	Spill Contingency Plan
The Project	Grays Bay Road and Port Project
TDG.....	Transportation of Dangerous Goods
WHMIS	Workplace Hazardous Materials Inventory System
WKR	West Kitikmeot Resources Corp

Glossary

Environment Manager	Designated WRK staff, responsible for Implementation of this Plan
Kitikmeot Inuit Association	A not-for-profit designated Inuit organization with community-elected leadership representing Inuit of the Kitikmeot Region of Nunavut. Their goal is to support Kitikmeot Inuit, providing them with more educational, employment, and business opportunities (KIA 2024).
Kitikmeot Region	The most western region of the Nunavut territory. It consists of the southern and eastern parts of Victoria Island with the adjacent part of the mainland and includes five permanent communities of: Cambridge Bay, Gjoa Haven, Kugaaruk, Kugluktuk and Taloyoak.
Spill	A release of a substance that is likely to pose imminent harm to the environment or human health, or meets or exceeds reportable amounts.
The Program	Field studies occurring concurrent with and in support of Project impact assessment, and early permitting

1 Introduction

West Kitikmeot Resources Corp. (WKR; the Company) is an Inuit-owned, Inuit-led company, based in Cambridge Bay, Nunavut. WKR is primarily focused on the advancement of the Grays Bay Road and Port Project (the Project). The Company's largest shareholder is a wholly-owned subsidiary of the Kitikmeot Inuit Association (KIA).

The Project is proposed as multi-user, multi-use transportation infrastructure to be located on a combination of Inuit Owned Land and Crown land in the Kitikmeot Region of western Nunavut. Subject to approval, the Project would result in the establishment of the first deep-water port in the Canadian Central Arctic at Grays Bay, as well as a 230 kilometre (km) all-season access road between Grays Bay and Jericho station near Contwoyto Lake. The Project will connect to the already approved Tibbitt to Contwoyto Winter Road (TCWR). The multi-user, multi-use Project would allow for the establishment of shared infrastructure with many potential users including the federal and territorial governments, communities, community members, resource companies, and defence agencies.

In support of advancing the design of the Project and of assessing impacts of the Project on the biophysical and socio-economic environment, WKR commenced field studies in July 2024. These studies are a continuation of, or are supplemental to, baseline studies screened and undertaken historically. This includes collecting biophysical environmental data, maintaining existing and installing new scientific instrumentation required to support environmental data collection, and undertaking design-related studies. These studies occur concurrent with Project impact assessment and early permitting, referred to here as the Program.

1.1 Purpose

A spill is a release of a substance that is likely to pose imminent harm to the environment or human health, or meets or exceeds the amounts listed in Appendix A. Spills may occur at a variety of worksites, including the fuel caches and drill sites. Regardless of the type or quantity of material involved, all worksites must implement measures to reduce the potential for spills and have an action plan for responding to spills.

This *Spill Contingency Plan* (the Plan) describes methods for preventing and responding to spills at Program work sites and considers the guidance provided in the documents listed in Table 1.1, which may be updated from time to time.

Table 1.1 Related Project documents and authorizations

Document	Authority
<i>Mine Health and Safety Act (1994) and Regulations (1995)</i>	Government of Nunavut
<i>Spill Contingency Planning and Reporting Regulations (1993)</i>	Government of Nunavut
<i>Canadian Environmental Protection Act (1999)</i>	Government of Canada
<i>Transportation of Dangerous Goods Act (1992)</i>	Government of Canada
<i>Transportation of Dangerous Goods Regulations (2012)</i>	Government of Canada
<i>Hazardous Products Act (1985)</i>	Government of Canada
<i>Canada Labour Code (1985)</i>	Government of Canada
<i>Canada Occupational Safety and Health Regulation (1986)</i>	Government of Canada
<i>Territorial Lands Act (1985) and Land Use Regulations (2016)</i>	Government of Canada
Contingency Planning and Spill Reporting in Nunavut: A guide to the new regulations	Government of Nunavut
Screening Decision	Nunavut Impact Review Board
Water Licence	Nunavut Water Board
Land Use Licence	Kitikmeot Inuit Association
Land Use Permit	Government of Canada

1.2 Scope

This Plan applies to activities occurring in the field during the early permitting/impact assessment phase of the Project, including baseline field studies on land, in freshwater and in the marine environment, and geotechnical drilling, predominantly in the port area.

Should WRK establish a camp, this Plan will be updated accordingly, as needed.

1.3 Plan Management

This Plan is reviewed annually at minimum by the Environment Manager or designate and revised as needed to reflect the terms and conditions of Program authorizations, outcomes of ongoing engagement, acquisition of Inuit Knowledge, and needs of both community members and WKR.

This Plan is effective upon approval, is valid throughout the early permitting/impact assessment phase of the Project, and may be updated from time to time.

A copy of this Plan is maintained on the corporate server in a manner such that it is accessible to workers. A copy is also maintained in any field office locations.

1.4 Roles and Responsibilities

WKR is responsible for implementation of this Plan. Table 1.2 outlines how to connect with the WKR team.

All workers, including staff, contractors, suppliers and visitors, are required to implement this Plan as it pertains to their field activities, including:

- Taking all necessary steps to minimize the chance of spills when working with chemicals, hydrocarbons, or regulated materials;
- Cooperating fully with your supervisor and/or WKR management to implement a spill prevention program in your work area;
- Responding to spills for which you are responsible or discover, and for which you have the requisite training and equipment; and
- Reporting all spills, no matter how small or seemingly insignificant, to your supervisor or WKR management in a timely manner.

Managers and field supervisors have a responsibility to ensure that workers have been trained in WKR spill response expectations and procedures. Additional field supervisor and manager responsibilities include:

- Ensuring site-specific and material-specific training is provided to all teams and workers;
- Ensuring there are appropriate and sufficient spill response supplies in work areas for the hazard characteristics and quantities of materials stored or handled;
- Providing assistance in response to spills including the coordination of additional response personnel or equipment, and related reporting as needed;
- Maintaining records regarding inspections, personnel training, emergency equipment testing and spill kit maintenance; and
- Contacting appropriate government agencies and emergency services where appropriate.

The **Environmental Manager** is responsible for overall implementation of this Plan. Specific duties include verifying that adequate communication and training occur, that adequate procedures are developed for spill prevention and response; allocating adequate resources and retaining competent personnel to carry out the work; ensuring adequate and timely reporting occurs; directing and reviewing incident investigations and related corrective action planning; implementing an assurance program to verify contractor compliance to this Plan.

Table 1.2 Proponent Contacts and Information

Item	Detail
Project Name	Grays Bay Road and Port Project
Proponent	West Kitikmeot Resources Corp.
Address	Head office: P.O. Box 6, 30B Mitik Street, Cambridge Bay, NU XOB OCO Project office: Suite 2110, 500 4 Ave SW, Calgary, AB T2P 2V6
Responsible Executive	Elliot Holland, Chief Operating Officer eholland@westkit.ca 867.446.0309
Principal Contact	Gavin Law, Environment Manager & Engagement Lead glaw@westkit.ca 403.837.5677
Website	www.westkit.ca

1.5 Site Description

As shown in Figure 1.1, the Project is entirely located within the Kitikmeot Region of Nunavut. Project. The northern extent of the Project area at the proposed port site and road terminus is located approximately 180 km east of Kugluktuk, NU at 505441.56 E / 7521154.57 N, while the southern extent of the Project area and proposed road terminus is located at the Jericho Mine site, approximately 400 km northeast of Yellowknife, Northwest Territories (NT) at 479617.47 E/ 7319795.35 N. Main points of access include Kugluktuk, NU, Cambridge Bay, NU and Yellowknife, NT, as well as existing regional mineral project camps site, when operational. The Project Area is primarily accessed by helicopter, with most areas also accessible by fixed wing aircraft, boat or snowmobile.

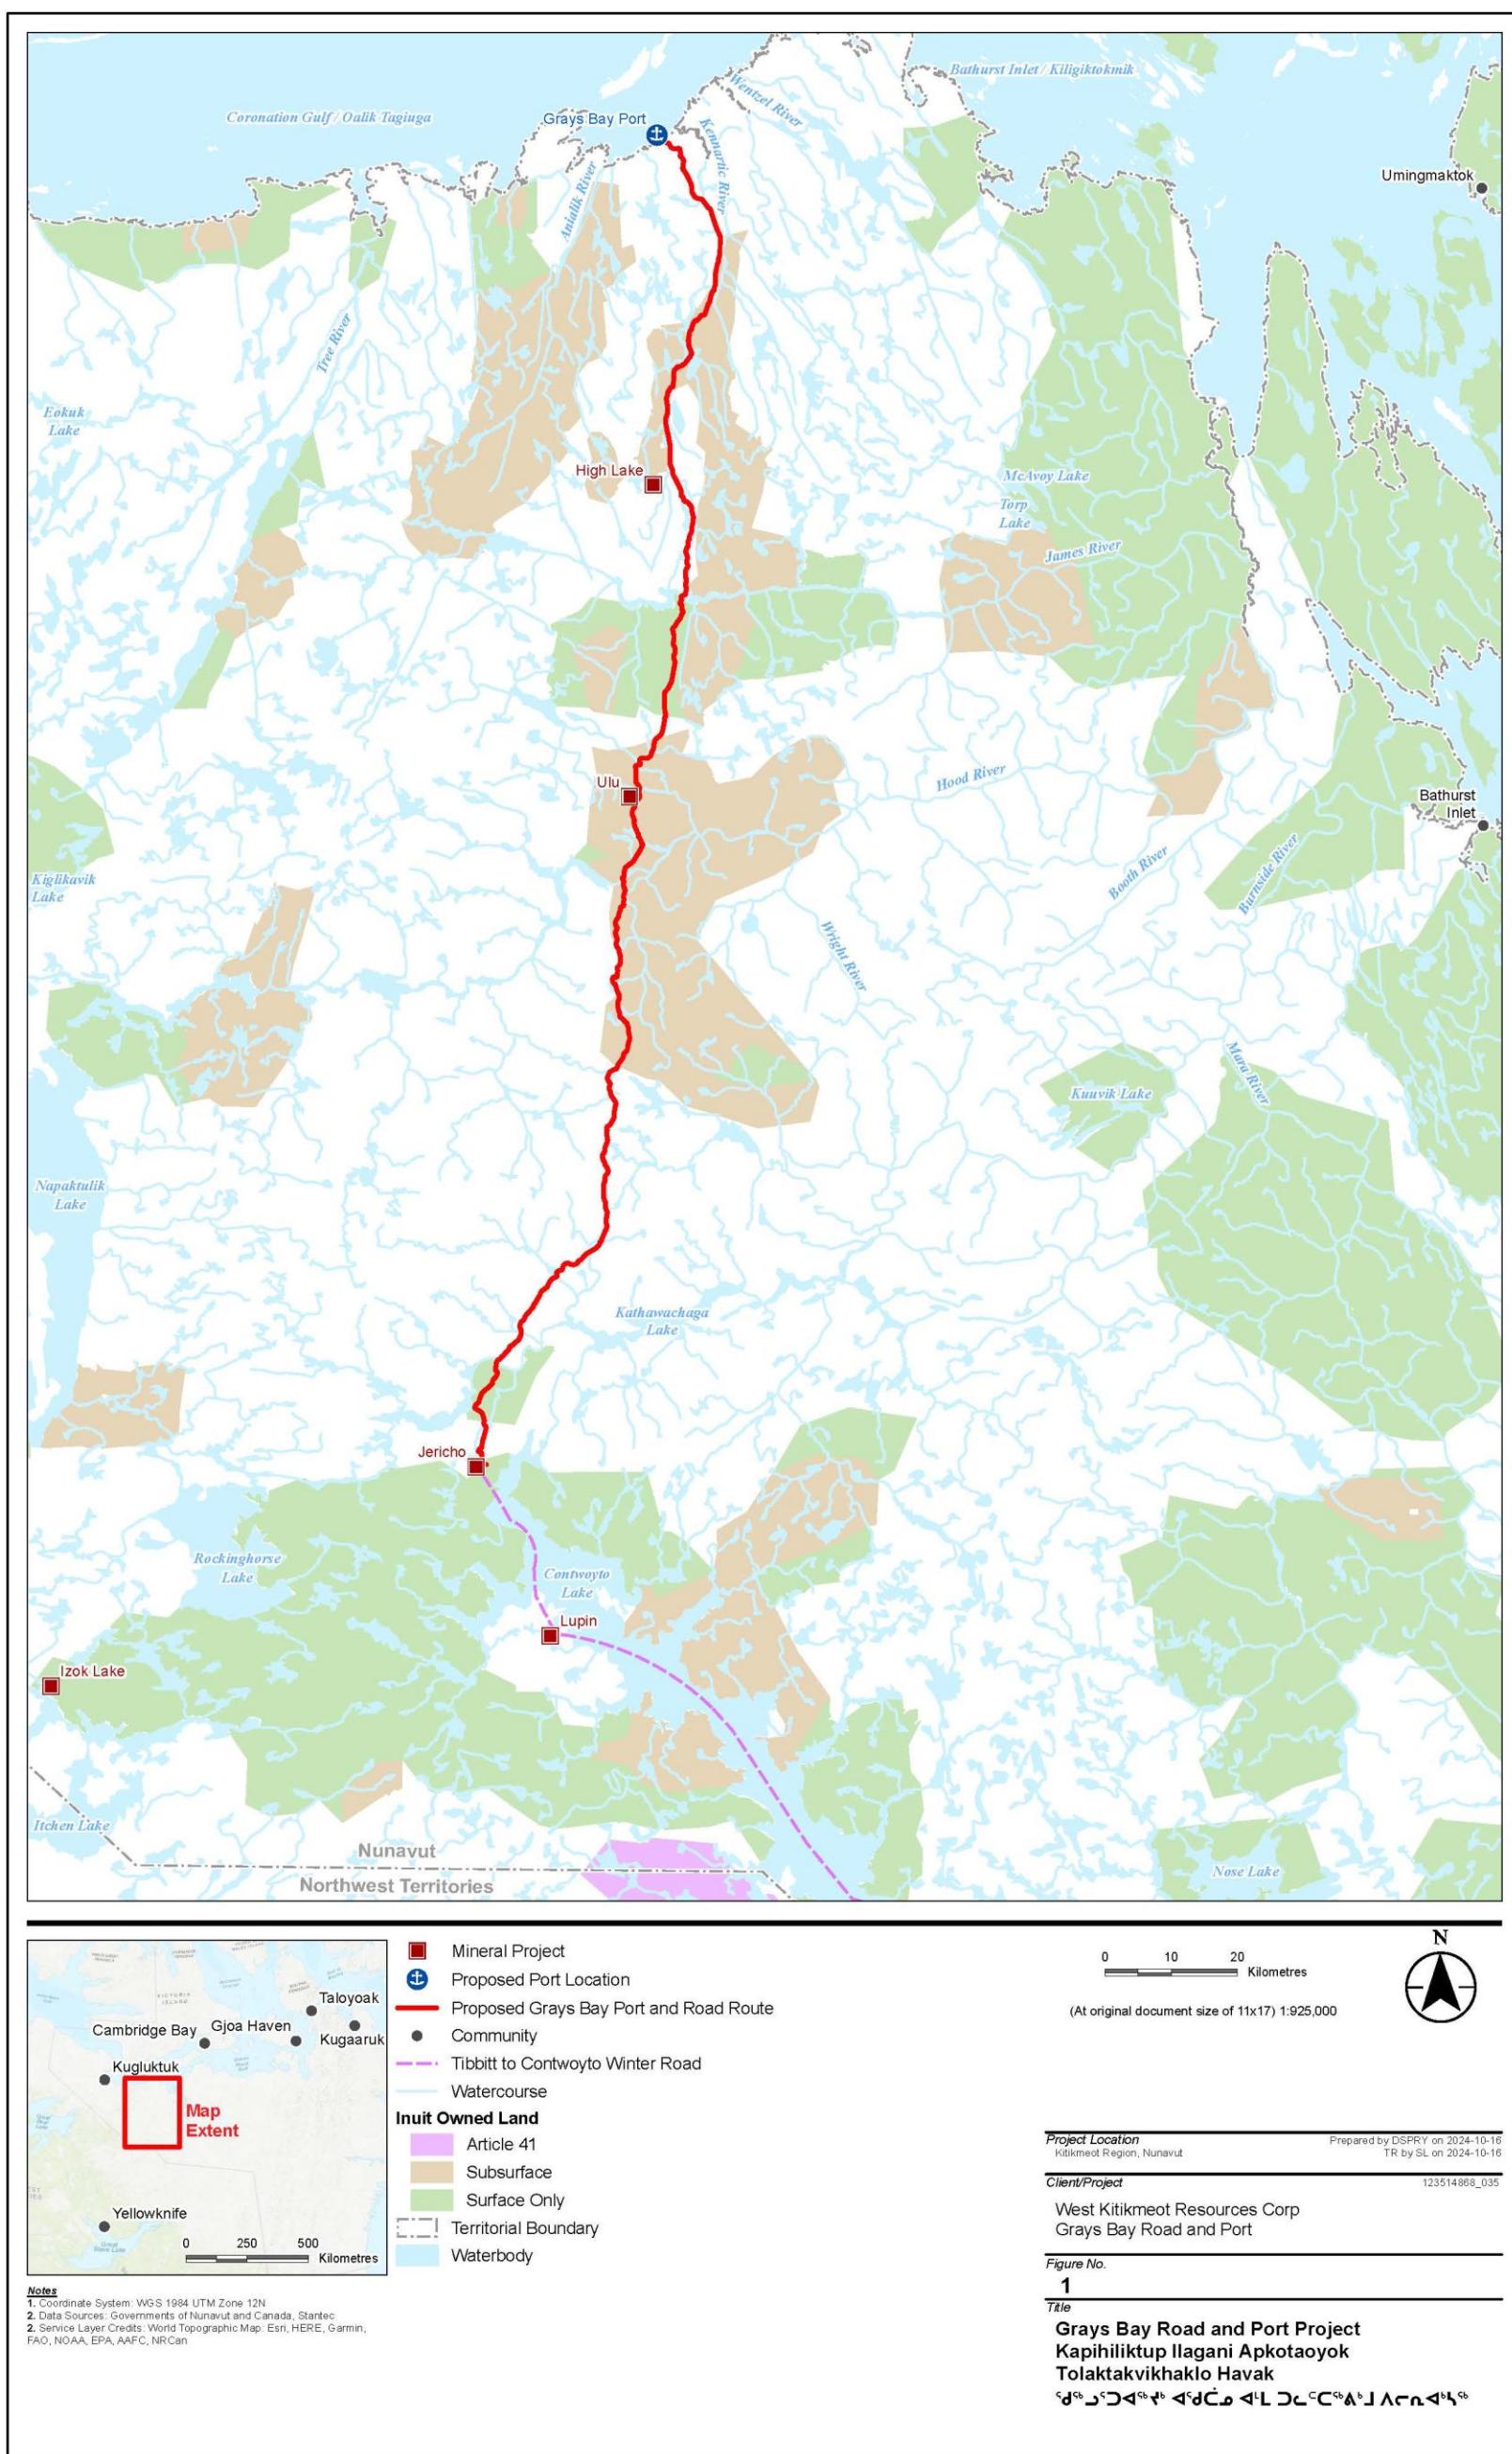


Figure 1.1 Grays Bay Road and Port Project

2 Spill Prevention

Successful spill prevention is largely based on safe storage and handling of materials and maintaining a known inventory of materials located within suitable containment.

2.1 Product Inventory

Table 2.1 outlines an approximate maximum inventory of products and volumes maintained among WKR's temporary caches, which may change in location over time. Volumes may vary by cache and activity. The Inspector is apprised of changes in current cache status.

2.2 Material Storage and Inspection

The materials listed in Table 2.1, along with their associated dispensing pumps and hoses, are stored in suitable containment. Other considerations for proper material storage include the following:

- Storing materials >31 m above the ordinary high water mark of any watercourse.
- Inspecting material storage areas periodically when on site or in accordance with permit and licence requirements, for capacity, ventilation, stability, organization, cleanliness and leak detection.
- Documenting all inspections, results and corrective actions taken.
- Properly labelling storage containers and areas in accordance with the Workplace Hazardous Materials Information Management System (WHMIS).
- Identifying material storage areas with appropriate signage.
- Maintaining storage area capacity such a that it is safely accessible.
- Storing gas cylinders securely in an upright position.
- Storing drums for immediate use in an upright position, and cached drums on their sides with bungs visible and in the 9 o'clock and/or 3 o'clock positions, to the extent possible.
- Maintain one additional empty drum for every twenty drums cached for fuel transfer in case a leak is detected.

Table 2.1 Petroleum and chemical products typically stored on site

Material	Amount	Typical Container	Location	Storage
Diesel	Up to 61,500 L (300 drums)	205 L drums, or equivalent	Drills Fuel cache	Secondary containment
Gasoline	Up to 30,750 L (150 drums)	205 L drums, or containers such as jerry cans	Drills Fuel cache	Secondary containment
Aviation fuel	Up to 51,500 L (300 drums)	205 L drums	Fuel cache	Secondary containment
Propane	Up to 5,000 lbs (50 cylinders)	100 lb cylinders	Drills	Secured upright in designated area
Various lubricants, greases and coolants	Up to 180 gal (36 pails)	5 gal pails	Drills	Designated area
Waste oil and related products (filters, rags)	Various	205 L drums, lined mega bags or similar	Staged at drill site for backhaul	Designated area
Salt	Up to 25,000 lbs (500 bags)	50 lb bags	Drills	Designated area
Drill additives	Up to 180 gal (36 pails)	5 gal pails	Drills	Designated area
Spent spill response materials	Various	205 L drums or lined mega bags	Staged at drill for backhaul	Designated area
Hazardous waste for backhaul and offsite disposal	Various	205 L drums, lined mega bags, or other TDG-approved container	Staged at drill site for backhaul	Designated area

2.3 Material Handling and Disposal

Fuel is transferred within secondary containment using a pump. Fuel caches are replenished throughout the season or annually as needed. Considerations for proper material handling include:

- Conducting refueling and equipment repair in a designated area, >31 m above the ordinary high water mark of any watercourse, within suitable containment or utilizing a drip tray, where possible¹;
- Using equipment or seek assistance when transporting heavy or awkward containers;
- Using funnels and spill containment trays when pouring or transferring chemicals from one container to another; and
- Utilizing proper Personal Protective Equipment (PPE) when handling hazardous materials.

Material disposal is limited to the disposal of spent spill response materials. Should a spill and related cleanup occur, spent response materials will be handled in accordance with the *Waste Management Plan*.

3 Spill Response

A spill response will vary depending upon the situation, the material spilled and location of the spill. As materials on site that pose the highest spill risk due to their volume and handling frequency are all petroleum products, the response procedures outlined in this document are considered to apply under most spill scenarios.

¹ Site-specific procedures for safe refueling during marine drilling are developed with the drilling contractor.

As illustrated in Appendix B, in all spill responses, the following steps should be taken to ensure worker safety and environmental protection are maintained:

- Ensure your own safety and the safety of your coworkers by:
 - Stopping what you are doing;
 - Staying clear of the spill;
 - Warning others nearby,
 - Shutting down nearby equipment;
 - If required, assist injured or contaminated persons;
- Assess the situation. Notify and report, as needed:
 - **Emergency:** if the spill poses a significant risk to persons, property or the environment, call for help and contact your supervisor or the Environment Manager immediately;
 - **Non-emergency:** proceed with appropriate spill response;
- Consult the Safety Data Sheets (SDS) for exposure risk;
- Put on appropriate PPE (gloves, safety glasses, apron, footwear);
- Contain the spill as outlined in the following sections;
- Label and store containers of waste and spent spill response materials;
- Conduct spill reporting;
- Where required, participate in incident investigations and follow-up measures.

Off-site resources may also be deployed in response to a spill. Depending on the spill location, Yellowknife is the closest major centre with adequate response capacity; it is accessible by air. Should off-site resources be needed to support a spill response, KBL Environmental Ltd. provides 24 hr emergency response support (based in Yellowknife); contact information for KBL Environmental Ltd. can be found in the Emergency Contact Information in this Plan.

3.1 Spills to Land

In the event of a flowing fluid spill to the ground surface or tundra:

- Trench or ditch to intercept or contain fluid where feasible or construct a berm or barrier downslope of the spill.
- Recover free product through manual or mechanical means including shovels, heavy equipment (where available) and pumps;
- Absorb petroleum residue with synthetic sorbent socks, pillows, pads or granular materials;
- Mechanically recover contaminated rock, soil and vegetation using a shovel;
- Backfill any excavated areas with available overburden or other suitable materials.

If dry chemicals or other materials are spilled to the ground surface or tundra, the product is cleaned up immediately with a shovel or otherwise manually, as needed, with any recovered materials reused to the greatest extent possible, and/or otherwise disposed of suitably.

Should any recoverable amounts of drill cuttings be deposited to the tundra in the vicinity of the drill, cuttings are collected and deposited in the drill sump, to the extent possible without disturbing the tundra, and/or to the satisfaction of the Inspector(s).

3.2 Spills to Snow

In the event of a spill to snow:

- If flowing fluid, construct an ice berm or barrier downslope of the spill by compacting snow and spraying with water (if conditions permit);
- Compact snow around the perimeter of the spill area;
- Clear channels in the snow, to allow free product to collect in a low point, in one area if possible;
- Recover free product through manual or mechanical means including shovels and pumps;
- Absorb petroleum residue with synthetic sorbent socks, pillows, pads or granular materials;
- Mechanically recover all contaminated snow and ice.

If dry chemicals or other materials are spilled, the product is cleaned up immediately with a shovel, or otherwise manually, as needed, with any recovered materials reused to the greatest extent possible, and/or otherwise disposed of suitably.

Should any recoverable amounts of drill cuttings be deposited to the snow in the vicinity of the drill, cuttings are collected and deposited in the drill sump, to the extent possible without disturbing the tundra, and/or to the satisfaction of the Inspector(s).

3.3 Spills to Ice

In the event of a spill of a fluid, dry materials or drill cuttings to ice, follow procedures for a spill to snow.

In the event that materials penetrate and are under the ice:

- Drill holes through ice using ice auger to locate fuel/petroleum product;
- Once detected, cut slots in the ice using chain saws and remove ice blocks to allow light non-aqueous phase liquids to collect in openings in the ice;
- Recover free product through manual or mechanical means including scoops or pumps, or, if approved, combust in situ;
- Absorb petroleum residue with synthetic sorbent socks, pillows or pads.

3.4 Spills to Water

In the event of a fluid spill to water:

- Monitor the movement of the spilled materials from a helicopter;
- Deploy and secure booms around the perimeter of the spilled material;
- Absorb petroleum residue with synthetic sorbent socks, pillows or pads;
- Recover free product by floating absorbent socks, pillows or pads on the water surface, deploying a skimmer, or, if approved, combust in situ or apply chemical dispersants.

3.5 Spill Kits

Spill kits on site may vary based on location and supplier. Contents of typical small and large kits are presented below. Large spill kits are located at each fuel cache, refueling area and drills, while small spill kits are deployed as needed.

A typical small (68 L) spill kit may contain the following:

- 50 oil sorbent pads;
- 4 small pillows;
- 2 large pillows;
- 4-4 inch socks;
- 1 plug patty (instant leak-stop);
- 1 pair of nitrile gloves;
- 1 pair of splash goggles; and
- 1 disposable respirator.

A typical large (220 L) spill kit may contain the following:

- 100 oil sorbent pads;
- 6 small pillows;
- 2 large pillows;
- 2 3"x4' socks;
- 5 3"x8' socks;
- 2 4' socks;
- 1 25 lb bag granular;
- 2 pair splash goggles;
- 2 poly coated Tyvek suits;
- 2 disposable respirators;
- 10 large bags with ties for temporary use;
- 2 large tarps;
- 1 collapsible shovel;
- 1 roll duct tape;
- 1 utility knife;
- 2 spill kit labels;
- 1 copy of the Plan;
- 1 231 L overpack drum;
- 1 checklist of required items

Spill kits include enough Flexible Intermediate Bulk Containers (FIBC)-type bags (suitable for transporting contaminated materials by helicopter) to be able to address the largest possible spill volume (i.e., combined spill of multiple barrels) being stored or transported at one time.

Spill kits are inspected at the start of each field season and following each spill response to ensure contents are sufficient.

Additional spill response materials are stored in the field program office and include:

- Trash pump;
- 38"x144' rolls absorbent matting;
- 16"x20" enviro matting;
- Booms;
- Large tarps;
- Shovels;
- Pick axes;
- Rakes.

4 Restoration

Restoration of areas affected by a spill varies depending on the receiving environment, seasonality and the nature and extent of the spill. Restoration of spill-affected areas is planned and undertaken in consultation with the Inspector, external agencies and the other interested parties as required and appropriate.

4.1 Potential Impacts

The Program occurs adjacent to marine and freshwater areas, which are fish-bearing watercourses. The Program area is used for cultural practices and traditional land uses including hunting, fishing, trapping, travel and spiritual practices. Depending on where a spill occurs, it may remain fairly local if spilled to land or, if spilled to water, it may flow downstream into other freshwater or marine environments.

Should there be a spill to land or water, information is communicated directly to appropriate authorities.

5 Reporting and Documentation

5.1 Safety Data Sheet

SDS are maintained at the drill and the field program office. The SDS are reviewed annually at the start of the field program to ensure that appropriate and current SDS are available. SDS for typical materials found on site are included in Appendix C.

5.2 Spill Reporting

Spill reporting is a key component of the spill response efforts. Once it is safe to do so, the first responder collects the following info:

- Date and time of spill;
- Location of spill (geo-referenced);
- Direction the spill is moving;
- Name of contact person at location of spill, and phone number where applicable;
- Material and quantity spilled;
- Cause of spill;
- Whether spill is contained or stopped;
- Action taken to contain, recover, clean-up and dispose of spilled material

All spills and unplanned releases are reported to the field supervisor, and externally where required. In the event of a reportable spill, and once it is safe to do so, the field crew lead or designate will initiate notification of the following, with internal reporting occurring as soon as practical and external initial reporting within 24 hours:

- Operations Manager;
- 24-hour spill report line (phone or email);
- Inspector(s).

Following initial notification, the field supervisor completes the Spill Reporting Form (Appendix D) and submits it to the Inspector(s) within seven calendar days of the incident.

A detailed follow-up report is submitted to the Inspector(s) within 30 days of the incident.

6 Training

All workers handling materials are trained in WHMIS procedures and participate in a site orientation upon arrival, which outlines onsite hazards and roles and responsibilities regarding material handling, storage and spill response. Spill kit contents and deployment are periodically reviewed at site safety meetings. Additional training occurs following a reportable incident and upon renewal of any equipment. An emergency response drill may be conducted; advance notice of a mock spill exercise is provided to applicable authorities.

7 References

Canada Labour Code. R.S.C., 1985, c. L-2

Canada Occupational Safety and Health Regulation. 1986. SOR/86-304

Canadian Environmental Protection Act. S.C. 1999, c.33

Hazardous Products Act. R.S.C., 1985, C. H-3

Mine Health and Safety Act. SNWT (Nu) 1994, c25

Mine Health and Safety Regulations NWT Reg (Nu) 125-95

Spill Contingency Planning and Reporting Regulations. R-068-93

Territorial Lands Act. R.S.C.. 1985, c. T-7

Territorial Land Use Regulations. SOR/2016 R-32, s.1.

Transportation of Dangerous Goods Act. (TDGA). S.C. 1992, c.34

Transportation of Dangerous Goods Regulations. SOR/2012-245


Government of Nunavut. (no publication date). Contingency Planning and Spill Reporting in Nunavut: A guide to the new regulations.

Appendix A. Reportable Spill Volumes

Unplanned releases of the materials listed below will immediately be reported to the 24 Hour Spill Report Line, Yellowknife, Tel: 867-920-8130 (Email: spills@gov.nt.ca; Fax: 867-873-6924) or using the Spill Report.


Description of Contaminant	Amount Spilled	TDG Class
Explosives	Any amount	1.0
Compressed gas (toxic/corrosive)	Any amount	2.3/2.4
Infectious substances	Any amount	6.2
Dangerous wastes	≥ 5 L or 5 kg	9.3
Radioactive materials	Any amount	7.0
Compressed gas (Flammable)	Any amount of gas from containers with a capacity greater than 100 L	2.1
Compressed gas (Non-corrosive, non-flammable)	Any amount of gas from containers with a capacity greater than 100 L	2.2
Flammable liquid	≥ 100 L	3.1/3.2/3.3
Flammable solid	≥ 25 kg	4.1 4.2
Substances liable to spontaneous combustion	≥ 25 kg	4.1 4.2
Water reactant substances	≥ 25 kg	4.3
Oxidizing substances	≥ 50 L or 50 kg	5.1
Organic peroxides	≥ 1 L or 1 kg	5.2
Environmentally hazardous	≥ 1 L or 1 kg	9.2
Poisonous substances	≥ 5 L or 5 kg	6.1
Corrosive substances	≥ 5 L or 5 kg	8.0
Miscellaneous products or substances excluding PCB mixtures	≥ 50 L or 50 kg	9.1
PCB mixtures of 5 or more parts per million	≥ 0.5 L or 0.5 kg	9.1
Other contaminants	≥ 100 L or 100 kg	None
Reported releases or potential releases of any size that: Are near or in an open water body; Are near or in a designated sensitive environment or habitat; Pose an imminent threat to human health or safety; or Pose an imminent threat to a listed species at risk or its critical habitat	Any amount	None

Appendix B. Spill Response Procedure

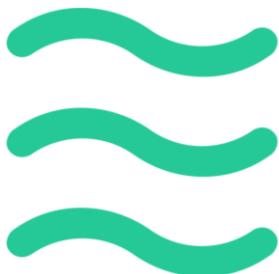

WEST KITIKMEOT RESOURCES CORP

Spill Response Procedures

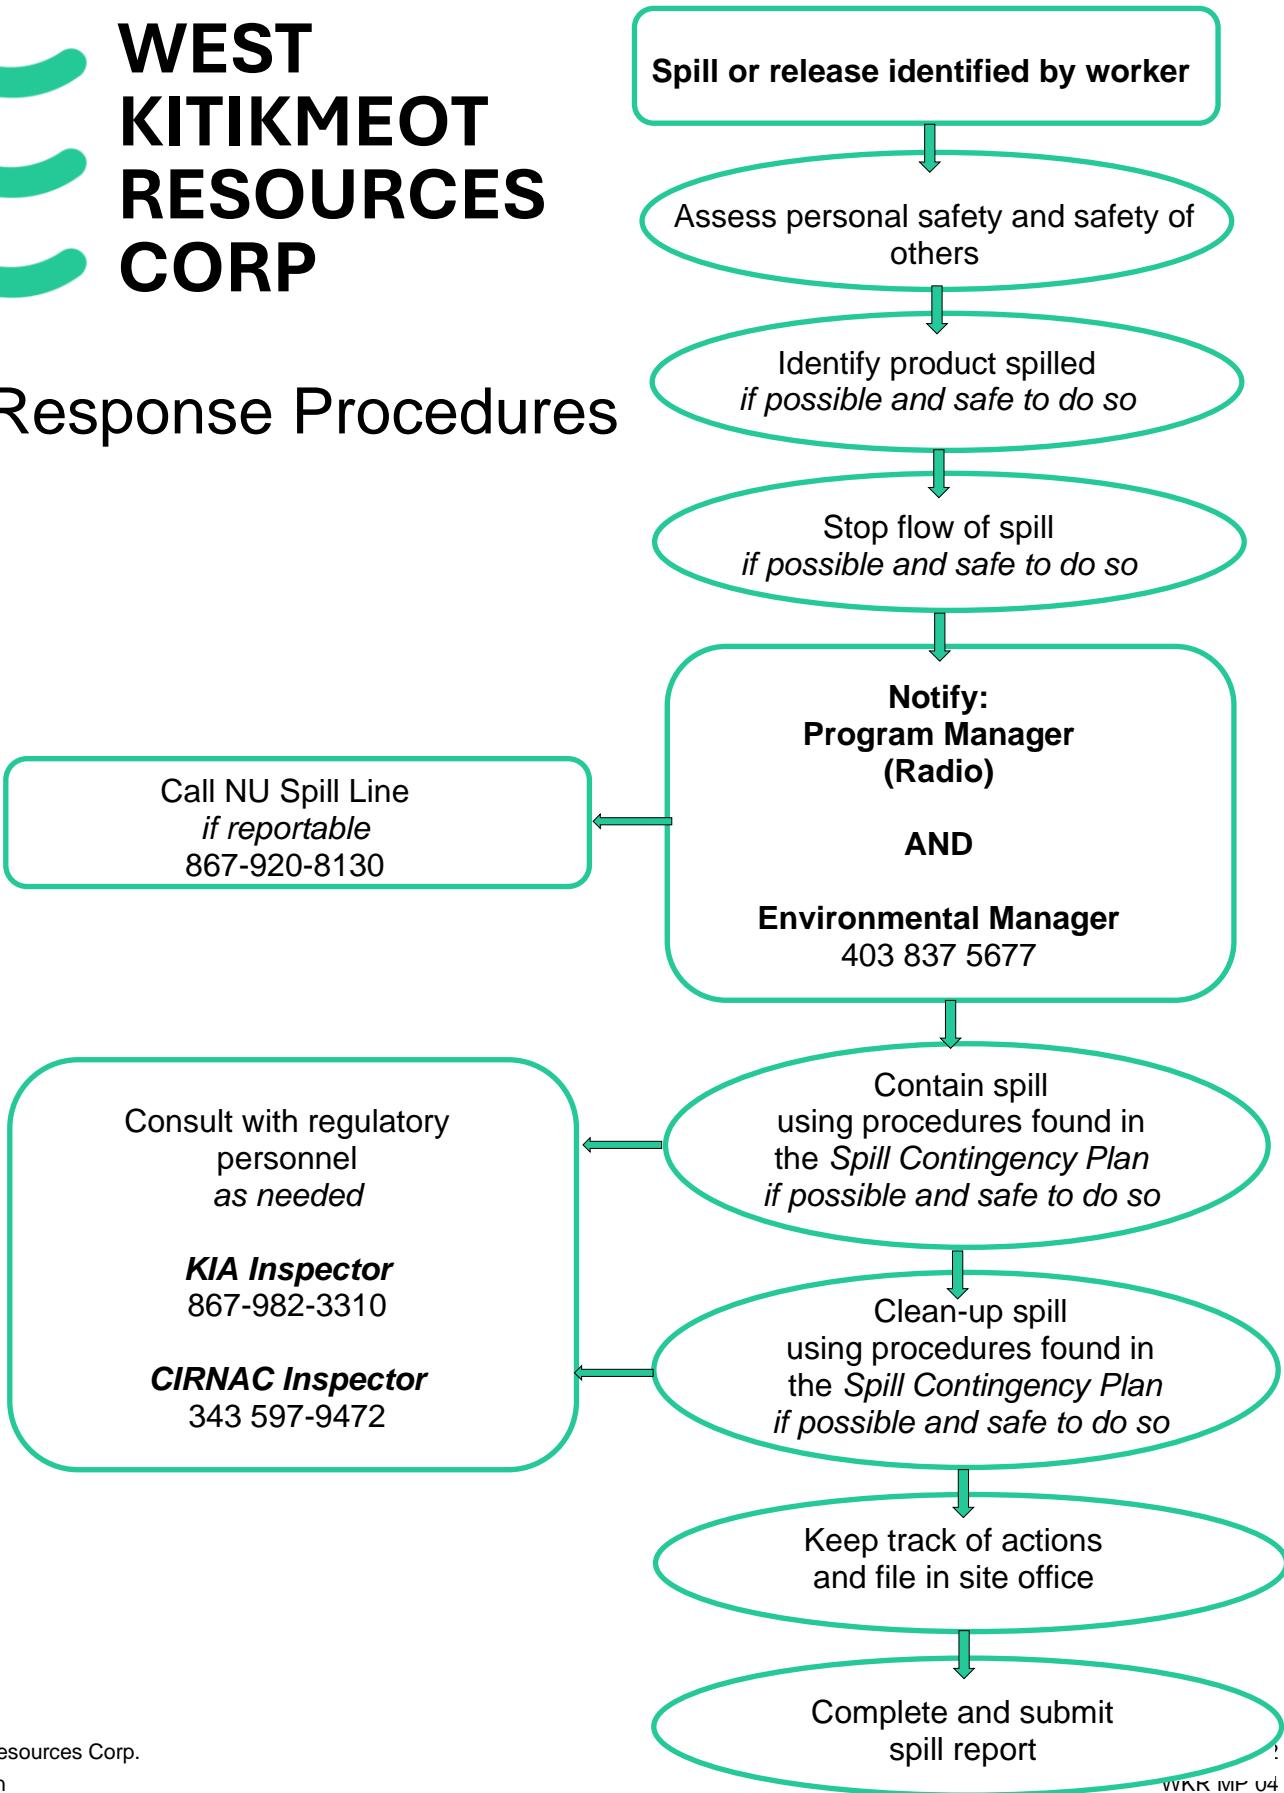

Appendix C. Safety Data Sheets

*SDS for typical materials found on site are included.
See the Program Manager or Field Supervisor for the complete, current list of SDS*



AMC CALCIUM CHLORIDE

AMC

Chemwatch: 20922

Version No: 6.1.1.1

Safety Data Sheet according to WHS and ADG requirements

Chemwatch Hazard Alert Code: 2

Issue Date: 02/04/2016

Print Date: 12/08/2017

L.GHS.AUS.EN

SECTION 1 IDENTIFICATION OF THE SUBSTANCE / MIXTURE AND OF THE COMPANY / UNDERTAKING

Product Identifier

Product name	AMC CALCIUM CHLORIDE
Chemical Name	calcium chloride
Chemical formula	Ca-Cl ₂
Other means of identification	Not Available
CAS number	10043-52-4

Relevant identified uses of the substance or mixture and uses advised against

Relevant identified uses	Used as a drying, dehydrating, desiccating agent for organic liquids, gases. Obsolescent use as refrigerant brine.
--------------------------	--

Details of the supplier of the safety data sheet

Registered company name	AMC
Address	216 Balcatta Rd Balcatta WA 6021 Australia
Telephone	+61 8 9445 4000
Fax	+61 8 9445 4040
Website	www.amcmud.com
Email	amc@imdexlimited.com

Emergency telephone number

Association / Organisation	Not Available
Emergency telephone numbers	1800 039 008 or +61 3 9573 3112,+800 2436 2255 +613 9573 3112
Other emergency telephone numbers	Not Available

SECTION 2 HAZARDS IDENTIFICATION

Classification of the substance or mixture

HAZARDOUS CHEMICAL. NON-DANGEROUS GOODS. According to the WHS Regulations and the ADG Code.

CHEMWATCH HAZARD RATINGS

	Min	Max
Flammability	0	
Toxicity	2	
Body Contact	2	
Reactivity	0	
Chronic	0	

0 = Minimum
1 = Low
2 = Moderate
3 = High
4 = Extreme

Poisons Schedule	Not Applicable
Classification [1]	Acute Toxicity (Oral) Category 4, Eye Irritation Category 2A

AMC CALCIUM CHLORIDE

Legend:

1. Classified by Chemwatch; 2. Classification drawn from HSIS ; 3. Classification drawn from EC Directive 1272/2008 - Annex VI

Label elements

Hazard pictogram(s)



SIGNAL WORD

WARNING

Hazard statement(s)

H302	Harmful if swallowed.
H319	Causes serious eye irritation.
AUH066	Repeated exposure may cause skin dryness and cracking.

Precautionary statement(s) Prevention

P270	Do not eat, drink or smoke when using this product.
P280	Wear protective gloves/protective clothing/eye protection/face protection.

Precautionary statement(s) Response

P305+P351+P338	IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.
P337+P313	If eye irritation persists: Get medical advice/attention.

Precautionary statement(s) Storage

Not Applicable

Precautionary statement(s) Disposal

P501	Dispose of contents/container in accordance with local regulations.
------	---

SECTION 3 COMPOSITION / INFORMATION ON INGREDIENTS

Substances

CAS No	%[weight]	Name
10043-52-4	>85	calcium chloride
		commercial materials may contain up to
		3% sodium chloride

Mixtures

See section above for composition of Substances

SECTION 4 FIRST AID MEASURES

Description of first aid measures

Eye Contact	If this product comes in contact with the eyes: ► Wash out immediately with fresh running water. ► Ensure complete irrigation of the eye by keeping eyelids apart and away from eye and moving the eyelids by occasionally lifting the upper and lower lids. ► Seek medical attention without delay; if pain persists or recurs seek medical attention. ► Removal of contact lenses after an eye injury should only be undertaken by skilled personnel.
Skin Contact	If skin or hair contact occurs: ► Flush skin and hair with running water (and soap if available). ► Seek medical attention in event of irritation.
Inhalation	► If fumes, aerosols or combustion products are inhaled remove from contaminated area. ► Other measures are usually unnecessary.
Ingestion	► IF SWALLOWED, REFER FOR MEDICAL ATTENTION, WHERE POSSIBLE, WITHOUT DELAY. ► For advice, contact a Poisons Information Centre or a doctor. ► Urgent hospital treatment is likely to be needed.

AMC CALCIUM CHLORIDE

- ▶ In the mean time, qualified first-aid personnel should treat the patient following observation and employing supportive measures as indicated by the patient's condition.
- ▶ If the services of a medical officer or medical doctor are readily available, the patient should be placed in his/her care and a copy of the SDS should be provided. Further action will be the responsibility of the medical specialist.
- ▶ If medical attention is not available on the worksite or surroundings send the patient to a hospital together with a copy of the SDS.

Where medical attention is not immediately available or where the patient is more than 15 minutes from a hospital or unless instructed otherwise:

- ▶ **INDUCE** vomiting with fingers down the back of the throat, **ONLY IF CONSCIOUS**. Lean patient forward or place on left side (head-down position, if possible) to maintain open airway and prevent aspiration.

NOTE: Wear a protective glove when inducing vomiting by mechanical means.

Indication of any immediate medical attention and special treatment needed

As in all cases of suspected poisoning, follow the ABCDEs of emergency medicine (airway, breathing, circulation, disability, exposure), then the ABCDEs of toxicology (antidotes, basics, change absorption, change distribution, change elimination).

For poisons (where specific treatment regime is absent):

BASIC TREATMENT

- ▶ Establish a patent airway with suction where necessary.
- ▶ Watch for signs of respiratory insufficiency and assist ventilation as necessary.
- ▶ Administer oxygen by non-rebreather mask at 10 to 15 L/min.
- ▶ Monitor and treat, where necessary, for pulmonary oedema.
- ▶ Monitor and treat, where necessary, for shock.
- ▶ Anticipate seizures.
- ▶ **DO NOT** use emetics. Where ingestion is suspected rinse mouth and give up to 200 ml water (5 ml/kg recommended) for dilution where patient is able to swallow, has a strong gag reflex and does not drool.

ADVANCED TREATMENT

- ▶ Consider orotracheal or nasotracheal intubation for airway control in unconscious patient or where respiratory arrest has occurred.
- ▶ Positive-pressure ventilation using a bag-valve mask might be of use.
- ▶ Monitor and treat, where necessary, for arrhythmias.
- ▶ Start an IV D5W TKO. If signs of hypovolaemia are present use lactated Ringers solution. Fluid overload might create complications.
- ▶ Drug therapy should be considered for pulmonary oedema.
- ▶ Hypotension with signs of hypovolaemia requires the cautious administration of fluids. Fluid overload might create complications.
- ▶ Treat seizures with diazepam.
- ▶ Proparacaine hydrochloride should be used to assist eye irrigation.

BRONSTEIN, A.C. and CURRENCE, P.L.

EMERGENCY CARE FOR HAZARDOUS MATERIALS EXPOSURE: 2nd Ed. 1994

Treat symptomatically.

SECTION 5 FIREFIGHTING MEASURES**Extinguishing media**

- ▶ There is no restriction on the type of extinguisher which may be used.
- ▶ Use extinguishing media suitable for surrounding area.

Special hazards arising from the substrate or mixture

Fire Incompatibility	None known.
----------------------	-------------

Advice for firefighters

Fire Fighting	<ul style="list-style-type: none"> ▶ Alert Fire Brigade and tell them location and nature of hazard. ▶ Wear breathing apparatus plus protective gloves in the event of a fire.
Fire/Explosion Hazard	<ul style="list-style-type: none"> ▶ Non combustible. ▶ Not considered a significant fire risk, however containers may burn. <p>Decomposition may produce toxic fumes of:</p> <ul style="list-style-type: none"> , hydrogen chloride , metal oxides <p>May emit poisonous fumes.</p> <p>May emit corrosive fumes.</p>
HAZCHEM	Not Applicable

SECTION 6 ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures

See section 8

Environmental precautions

See section 12

Methods and material for containment and cleaning up

Minor Spills	<ul style="list-style-type: none">▸ Remove all ignition sources.▸ Clean up all spills immediately.
Major Spills	Moderate hazard. <ul style="list-style-type: none">▸ CAUTION: Advise personnel in area.

Personal Protective Equipment advice is contained in Section 8 of the SDS.

SECTION 7 HANDLING AND STORAGE

Precautions for safe handling

Safe handling	<ul style="list-style-type: none">▸ Avoid all personal contact, including inhalation.▸ Wear protective clothing when risk of exposure occurs.
Other information	<ul style="list-style-type: none">▸ Material is hygroscopic, i.e. absorbs moisture from the air. Keep containers well sealed in storage.▸ Store in original containers.▸ Keep containers securely sealed.

Conditions for safe storage, including any incompatibilities

Suitable container	<ul style="list-style-type: none">▸ DO NOT use aluminium or galvanised containers▸ Polyethylene or polypropylene container.▸ Check all containers are clearly labelled and free from leaks.
Storage incompatibility	<p>Inorganic alkaline earth metal derivative. Derivative of very electropositive metal. Calcium chloride (and its hydrates):</p> <ul style="list-style-type: none">▸ are incompatible with boric acid, calcium oxide, bromine trifluoride, 2-furan, percarboxylic acid▸ may produce explosive hydrogen gas on contact with zinc▸ catalyse exothermic polymerisation of methyl vinyl ether▸ produce heat on contact with water▸ attack metals <p>Addition of a quantity of calcium chloride to boiling water has generated heat sufficient to cause a violent steam explosion on several occasions</p> <ul style="list-style-type: none">▸ Metals and their oxides or salts may react violently with chlorine trifluoride and bromine trifluoride.▸ These trifluorides are hypergolic oxidisers.▸ In presence of moisture, the material is corrosive to aluminium, zinc and tin producing highly flammable hydrogen gas.

SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

Control parameters

OCCUPATIONAL EXPOSURE LIMITS (OEL)

INGREDIENT DATA

Not Available

EMERGENCY LIMITS

Ingredient	Material name	TEEL-1	TEEL-2	TEEL-3
calcium chloride	Calcium chloride	12 mg/m ³	130 mg/m ³	790 mg/m ³

Ingredient	Original IDLH	Revised IDLH
calcium chloride	Not Available	Not Available

MATERIAL DATA

It is the goal of the ACGIH (and other Agencies) to recommend TLVs (or their equivalent) for all substances for which there is evidence of health effects at airborne concentrations encountered in the workplace.

AMC CALCIUM CHLORIDE

At this time no TLV has been established, even though this material may produce adverse health effects (as evidenced in animal experiments or clinical experience).

Sensory irritants are chemicals that produce temporary and undesirable side-effects on the eyes, nose or throat. Historically occupational exposure standards for these irritants have been based on observation of workers' responses to various airborne concentrations.

Exposure controls

Appropriate engineering controls	Engineering controls are used to remove a hazard or place a barrier between the worker and the hazard. Well-designed engineering controls can be highly effective in protecting workers and will typically be independent of worker interactions to provide this high level of protection.
Personal protection	    
Eye and face protection	► Safety glasses with side shields. ► Chemical goggles.
Skin protection	See Hand protection below
Hands/feet protection	The selection of suitable gloves does not only depend on the material, but also on further marks of quality which vary from manufacturer to manufacturer. Where the chemical is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application. Experience indicates that the following polymers are suitable as glove materials for protection against undissolved, dry solids, where abrasive particles are not present. ► polychloroprene.
Body protection	See Other protection below
Other protection	► Overalls. ► P.V.C.
Thermal hazards	Not Available

Respiratory protection

Particulate. (AS/NZS 1716 & 1715, EN 143:2000 & 149:001, ANSI Z88 or national equivalent)

- Respirators may be necessary when engineering and administrative controls do not adequately prevent exposures.
- The decision to use respiratory protection should be based on professional judgment that takes into account toxicity information, exposure measurement data, and frequency and likelihood of the worker's exposure - ensure users are not subject to high thermal loads which may result in heat stress or distress due to personal protective equipment (powered, positive flow, full face apparatus may be an option).
- Published occupational exposure limits, where they exist, will assist in determining the adequacy of the selected respiratory protection. These may be government mandated or vendor recommended.
- Certified respirators will be useful for protecting workers from inhalation of particulates when properly selected and fit tested as part of a complete respiratory protection program.
- Use approved positive flow mask if significant quantities of dust becomes airborne.
- Try to avoid creating dust conditions.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties

Appearance	Material is hygroscopic, absorbs moisture from surrounding air. Small white crystals, granules, or flakes. No odour.		
Physical state	Divided Solid	Relative density (Water = 1)	2.15
Odour	Not Available	Partition coefficient n-octanol / water	Not Available
Odour threshold	Not Available	Auto-ignition temperature (°C)	Not Applicable
pH (as supplied)	Not Applicable	Decomposition temperature	Not available.
Melting point / freezing point (°C)	772	Viscosity (cSt)	Not Applicable
Initial boiling point and boiling range (°C)	>1600	Molecular weight (g/mol)	110.99
Flash point (°C)	Not Applicable	Taste	Not Available
Evaporation rate	Not Applicable	Explosive properties	Not Available
Flammability	Not Applicable	Oxidising properties	Not Available

AMC CALCIUM CHLORIDE

Upper Explosive Limit (%)	Not Applicable	Surface Tension (dyn/cm or mN/m)	Not Applicable
Lower Explosive Limit (%)	Not Applicable	Volatile Component (%vol)	Nil
Vapour pressure (kPa)	Negligible	Gas group	Not Available
Solubility in water (g/L)	Miscible	pH as a solution (1%)	Not available.
Vapour density (Air = 1)	Not Applicable	VOC g/L	Not Applicable

SECTION 10 STABILITY AND REACTIVITY

Reactivity	See section 7
Chemical stability	► Unstable in the presence of incompatible materials. ► Product is considered stable.
Possibility of hazardous reactions	See section 7
Conditions to avoid	See section 7
Incompatible materials	See section 7
Hazardous decomposition products	See section 5

SECTION 11 TOXICOLOGICAL INFORMATION

Information on toxicological effects

Inhaled	The material is not thought to produce either adverse health effects or irritation of the respiratory tract following inhalation (as classified by EC Directives using animal models). Nevertheless, adverse systemic effects have been produced following exposure of animals by at least one other route and good hygiene practice requires that exposure be kept to a minimum and that suitable control measures be used in an occupational setting. Persons with impaired respiratory function, airway diseases and conditions such as emphysema or chronic bronchitis, may incur further disability if excessive concentrations of particulate are inhaled. If prior damage to the circulatory or nervous systems has occurred or if kidney damage has been sustained, proper screenings should be conducted on individuals who may be exposed to further risk if handling and use of the material result in excessive exposures.
Ingestion	Accidental ingestion of the material may be harmful; animal experiments indicate that ingestion of less than 150 gram may be fatal or may produce serious damage to the health of the individual. Compared with other metals, the calcium ion and most calcium compounds have low toxicity. Acute calcium poisoning is rare, and difficult to achieve unless calcium compounds are administered intravenously or taken in high doses over a prolonged period.. Use as a food additive indicates tolerance of small amounts, but irritant properties and toxic effects of large amounts are well documented. Estimated lethal dose for adult is 30 grams.
Skin Contact	Skin contact is not thought to produce harmful health effects (as classified under EC Directives using animal models). Systemic harm, however, has been identified following exposure of animals by at least one other route and the material may still produce health damage following entry through wounds, lesions or abrasions. Repeated exposure may cause skin cracking, flaking or drying following normal handling and use. Open cuts, abraded or irritated skin should not be exposed to this material Solution of material in moisture on the skin, or perspiration, may increase irritant effects Entry into the blood-stream through, for example, cuts, abrasions, puncture wounds or lesions, may produce systemic injury with harmful effects. Examine the skin prior to the use of the material and ensure that any external damage is suitably protected. If skin is wet or moist with perspiration, superficial burns may result. Contact with abraded skin or cuts may rapidly cause severe skin burns.
Eye	Evidence exists, or practical experience predicts, that the material may cause severe eye irritation in a substantial number of individuals and/or may produce significant ocular lesions which are present twenty-four hours or more after instillation into the eye(s) of experimental animals. Eye contact may cause significant inflammation with pain.
Chronic	Prolonged or repeated skin contact may cause drying with cracking, irritation and possible dermatitis following. Limited evidence suggests that repeated or long-term occupational exposure may produce cumulative health effects involving organs or biochemical systems. High blood concentrations of calcium ion may give rise to vasodilation and depress cardiac function leading to hypotension and syncope. Calcium ions enhance the effects of digitalis on the heart and may precipitate digitalis intoxication. Long term exposure to high dust concentrations may cause changes in lung function (i.e. pneumoconiosis) caused by particles less than 0.5 micron penetrating and remaining in the lung. A prime symptom is breathlessness.

AMC CALCIUM CHLORIDE

calcium chloride	TOXICITY	IRRITATION
	Oral (rat) LD50: 1000 mg/kg ^[2]	Eye (unknown): severe* [ICI] Skin (unknown): moderate*

Legend: 1. Value obtained from Europe ECHA Registered Substances - Acute toxicity 2. * Value obtained from manufacturer's SDS. Unless otherwise specified data extracted from RTECS - Register of Toxic Effect of chemical Substances

CALCIUM CHLORIDE	for calcium: Toxicity from calcium is not common because the gastrointestinal tract normally limits the amount of calcium absorbed. Therefore, short-term intake of large amounts of calcium does not generally produce any ill effects aside from constipation and an increased risk of kidney stones .	
	The material may produce severe irritation to the eye causing pronounced inflammation. Repeated or prolonged exposure to irritants may produce conjunctivitis.	
	The material may cause skin irritation after prolonged or repeated exposure and may produce a contact dermatitis (nonallergic). This form of dermatitis is often characterised by skin redness (erythema) and swelling the epidermis.	

Acute Toxicity	✓	Carcinogenicity	✗
Skin Irritation/Corrosion	✗	Reproductivity	✗
Serious Eye Damage/Irritation	✓	STOT - Single Exposure	✗
Respiratory or Skin sensitisation	✗	STOT - Repeated Exposure	✗
Mutagenicity	✗	Aspiration Hazard	✗

Legend: ✗ – Data available but does not fill the criteria for classification
✓ – Data available to make classification
✗ – Data Not Available to make classification

SECTION 12 ECOLOGICAL INFORMATION

Toxicity

calcium chloride	ENDPOINT	TEST DURATION (HR)	SPECIES	VALUE	SOURCE
	LC50	96	Fish	=3mg/L	1
	EC50	48	Crustacea	=52mg/L	1
	EC50	96	Algae or other aquatic plants	3130mg/L	4
	BCFD	48	Crustacea	0.0832425mg/L	4
	NOEC	48	Crustacea	260.12mg/L	4

Legend: Extracted from 1. IUCLID Toxicity Data 2. Europe ECHA Registered Substances - Ecotoxicological Information - Aquatic Toxicity 3. EPIWIN Suite V3.12 (QSAR) - Aquatic Toxicity Data (Estimated) 4. US EPA, Ecotox database - Aquatic Toxicity Data 5. ECETOC Aquatic Hazard Assessment Data 6. NITE (Japan) - Bioconcentration Data 7. METI (Japan) - Bioconcentration Data 8. Vendor Data

for calcium chloride:

Environmental fate:

Calcium chlorides vapour pressure is negligible and its water solubility is 745 g/L at 20 deg C. Calcium chloride is readily dissociated into calcium and chloride ions in water. These physico-chemical properties indicate that calcium chloride released into the environment is distributed into the water compartment in the form of calcium and chloride ions.

Calcium provides an important link between tectonics, climate and the carbon cycle. In the simplest terms, uplift of mountains exposes Ca-bearing rocks to chemical weathering and releases Ca²⁺ into surface water.

Although inorganic chloride ions are not normally considered toxic they can exist in effluents at acutely toxic levels (chloride >3000 mg/l). The resulting salinity can exceed the tolerances of most freshwater organisms.

DO NOT discharge into sewer or waterways.

Persistence and degradability

Ingredient	Persistence: Water/Soil	Persistence: Air
	No Data available for all ingredients	No Data available for all ingredients

Bioaccumulative potential

Ingredient	Bioaccumulation
	No Data available for all ingredients

AMC CALCIUM CHLORIDE

Mobility in soil

Ingredient	Mobility
	No Data available for all ingredients

SECTION 13 DISPOSAL CONSIDERATIONS**Waste treatment methods**

Product / Packaging disposal	<ul style="list-style-type: none"> ▸ Containers may still present a chemical hazard/ danger when empty. ▸ Return to supplier for reuse/ recycling if possible. <p>Legislation addressing waste disposal requirements may differ by country, state and/ or territory. Each user must refer to laws operating in their area.</p> <ul style="list-style-type: none"> ▸ DO NOT allow wash water from cleaning or process equipment to enter drains. ▸ It may be necessary to collect all wash water for treatment before disposal. ▸ Recycle wherever possible or consult manufacturer for recycling options. ▸ Consult State Land Waste Management Authority for disposal.
-------------------------------------	--

SECTION 14 TRANSPORT INFORMATION**Labels Required**

Marine Pollutant	NO
HAZCHEM	Not Applicable

Land transport (ADG): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS**Air transport (ICAO-IATA / DGR): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS****Sea transport (IMDG-Code / GGVSee): NOT REGULATED FOR TRANSPORT OF DANGEROUS GOODS****Transport in bulk according to Annex II of MARPOL and the IBC code**

Not Applicable

SECTION 15 REGULATORY INFORMATION**Safety, health and environmental regulations / legislation specific for the substance or mixture****CALCIUM CHLORIDE(10043-52-4) IS FOUND ON THE FOLLOWING REGULATORY LISTS**

Australia Hazardous Substances Information System - Consolidated Lists

Australia Inventory of Chemical Substances (AICS)

National Inventory	Status
Australia - AICS	Y
Canada - DSL	Y
Canada - NDSL	N (calcium chloride)
China - IECSC	Y
Europe - EINEC / ELINCS / NLP	Y
Japan - ENCS	Y
Korea - KECI	Y
New Zealand - NZIoC	Y
Philippines - PICCS	Y
USA - TSCA	Y
Legend:	<p>Y = All ingredients are on the inventory</p> <p>N = Not determined or one or more ingredients are not on the inventory and are not exempt from listing(see specific ingredients in brackets)</p>

SECTION 16 OTHER INFORMATION**Other information**

Classification of the preparation and its individual components has drawn on official and authoritative sources as well as independent review by the Chemwatch Classification committee using available literature references.

AMC CALCIUM CHLORIDE

The SDS is a Hazard Communication tool and should be used to assist in the Risk Assessment. Many factors determine whether the reported Hazards are Risks in the workplace or other settings.

Definitions and abbreviations

PC-TWA: Permissible Concentration-Time Weighted Average
PC-STEL: Permissible Concentration-Short Term Exposure Limit
IARC: International Agency for Research on Cancer
ACGIH: American Conference of Governmental Industrial Hygienists
STEL: Short Term Exposure Limit
TEEL: Temporary Emergency Exposure Limit.
IDLH: Immediately Dangerous to Life or Health Concentrations
OSF: Odour Safety Factor
NOAEL: No Observed Adverse Effect Level
LOAEL: Lowest Observed Adverse Effect Level
TLV: Threshold Limit Value
LOD: Limit Of Detection
OTV: Odour Threshold Value
BCF: BioConcentration Factors
BEI: Biological Exposure Index

This document is copyright.

Apart from any fair dealing for the purposes of private study, research, review or criticism, as permitted under the Copyright Act, no part may be reproduced by any process without written permission from CHEMWATCH.



Material Safety Data Sheet

NFPA	HMIS (U.S.A.)	Rating	Protective Clothing	DOT (pictograms)
	Health Fire Hazard Reactivity Specific hazard	Health Hazard 2* Fire Hazard 1 Reactivity 0 Personal Protection H	0 Insignificant 1 Slight 2 Moderate 3 High 4 Extreme	

Section I. Chemical Product and Company Identification

Product Name	ANTIFREEZE	Code	W269
Synonym	Universal Antifreeze, Radiator Antifreeze, Diesel Antifreeze, Petro-Canada Antifreeze-Coolant, Petro-Canada Heavy Duty Antifreeze-Coolant, Pre-Mix Antifreeze, Petro-Canada Premium Radiator Antifreeze.	DSL	On the DSL.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	TSCA	On TSCA list.
Material Uses	Used as an engine antifreeze coolant.		

Section II. Composition and Information on Ingredients

			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Ethylene glycol	107-21-1	≥55	Not established	Not established	100 mg/m ³ (aerosol)
2) Sodium tetraborate pentahydrate	1330-43-4	≤5	1 mg/m ³	Not established	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

Section III. Hazards Identification.

Potential Health Effects	Contact can cause slight irritation of skin, eyes and respiratory tract. Extremely dangerous in case of ingestion. For more information, refer to Section 11.
--------------------------	---

Section IV. First Aid Measures

Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

Section V. Fire-fighting Measures

Flammability	May be combustible at high temperature.	Flammable Limits	Lower: 3.2%, Upper: 15.3%
Flash Points	Closed Cup: 116°C (Tagliabue) Open Cup: 116°C (Cleveland)	Auto-Ignition Temperature	413°C
Fire Hazards in Presence of Various Substances	Combustible in presence of open flames and sparks.	Explosion Hazards in Presence of Various Substances	Not a product presenting risks of explosion.
Products of Combustion	Carbon oxides (CO, CO ₂), smoke and irritating vapours as products of incomplete combustion.		
Fire Fighting Media and Instructions	SMALL FIRE: Use DRY chemicals, CO ₂ , water spray or foam. LARGE FIRE: Use water spray, fog or foam. DO NOT use water jet.		

Section VI. Accidental Release Measures

Material Release or Spill	Small spill or leak: Dilute with water and mop up or absorb with an inert DRY material and place in an appropriate waste disposal container. Large spill or leak: Absorb with an inert material and put the spilled material in an appropriate waste disposal. Dispose of in accordance with regional regulations.
----------------------------------	---

Section VII. Handling and Storage

Handling	Avoid contamination with reactive substances. After handling, always wash hands thoroughly with soap and water.
Storage	Keep container dry. Keep container tightly closed. Keep in a cool, well-ventilated place.

Section VIII. Exposure Controls/Personal Protection

Engineering Controls	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
Personal Protection - <i>The selection of personal protective equipment varies, depending upon conditions of use.</i>	
Eyes	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
Body	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
Respiratory	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
Hands	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
Feet	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

Section IX. Physical and Chemical Properties

Physical State and Appearance	Clear viscous liquid.	Viscosity	Not available
Colour	Green.	Pour Point	Not available
Odour	Odourless.	Softening Point	Not applicable.
Odour Threshold	Not available	Dropping Point	Not applicable.
Boiling Point	129 to 197°C (264 to 387°F)	Penetration	Not applicable.
Density	1.115 to 1.145 (Water = 1)	Oil / Water Dist. Coeff.	Not available
Vapour Density	2.1 (Air=1).	Ionicity (in water)	Not available
Vapour Pressure	0.06 mmHg @ 20°C (68°F).	Dispersion Properties	Not available
Volatility	0% (w/w)	Solubility	Soluble in water, methanol and diethyl ether.

Section X. Stability and Reactivity

Corrosivity	Not available		
Stability	The product is stable.	Hazardous Polymerization	Will not occur under normal working conditions.
Incompatible Substances / Conditions to Avoid	Reactive with oxidizing agents, acids and alkalis.	Decomposition Products	May release CO _x , smoke and irritating vapours when heated to decomposition.

Section XI. Toxicological Information

Routes of Entry	Eye contact and ingestion.
Acute Lethality	LD50: 4700 mg/kg (oral/rat). [Ethylene Glycol] LD50: 9530 mg/kg (dermal/rabbit). [Ethylene Glycol]
Chronic or Other Toxic Effects	
Dermal Route:	Slightly hazardous in case of skin contact (irritant).
Inhalation Route:	Slightly hazardous in case of inhalation (lung irritant). Can cause nausea, headaches and vomiting.
Oral Route:	Extremely dangerous in case of ingestion.
Eye Irritation/Inflammation:	Slightly hazardous in case of eye contact (irritant).
Immunotoxicity:	Not available
Skin Sensitization:	Not available
Respiratory Tract Sensitization:	Not available
Mutagenic:	Not available

Reproductive Toxicity:	Not available
Teratogenicity/Embryotoxicity:	Fetotoxic and teratogenic in mice at levels below maternal toxicity.
Carcinogenicity (ACGIH):	ACGIH A4: not classifiable as a human carcinogen.
Carcinogenicity (IARC):	Not available
Carcinogenicity (NTP):	Not available
Carcinogenicity (IRIS):	Not available
Carcinogenicity (OSHA):	Not available
Other Considerations	The substance may be toxic to kidneys and liver. Repeated or prolonged exposure to the substance can produce target organs damage. Repeated exposure to a highly toxic material may produce general deterioration of health by an accumulation in one or many human organs.

Section XII. Ecological Information

Environmental Fate	Not available	Persistance/ Bioaccumulation Potential	Not available
BOD5 and COD	Not available	Products of Biodegradation	Not available
Additional Remarks	No additional remark.		

Section XIII. Disposal Considerations

Waste Disposal	Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations. Consult your local or regional authorities.
-----------------------	--

Section XIV. Transport Information

DOT Classification	Not a DOT controlled material (United States).	Special Provisions for Transport	Not applicable.
---------------------------	--	---	-----------------

Section XV. Regulatory Information

Other Regulations	<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>		
DSD/DPD (EEC)	Not evaluated.	WHMIS (Canada)	D-2A
ADR (Europe) (Pictograms)	NOT EVALUATED FOR EUROPEAN TRANSPORT NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN	TDG (Canada) (Pictograms)	

Section XVI. Other Information

References	Available upon request. * Marque de commerce de Petro-Canada - Trademark
-------------------	---

Glossary

ACGIH - American Conference of Governmental Industrial Hygienists	IRIS - Integrated Risk Information System
ADR - Agreement on Dangerous goods by Road (Europe)	LD50/LC50 - Lethal Dose/Concentration kill 50%
ASTM - American Society for Testing and Materials (LDLo/LCLo - Lowest Published Lethal Dose/Concentration
BOD5 - Biological Oxygen Demand in 5 days	NAERG'96 - North American Emergency Response Guide Book (1996)
CAN/CGA B149.2 Propane Installation Code	NFPA - National Fire Prevention Association
CAS - Chemical Abstract Services	NIOSH - National Institute for Occupational Safety & Health
CEPA - Canadian Environmental Protection Act	NPRI - National Pollutant Release Inventory
CERCLA - Comprehensive Environmental Response, Compensation and Liability Act	NSNR - New Substances Notification Regulations (Canada)
CFR - Code of Federal Regulations	NTP - National Toxicology Program
CHIP - Chemicals Hazard Information and Packaging Approved Supply List	OSHA - Occupational Safety & Health Administration
COD5 - Chemical Oxygen Demand in 5 days	PEL - Permissible Exposure Limit
CPR - Controlled Products Regulations	RCRA - Resource Conservation and Recovery Act
DOT - Department of Transport	SARA - Superfund Amendments and Reorganization Act
DSCL - Dangerous Substances Classification and Labeling (Europe)	SD - Single Dose
DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)	STEL - Short Term Exposure Limit (15 minutes)
DSL - Domestic Substance List	TDG - Transportation Dangerous Goods (Canada)
EEC/EU - European Economic Community/European Union	TDLo/TCLo - Lowest Published Toxic Dose/Concentration
EINECS - European Inventory of Existing Commercial Chemical Substances	TLM - Median Tolerance Limit
EPCRA - Emergency Planning and Community Right to Know Act	TLV-TWA - Threshold Limit Value-Time Weighted Average
	TSCA - Toxic Substances Control Act
	USEPA - United States Environmental Protection Agency

FDA - Food and Drug Administration
FIFRA - Federal Insecticide, Fungicide and Rodenticide Act
HCS - Hazardous Communication System
HMIS - Hazardous Material Information System
IARC - International Agency for Research on Cancer

USP - United States Pharmacopoeia
WHMIS - Workplace Hazardous Material Information System

For Copy of MSDS
Western Canada, telephone: 403-296-4158; fax: 403-296-6551
Ontario & Central Canada, telephone: 1-800-668-0220; fax: 1-800-837-1228
Quebec & Eastern Canada, telephone: 514-640-8308; fax: 514-640-8385

Prepared by Product Safety - TAR on 7/3/2001.

Data entry by Product Safety - JDW.

For Product Safety Information: (905) 804-4752

To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.

MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID
(US, CN, EU Version for International Trade)

SECTION 1: PRODUCT AND COMPANY IDENTIFICATION

PRODUCT NAME:	Lead Acid Battery Wet, Filled With Acid
OTHER PRODUCT NAMES:	Electric Storage Battery, SLI or Industrial Battery, UN2794
MANUFACTURER:	East Penn Manufacturing Company, Inc.
DIVISION:	Deka Road
ADDRESS:	Lyon Station, PA 19536 USA
EMERGENCY TELEPHONE NUMBERS:	US: CHEMREC 1-800-424-9300 CN: CHEMREC 1-800-424-9300 Outside US: 1-703-527-3887
NON-EMERGENCY HEALTH/SAFETY INFORMATION:	1-610-682-6361
CHEMICAL FAMILY:	This product is a wet lead acid storage battery. May also include gel/absorbed electrolyte type lead acid battery types.
PRODUCT USE:	Industrial/Commercial electrical storage batteries.

This product is considered a Hazardous Substance, Preparation or Article that is regulated under US-OSHA; CAN-WHMIS; IOSH; ISO; UK-CHIP; or EU Directives (67/548/EEC-Dangerous Substance Labelling, 98/24/EC-Chemical Agents at Work, 99/45/EC-Preparation Labelling, 2001/58/EC-MSDS Content, and 1907/2006/EC-REACH), and an MSDS/SDS is required for this product considering that when used as recommended or intended, or under ordinary conditions, it may present a health and safety exposure or other hazard.

Additional Information

This product may not be compatible with all environments, such as those containing liquid solvents or extreme temperature or pressure. Please request information if considering use under extreme conditions or use beyond current product labelling.

SECTION 2: HAZARDS IDENTIFICATION

GHS Classification:

Health	Environmental	Physical
Acute Toxicity – Not listed (NL) Eye Corrosion – Corrosive* Skin Corrosion – Corrosive* Skin Sensitization – NL Mutagenicity/Carcinogenicity – NL Reproductive/Developmental – NL Target Organ Toxicity (Repeated) – NL	Aquatic Toxicity – NL	NFPA – Flammable gas, hydrogen (during charging) CN - NL EU - NL

*as sulfuric acid

GHS Label: Lead Acid Battery, Wet

Symbols:	C (Corrosive)	
Hazard Statements	Precautionary Statements	

Contact with internal components may cause irritation of severe burns. Irritating to eyes, respiratory system, and skin.

Keep out of reach of children. Keep containers tightly closed. Avoid heat, sparks, and open flame while charging batteries. Avoid contact with internal acid.

EMERGENCY OVERVIEW: May form explosive air/gas mixture during charging. Contact with internal components may cause irritation or severe burns. Irritating to eyes, respiratory system, and skin. Prolonged inhalation or ingestion may result in serious damage to health. Pregnant

MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID
(US, CN, EU Version for International Trade)

women exposed to internal components may experience reproductive/developmental effects.

POTENTIAL HEALTH EFFECTS:

EYES: Direct contact of internal electrolyte liquid with eyes may cause severe burns or blindness.
SKIN: Direct contact of internal electrolyte liquid with the skin may cause skin irritation or damaging burns.
INGESTION: Swallowing this product may cause severe burns to the esophagus and digestive tract and harmful or fatal lead poisoning. Lead ingestion may cause nausea, vomiting, weight loss, abdominal spasms, fatigue, and pain in the arms, legs and joints.
INHALATION: Respiratory tract irritation and possible long-term effects.

ACUTE HEALTH HAZARDS:

Repeated or prolonged contact may cause mild skin irritation.

CHRONIC HEALTH HAZARDS:

Lead poisoning if persons are exposed to internal components of the batteries. Lead absorption may cause nausea, vomiting, weight loss, abdominal spasms, fatigue, and pain in the arms, legs and joints. Other effects may include central nervous system damage, kidney dysfunction, and potential reproductive effects. Chronic inhalation of sulfuric acid mist may increase the risk of lung cancer.

MEDICAL CONDITIONS GENERALLY AGGRAVATED BY EXPOSURE:

Respiratory and skin diseases may predispose the user to acute and chronic effects of sulfuric acid and/or lead. Children and pregnant women must be protected from lead exposure. Persons with kidney disease may be at increased risk of kidney failure.

Additional Information

No health effects are expected related to normal use of this product as sold.

SECTION 3: COMPOSITION/INFORMATION ON INGREDIENTS

INGREDIENTS (Chemical/Common Names):	CAS No.:	% by Wt:	EC No.:
Lead, inorganic	7439-92-1	43–70 (average: 65)	231-100-4
Sulfuric acid	7664-93-9	20–44 (average: 25)	231-639-5
Antimony	7440-36-0	0–4 (average: 1)	231-146-5
Arsenic	7440-38-2	<0.01	231-148-6
Polypropylene	9003-07-0	5–10 (average: 8)	NA

NA: Not applicable; ND: Not determined

Additional Information

These ingredients reflect components of the finished product related to performance of the product as distributed into commerce.

SECTION 4: FIRST AID MEASURES

EYE CONTACT: Flush eyes with large amounts of water for at least 15 minutes. Seek immediate medical attention if eyes have been exposed directly to acid.

SKIN CONTACT: Flush affected area(s) with large amounts of water using deluge emergency shower, if available, shower for at least 15 minutes. Remove contaminated clothing. If symptoms persist, seek medical attention.

INGESTION: If swallowed, give large amounts of water. Do NOT induce vomiting or aspiration into the lungs may occur and can cause permanent injury or death.

INHALATION: If breathing difficulties develop, remove person to fresh air. If symptoms persist, seek medical attention.

SECTION 5: FIRE-FIGHTING MEASURES

SUITABLE/UNSUITABLE EXTINGUISHING MEDIA:

Dry chemical, carbon dioxide, water, foam. Do not use water on live electrical circuits.

MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID
(US, CN, EU Version for International Trade)

SPECIAL FIREFIGHTING PROCEDURES & PROTECTIVE EQUIPMENT:

Use appropriate media for surrounding fire. Do not use carbon dioxide directly on cells. Avoid breathing vapours. Use full protective equipment (bunker gear) and self-contained breathing apparatus.

UNUSUAL FIRE AND EXPLOSION HAZARDS:

Batteries evolve flammable hydrogen gas during charging and may increase fire risk in poorly ventilated areas near sparks, excessive heat or open flames.

SPECIFIC HAZARDS IN CASE OF FIRE:

Thermal shock may cause battery case to crack open. Containers may explode when heated.

Additional Information

Firefighting water runoff and dilution water may be toxic and corrosive and may cause adverse environmental impacts.

SECTION 6: ACCIDENTAL RELEASE MEASURES

PERSONAL PRECAUTIONS:

Avoid Contact with Skin. Neutralize any spilled electrolyte with neutralizing agents, such as soda ash, sodium bicarbonate, or very dilute sodium hydroxide solutions.

ENVIRONMENTAL PRECAUTIONS:

Prevent spilled material from entering sewers and waterways.

SPILL CONTAINMENT & CLEANUP METHODS/MATERIALS:

Add neutralizer/absorbent to spill area. Sweep or shovel spilled material and absorbent and place in approved container. Dispose of any non-recyclable materials in accordance with local, state, provincial or federal regulations.

Additional Information

Lead acid batteries and their plastic cases are recyclable. Contact your East Penn representative for recycling information.

SECTION 7: HANDLING AND STORAGE

PRECAUTIONS FOR SAFE HANDLING AND STORAGE:

- Keep containers tightly closed when not in use.
- If battery case is broken, avoid contact with internal components.
- Do not handle near heat, sparks, or open flames.
- Protect containers from physical damage to avoid leaks and spills.
- Place cardboard between layers of stacked batteries to avoid damage and short circuits.
- Do not allow conductive material to touch the battery terminals. A dangerous short-circuit may occur and cause battery failure and fire.

OTHER PRECAUTIONS (e.g.; Incompatibilities):

Keep away from combustible materials, organic chemicals, reducing substances, metals, strong oxidizers and water.

SECTION 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

ENGINEERING CONTROLS/SYSTEM DESIGN INFORMATION:

Charge in areas with adequate ventilation.

VENTILATION:

General dilution ventilation is acceptable.

RESPIRATORY PROTECTION:

Not required for normal conditions of use. See also special firefighting procedures (Section 5).

EYE PROTECTION:

Wear protective glasses with side shields or goggles.

SKIN PROTECTION:

Wear chemical resistant gloves as a standard procedure to prevent skin contact.

OTHER PROTECTIVE CLOTHING OR EQUIPMENT: Chemically impervious apron and face shield recommended when adding water or electrolyte to batteries.

Wash Hands after handling.

EXPOSURE GUIDELINES & LIMITS:

OSHA	Permissible Exposure Limit (PEL/TWA)	Lead, inorganic (as Pb)	0.05 mg/m ³
		Sulfuric acid	1.00 mg/m ³

MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID
(US, CN, EU Version for International Trade)

EXPOSURE GUIDELINES & LIMITS:

ACGIH	2007 Threshold Limit Value (TLV)	Antimony	0.50 mg/m ³
		Arsenic	0.01 mg/m ³
		Lead, inorganic (as Pb)	0.05 mg/m ³
		Sulfuric acid	0.20 mg/m ³
Quebec	Permissible Exposure Value (PEV)	Antimony	0.50 mg/m ³
		Arsenic	0.01 mg/m ³
		Lead, inorganic (as Pb)	0.15 mg/m ³
		Sulfuric acid	1.00 mg/m ³
		Antimony	3.00 mg/m ³
		Arsenic	0.50 mg/m ³
Ontario	Occupational Exposure Level (OEL)	Lead (designated substance)	0.10 mg/m ³
		Sulfuric acid	1.00 mg/m ³
		Antimony	3.00 mg/m ³
		Arsenic (designated substance)	0.01 mg/m ³
Netherlands	Maximaal Aanvaarde Concentratie (MAC)	Lead, inorganic (as Pb)	0.15 mg/m ³
Germany	Maximale Arbeitsplatzkonzentrationen (MAK)	Sulfuric acid	1.00 mg/m ³
		Lead, inorganic (as Pb)	0.10 mg/m ³
		Sulfuric acid	1.00 mg/m ³
		Antimony	2.00 mg/m ³
United Kingdom	Occupational Exposure Standard (OES)	Lead	0.50 mg/m ³
		Antimony	0.15 mg/m ³
		Arsenic	0.50 mg/m ³
			0.10 mg/m ³

TWA: 8-Hour Time-Weighted Average; STE: Short-Term Exposure; mg/m³: milligrams per cubic meter of air; NE: Not Established; STEV: Short-Term Exposure Value; TWAEV: Time-Weighted Average Exposure Value; STEL: Short-Term Exposure Limit

Additional Information

- Batteries are housed in polypropylene cases which are regulated as total dust or respirable dust only when they are ground up during recycling. The OSHA PEL for dust is 15 mg/m³ as total dust or 5 mg/m³ as respirable dust.
- May be required to meet Domestic Requirements for a Specific Destination(s).

SECTION 9: PHYSICAL AND CHEMICAL PROPERTIES

APPEARANCE:	Industrial/commercial lead acid battery
ODOUR:	Odourless
ODOUR THRESHOLD:	NA
PHYSICAL STATE:	Sulfuric Acid: Liquid; Lead: solid
pH:	<1
BOILING POINT:	235-240 °F (113-116 °C) (as sulfuric acid)
MELTING POINT:	NA
FREEZING POINT:	NA
VAPOUR PRESSURE:	10 mmHg
VAPOUR DENSITY (AIR = 1):	> 1
SPECIFIC GRAVITY (H₂O = 1):	1.27–1.33
EVAPORATION RATE (n-BuAc=1):	< 1
SOLUBILITY IN WATER:	100% (as sulfuric acid)
FLASH POINT:	Below room temperature (as hydrogen gas)
AUTO-IGNITION TEMPERATURE:	NA
LOWER EXPLOSIVE LIMIT (LEL):	4% (as hydrogen gas)
UPPER EXPLOSIVE LIMIT (UEL):	74% (as hydrogen gas)
PARTITION COEFFICIENT:	NA
VISCOOSITY (poise @ 25 °C):	Not Available

MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID
(US, CN, EU Version for International Trade)

DECOMPOSITION TEMPERATURE: Not Available

FLAMMABILITY/HMIS HAZARD CLASSIFICATIONS (US/CN/EU): As sulfuric acid

HEALTH: 3 FLAMMABILITY: 0 REACTIVITY: 2

SECTION 10: STABILITY AND REACTIVITY

STABILITY: This product is stable under normal conditions at ambient temperature.
INCOMPATIBILITY (MATERIAL TO AVOID): Strong bases, combustible organic materials, reducing agents, finely divided metals, strong oxidizers, and water.
HAZARDOUS DECOMPOSITION BY-PRODUCTS: Thermal decomposition will produce sulfur dioxide, sulfur trioxide, carbon monoxide, sulfuric acid mist, and hydrogen.
HAZARDOUS POLYMERIZATION: Will not occur
CONDITIONS TO AVOID: Overcharging, sources of ignition

SECTION 11: TOXICOLOGICAL INFORMATION

ACUTE TOXICITY (Test Results Basis and Comments):

Sulfuric acid: LD50, Rat: 2140 mg/kg
LC50, Guinea pig: 510 mg/m³

Lead: No data available for elemental lead

SUBCHRONIC/CHRONIC TOXICITY (Test Results and Comments):

Repeated exposure to lead and lead compounds in the workplace may result in nervous system toxicity. Some toxicologists report abnormal conduction velocities in persons with blood lead levels of 50 µg/100 ml or higher. Heavy lead exposure may result in central nervous system damage, encephalopathy and damage to the blood-forming (hematopoietic) tissues.

Additional Information

- Very little chronic toxicity data available for elemental lead.
- Lead is listed by IARC as a 2B carcinogen: possible carcinogen in humans. Arsenic is listed by IARC, ACGIH, and NTP as a carcinogen, based on studies with high doses over long periods of time. The other ingredients in this product, present at equal to or greater than 0,1% of the product, are not listed by OSHA, NTP, or IARC as suspect carcinogens.
- The 19th Amendment to EC Directive 67/548/EEC classified lead compounds, but not lead in metal form, as possibly toxic to reproduction. Risk phrase 61: May cause harm to the unborn child, applies to lead compounds, especially soluble forms.

SECTION 12: ECOLOGICAL INFORMATION

PERSISTENCE & DEGRADABILITY:

Lead is very persistent in soils and sediments. No data available on biodegradation.

BIOACCUMULATIVE POTENTIAL (Including Mobility):

Mobility of metallic lead between ecological compartments is low. Bioaccumulation of lead occurs in aquatic and terrestrial animals and plants, but very little bioaccumulation occurs through the food chain. Most studies have included lead compounds, not solid inorganic lead.

AQUATIC TOXICITY (Test Results & Comments):

Sulfuric acid: 24-hour LC50, fresh water fish (*Brachydanio rerio*): 82 mg/l
96-hour LOEC, fresh water fish (*Cyprinus carpio*): 22 mg/l (lowest observable effect concentration)

Lead (metal): No data available

Additional Information

- No known effects on stratospheric ozone depletion.
- Volatile organic compounds: 0% (by Volume)
- Water Endangering Class (WGK): NA

SECTION 13: DISPOSAL CONSIDERATIONS

WASTE DISPOSAL METHOD:

Following local, State/Provincial, and Federal/National regulations applicable to end-of-life characteristics will be the responsibility of the end-user.

MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID
(US, CN, EU Version for International Trade)

HAZARDOUS WASTE

CLASS/CODE: US - Not applicable to finished product as manufactured for distribution into commerce.
CN - Not applicable to finished product as manufactured for distribution into commerce.
EWC - Not applicable to finished product as manufactured for distribution into commerce.

Additional Information

Not Included – **Recycle** or dispose as allowed by local jurisdiction for the end-of-life characteristics as-disposed.

SECTION 14: TRANSPORT INFORMATION

GROUND – US-DOT/CAN-TDG/EU-ADR/APEC-ADR:

Proper Shipping Name	Batteries, Wet, Filled with Acid	ID Number	UN2794
Hazard Class	8	Labels	Corrosive
Packing Group	III		

AIRCRAFT – ICAO-IATA:

Proper Shipping Name	Batteries, Wet, Filled with Acid	ID Number	UN2794
Hazard Class	8	Labels	Corrosive
Packing Group	III		

Reference IATA packing instructions 870

VESSEL – IMO-IMDG:

Proper Shipping Name	Batteries, Wet, Filled with Acid	ID Number	UN2794
Hazard Class	8	Labels	Corrosive
Packing Group	III		

Reference IMDG packing instructions P801

Additional Information

Transport requires proper packaging and paperwork, including the Nature and Quantity of goods, per applicable origin/destination/customs points as-shipped.

SECTION 15: REGULATORY INFORMATION

INVENTORY STATUS:

All components are listed on the TSCA; EINECS/ELINCS; and DSL, unless noted otherwise below.

U.S. FEDERAL REGULATIONS:

TSCA Section 8b – Inventory Status: All chemicals comprising this product are either exempt or listed on the TSCA Inventory.

TSCA Section 12b – Export Notification: If the finished product contains chemicals subject to TSCA Section 12b export notification, they are listed below:

<u>Chemical</u>	<u>CAS #</u>
None	NA

CERCLA (COMPREHENSIVE RESPONSE COMPENSATION, AND LIABILITY ACT)

Chemicals present in the product which could require reporting under the statute:

<u>Chemical</u>	<u>CAS #</u>
Lead	7439-92-1
Sulfuric acid	7664-93-9

SARA TITLE III (SUPERFUND AMENDMENTS AND REAUTHORIZATION ACT)

The finished product contains chemicals subject to the reporting requirements of Section 313 of SARA Title III.

<u>Chemical</u>	<u>CAS #</u>	<u>% wt</u>
Lead	7439-92-1	65
Sulfuric acid	7664-93-9	25

CERCLA SECTION 311/312 HAZARD CATEGORIES: Note that the finished product is exempt from these regulations, but lead and sulfuric acid above the thresholds are reportable on Tier II reports.

Fire Hazard	No
Pressure Hazard	No
Reactivity Hazard	No
Immediate Hazard	Yes (Sulfuric acid is Corrosive)
Delayed Hazard	No

Note: Sulfuric acid is Hazardous

**MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID**
(US, CN, EU Version for International Trade)

listed as an Extremely Substance.

STATE REGULATIONS (US):

California Proposition 65

The following chemicals identified to exist in the finished product as distributed into commerce are known to the State of California to cause cancer, birth defects, or other reproductive harm:

<u>Chemical</u>	<u>CAS #</u>	<u>% Wt</u>
Arsenic (as arsenic oxides)	7440-38-2	<0.1
Strong inorganic acid mists including sulfuric acid	NA	25
Lead	7439-92-1	65

California Consumer Product Volatile Organic Compound Emissions

This Product is not regulated as a Consumer Product for purposes of CARB/OTC VOC Regulations, as-sold for the intended purpose and into the industrial/Commercial supply chain.

INTERNATIONAL REGULATIONS (Non-US):

Canadian Domestic Substance List (DSL)

All ingredients remaining in the finished product as distributed into commerce are included on the Domestic Substances List.

WHMIS Classifications

Class E: Corrosive materials present at greater than 1%

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all the information required by the Controlled Products Regulations.

NPRI and Ontario Regulation 127/01

This product contains the following chemicals subject to the reporting requirements of Canada NPRI +/or Ont. Reg. 127/01:

<u>Chemical</u>	<u>CAS #</u>	<u>% Wt</u>
Lead	7439-92-1	65
Sulfuric acid	7664-93-9	25

European Inventory of Existing Commercial Chemical Substances (EINECS)

All ingredients remaining in the finished product as distributed into commerce are exempt from, or included on, the European Inventory of Existing Commercial Chemical Substances.

European Communities (EC) Hazard Classification according to directives 67/548/EEC and 1999/45/EC.

<u>R-Phrases</u>	<u>S-Phrases</u>
35, 36, 38	1/2, 26, 30, 45

Additional Information

This product may be subject to Restriction of Hazardous Substances (RoHS) regulations in Europe and China, or may be regulated under additional regulations and laws not identified above, such as for uses other than described or as-designed/as-intended by the manufacturer, or for distribution into specific domestic destinations.

SECTION 16: OTHER INFORMATION

OTHER INFORMATION:

Distribution into Quebec to follow Canadian Controlled Product Regulations (CPR) 24(1) and 24(2).

Distribution into the EU to follow applicable Directives to the Use, Import/Export of the product as-sold.

Sources of Information:

International Agency for Research on Cancer (1987), *IARC Monographs on the Evaluation of Carcinogenic Risks to Humans: Overall Evaluations of Carcinogenicity: An updating of IARC Monographs Volumes 1-42, Supplement 7*, Lyon, France.

Ontario Ministry of Labour Regulation 654/86. Regulations Respecting Exposure to Chemical or Biological Agents.

RTECS – Registry of Toxic Effects of Chemical Substances, National institute for Occupational Safety and Health.

MSDS/SDS PREPARATION INFORMATION:

DATE OF ISSUE: **30 April 2013**

SUPERCEDES:

16 December 2011

DISCLAIMER:

This Material Safety Data Sheet is based upon information and sources available at the time of preparation or revision date. The information in the MSDS was obtained from sources which we believe are reliable, but are beyond our direct supervision or control. We make no Warranty of Merchantability, Fitness for any particular purpose or any other Warranty, Expressed or Implied, with respect to such information and we assume no liability resulting from its use. For this and other reasons, we do

MATERIAL SAFETY DATA SHEET
LEAD ACID BATTERY WET, FILLED WITH
ACID
(US, CN, EU Version for International Trade)

not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of the product. It is the obligation of each user of this product to determine the suitability of this product and comply with the requirements of all applicable laws regarding use and disposal of this product. For additional information concerning East Penn Manufacturing Co., Inc. products or questions concerning the content of this MSDS please contact your East Penn representative.

END

SAFETY DATA SHEET

Lucas Extreme Duty Gun Grease



Section 1. Identification

GHS product identifier	:	Lucas Extreme Duty Gun Grease
Other means of identification	:	Not available.
Product number	:	10889, 10919

Identified uses

Not available.

Supplier's details	:	Lucas Oil Products, Inc 302 North Sheridan Street Corona, California 92880-2067 Toll Free: (800) 342-2512 Tel: (951) 270-0154 Fax: (951) 270-1902 Website: www.LucasOil.com
---------------------------	---	---

Emergency telephone number (with hours of operation)	:	(951) 493-1149 (951) 847-5949 Markn@lucasoil.com
---	---	--

7:00A.M. to 5:00P.M. Monday thru Friday

Section 2. Hazards identification

OSHA/HCS status	:	This material is considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200).
Classification of the substance or mixture	:	SKIN CORROSION/IRRITATION - Category 2 SERIOUS EYE DAMAGE/ EYE IRRITATION - Category 2A

GHS label elements

Hazard pictograms



Signal word

:

Warning

Hazard statements

:

Causes serious eye irritation.
Causes skin irritation.

Precautionary statements

General

:

Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Prevention

:

Wear protective gloves. Wear eye or face protection. Wash hands thoroughly after handling.





Section 2. Hazards identification

Response	: IF ON SKIN: Wash with plenty of soap and water. Take off contaminated clothing. Wash contaminated clothing before reuse. If skin irritation occurs: Get medical attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical attention.
Storage	: Not applicable.
Disposal	: Not applicable.
Hazards not otherwise classified	: None known.

Section 3. Composition/information on ingredients

Substance/mixture	: Mixture
Other means of identification	: Not available.

CAS number/other identifiers

CAS number	: Not applicable.
Product code	:

Ingredient name	%	CAS number
Antimony, dialkyl dithiocarbamate	5 - 10	15890-25-2
Butene, homopolymer	1 - 5	9003-29-6
Lithium hydroxide, monohydrate	1 - 5	1310-66-3

Any concentration shown as a range is to protect confidentiality or is due to batch variation.

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

Occupational exposure limits, if available, are listed in Section 8.

Section 4. First aid measures

Description of necessary first aid measures

Eye contact	: Immediately flush eyes with plenty of water, occasionally lifting the upper and lower eyelids. Check for and remove any contact lenses. Continue to rinse for at least 20 minutes. Get medical attention.
Inhalation	: Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation. Get medical attention if adverse health effects persist or are severe. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband. In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.
Skin contact	: Flush contaminated skin with plenty of water. Continue to rinse for at least 20 minutes. Get medical attention. Wash clothing before reuse. Clean shoes thoroughly before reuse.





Section 4. First aid measures

Ingestion

: Wash out mouth with water. Remove dentures if any. Remove victim to fresh air and keep at rest in a position comfortable for breathing. If material has been swallowed and the exposed person is conscious, give small quantities of water to drink. Stop if the exposed person feels sick as vomiting may be dangerous. Do not induce vomiting unless directed to do so by medical personnel. If vomiting occurs, the head should be kept low so that vomit does not enter the lungs. Get medical attention if adverse health effects persist or are severe. Never give anything by mouth to an unconscious person. If unconscious, place in recovery position and get medical attention immediately. Maintain an open airway. Loosen tight clothing such as a collar, tie, belt or waistband.

Most important symptoms/effects, acute and delayed

Potential acute health effects

Eye contact

: Causes serious eye irritation.

Inhalation

: Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Skin contact

: Causes skin irritation.

Ingestion

: Irritating to mouth, throat and stomach.

Over-exposure signs/symptoms

Eye contact

: Adverse symptoms may include the following:
pain or irritation
watering
redness

Inhalation

: No known significant effects or critical hazards.

Skin contact

: Adverse symptoms may include the following:
irritation
redness

Ingestion

: No known significant effects or critical hazards.

Indication of immediate medical attention and special treatment needed, if necessary

Notes to physician

: In case of inhalation of decomposition products in a fire, symptoms may be delayed. The exposed person may need to be kept under medical surveillance for 48 hours.

Specific treatments

: No specific treatment.

Protection of first-aiders

: No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.

See toxicological information (Section 11)

Section 5. Fire-fighting measures

Extinguishing media

Suitable extinguishing media

: Use an extinguishing agent suitable for the surrounding fire.

Unsuitable extinguishing media

: None known.

Specific hazards arising from the chemical

: No specific fire or explosion hazard.



Section 5. Fire-fighting measures

- Hazardous thermal decomposition products** : Decomposition products may include the following materials:
carbon dioxide
carbon monoxide
nitrogen oxides
Sulfur oxides
metal oxide/oxides
- Special protective actions for fire-fighters** : No special measures are required.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.

Section 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

- For non-emergency personnel** : No action shall be taken involving any personal risk or without suitable training. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilled material. Avoid breathing vapor or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment.
- For emergency responders** : If specialized clothing is required to deal with the spillage, take note of any information in Section 8 on suitable and unsuitable materials. See also the information in "For non-emergency personnel".
- Environmental precautions** : Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).

Methods and materials for containment and cleaning up

- Small spill** : Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill** : Stop leak if without risk. Move containers from spill area. Approach release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see Section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilled product. Note: see Section 1 for emergency contact information and Section 13 for waste disposal.

Section 7. Handling and storage

Precautions for safe handling

- Protective measures** : Put on appropriate personal protective equipment (see Section 8). Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapor or mist. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Advice on general occupational hygiene** : Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. See also Section 8 for additional information on hygiene measures.



Section 7. Handling and storage

Conditions for safe storage, including any incompatibilities : Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see Section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabeled containers. Use appropriate containment to avoid environmental contamination.

Section 8. Exposure controls/personal protection

Control parameters

Occupational exposure limits

Ingredient name	Exposure limits
Antimony, dialkyl dithiocarbamate	ACGIH TLV (United States, 6/2013). TWA: 0.5 mg/m ³ , (as Sb) 8 hours. OSHA PEL (United States, 2/2013). TWA: 0.5 mg/m ³ , (as Sb) 8 hours. NIOSH REL (United States, 4/2013). TWA: 0.5 mg/m ³ , (as Sb) 10 hours.

Appropriate engineering controls : Good general ventilation should be sufficient to control worker exposure to airborne contaminants.

Environmental exposure controls : Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation.

Individual protection measures

Hygiene measures : Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.

Eye/face protection : Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists, gases or dusts. If contact is possible, the following protection should be worn, unless the assessment indicates a higher degree of protection: chemical splash goggles.

Skin protection

Hand protection : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Considering the parameters specified by the glove manufacturer, check during use that the gloves are still retaining their protective properties. It should be noted that the time to breakthrough for any glove material may be different for different glove manufacturers. In the case of mixtures, consisting of several substances, the protection time of the gloves cannot be accurately estimated.

Body protection : Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Other skin protection : Appropriate footwear and any additional skin protection measures should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.

Respiratory protection : Use a properly fitted, air-purifying or supplied air respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.





Section 9. Physical and chemical properties

Appearance

Physical state	: Liquid. [Grease.]
Color	: Blue.
Odor	: Grape.
Odor threshold	: Not available.
pH	: Not available.
Melting point	: Not available.
Boiling point	: Not available.
Flash point	: Closed cup: >200°C (>392°F)
Evaporation rate	: Not available.
Flammability (solid, gas)	: Not available.
Lower and upper explosive (flammable) limits	: Not available.
Vapor pressure	: Not available.
Vapor density	: >1 [Air = 1]
Relative density	: 0.92
Solubility	: Negligible.
Partition coefficient: n-octanol/water	: Not available.
Auto-ignition temperature	: Not available.
Decomposition temperature	: Not available.
Viscosity	: Not available.

Section 10. Stability and reactivity

Reactivity	: No specific test data related to reactivity available for this product or its ingredients.
Chemical stability	: The product is stable.
Possibility of hazardous reactions	: Under normal conditions of storage and use, hazardous reactions will not occur.
Conditions to avoid	: High temperatures, sparks, or open flames.
Incompatible materials	: Reactive or incompatible with the following materials: oxidizing materials.
Hazardous decomposition products	: Under normal conditions of storage and use, hazardous decomposition products should not be produced.

Section 11. Toxicological information

Information on toxicological effects

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
Antimony, dialkyl dithiocarbamate	LD50 Dermal LD50 Oral	Rabbit Rat	16000 mg/kg 16400 mg/kg	- -





Section 11. Toxicological information

Irritation/Corrosion

There is no data available.

Sensitization

There is no data available.

Carcinogenicity

There is no data available.

Specific target organ toxicity (single exposure)

There is no data available.

Specific target organ toxicity (repeated exposure)

There is no data available.

Aspiration hazard

Name	Result
Butene, homopolymer	ASPIRATION HAZARD - Category 1

Information on the likely routes of exposure : Dermal contact. Eye contact. Inhalation. Ingestion.

Potential acute health effects

Eye contact : Causes serious eye irritation.

Inhalation : Exposure to decomposition products may cause a health hazard. Serious effects may be delayed following exposure.

Skin contact : Causes skin irritation.

Ingestion : Irritating to mouth, throat and stomach.

Symptoms related to the physical, chemical and toxicological characteristics

Eye contact : Adverse symptoms may include the following:
pain or irritation
watering
redness

Inhalation : No known significant effects or critical hazards.

Skin contact : Adverse symptoms may include the following:
irritation
redness

Ingestion : No known significant effects or critical hazards.

Delayed and immediate effects and also chronic effects from short and long term exposure

Short term exposure

Potential immediate effects : No known significant effects or critical hazards.

Potential delayed effects : No known significant effects or critical hazards.

Long term exposure

Potential immediate effects : No known significant effects or critical hazards.

Potential delayed effects : No known significant effects or critical hazards.

Potential chronic health effects

General : No known significant effects or critical hazards.





Section 11. Toxicological information

Carcinogenicity	: No known significant effects or critical hazards.
Mutagenicity	: No known significant effects or critical hazards.
Teratogenicity	: No known significant effects or critical hazards.
Developmental effects	: No known significant effects or critical hazards.
Fertility effects	: No known significant effects or critical hazards.

Numerical measures of toxicity

Acute toxicity estimates

Route	ATE value
Oral	16835 mg/kg

Section 12. Ecological information

Toxicity

There is no data available.

Persistence and degradability

There is no data available.

Bioaccumulative potential

Product/ingredient name	LogP _{ow}	BCF	Potential
Butene, homopolymer	7.6 to 7.8	314 to 1882	high

Mobility in soil

Soil/water partition coefficient (K_{oc})	: Not available.
--	------------------

Other adverse effects	: No known significant effects or critical hazards.
------------------------------	---

Section 13. Disposal considerations

Disposal methods	: The generation of waste should be avoided or minimized wherever possible. Disposal of this product, solutions and any by-products should comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Waste should not be disposed of untreated to the sewer unless fully compliant with the requirements of all authorities with jurisdiction. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling empty containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilled material and runoff and contact with soil, waterways, drains and sewers.
-------------------------	---





Section 14. Transport information

	DOT Classification	IMDG	IATA
UN number	Not regulated.	Not regulated.	Not regulated.
UN proper shipping name			-
Transport hazard class(es)	-	-	-
Packing group	-	-	-
Environmental hazards	No.	No.	No.
Additional information	-	-	-

AERG : Not applicable.

Special precautions for user : **Transport within user's premises:** always transport in closed containers that are upright and secure. Ensure that persons transporting the product know what to do in the event of an accident or spillage.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code : Not available.

Section 15. Regulatory information

U.S. Federal regulations : **TSCA 8(a) CDR Exempt/Partial exemption:** Not determined
United States inventory (TSCA 8b): All components are listed or exempted.
Clean Water Act (CWA) 307: Antimony, dialkyl dithiocarbamate

Clean Air Act Section 112 : Listed

(b) Hazardous Air Pollutants (HAPs)

Clean Air Act Section 602 : Not listed
Class I Substances

Clean Air Act Section 602 : Not listed
Class II Substances

DEA List I Chemicals (Precursor Chemicals) : Not listed

DEA List II Chemicals (Essential Chemicals) : Not listed

SARA 302/304

Composition/information on ingredients

No products were found.

SARA 304 RQ : Not applicable.





Section 15. Regulatory information

SARA 311/312

Classification : Immediate (acute) health hazard

Composition/information on ingredients

Name	%	Fire hazard	Sudden release of pressure	Reactive	Immediate (acute) health hazard	Delayed (chronic) health hazard
Butene, homopolymer Lithium hydroxide, monohydrate	1 - 5 1 - 5	No. No.	No. No.	No. No.	Yes. Yes.	No. No.

SARA 313

	Product name	CAS number	%
Form R - Reporting requirements	Antimony, dialkyl dithiocarbamate	15890-25-2	5 - 10
Supplier notification	Antimony, dialkyl dithiocarbamate	15890-25-2	5 - 10

SARA 313 notifications must not be detached from the SDS and any copying and redistribution of the SDS shall include copying and redistribution of the notice attached to copies of the SDS subsequently redistributed.

State regulations

Massachusetts : None of the components are listed.

New York : None of the components are listed.

New Jersey : The following components are listed: Distillates (petroleum), hydrotreated heavy naphthenic; Distillates (petroleum), solvent-refined heavy paraffinic; Antimony, dialkyl dithiocarbamate; Lithium hydroxide, monohydrate

Pennsylvania : The following components are listed: Antimony, dialkyl dithiocarbamate

California Prop. 65

No products were found.

Section 16. Other information

Hazardous Material Information System (U.S.A.)

Health : 2 * **Flammability :** 1 **Physical hazards :** 0

Caution: HMIS® ratings are based on a 0-4 rating scale, with 0 representing minimal hazards or risks, and 4 representing significant hazards or risks. Although HMIS® ratings are not required on SDSs under 29 CFR 1910.1200, the preparer may choose to provide them. HMIS® ratings are to be used with a fully implemented HMIS® program. HMIS® is a registered mark of the National Paint & Coatings Association (NPCA). HMIS® materials may be purchased exclusively from J. J. Keller (800) 327-6868.

The customer is responsible for determining the PPE code for this material.

National Fire Protection Association (U.S.A.)

Health : 2 **Flammability :** 1 **Instability :** 0

Reprinted with permission from NFPA 704-2001, Identification of the Hazards of Materials for Emergency Response Copyright ©1997, National Fire Protection Association, Quincy, MA 02269. This reprinted material is not the complete and official position of the National Fire Protection Association, on the referenced subject which is represented only by the standard in its entirety.

Copyright ©2001, National Fire Protection Association, Quincy, MA 02269. This warning system is intended to be interpreted and applied only by properly trained individuals to identify fire, health and reactivity hazards of chemicals. The user is referred to certain limited number of chemicals with recommended classifications in NFPA 49 and NFPA 325, which would be used as a guideline only. Whether the chemicals are classified by NFPA or not, anyone using the 704 systems to classify chemicals does so at their own risk.

History

Date of issue mm/dd/yyyy : 02/15/2015





Section 16. Other information

Version	: 1
Revised Section(s)	: Not applicable.
Prepared by	: KMK Regulatory Services Inc.
Key to abbreviations	: ATE = Acute Toxicity Estimate BCF = Bioconcentration Factor GHS = Globally Harmonized System of Classification and Labelling of Chemicals IATA = International Air Transport Association IBC = Intermediate Bulk Container IMDG = International Maritime Dangerous Goods LogPow = logarithm of the octanol/water partition coefficient MARPOL 73/78 = International Convention for the Prevention of Pollution From Ships, 1973 as modified by the Protocol of 1978. ("Marpol" = marine pollution) UN = United Nations

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



MATERIAL SAFETY DATA SHEET



102-17910 55 Ave., Surrey, BC, Canada V3S 6C8 • Toll Free **1-866-535-6699**

Tel: **604-575-6660** Fax: 604-575-5494 e-mail: extreme.ron@telus.net

EXTREME ENVIRO COTE

EMERGENCY PHONE NO. (604) 575-6660

PAGE 1 OF 4

WHMIS HAZARD INDEX:

DEGREE OF HAZARD:

HEALTH	0
FIRE	1
REACTIVITY	0
OTHER:	B (GLASSES & GLOVES)

HAZARD RATING:

0	LEAST
1	SLIGHT
2	MODERATE
3	HIGH
4	EXTREME

SECTION 1

PRODUCT IDENTIFICATION

PRODUCT NAME:

EXTREME ENVIRO COTE

CHEMICAL IDENTIFICATION:

Base Oil and Additives

MATERIAL USE:

Lubricating Grease

WHMIS CLASSIFICATION:

N/A

WORK PLACE HAZARD:

N/A

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION:

Not Dangerous Goods

PACKAGE GROUP:

N/A

CAS NUMBER:

N/A

MSDS CODE:

N/A

SECTION 2

HAZARDOUS INGREDIENTS

INGREDIENT:

Base Oil and Additives

PERCENTAGE:

100%

CAS NUMBER:

471-34-1

LD (50):

(Rat) >2000mg/kg MINIMALLY TOXIC

LC (50):

(Rat) >5000mg/m³ MINIMALLY TOXIC

MATERIAL SAFETY DATA SHEET**EXTREME ENVIRO COTE****SECTION 3****PHYSICAL DATA**

APPEARANCE AND ODOUR:	Semi Fluid, White, Slight Hydrocarbon Odor
DENSITY (SPECIFIC GRAVITY):	0.88
BOILING POINT:	>371°C
MELTING POINT:	Not Available
SOLUBILITY:	Negligible
EVAPORATION RATE: (EE=1):	Not Available
VAPOUR PRESSURE: (MM HG):	>0.013 kPa
VAPOUR DENSITY: (AIR = 1):	Not Available

SECTION 4**FIRE AND EXPLOSION**

FLASHPOINT:	249°C
FLAMMABLE LIMIT:	Not Available
AUTO IGNITION TEMP:	Not Available
EXTINGUISHING MEDIA:	Dry Chemical, Foam, Water Fog, CO ₂ , Do Not Spray with Straight Streams of Water
SPECIAL FIRE FIGHTING PROCEDURES:	Prevent runoff from fire control from entering streams, watercourses and drinking water sources.
UNUSUAL FIRE AND EXPLOSION HAZARDS:	None currently known.

SECTION 5**REACTIVITY DATA**

STABILITY (THERMAL, LIGHT, ETC.):	Stable under normal conditions
INCOMPATIBILITY (CONDITIONS TO AVOID):	Strong Oxidizers
HAZARDOUS POLYMERIZATION:	Will not occur
HAZARDOUS DECOMPOSITION PRODUCTS:	Material does not decompose at ambient temperatures

MATERIAL SAFETY DATA SHEET

EXTREME ENVIRO COTE

SECTION 6

HEALTH HAZARDS

ROUTE OF ENTRY:

(X) SKIN (X) EYE CONTACT

(X) INHALATION

(X) INGESTION

SKIN CONTACT:

If product is injected into or under the skin the individual should be evaluated immediately by a physician as a surgical emergency.

EYE CONTACT:

If contact is likely, safety glasses with side shields are recommended.

INHALATION:

No protection is ordinarily required under normal conditions of use with adequate ventilation.

INGESTION:

First Aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 7

PREVENTATIVE MEASURES

SKIN PROTECTION:

Impervious gloves and protective clothing as required.

EYE PROTECTION:

No special requirements under normal conditions.

VENTILATION:

No special requirements under normal conditions.

RESPIRATORY PROTECTION:

None required under normal use.

LEAK & SPILL PROCEDURE:

Contain and gather up with use of absorbent material.

WASTE DISPOSAL:

Dispose of in compliance with local and government regulations.

STORAGE REQUIREMENTS:

Store in a cool, dry area. Keep containers closed when not in use.

MATERIAL SAFETY DATA SHEET**EXTREME ENVIRO COTE****SECTION 8****FIRST AID MEASURES****SKIN:**

Wipe excess from skin. Wash with mild soap and water. If product is injected into or under the skin the individual should be evaluated immediately by a physician as a surgical emergency.

EYE:

Flush thoroughly with water for at least 15 minutes. If irritation occurs seek medical attention.

INHALATION:

At normal handling temperatures, minimal or no irritation due to inhalation.

INGESTION:

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 9**PREPARATION DATE****DATE ISSUED:****AUGUST 20, 1996****DATE REVISED:****JANUARY 01, 2012****BY:****PRODUCT SAFETY COMMITTEE**

THE DATA REPRESENTED HEREIN IS BELIEVED ACCURATE AND REFLECTS OUR BEST PROFESSIONAL JUDGMENT. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY USE, OR ANY OTHER WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF SUCH DATA, THE RESULTS TO BE OBTAINED FROM THE USE THEREOF, OR THAT ANY SUCH USE DOES NOT INFRINGE ANY PATENT. SINCE THE INFORMATION CONTAINED HEREIN MAY BE APPLIED UNDER CONDITIONS OF USE BEYOND OUR CONTROL AND WITH WHICH WE MAY BE UNFAMILIAR, WE DO NOT ASSUME ANY RESPONSIBILITY FOR THE RESULTS OF SUCH APPLICATION. THIS INFORMATION IS FURNISHED UPON THE CONDITION THAT THE PERSON RECEIVING IT SHALL MAKE HIS OWN DETERMINATION OF THE SUITABILITY OF THE MATERIAL FOR HIS PARTICULAR PURPOSE.

MATERIAL SAFETY DATA SHEET

SECTION 1

PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBILUX EP 2
Product Description: Base Oil and Additives
MSDS Number: 6482
Product Code: 2015A0208050
Intended Use: Grease

COMPANY IDENTIFICATION

Supplier: Imperial Oil Downstream
240 4th Avenue
Calgary, ALBERTA. T2P 3M9 Canada
24 Hour Environmental / Health Emergency 1-866-232-9563
Telephone
Transportation Emergency Phone Number 1-866-232-9563
Product Technical Information 1-800-268-3183
Supplier General Contact 1-800-567-3776

SECTION 2

COMPOSITION / INFORMATION ON INGREDIENTS

No Reportable Hazardous Substance(s) or Complex Substance(s).

SECTION 3

HAZARDS IDENTIFICATION

This material is not considered to be hazardous according to regulatory guidelines see Section 15.

HEALTH EFFECTS

Excessive exposure may result in eye, skin, or respiratory irritation. High-pressure injection under skin may cause serious damage.

NFPA Hazard ID: Health: 0 Flammability: 1 Reactivity: 0
HMIS Hazard ID: Health: 0 Flammability: 1 Reactivity: 0

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 4

FIRST AID MEASURES

INHALATION

Under normal conditions of intended use, this material is not expected to be an inhalation hazard.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 5

FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight streams of water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Aldehydes, Oxides of carbon, Smoke, Fume, Sulphur oxides, Incomplete combustion products

FLAMMABILITY PROPERTIES

Flash Point [Method]: >204°C (400°F) [EST. FOR OIL, ASTM D-92 (COC)]

Flammable Limits (Approximate volume % in air): LEL: N/D UEL: N/D

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

SPILL MANAGEMENT

Land Spill: Allow spilled material to solidify and shovel it up into a suitable container for recycle or disposal. Scrape up spilled material with shovels into a suitable container for recycle or disposal.

Water Spill: Stop leak if you can do so without risk. Confine the spill immediately with booms. Warn other shipping. Skim from surface

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Prevent small spills and leakage to avoid slip hazard.

Static Accumulator: This material is not a static accumulator.

STORAGE

Do not store in open or unlabelled containers.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications,

handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No protection is ordinarily required under normal conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

SECTION 9

PHYSICAL AND CHEMICAL PROPERTIES

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Solid
Form: Semi-fluid
Colour: Brown
Odour: Characteristic
Odour Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 °C): 0.92
Flash Point [Method]: >204°C (400°F) [EST. FOR OIL, ASTM D-92 (COC)]

Flammable Limits (Approximate volume % in air): LEL: N/D UEL: N/D
Autoignition Temperature: N/D
Boiling Point / Range: > 316°C (600°F)
Vapour Density (Air = 1): N/D
Vapour Pressure: < 0.013 kPa (0.1 mm Hg) at 20°C
Evaporation Rate (n-butyl acetate = 1): N/D
pH: N/A
Log Pow (n-Octanol/Water Partition Coefficient): > 3.5
Solubility in Water: Negligible
Viscosity: 150 cSt (150 mm²/sec) at 40°C
Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D
Melting Point: N/D
DMSO Extract (mineral oil only), IP-346: < 3 %wt
Decomposition Temperature: N/D

NOTE: Most physical properties above are for the oil component in the material.

SECTION 10

STABILITY AND REACTIVITY

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

HAZARDOUS POLYMERIZATION: Will not occur.

SECTION 11

TOXICOLOGICAL INFORMATION

ACUTE TOXICITY

<u>Route of Exposure</u>	<u>Conclusion / Remarks</u>
Inhalation	
Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Irritation: No end point data for material.	Negligible hazard at ambient/normal handling temperatures.
Ingestion	
Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Skin	
Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Irritation: No end point data for material.	Negligible irritation to skin at ambient temperatures. Based on assessment of the components.
Eye	
Irritation: No end point data for material.	May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.

CHRONIC/OTHER EFFECTS

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitising in test animals.

CMR Status:

Chemical Name	CAS Number	List Citations
SOLVENT DEWAXED RESIDUAL OIL (PETROLEUM)	64742-62-7	1, 6

--REGULATORY LISTS SEARCHED--

1 = IARC 1
2 = IARC 2A

3 = IARC 2B
4 = ACGIH ALL

5 = ACGIH A1
6 = ACGIH A2

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.
Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14

TRANSPORT INFORMATION

LAND (TDG): Not Regulated for Land Transport

LAND (DOT): Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

AIR (IATA): Not Regulated for Air Transport

SECTION 15

REGULATORY INFORMATION

WHMIS Classification: Not controlled

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the (M)SDS contains all the information required by the Controlled Products Regulations.

CEPA: All components of this material are either on the Canadian Domestic Substances List (DSL), exempt, or have been notified under CEPA.

Listed or exempt from listing/notification on the following chemical inventories: DSL, IECSC, KECI, PICCS, TSCA

Special Cases:

Inventory	Status
AICS	Restrictions Apply

The Following Ingredients are Cited on the Lists Below:

Chemical Name	CAS Number	List Citations
ZINC DITHIOPHOSPHATE	68649-42-3	6

--REGULATORY LISTS SEARCHED--

1 = TSCA 4	3 = TSCA 5e	5 = TSCA 12b
2 = TSCA 5a2	4 = TSCA 6	6 = NPRI

SECTION 16

OTHER INFORMATION

N/D = Not determined, N/A = Not applicable

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

Revision Changes:

Section 06: Protective Measures information was modified.
Section 11: Tox Table - Header information was modified.
Section 06: Accidental Release - Protective Measures - Header information was added.
Section 11: Chemical Name - Header information was added.
Section 11: CAS Number - Header information was added.
Section 11: List Citation - Header information was added.
Section 11: Tox List Cited Table information was added.

WHMIS Classification: Not controlled

The information and recommendations contained herein are, to the best of Imperial Oil's knowledge and belief, accurate and reliable as of the date issued. Imperial Oil assumes no responsibility for accuracy of information unless the document is the most current available from an official Imperial Oil distribution system. The information and recommendations are offered for the user's consideration and examination, and it is the user's responsibility to satisfy itself that they are suitable and complete for its particular use. If buyer repackages this product, legal counsel should be consulted to insure proper health, safety and other necessary information is included on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, republication or retransmission of this document, in whole or in part, is not permitted.

DGN: 5006468 (1012446)

Copyright 2002 Imperial Oil Limited, All rights reserved

Prepared by: Imperial Oil Limited, IH and Product Safety

MATERIAL SAFETY DATA SHEET



102, 17910 – 55 Ave Surrey, BC, Canada V3S 6C8 • Toll Free **1-866-535-6699**

Tel: **604-575-6660** Fax: 604-575-5494 e-mail: extreme.ron@telus.net

EXTREME ROD GREASE

EMERGENCY PHONE NO. (604) 575-6660

PAGE 1 OF 4

WHMIS HAZARD INDEX:

DEGREE OF HAZARD:

HEALTH 0
FIRE 1
REACTIVITY 0
OTHER: A (GLASSES & GLOVES)

HAZARD RATING:

0 LEAST
1 SLIGHT
2 MODERATE
3 HIGH
4 EXTREME

SECTION 1

PRODUCT IDENTIFICATION

PRODUCT NAME: EXTREME ROD GREASE
CHEMICAL IDENTIFICATION: Petroleum Hydrocarbon
MATERIAL USE: Thick composition, industrial lubricant
WHMIS CLASSIFICATION: Not controlled
WORK PLACE HAZARD: Not applicable

TRANSPORTATION OF DANGEROUS GOODS (TDGR)

CLASSIFICATION: Not dangerous goods
PACKAGE GROUP: Not applicable
CAS NUMBER: Not applicable
MSDS CODE: Not applicable

SECTION 2

HAZARDOUS INGREDIENTS

INGREDIENT: Mixture of hydrotreated neutral base oil and additives
PERCENTAGE: 100%
CAS NUMBER: Not applicable
LD (50): Acute oral toxicity (Rat): 5000 Mg/Kg
LC (50): Not determined
TLV-TWA: 5 Mg/m³ (Oil Mist)

MATERIAL SAFETY DATA SHEET**EXTREME ROD GREASE****SECTION 3****PHYSICAL DATA**

APPEARANCE AND ODOUR:	Long fibered grease, greenish brown colour, mild grease like odour.
DENSITY (SPECIFIC GRAVITY):	.89
BOILING POINT:	260°C
MELTING POINT:	Not available
SOLUBILITY:	Insoluble in cold water, soluble in non-polar hydrocarbon solvents.
EVAPORATION RATE: (EE=1):	Not available
VAPOUR PRESSURE: (MM HG):	0.0075 @ 20°C
VAPOUR DENSITY: (AIR = 1):	Not available

SECTION 4**FIRE AND EXPLOSION**

FLASHPOINT:	252°C
FLAMMABLE LIMIT:	Not available
AUTO IGNITION TEMP:	316°C
EXTINGUISHING MEDIA:	Dry chemical, foam, CO ₂ , water spray, fog
SPECIAL FIRE FIGHTING PROCEDURES:	None required
UNUSUAL FIRE AND EXPLOSION HAZARDS:	None

SECTION 5**REACTIVITY DATA**

STABILITY (THERMAL, LIGHT, ETC.):	Stable
INCOMPATIBILITY (CONDITIONS TO AVOID):	Avoid excessive heat, highly reactive with oxidizing agents.
HAZARDOUS POLYMERIZATION:	Will not occur
HAZARDOUS DECOMPOSITION PRODUCTS:	Oxides of carbon and nitrogen, irritating fumes and smoke as products of incomplete combustion.

MATERIAL SAFETY DATA SHEET

EXTREME ROD GREASE

SECTION 6

HEALTH HAZARDS

ROUTE OF ENTRY:

(X) SKIN (X) EYE CONTACT

(X) INHALATION

(X) INGESTION

SKIN CONTACT:

EYE CONTACT:

INHALATION:

INGESTION:

Non-irritating; for prolonged exposure wear gloves.

May irritate the eyes

Low vapour pressure, not expected to present inhalation exposure under normal conditions.

Low toxicity on ingestion; has laxative effect and rapidly eliminated.

SECTION 7

PREVENTATIVE MEASURES

SKIN PROTECTION:

None normally required. Personal preference suggest gloves, boots and long sleeved clothing.

Wear safety glasses/goggles.

EYE PROTECT

No special ventilation required for normal conditions.

RESPIRATORY PROTECTION:

None normally required. If mist generated by heating or spraying wear an organic vapour respirator with mist filter.

LEAK & SPILL PROCEDURE:

Contain spill. Use appropriate tools to place spilled material in a container for reclaiming or disposal.

WASTE DISPOSAL:

Dispose of in compliance with local and government regulations.

STORAGE REQUIREMENTS:

Store in cool, dry area away from oxidizing agents. Keep containers tightly closed when not in use.

MATERIAL SAFETY DATA SHEET**EXTREME ROD GREASE****SECTION 8****FIRST AID MEASURES****SKIN:**

Wash gently and thoroughly with mild soap and water. Remove and launder contaminated clothes.

EYE:

Immediately flush eyes with running water for at least 15 minutes. Keep eyelids open. Do not use an eye ointment. Seek medical attention if irritation persists.

INHALATION:

Not expected under normal conditions. Remove victim to safe area, perform mouth to mouth resuscitation if victim is not breathing. Seek medical attention.

INGESTION:

Do not induce vomiting. Has laxative effect; rapidly eliminated. Medical assessment advised.

SECTION 9**PREPARATION DATE****DATE ISSUED:**

AUGUST 20, 2009

DATE REVISED:

JANUARY 01, 2012

BY:

PRODUCT SAFETY COMMITTEE

THE DATA REPRESENTED HEREIN IS BELIEVED ACCURATE AND REFLECTS OUR BEST PROFESSIONAL JUDGMENT. HOWEVER, NO WARRANTY OF MERCHANTABILITY, FITNESS FOR ANY USE, OR ANY OTHER WARRANTY IS EXPRESSED OR IMPLIED REGARDING THE ACCURACY OF SUCH DATA, THE RESULTS TO BE OBTAINED FROM THE USE THEREOF, OR THAT ANY SUCH USE DOES NOT INFRINGE ANY PATENT. SINCE THE INFORMATION CONTAINED HEREIN MAY BE APPLIED UNDER CONDITIONS OF USE BEYOND OUR CONTROL AND WITH WHICH WE MAY BE UNFAMILIAR, WE DO NOT ASSUME ANY RESPONSIBILITY FOR THE RESULTS OF SUCH APPLICATION. THIS INFORMATION IS FURNISHED UPON THE CONDITION THAT THE PERSON RECEIVING IT SHALL MAKE HIS OWN DETERMINATION OF THE SUITABILITY OF THE MATERIAL FOR HIS PARTICULAR PURPOSE.

MATERIAL SAFETY DATA SHEET

SECTION 1

PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: Z-50 PIPE DOPE
Product Description: Base Oil and Additives
MSDS Number: 8503
Product Code: 2015A020X010
Intended Use: Sealant

COMPANY IDENTIFICATION

Supplier: Imperial Oil Products Division
240 4th Avenue
Calgary, ALBERTA. T2P 3M9 Canada
24 Hour Environmental / Health Emergency 1-866-232-9563
Telephone
Transportation Emergency Phone Number 1-866-232-9563
Product Technical Information 1-800-268-3183
Supplier General Contact 1-800-567-3776

SECTION 2

COMPOSITION / INFORMATION ON INGREDIENTS

No Reportable Hazardous Substance(s) or Complex Substance(s).

SECTION 3

HAZARDS IDENTIFICATION

This material is not considered to be hazardous according to regulatory guidelines see Section 15.

HEALTH EFFECTS

Low order of toxicity. Excessive exposure may result in eye, skin, or respiratory irritation. High-pressure injection under skin may cause serious damage.

NFPA Hazard ID: Health: 1 Flammability: 1 Reactivity: 1
HMIS Hazard ID: Health: 1 Flammability: 1 Reactivity: 1

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 4

FIRST AID MEASURES

INHALATION

Under normal conditions of intended use, this material is not expected to be an inhalation hazard.

SKIN CONTACT

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

SECTION 5

FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight streams of water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Smoke, Fume, Aldehydes, Sulphur oxides, Incomplete combustion products, Oxides of carbon, Metal Oxides

FLAMMABILITY PROPERTIES

Flash Point [Method]: >221°C (430°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: >260°C (500°F)

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

SPILL MANAGEMENT

Land Spill: Scrape up spilled material with shovels into a suitable container for recycle or disposal.

Water Spill: Stop leak if you can do so without risk. Warn other shipping. Material will sink. Consult an expert. No immediate action required.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Prevent small spills and leakage to avoid slip hazard.

Static Accumulator: This material is not a static accumulator.

STORAGE

Do not store in open or unlabelled containers.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

Substance Name	Form	Limit/Standard		Note	Source
MICA	Respirable fraction.	TWA	3 mg/m ³		ACGIH

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No protection is ordinarily required under normal conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

SECTION 9

PHYSICAL AND CHEMICAL PROPERTIES

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Solid

Form: Semi-fluid

Colour: Grey

Odour: Characteristic

Odour Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 °C): 1.59

Flash Point [Method]: >221°C (430°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: >260°C (500°F)

Boiling Point / Range: < 316°C (601°F) [Estimated]

Vapour Density (Air = 1): N/D

Vapour Pressure: < 0.013 kPa (0.1 mm Hg) at 20°C [Estimated]

Evaporation Rate (n-butyl acetate = 1): < 0.01

pH: N/D

Log Pow (n-Octanol/Water Partition Coefficient): N/A

Solubility in Water: Negligible

Viscosity: [N/D at 40°C]

Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D

Melting Point: 196°C (385°F)

Decomposition Temperature: N/D

NOTE: Most physical properties above are for the oil component in the material.

SECTION 10

STABILITY AND REACTIVITY

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

MATERIALS TO AVOID: Strong oxidizers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

HAZARDOUS POLYMERIZATION: Will not occur.

SECTION 11

TOXICOLOGICAL INFORMATION

ACUTE TOXICITY

<u>Route of Exposure</u>	<u>Conclusion / Remarks</u>
Inhalation	
Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Irritation: No end point data for material.	Negligible hazard at ambient/normal handling temperatures. Based on assessment of the components.
Ingestion	
Toxicity (Rat): LD50 > 5000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Skin	
Toxicity (Rabbit): LD50 > 5000 mg/kg	Minimally Toxic. Based on test data for structurally similar materials.
Irritation (Rabbit): Data available.	Negligible irritation to skin at ambient temperatures. Based on assessment of the components.
Eye	
Irritation (Rabbit): Data available.	May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.

CHRONIC/OTHER EFFECTS

Contains:

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitising in test

animals.

Additional information is available by request.

CMR Status: None.

Chemical Name	CAS Number	List Citations
MICA	12001-26-2	4

--REGULATORY LISTS SEARCHED--

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data available for the material, the components of the material, and similar materials.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land. Expected to partition to sediment and wastewater solids.

PERSISTENCE AND DEGRADABILITY

Biodegradation:

Base oil component -- Expected to be inherently biodegradable

BIOACCUMULATION POTENTIAL

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

REGULATORY DISPOSAL INFORMATION

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain

residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14

TRANSPORT INFORMATION

LAND (TDG): Not Regulated for Land Transport

LAND (DOT): Not Regulated for Land Transport

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

AIR (IATA): Not Regulated for Air Transport

SECTION 15

REGULATORY INFORMATION

WHMIS Classification: Not controlled

This product has been classified in accordance with hazard criteria of the Controlled Products Regulations and the (M)SDS contains all the information required by the Controlled Products Regulations.

CEPA: All components of this material are either on the Canadian Domestic Substances List (DSL), exempt, or have been notified under CEPA.

Complies with the following national/regional chemical inventory requirements: AICS, DSL, IECSC, KECI, PICCS

The Following Ingredients are Cited on the Lists Below:

Chemical Name	CAS Number	List Citations
ZINC	7440-66-6	6

--REGULATORY LISTS SEARCHED--

1 = TSCA 4
2 = TSCA 5a2

3 = TSCA 5e
4 = TSCA 6

5 = TSCA 12b
6 = NPRI

SECTION 16

OTHER INFORMATION

N/D = Not determined, N/A = Not applicable

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:**Revision Changes:**

Section 06: Notification Procedures - Header was modified.
Section 10: Materials To Avoid - Header was modified.
Section 11: Acute Toxicity Table Header was modified.
Section 09: Phys/Chem Properties Note was modified.
Section 09: Colour was modified.
Section 11: Ingestion Acute Lethality - Header was modified.
Section 11: Inhalation - Header was modified.
Section 09: Boiling Point C(F) was modified.
Section 09: Evaporation Rate - Header was modified.
Section 08: Personal Protection - Header was modified.
Section 08: Comply with applicable regulations phrase was modified.
Section 09: Vapour Pressure - Header was modified.
Section 09: Vapour Pressure was modified.
Section 11: Inhalation Lethality Test Data was modified.
Section 11: Inhalation Irritation Test Data was modified.
Section 05: Hazardous Combustion Products was modified.
Section 06: Accidental Release- Spill Management- Water was modified.
Section 09: Relative Density - Header was modified.
Section 09: Flash Point C(F) was modified.
Section 14: Sea (IMDG) - Header was modified.
Section 14: Air (IATA) - Header was modified.
Section 14: LAND (TDG) - Header was modified.
Section 14: LAND (DOT) - Header was modified.
Section 14: LAND (DOT) - Default was modified.
Section 14: LAND (TDG) Default was modified.
Section 14: Sea (IMDG) - Default was modified.
Section 14: Air (IATA) - Default was modified.
Section 15: National Chemical Inventory Listing - Header was modified.
Section 15: National Chemical Inventory Listing was modified.
Hazard Identification: Hazards Note was modified.
Section 16: CA Prepared by - Header was modified.
Section 09: Section 9 Footnotes was modified.
Section 09: Oxidizing Properties was modified.
Section 15: Canadian List Citations Table was modified.
Section 01: Company Contact Methods Sorted by Priority was modified.
Section 06: Protective Measures was added.
Section 06: Accidental Release - Protective Measures - Header was added.
Section 09: Form - Header was added.
Section 09: Physical State was added.
Section 09: Decomposition Temperature was added.
Section 09: Decomposition Temp - Header was added.
Section 09: Vapour Pressure was added.
Section 01: Product Code was added.
Section 01: Product Code - Header was added.
Section 09: Form - Header was deleted.
Section 09: Physical State was deleted.

WHMIS Classification: Not controlled

The information and recommendations contained herein are, to the best of Imperial Oil's knowledge and belief, accurate and reliable as of the date issued. Imperial Oil assumes no responsibility for accuracy of information unless the document is the most current available from an official Imperial Oil distribution system. The information and recommendations are offered for the user's consideration and examination, and it is the user's responsibility to satisfy itself that they are suitable and complete for its particular use. If buyer repackages this product, legal counsel should be consulted to insure proper health, safety and other necessary information is included on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, republication or retransmission of this document, in whole or in part, is not permitted.

DGN: 5007465 (1015931)

Copyright 2002 Imperial Oil Limited, All rights reserved

Prepared by: Imperial Oil Limited, IH and Product Safety

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

SECTION 1. IDENTIFICATION

Product name	: DIESEL FUEL
Synonyms	: Seasonal Diesel, #2 Diesel, #1 Diesel, #2 Heating Oil, #1 Heating Oil, OSX, D50, Arctic Diesel, Farm Diesel, Marine Diesel, Low Sulphur Diesel, LSD, Ultra Low Sulphur Diesel, ULSD, Mining Diesel, Naval Distillate, Dyed Diesel, Marked Diesel, Coloured Diesel, Furnace special, Biodiesel blend, B1, B2, B5, Diesel Low Cloud (LC), Marine Gas Oil, Marine Gas Oil Dyed.
Product code	: 103136, 103135, 103134, 103133, 103132, 103131, 101799, 102907, 102762, 102763, 102755, 102302, 102744, 101801, 100678, 100677, 101802, 100107, 100668, 100658, 100911, 100663, 100652, 100460, 100065, 101796, 101793, 101795, 101792, 101794, 101791, 100768, 100643, 100642, 100103, 101798, 101800, 101797, 101788, 101789, 101787, 102531, 100734, 100733, 100640, 100997, 100995, 100732, 100731, 100994
Manufacturer or supplier's details	Petro-Canada P.O. Box 2844, 150 - 6th Avenue South-West Calgary Alberta T2P 3E3 Canada
Emergency telephone number	CHEMTRAC: 1-800-424-9300 (toll free) or +1 703-527-3887; Suncor Energy: +1 403-296-3000

Recommended use of the chemical and restrictions on use

Recommended use	: Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type. Mining diesels, marine diesels, MDO and naval distillates may have a higher flash point requirement.
Prepared by	: Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Bright oily liquid.
Colour	Clear to yellow (This product may be dyed red for taxation purposes)
Odour	Mild petroleum oil like.

GHS Classification

Flammable liquids : Category 3

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2 Revision Date 2020/03/09 Print Date 2020/03/09

Acute toxicity (Inhalation)	:	Category 4
Skin irritation	:	Category 2
Carcinogenicity	:	Category 2
Specific target organ toxicity - single exposure	:	Category 3 (Central nervous system)
Specific target organ toxicity - repeated exposure	:	Category 2 (Liver, thymus, Bone)
Aspiration hazard	:	Category 1

GHS label elements

Hazard pictograms	:	
Signal word	:	Danger
Hazard statements	:	Flammable liquid and vapour. May be fatal if swallowed and enters airways. Causes skin irritation. Harmful if inhaled. May cause drowsiness or dizziness. Suspected of causing cancer. May cause damage to organs (Liver, thymus, Bone) through prolonged or repeated exposure.
Precautionary statements	:	Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Keep container tightly closed. Ground and bond container and receiving equipment. Use explosion-proof electrical/ ventilating/ lighting equipment. Use non-sparking tools. Take action to prevent static discharges. Do not breathe dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/ protective clothing/ eye protection/ face protection. Response: IF SWALLOWED: Immediately call a POISON CENTER/doctor. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell. IF exposed or concerned: Get medical advice/ attention. Do NOT induce vomiting.

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

If skin irritation occurs: Get medical advice/ attention.
Take off contaminated clothing and wash it before reuse.
In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

Storage:

Store in a well-ventilated place. Keep container tightly closed.
Store in a well-ventilated place. Keep cool.
Store locked up.

Disposal:

Dispose of contents/ container to an approved waste disposal plant.

Potential Health Effects

Primary Routes of Entry : Eye contact
Ingestion
Inhalation
Skin contact

Aggravated Medical Condition : None known.

Other hazards

None known.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
Kerosine (petroleum), hydrodesulfurized; Kerosine -unspecified	64742-81-0	70 - 100 %
Kerosine (petroleum); Straight run kerosine	8008-20-6	
Fuels, diesel; Gasoil -unspecified	68334-30-5	
Alkanes, C10-20-branched and linear	928771-01-1	0 - 30 %
Fatty acids, C16-18 and C18-unsatd., Me esters	67762-38-3	0 - 20 %

All above concentrations are in percent by weight.

SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids,

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

If swallowed	for at least 15 minutes. Obtain medical attention. : Rinse mouth with water. DO NOT induce vomiting unless directed to do so by a physician or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.
Most important symptoms and effects, both acute and delayed	: Harmful if inhaled. Respiratory, skin and eye irritation; nausea; cancer.
Notes to physician	: Treat symptomatically. For specialist advice physicians should contact the Poisons Information Service.

SECTION 5. FIREFIGHTING MEASURES

Suitable extinguishing media	: Dry chemical Carbon dioxide (CO2) Water fog. Foam
Unsuitable extinguishing media	: Do NOT use water jet.
Specific hazards during firefighting	: Cool closed containers exposed to fire with water spray.
Hazardous combustion products	: Carbon oxides (CO, CO2), nitrogen oxides (NOx), sulphur oxides (SOx), smoke and irritating vapours as products of incomplete combustion.
Further information	: Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for firefighters	: Wear self-contained breathing apparatus for firefighting if necessary.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	: For personal protection see section 8. Ensure adequate ventilation. Evacuate personnel to safe areas. Material can create slippery conditions.
Environmental precautions	: If the product contaminates rivers and lakes or drains inform respective authorities.
Methods and materials for containment and cleaning up	: Prevent further leakage or spillage if safe to do so. Remove all sources of ignition. Soak up with inert absorbent material. Non-sparking tools should be used. Ensure adequate ventilation. Contact the proper local authorities.

SECTION 7. HANDLING AND STORAGE

Advice on safe handling	: For personal protection see section 8.
-------------------------	--

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

Conditions for safe storage

Smoking, eating and drinking should be prohibited in the application area.
Use only with adequate ventilation.
In case of insufficient ventilation, wear suitable respiratory equipment.
Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity.
Avoid contact with skin, eyes and clothing.
Do not ingest.
Keep away from heat and sources of ignition.
Keep container closed when not in use.
: Store in original container.
Containers which are opened must be carefully resealed and kept upright to prevent leakage.
Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight.
Ensure the storage containers are grounded/bonded.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parame- ters / Permissible concentration	Basis
Kerosine (petroleum), hy-drodesulfurized; Kerosine - unspecified	64742-81-0	TWA	200 mg/m ³ (As total hydro-carbon vapour)	ACGIH
		TWA	200 mg/m ³ (total hydrocarbon vapor)	CA AB OEL
		TWA	525 mg/m ³	CA ON OEL
		TWA	200 mg/m ³ (As total hydro-carbon vapour)	ACGIH
		TWA	200 mg/m ³ (total hydrocarbon vapor)	ACGIH
Kerosine (petroleum); Straight run kerosine	8008-20-6	TWA	200 mg/m ³ (total hydrocarbon vapor)	CA BC OEL
		TWA	200 mg/m ³ (total hydrocarbon vapor)	CA AB OEL
		TWA	200 mg/m ³ (total hydrocarbon vapor)	ACGIH
Fuels, diesel; Gasoil - unspecified	68334-30-5	TWA	100 mg/m ³ (total hydrocar-bons)	CA AB OEL
		TWA (Va-pour and	100 mg/m ³ (total hydrocar-	CA BC OEL

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

		inhalable aerosols)	bons)	
		TWA (Inhalable fraction and vapor)	100 mg/m ³ (total hydrocarbons)	ACGIH

Engineering measures	<ul style="list-style-type: none">Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.Use only in well-ventilated areas.Ensure that eyewash station and safety shower are proximal to the work-station location.
Personal protective equipment	
Respiratory protection	<ul style="list-style-type: none">Concentration in air determines protection needed.Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines.Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
Filter type	<ul style="list-style-type: none">organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
Hand protection	
Material	<ul style="list-style-type: none">neoprene, nitrile, polyvinyl alcohol (PVA), Viton(R). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals.Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.
Remarks	<ul style="list-style-type: none">Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Eye protection	<ul style="list-style-type: none">Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	<ul style="list-style-type: none">Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	<ul style="list-style-type: none">Wash contaminated clothing before re-use.
Hygiene measures	<ul style="list-style-type: none">Remove and wash contaminated clothing and gloves, including the inside, before re-use.Wash face, hands and any exposed skin thoroughly after handling.

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Bright oily liquid.
Colour	: Clear to yellow (This product may be dyed red for taxation purposes)
Odour	: Mild petroleum oil like.
Odour Threshold	: No data available
pH	: No data available
Melting point	: No data available
Boiling point/boiling range	: 150 - 371 °C (302 - 700 °F)
Decomposition temperature	: No data available
Flash point	: > 40 °C (104 °F) Method: closed cup
Auto-Ignition Temperature	: 225 °C (437 °F)
Evaporation rate	: No data available
Flammability	: Flammable in presence of open flames, sparks and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite.
Upper explosion limit	: 6 %(V)
Lower explosion limit	: 0.7 %(V)
Vapour pressure	: 7.5 mmHg (20 °C / 68 °F)
Relative vapour density	: 4.5
Relative density	: 0.8 - 0.88
Solubility(ies)	
Water solubility	: insoluble
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Viscosity, kinematic	: 1.3 - 4.1 cSt (40 °C / 104 °F)

SECTION 10. STABILITY AND REACTIVITY

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

Reactivity	: Stable at normal ambient temperature and pressure.
Chemical stability	: Stable under normal conditions.
Possibility of hazardous reactions	: Hazardous polymerisation does not occur.
Conditions to avoid	: Extremes of temperature and direct sunlight.
Incompatible materials	: Reactive with oxidising agents and acids.
Hazardous decomposition products	: May release CO _x , NO _x , SO _x , smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact
Ingestion
Inhalation
Skin contact

Acute toxicity

Product:

Acute oral toxicity	: Remarks: No data available
Acute inhalation toxicity	: Acute toxicity estimate: 1.2 mg/l Exposure time: 4 h Test atmosphere: dust/mist Method: Calculation method
Acute dermal toxicity	: Remarks: No data available

Components:

Kerosine (petroleum), hydrodesulfurized; Kerosine -unspecified:

Acute oral toxicity	: LD50 (Rat): > 5,000 mg/kg,
Acute inhalation toxicity	: LC50 (Rat): > 5.2 mg/l Exposure time: 4 hrs Test atmosphere: dust/mist
Acute dermal toxicity	: LD50 (Rabbit): > 2,000 mg/kg,

Kerosine (petroleum); Straight run kerosine:

Acute oral toxicity	: LD50 (Rat): > 5,000 mg/kg,
Acute inhalation toxicity	: LC50 (Rat): > 5 mg/l Exposure time: 4 h Test atmosphere: dust/mist
Acute dermal toxicity	: LD50 (Rabbit): > 2,000 mg/kg,

Fuels, diesel; Gasoil -unspecified:

Acute oral toxicity	: LD50 (Rat): 7,500 mg/kg,
Acute inhalation toxicity	: LC50 (Rat): 4.1 mg/l Exposure time: 4 h

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

Test atmosphere: vapour

Acute dermal toxicity : LD50 (Mouse): 24,500 mg/kg,

Skin corrosion/irritation

Product:

Remarks: Causes skin irritation.

Serious eye damage/eye irritation

Product:

Remarks: No data available

Respiratory or skin sensitisation

Product:

Remarks: Based on available data, the classification criteria are not met.

Germ cell mutagenicity

Product:

Genotoxicity in vitro Remarks: No data available

Genotoxicity in vivo Remarks: No data available

Carcinogenicity

Product:

Carcinogenicity - Assessment Suspected of causing cancer.

Reproductive toxicity

Product:

Effects on fertility Remarks: Based on available data, the classification criteria are not met.

STOT - single exposure

Product:

Remarks: May cause drowsiness or dizziness.

STOT - repeated exposure

Product:

Remarks: May cause damage to organs through prolonged or repeated exposure.

No data available

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

Aspiration toxicity

Product:

May be fatal if swallowed and enters airways.

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish	:	Remarks: No data available
Toxicity to daphnia and other aquatic invertebrates	:	Remarks: No data available
Toxicity to algae	:	Remarks: No data available
Toxicity to bacteria	:	Remarks: No data available

Persistence and degradability

Product:

Biodegradability	:	Remarks: No data available
------------------	---	----------------------------

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues	:	The product should not be allowed to enter drains, water courses or the soil. Offer surplus and non-recyclable solutions to a licensed disposal company. Waste must be classified and labelled prior to recycling or disposal. Send to a licensed waste management company. Dispose of as hazardous waste in compliance with local and national regulations. Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.
---------------------	---	--

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

UN/ID No. : UN 1202
Proper shipping name : Diesel fuel
Class : 3
Packing group : III
Labels : Class 3 - Flammable Liquid
Packing instruction (cargo aircraft) : 366

IMDG-Code

UN number : UN 1202
Proper shipping name : DIESEL FUEL
Class : 3
Packing group : III
Labels : 3
EmS Code : F-E, S-E
Marine pollutant : no

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

National Regulations

TDG

UN number : UN 1202
Proper shipping name : DIESEL FUEL
Class : 3
Packing group : III
Labels : 3
ERG Code : 128
Marine pollutant : no

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the Hazardous Products Regulations (HPR) and the SDS contains all of the information required by the HPR.

The components of this product are reported in the following inventories:

DSL On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

For Copy of SDS : Internet: www.petro-canada.ca/msds
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228
For Product Safety Information: 1 905-804-4752

SAFETY DATA SHEET

DIESEL FUEL

000003000395



Version 5.2

Revision Date 2020/03/09

Print Date 2020/03/09

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2020/03/09

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

SECTION 1. IDENTIFICATION

Product name	: GASOLINE, UNLEADED
Synonyms	: TN-PE-TM15-X00-1499; Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, WinterGas, SummerGas, Supreme, SuperClean, SuperClean WinterGas, Regular-Clean, PlusClean, Premium, marked or dyed gasoline, TQRUL, transitional quality regular unleaded, BOB, Blend-stock for Oxygenate Blending, Conventional Gasoline, RUL, MUL, SUL, PUL.
Product code	: 100127, 100126, 101823, 100507, 101811, 101814, 100141, 101813, 101810, 101812, 100063, 101822, 100138, 101821, 100064, 101820, 101819, 100506, 101818, 101816, 101817, 100488
<hr/>	
Manufacturer or supplier's details	Petro-Canada P.O. Box 2844, 150 - 6th Avenue South-West Calgary Alberta T2P 3E3 Canada
Emergency telephone number	Suncor Energy: +1 403-296-3000; Canutec Transportation: 1-888-226-8832 (toll-free) or 613-996-6666; Poison Control Centre: Consult local telephone directory for emergency number(s).

Recommended use of the chemical and restrictions on use

Recommended use	: Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.
Prepared by	: Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Clear liquid.
Colour	Clear to slightly yellow or green, undyed liquid. May be dyed red for taxation purposes.
Odour	Gasoline

GHS Classification

Flammable liquids	: Category 1
-------------------	--------------

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0 Revision Date 2019/06/14 Print Date 2019/06/14

Skin irritation	: Category 2
Germ cell mutagenicity	: Category 1B
Carcinogenicity	: Category 1A
Reproductive toxicity	: Category 2
Specific target organ toxicity - single exposure	: Category 3 (Central nervous system)
Specific target organ toxicity - repeated exposure	: Category 1
Aspiration hazard	: Category 1

GHS label elements

Hazard pictograms	: Three red diamond-shaped hazard pictograms: the first shows a flame, the second shows a person with a cross over their body, and the third shows an exclamation mark.
Signal word	: Danger
Hazard statements	: Extremely flammable liquid and vapour. May be fatal if swallowed and enters airways. Causes skin irritation. May cause drowsiness or dizziness. May cause genetic defects. May cause cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure.

Precautionary statements	: Prevention: Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Keep container tightly closed. Ground and bond container and receiving equipment. Use explosion-proof electrical/ ventilating/ lighting equipment. Use non-sparking tools. Take action to prevent static discharges. Do not breathe dust/ fume/ gas/ mist/ vapours/ spray. Wash skin thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Wear protective gloves/ protective clothing/ eye protection/ face protection. Response: IF SWALLOWED: Immediately call a POISON CENTER/doctor. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water.
--------------------------	--

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.

IF exposed or concerned: Get medical advice/ attention.

Do NOT induce vomiting.

If skin irritation occurs: Get medical advice/ attention.

Take off contaminated clothing and wash it before reuse.

In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

Storage:

Store in a well-ventilated place. Keep container tightly closed.

Store in a well-ventilated place. Keep cool.

Store locked up.

Disposal:

Dispose of contents/ container to an approved waste disposal plant.

Potential Health Effects

Primary Routes of Entry : Eye contact
Ingestion
Inhalation
Skin contact

Aggravated Medical Condition : None known.

Other hazards

None known.

IARC Group 1: Carcinogenic to humans

Benzene 71-43-2

ACGIH Confirmed human carcinogen

Benzene 71-43-2

Confirmed animal carcinogen with unknown relevance to humans

Gasoline 86290-81-5

Ethanol 64-17-5

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

Hazardous components

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

Chemical name	CAS-No.	Concentration
Gasoline; Low boiling point naphtha -unspecified	86290-81-5	95 - 100 %
toluene	108-88-3	1 - 40 %
benzene	71-43-2	0.5 - 1.5 %
ethanol	64-17-5	0.1 - 0.3 %

All above concentrations are in percent by weight.

SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.
- If swallowed : Rinse mouth with water.
DO NOT induce vomiting unless directed to do so by a physician or poison control center.
Never give anything by mouth to an unconscious person.
Seek medical advice.
- Most important symptoms and effects, both acute and delayed : Inhalation may cause central nervous system effects.
Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness.
Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhoea.
Chronic exposure to benzene may result in increased risk of leukemia and other blood disorders.
- Notes to physician : Treat symptomatically.
Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Dry chemical
Carbon dioxide (CO₂)
Water fog.
Foam

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

Unsuitable extinguishing media	: Do NOT use water jet.
Specific hazards during fire-fighting	: Cool closed containers exposed to fire with water spray.
Hazardous combustion products	: Carbon oxides (CO, CO ₂), nitrogen oxides (NO _x), polynuclear aromatic hydrocarbons, phenols, aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.
Further information	: Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for firefighters	: Wear self-contained breathing apparatus and full protective wear. Wear a positive-pressure supplied-air respirator with full face-piece.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	: For personal protection see section 8. Ensure adequate ventilation. Evacuate personnel to safe areas. Material can create slippery conditions.
Environmental precautions	: If the product contaminates rivers and lakes or drains inform respective authorities.
Methods and materials for containment and cleaning up	: Prevent further leakage or spillage if safe to do so. Remove all sources of ignition. Soak up with inert absorbent material. Non-sparking tools should be used. Ensure adequate ventilation. Contact the proper local authorities.

SECTION 7. HANDLING AND STORAGE

Advice on safe handling	: For personal protection see section 8. Smoking, eating and drinking should be prohibited in the application area. Use only with adequate ventilation. In case of insufficient ventilation, wear suitable respiratory equipment. Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity. Avoid contact with skin, eyes and clothing. Do not ingest. Keep away from heat and sources of ignition. Keep container closed when not in use.
Conditions for safe storage	: Store in original container. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

Keep in a dry, cool and well-ventilated place.
Keep in properly labelled containers.
To maintain product quality, do not store in heat or direct sunlight.

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parame- ters / Permissible concentration	Basis
toluene	108-88-3	TWA	50 ppm 188 mg/m ³	CA AB OEL
		TWA	20 ppm	CA BC OEL
		TWAEV	50 ppm 188 mg/m ³	CA QC OEL
		TWA	20 ppm	ACGIH
benzene	71-43-2	TWA	0.5 ppm 1.6 mg/m ³	CA AB OEL
		STEL	2.5 ppm 8 mg/m ³	CA AB OEL
		TWA	0.5 ppm	CA BC OEL
		STEL	2.5 ppm	CA BC OEL
		TWA	0.5 ppm	CA ON OEL
		STEL	2.5 ppm	CA ON OEL
		TWAEV	1 ppm 3 mg/m ³	CA QC OEL
		STEV	5 ppm 15.5 mg/m ³	CA QC OEL
		TWA	0.5 ppm	ACGIH
		STEL	2.5 ppm	ACGIH
Gasoline; Low boiling point naphtha -unspecified	86290-81-5	TWA	300 ppm	CA AB OEL
		STEL	500 ppm	CA AB OEL
		TWA	300 ppm	CA BC OEL
		STEL	500 ppm	CA BC OEL
		TWA	300 ppm	ACGIH
ethanol	64-17-5	TWA	1,000 ppm 1,880 mg/m ³	CA AB OEL
		STEL	1,000 ppm	CA BC OEL
		TWAEV	1,000 ppm 1,880 mg/m ³	CA QC OEL
		STEL	1,000 ppm	ACGIH

Biological occupational exposure limits

Components	CAS-No.	Control parameters	Biological specimen	Sam- pling time	Permissible concentra- tion	Basis
Toluene	108-88-3	Toluene	In blood	Prior to last shift of work-	0.02 mg/l	ACGIH BEI

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

				week		
		Toluene	Urine	End of shift (As soon as possible after exposure ceases)	0.03 mg/l	ACGIH BEI

Engineering measures

- : Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.
- Use only in well-ventilated areas.
- Ensure that eyewash station and safety shower are proximal to the work-station location.

Personal protective equipment

Respiratory protection

- : Concentration in air determines protection needed.
- Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines.
- Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type

- : A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hand protection

Material

- : polyvinyl alcohol (PVA), Viton(R). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Remarks

- : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

Eye protection

- : Wear face-shield and protective suit for abnormal processing problems.

Skin and body protection

- : Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

Protective measures	: Wash contaminated clothing before re-use.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Clear liquid.
Colour	: Clear to slightly yellow or green, undyed liquid. May be dyed red for taxation purposes.
Odour	: Gasoline
Odour Threshold	: No data available
pH	: No data available
Melting point	: No data available
Boiling point/boiling range	: 25 - 225 °C (77 - 437 °F)
Decomposition temperature	: No data available
Flash point	: -50 - -38 °C (-58 - -36 °F) Method: Tagliabue.
Auto-Ignition Temperature	: 257 °C (495 °F)
Evaporation rate	: No data available
Flammability	: Extremely flammable in presence of open flames, sparks, shocks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.
Upper explosion limit	: 7.6 %(V)
Lower explosion limit	: 1.3 %(V)
Vapour pressure	: < 802.5 mmHg (20 °C / 68 °F)
Relative vapour density	: 3
Relative density	: 0.685 - 0.8
Solubility(ies)	
Water solubility	: insoluble
Partition coefficient: n-octanol/water	: No data available

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

Viscosity

Viscosity, kinematic : No data available

SECTION 10. STABILITY AND REACTIVITY

Reactivity : No dangerous reaction known under conditions of normal use.

Chemical stability : Stable under normal conditions.

Possibility of hazardous reactions : Hazardous polymerisation does not occur.

Conditions to avoid : Extremes of temperature and direct sunlight.

Incompatible materials : Reactive with oxidising agents, acids and interhalogens.

Hazardous decomposition products : May release CO_x, NO_x, phenols, polycyclic aromatic hydrocarbons, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact

Ingestion

Inhalation

Skin contact

Acute toxicity

Product:

Acute oral toxicity : Remarks: Based on available data, the classification criteria are not met.

Acute inhalation toxicity : Remarks: Based on available data, the classification criteria are not met.

Acute dermal toxicity : Remarks: Based on available data, the classification criteria are not met.

Components:

Gasoline; Low boiling point naphtha -unspecified:

Acute oral toxicity : LD₅₀ (Rat): 13,600 mg/kg,

Acute dermal toxicity : LD₅₀ (Rabbit): > 3,750 mg/kg,

toluene:

Acute oral toxicity : LD₅₀ (Rat): 5,580 mg/kg,

Acute inhalation toxicity : LC₅₀ (Rat): 7585 ppm

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

Exposure time: 4 h
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): 12,125 mg/kg,

benzene:

Acute oral toxicity : LD50 (Rat): 2,990 mg/kg,

Acute inhalation toxicity : LC50 (Rat): 13700 ppm
Exposure time: 4 h
Test atmosphere: vapour

Acute dermal toxicity : LD50 (Rabbit): > 8,240 mg/kg,

ethanol:

Acute oral toxicity : LD50 (Rat): 7,060 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 32380 ppm
Exposure time: 4 h
Test atmosphere: vapour

Skin corrosion/irritation

Product:

Remarks: Causes skin irritation.

Serious eye damage/eye irritation

Product:

Remarks: Based on available data, the classification criteria are not met.

Respiratory or skin sensitisation

Product:

Remarks: Based on available data, the classification criteria are not met.

Germ cell mutagenicity

Product:

Germ cell mutagenicity- Assessment May cause genetic defects.

Carcinogenicity

Product:

Carcinogenicity - Assessment May cause cancer.

Reproductive toxicity

Product:

Reproductive toxicity - Suspected of damaging fertility or the unborn child.

SAFETY DATA SHEET
GASOLINE, UNLEADED



000003000644

Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

Assessment

STOT - single exposure

Product:

Remarks: May cause drowsiness or dizziness.

STOT - repeated exposure

Product:

Remarks: Causes damage to organs through prolonged or repeated exposure.

No data available

Aspiration toxicity

Product:

May be fatal if swallowed and enters airways.

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

Persistence and degradability

Product:

Biodegradability : Remarks: No data available

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644



Version 3.0

Revision Date 2019/06/14

Print Date 2019/06/14

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.
Offer surplus and non-recyclable solutions to a licensed disposal company.
Waste must be classified and labelled prior to recycling or disposal.
Send to a licensed waste management company.
Dispose of as hazardous waste in compliance with local and national regulations.
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

UN/ID No. : UN 1203
Proper shipping name : Gasoline
Class : 3
Packing group : II
Labels : Class 3 - Flammable Liquid
Packing instruction (cargo aircraft) : 364

IMDG-Code

UN number : UN 1203
Proper shipping name : GASOLINE

Class : 3
Packing group : II
Labels : 3
EmS Code : F-E, S-E
Marine pollutant : no

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

National Regulations

TDG

UN number : UN 1203
Proper shipping name : GASOLINE

Class : 3
Packing group : II
Labels : 3
ERG Code : 128
Marine pollutant : no

SAFETY DATA SHEET

GASOLINE, UNLEADED

000003000644

Version 3.0

Revision Date 2019/06/14



Print Date 2019/06/14

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the Hazardous Products Regulations (HPR) and the SDS contains all of the information required by the HPR.

The components of this product are reported in the following inventories:

DSL On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

For Copy of SDS : Internet: www.petro-canada.ca/msds
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2019/06/14

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

SECTION 1. IDENTIFICATION

Product name : PROPANE

Synonyms : Propane HD-5, Propane commercial, Liquified Petroleum Gas (LPG), C3H8, CGSB Propane Grade 1, CGSB Propane Grade 2, odorized propane, stenched propane, automotive propane, ER62.

Product code : 100139

Manufacturer or supplier's details

Petro-Canada
P.O. Box 2844, 150 - 6th Avenue South-West
Calgary Alberta T2P 3E3
Canada

Emergency telephone number : CHEMTRAC: 1-800-424-9300 (toll free) or +1 703-527-3887;
Suncor Energy: +1 403-296-3000

Recommended use of the chemical and restrictions on use

Recommended use : Propane is used as a fuel gas, refrigerant and as a raw material for organic synthesis. It is also used as a laboratory gas. The grade determines the propane content. It is supplied as pressurized liquid in tanks.

Prepared by : Product Safety: +1 905-804-4752

SECTION 2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance	Gas at room temperature; liquid when stored under pressure., compressed liquefied gas
Colour	colourless
Odour	Propane is an odourless gas. Odourized propane will contain up to 30 g Ethyl Mercaptan per 1000 L of propane.

GHS Classification

Flammable gases : Category 1

Gases under pressure : Liquefied gas

Simple Asphyxiant : Category 1

GHS label elements

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Hazard pictograms



Signal word

: Danger

Hazard statements

: Extremely flammable gas.
Contains gas under pressure; may explode if heated.
May displace oxygen and cause rapid suffocation.

Precautionary statements

: **Prevention:**
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.
Response:
Leaking gas fire: Do not extinguish, unless leak can be stopped safely.
In case of leakage, eliminate all ignition sources.
Storage:
Protect from sunlight. Store in a well-ventilated place.

Potential Health Effects

Primary Routes of Entry

: Eye contact
Inhalation
Skin contact

Aggravated Medical Condition

: None known.

Other hazards

None known.

IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

ACGIH

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture

: Mixture

Hazardous components

Chemical name	CAS-No.	Concentration
propane	74-98-6	90 - 100 %
propene	115-07-1	1 - 5 %
butane	106-97-8	1 - 2.5 %

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

ethane	74-84-0	1 - 1.5 %
methane	74-82-8	0.1 - 0.2 %

All above concentrations are percent by volume.

SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.
Artificial respiration and/or oxygen may be necessary.
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.
Wash skin thoroughly with soap and water or use recognized skin cleanser.
Wash contaminated clothing before reuse.
Seek medical advice.
- In case of eye contact : Remove contact lenses.
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.
Obtain medical attention.
- If swallowed : Not a significant route of exposure.
- Most important symptoms and effects, both acute and delayed : Inhalation may cause central nervous system effects.
Inhalation of vapours may cause drowsiness, headache, dizziness and disorientation.
May cause irritation of respiratory tract.
Contact with rapidly expanding gas may cause burns or frost-bite.
Overexposure may lead to cardiac sensitization.
High concentrations can remove oxygen and cause dizziness or suffocation.
- Notes to physician : Treat symptomatically.
Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Use extinguishing measures that are appropriate to local circumstances and the surrounding environment.
- Unsuitable extinguishing media : No information available.
- Specific hazards during fire-fighting : If the product release cannot be shut off safely, allow the product to burn itself out.
Cool closed containers exposed to fire with water spray.
- Hazardous combustion products : Carbon oxides (CO, CO₂), smoke and irritating vapours as products of incomplete combustion.

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Further information	: Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for firefighters	: Wear self-contained breathing apparatus and full protective wear. Wear a positive-pressure supplied-air respirator with full face-piece.

SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	: Use personal protective equipment. Ensure adequate ventilation. Evacuate personnel to safe areas. In case of inadequate ventilation wear respiratory protection. Remove all sources of ignition.
Environmental precautions	: If the product contaminates rivers and lakes or drains inform respective authorities.
Methods and materials for containment and cleaning up	: Prevent further leakage or spillage if safe to do so. Ensure adequate ventilation. Use explosion-proof ventilation equipment. Non-sparking tools should be used. Contact the proper local authorities.

SECTION 7. HANDLING AND STORAGE

Advice on safe handling	: For personal protection see section 8. Smoking, eating and drinking should be prohibited in the application area. In case of insufficient ventilation, wear suitable respiratory equipment. Avoid contact with skin, eyes and clothing. Avoid breathing gas. Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity. Use only with adequate ventilation. Keep away from heat and sources of ignition. Keep container closed when not in use. Do not use sparking tools. Do not enter areas where used or stored until adequately ventilated.
Conditions for safe storage	: Store in original container. Containers which are opened must be carefully resealed and kept upright to prevent leakage. Keep in a dry, cool and well-ventilated place. Keep in properly labelled containers. To maintain product quality, do not store in heat or direct sunlight. Keep away from sources of ignition - No smoking. Ensure the storage containers are grounded/bonded.

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control param- eters / Permissible concentration	Basis
propane	74-98-6	TWA	1,000 ppm	CA AB OEL
		TWA	1,000 ppm	CA BC OEL
		TWAEV	1,000 ppm 1,800 mg/m ³	CA QC OEL
propene	115-07-1	TWA	500 ppm 860 mg/m ³	CA AB OEL
		TWA	500 ppm	CA BC OEL
		TWA	500 ppm	ACGIH
butane	106-97-8	TWA	1,000 ppm	CA AB OEL
		TWA	600 ppm	CA BC OEL
		STEL	750 ppm	CA BC OEL
ethane	74-84-0	TWAEV	800 ppm 1,900 mg/m ³	CA QC OEL
		STEL	1,000 ppm	ACGIH
		TWA	1,000 ppm	CA BC OEL

Engineering measures : Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.
Use only in well-ventilated areas.
Use explosion-proof ventilation equipment.

Personal protective equipment

Respiratory protection : Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : Always wear NIOSH-approved self-contained breathing apparatus when handling this material.

Hand protection
Material : Wear insulated gloves to prevent frostbite. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Remarks : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Eye protection	: Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	: Wash contaminated clothing before re-use. Wear suitable protective equipment.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Gas at room temperature; liquid when stored under pressure., compressed liquefied gas
Colour	: colourless
Odour	: Propane is an odourless gas. Odourized propane will contain up to 30 g Ethyl Mercaptan per 1000 L of propane.
Odour Threshold	: No data available
pH	: No data available
Melting point/freezing point	: No data available
Boiling point/boiling range	: -42 °C (-44 °F)
Decomposition temperature	: No data available
Flash point	: -104 °C (-155 °F) Method: closed cup
Auto-Ignition Temperature	: 450 °C (842 °F)
Evaporation rate	: No data available
Flammability	: Extremely flammable in presence of open flames, sparks, and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. Rapid escape of vapour may generate static charge causing ignition. May accumulate in confined spaces.
Upper explosion limit	: 9.5 %(V)
Lower explosion limit	: 2.1 %(V)
Vapour pressure	: 10,763 mmHg (38 °C / 100 °F)
Relative vapour density	: 1.56

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Relative density	:	No data available
Solubility(ies)	:	
Water solubility	:	No data available
Partition coefficient: n-octanol/water	:	No data available
Viscosity	:	
Viscosity, kinematic	:	No data available

SECTION 10. STABILITY AND REACTIVITY

Reactivity	:	No dangerous reaction known under conditions of normal use.
Chemical stability	:	Stable under normal conditions.
Possibility of hazardous reactions	:	Hazardous polymerisation does not occur.
Conditions to avoid	:	Heat, flames and sparks.
Incompatible materials	:	Reactive with oxidising agents and halogenated compounds.
Hazardous decomposition products	:	May release CO _x , smoke and irritating vapours when heated to decomposition.

SECTION 11. TOXICOLOGICAL INFORMATION

Information on likely routes of exposure

Eye contact
Inhalation
Skin contact

Acute toxicity

Product:

Acute oral toxicity	:	Remarks: Based on available data, the classification criteria are not met.
Acute inhalation toxicity	:	Remarks: Based on available data, the classification criteria are not met.
Acute dermal toxicity	:	Remarks: Based on available data, the classification criteria are not met.

Components:

butane:

Acute inhalation toxicity : LC50 (Rat): 658 mg/l

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Exposure time: 4 h
Test atmosphere: gas

Skin corrosion/irritation

Product:

Remarks: Based on available data, the classification criteria are not met.

Serious eye damage/eye irritation

Product:

Remarks: Based on available data, the classification criteria are not met.

Respiratory or skin sensitisation

Product:

Remarks: Based on available data, the classification criteria are not met.

Germ cell mutagenicity

Product:

Germ cell mutagenicity- Assessment	Based on available data, the classification criteria are not met.
---------------------------------------	--

Carcinogenicity

Product:

Carcinogenicity - As- essment	Based on available data, the classification criteria are not met.
----------------------------------	--

Reproductive toxicity

Product:

Reproductive toxicity - Assessment	Based on available data, the classification criteria are not met.
---------------------------------------	--

STOT - single exposure

Product:

Remarks: Based on available data, the classification criteria are not met.

STOT - repeated exposure

Product:

Remarks: Based on available data, the classification criteria are not met.

No data available

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

SECTION 12. ECOLOGICAL INFORMATION

Ecotoxicity

Product:

Toxicity to fish	:	Remarks: No data available
Toxicity to daphnia and other aquatic invertebrates	:	Remarks: No data available
Toxicity to algae	:	Remarks: No data available
Toxicity to bacteria	:	Remarks: No data available

Persistence and degradability

Product:

Biodegradability	:	Remarks: No data available
------------------	---	----------------------------

Bioaccumulative potential

No data available

Mobility in soil

No data available

Other adverse effects

No data available

SECTION 13. DISPOSAL CONSIDERATIONS

Disposal methods

Waste from residues	:	The product should not be allowed to enter drains, water courses or the soil. Offer surplus and non-recyclable solutions to a licensed disposal company. Waste must be classified and labelled prior to recycling or disposal. Send to a licensed waste management company. Dispose of as hazardous waste in compliance with local and national regulations. Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.
---------------------	---	--

SECTION 14. TRANSPORT INFORMATION

International Regulations

IATA-DGR

UN/ID No. : UN 1978

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

Proper shipping name	:	Propane
Class	:	2.1
Packing group	:	Not assigned by regulation
Labels	:	Class 2 - Gases: Flammable (Division 2.1)
Packing instruction (cargo aircraft)	:	200

IMDG-Code

UN number	:	UN 1978
Proper shipping name	:	PROPANE
Class	:	2.1
Packing group	:	Not assigned by regulation
Labels	:	2.1
EmS Code	:	F-D, S-U
Marine pollutant	:	no

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

National Regulations

TDG

UN number	:	UN 1978
Proper shipping name	:	PROPANE
Class	:	2.1
Packing group	:	Not assigned by regulation
Labels	:	2.1
ERG Code	:	115
Marine pollutant	:	no

SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the Hazardous Products Regulations (HPR) and the SDS contains all of the information required by the HPR.

The components of this product are reported in the following inventories:

DSL On the inventory, or in compliance with the inventory

SECTION 16. OTHER INFORMATION

For Copy of SDS : Internet: www.petro-canada.ca/msds
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2020/01/27

SAFETY DATA SHEET

PROPANE

000003000646



Version 3.0

Revision Date 2020/01/27

Print Date 2020/01/27

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

1. IDENTIFICATION OF THE SUBSTANCE/PREPARATION AND OF THE COMPANY/UNDERTAKING

Ashland P.O. Box 2219 Columbus, OH 43216	Regulatory Information Number Telephone Emergency telephone	1-800-325-3751 614-790-3333 1-800-ASHLAND (1-800-274-5263)
Product name	NAPA® PREM PERF GEAR OIL SAE 80W-90 GEAR OIL	
Product code	NP75213	
Product Use Description	No data	

2. HAZARDS IDENTIFICATION

Emergency Overview

Appearance: liquid, amber

CAUTION! PROLONGED OR REPEATED CONTACT MAY DRY SKIN AND CAUSE IRRITATION.

Potential Health Effects

Routes of exposure

Inhalation, Skin contact, Eye Contact, Ingestion

Eye contact

Unlikely to cause eye irritation or injury.

Skin contact

Unlikely to cause skin irritation or injury. Prolonged or repeated contact may dry and crack the skin.

Ingestion

Swallowing small amounts of this material during normal handling is not likely to cause harmful effects. Swallowing large amounts may be harmful.

Inhalation

It is possible to breathe this material under certain conditions of handling and use (for example, during heating, spraying, or stirring). Breathing small amounts of this

material during normal handling is not likely to cause harmful effects. Breathing large amounts may be harmful. Symptoms are not expected at air concentrations below the recommended exposure limits, if applicable (see Section 8.).

Aggravated Medical Condition

Preexisting disorders of the following organs (or organ systems) may be aggravated by exposure to this material:, Skin, lung (for example, asthma-like conditions)

Symptoms

Signs and symptoms of exposure to this material through breathing, swallowing, and/or passage of the material through the skin may include:, stomach or intestinal upset (nausea, vomiting, diarrhea), irritation (nose, throat, airways)

Target Organs

No data

Carcinogenicity

This material is not listed as a carcinogen by the International Agency for Research on Cancer (IARC), the National Toxicology Program (NTP), or the Occupational Safety and Health Administration (OSHA).

Reproductive hazard

There are no data available for assessing risk to the fetus from maternal exposure to this material.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Components	CAS-No.	Concentration
DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAF	64742-54-7	>=70-<80%

4. FIRST AID MEASURES**Eyes**

If symptoms develop, move individual away from exposure and into fresh air. Flush eyes gently with water while holding eyelids apart. If symptoms persist or there is any visual difficulty, seek medical attention.

Skin

Remove contaminated clothing. Wash exposed area with soap and water. If symptoms persist, seek medical attention. Launder clothing before reuse.

Ingestion

Do not induce vomiting. Give one glass of milk or water, and get medical attention immediately. If possible, do not leave victim unattended.

Inhalation

If symptoms develop, immediately move individual away from exposure and into fresh air. Seek immediate medical attention; keep person warm and quiet. If person is not breathing, begin artificial respiration. If breathing is difficult, administer oxygen.

Notes to physician

Hazards: Acute aspiration of large amounts of oil-laden material may produce a serious aspiration pneumonia. Patients who aspirate these oils should be followed for the development of long-term sequelae. Repeated aspiration of small quantities of mineral oil can produce chronic inflammation of the lungs (i.e. lipoid pneumonia) that may progress to pulmonary fibrosis. Symptoms are often subtle and radiological changes appear worse than clinical abnormalities. Occasionally, persistent cough, irritation of the upper respiratory tract, shortness of breath with exertion, fever, and bloody sputum occur. Inhalation exposure to oil mists below current workplace exposure limits is unlikely to cause pulmonary abnormalities.

Treatment: No information available.

5. FIRE-FIGHTING MEASURES**Suitable extinguishing media**

Dry chemical, Carbon dioxide (CO₂), Foam, Water spray

Hazardous combustion products

carbon dioxide and carbon monoxide, oxides of sulfur, nitrogen and phosphorus, Hydrocarbons

Precautions for fire-fighting

Never use welding or cutting torch on or near drum (even empty) because product (even just residue) can ignite explosively. Wear full firefighting turn-out gear (full Bunker gear), and respiratory protection (SCBA). DO NOT direct a solid stream of water or foam into hot, burning pools of liquid since this may cause frothing and increase

fire intensity. Frothing can be violent and possibly endanger any firefighter standing too close to the burning liquid.

Flammability Class for Flammable Liquids
Combustible Liquid Class IIIB

6. ACCIDENTAL RELEASE MEASURES

Personal precautions

For personal protection see section 8. Persons not wearing protective equipment should be excluded from area of spill until clean-up has been completed.

Environmental precautions

Prevent run-off to sewers, streams or other bodies of water. If run-off occurs, notify proper authorities as required, that a spill has occurred.

Methods for cleaning up

Absorb liquid on vermiculite, floor absorbent or other absorbent material.

7. HANDLING AND STORAGE

Handling

Containers of this material may be hazardous when emptied. Since emptied containers retain product residues (vapor, liquid, and/or solid), all hazard precautions given in the data sheet must be observed.

Storage

Store in a cool, dry, ventilated area.

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Exposure Guidelines

General advice

These recommendations provide general guidance for handling this product. Personal protective equipment should be selected for individual applications and should consider factors which affect exposure potential, such as handling practices, chemical concentrations and ventilation. It is ultimately the responsibility of the employer to follow regulatory guidelines established by local authorities.

Exposure controls

General room ventilation should be adequate for normal conditions of use. However, if unusual operating conditions exist, provide sufficient mechanical (general and/or local exhaust) ventilation to maintain exposure below exposure guidelines (if applicable) or below levels that cause known, suspected or apparent adverse effects.

Eye protection

Not required under normal conditions of use. Wear splash-proof safety goggles if material could be misted or splashed into eyes.

Skin and body protection

Wear resistant gloves (consult your safety equipment supplier). Wear normal work clothing including long pants, long-sleeved shirts and foot covering to prevent direct contact of the product with the skin. Launder clothing before reuse. If skin irritation develops, contact your facility health and safety professional or your local safety equipment supplier to determine the proper personal protective equipment for your use.

Respiratory protection

Respiratory protection is not required under normal conditions of use.

9. PHYSICAL AND CHEMICAL PROPERTIES

Physical state	liquid
Form	No data
Colour	amber
Odour	No data
Boiling point/boiling range	218.30 °C / 424.9 °F@ 760.00 mmHg
pH	No data
Flash point	(>)432 °F / 222 °C, Cleveland open cup
Evaporation rate	> 1 (Ethyl Ether)
Explosion limits	No data
Vapour pressure	0.10 mmHg
Vapour density	(>) 1 (AIR=1)
Density	0.8916 g/cm3 @ 60.01 °F / 15.56 °C 7.28 lb/gal @ 60.1 °F / 15.6 °C
Solubility	No data
Partition coefficient: n-octanol/water	No data

NAPA® PREM PERF GEAR OIL SAE
80W-90 GEAR OIL NP75213

Page: 6
Revision Date: 06/27/2008
Print Date: 7/1/2008
MSDS Number: R0091437
Version: 2.0

log Pow no data available
Autoignition temperature No data

10. STABILITY AND REACTIVITY

Stability
Stable

Conditions to avoid
None known.

Incompatible products
Strong oxidizing agents

Hazardous decomposition products
carbon dioxide and carbon monoxide, oxides of sulfur, nitrogen and phosphorus,
Hydrocarbons

Hazardous reactions
Product will not undergo hazardous polymerization.

Thermal decomposition
No data

11. TOXICOLOGICAL INFORMATION

Acute oral toxicity

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAF	LD 50 Rat: > 15 g/kg
--	----------------------

Acute inhalation toxicity

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAF	no data available
--	-------------------

Acute dermal toxicity

DISTILLATES (PETROLEUM), HYDROTREATED HEAVY PARAF	LD 50 Rabbit: > 5 g/kg
--	------------------------

12. ECOLOGICAL INFORMATION

NAPA® PREM PERF GEAR OIL SAE
80W-90 GEAR OIL NP75213

Page: 7
Revision Date: 06/27/2008
Print Date: 7/1/2008
MSDS Number: R0091437
Version: 2.0

Aquatic toxicity

Acute and Prolonged Toxicity to Fish

No data

Acute Toxicity to Aquatic Invertebrates

No data

Environmental fate and pathways

No data

13. DISPOSAL CONSIDERATIONS

Waste disposal methods

Dispose of in accordance with all applicable local, state and federal regulations. For assistance with your waste management needs - including disposal, recycling and waste stream reduction, contact Ashland Distribution's Environmental Services Group at 800-637-7922.

14. TRANSPORT INFORMATION

Dangerous goods descriptions (if indicated above) may not reflect package size, quantity, end-use or region-specific exceptions that can be applied. Consult shipping documents for descriptions that are specific to the shipment.

15. REGULATORY INFORMATION

California Prop. 65

This product does not contain any chemicals known to State of California to cause cancer, birth, or any other reproductive defects.

SARA Hazard Classification Acute Health Hazard

SARA 313 Component(s)

Reportable quantity - Components

DISTILLATES (PETROLEUM),	64742-54-7	none
HYDROTREATED HEAVY PARAF		

ASHLAND
SAFETY DATA SHEET

NAPA® PREM PERF GEAR OIL SAE
80W-90 GEAR OIL NP75213

Page: 8
Revision Date: 06/27/2008
Print Date: 7/1/2008
MSDS Number: R0091437
Version: 2.0

	Health	Flammability	Reactivity	Other
HMIS	1	1	0	
NFPA	1	1	0	

16. OTHER INFORMATION

The information accumulated herein is believed to be accurate but is not warranted to be whether originating with the company or not. Recipients are advised to confirm in advance of need that the information is current, applicable, and suitable to their circumstances. This MSDS has been prepared by Ashland's Environmental Health and Safety Department (1-800-325-3751).



SAFETY DATA SHEET

Page : 1

Revised edition no : 6

Date : 6 / 1 / 2014

Supersedes : 0 / 0 / 0

Gulf Harmony AW 32

10103/32/1/6

1. IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

Product identifier : Gulf Harmony AW 32
Viscosity Grade : ISO VG 32
Product code Gulf Oil International : 10103/32/1/6
Relevant identified uses of the substance or mixture and uses advised against : Industrial hydraulic oil.
This oil should not be used for any other purpose than the intended use as a hydraulic oil without expert advice.
Details of the supplier of the safety data sheet : Gulf Oil Lubricants India Ltd, IN Centre, 12th Road, Marol, Andheri (East), Mumbai - 400 093
Emergency telephone number : +91 22 66487777

2. HAZARDS IDENTIFICATION

Classification of the substance or mixture : Not classified as dangerous under EC criteria.
Most important adverse physico-chemical effects : Combustible liquid.
Most important adverse human health effects : Prolonged or repeated skin contact with the material will remove natural oils and could lead to a dermatitis.
Most important adverse environmental effects : No specific risk for the environment.
Label elements:
- **safety advices** : Do not empty into drains; dispose of this material and its container in a safe way.
Other hazards : Injection under the skin can occur when using high pressure equipment. Overexposure to oil mist may cause respiratory irritations.
Oil mist deposited on surfaces may cause slip hazard.

3. COMPOSITION/INFORMATION ON INGREDIENTS

Chemical characterization		: Mixture of highly refined mineral oils and additives.(PCA-content < 3% - IP 346)				
Substance name	Contents	CAS No	EC No	Annex No	Ref REACH	Classification
Zinc dialkyl dithiophosphate	: 0.36 - 0.66 %	68649-42-3	272-028-3	----	----	Xi; R36/38
Alkyl phenol	: 0.11 - 0.22 %	----	----	----	----	N; R50-53
Long chain alkenyl succinimide	: 0.06 - 0.11 %	----	----	----	----	----
Calcium alkaryl sulfonate	: 0.006 - 0.011 %	----	----	----	----	Xi; R38-41
Aryl phosphine	: 0.0029 - 0.0055 %	----	----	----	----	Xn; R48/20/22 R43 N; R50-53

4. FIRST AID MEASURES

Description of first aid measures:

- **after inhalation** : Assure fresh air breathing. If you feel unwell, seek medical advice.
- **after contact with skin** : Remove contaminated clothing and shoes. Wash skin thoroughly with mild soap and water. Never use kerosine or gasoline for cleaning the skin.
- **after contact with the eyes** : Rinse immediately with plenty of water. Seek medical attention if irritation develops.
- **after ingestion** : Do not induce vomiting. Seek medical attention immediately.
- **after injection** : If injected under the skin when using high pressure equipment, send casualty immediately to a hospital, even when there are few or no symptoms.

Gulf Oil International

16 Charles II St. SW1Y 4QU - London - United Kingdom



SAFETY DATA SHEET

Page : 2

Revised edition no : 6

Date : 6 / 1 / 2014

Supersedes : 0 / 0 / 0

Gulf Harmony AW 32

10103/32/1/6

SECTION 4. FIRST AID MEASURES (continued)

Most important symptoms and effects, both acute and delayed : Symptoms of overexposure to vapours include drowsiness, weakness, headache, dizziness, nausea, vomiting, dimming of vision.

Indication of any immediate medical attention and special treatment needed : High-pressure hydrocarbon injection injuries may produce substantial necrosis of underlying tissue despite an innocuous appearing external wound. Often these injuries require extensive emergency surgical debridement and all injuries should be evaluated by a specialist in order to assess the extent of the injury.

5. FIRE-FIGHTING MEASURES

Suitable extinguishing media : Water fog. Carbon dioxide. Foam. Dry chemical product.

Extinguishing media which shall not be used for safety reasons : Do not use a heavy water stream.

Special hazards arising from the substance or mixture : Under fire conditions, hazardous fumes will be present.

Advice for firefighters : Do not enter fire area without proper protective equipment, including respiratory protection. Wear self-contained breathing apparatus, rubber boots and thick rubber gloves. Use water spray or fog for cooling exposed containers. Avoid fire-fighting water to enter environment.

6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures:

- for non-emergency personnel : Evacuate unnecessary personnel.

- for emergency responders : Equip cleanup crew with proper protection. Wear suitable protective clothing, gloves and eye or face protection. Eliminate every possible source of ignition.

Environmental precautions : Contain any spills with dikes or absorbents to prevent migration and entry into sewers or streams. Avoid release to the environment. Notify authorities if liquid enters sewers or public waters. Spill area may be slippery.

Methods and material for containment and cleaning up : Clean up any spills as soon as possible, using an absorbent material to collect it. Use suitable disposal containers.

Reference to other sections : See Heading 8 & 13

7. HANDLING AND STORAGE

Precautions for safe handling : Keep away from sources of ignition. No naked lights. No smoking. Use only in well ventilated areas. Avoid release to the environment. Do not eat, drink or smoke when using this product. Wash hands and other exposed areas with soap and water before leaving work.

Conditions for safe storage, including any incompatibilities : Store this product in a dry location where it can be protected from the elements. Store in tightly closed, properly ventilated containers away from heat, sparks, open flame, strong oxidizers, radiations, and other initiators. Keep at temperature not exceeding 50°C.

Specific end use(s) : Industrial hydraulic oil. This oil should not be used for any other purpose than the intended use as a hydraulic oil without expert advice.



SAFETY DATA SHEET

Page : 3

Revised edition no : 6

Date : 6 / 1 / 2014

Supersedes : 0 / 0 / 0

Gulf Harmony AW 32

10103/32/1/6

8. EXPOSURE CONTROLS/PERSONAL PROTECTION

Control parameters:

Occupational exposure limit values:

- Australia : National exposure standards for atmospheric contaminants in the occupational environment; Time-Weighted Average (normal eight-hour working day, for a five-day working week): 5 mg/m³ for oil mist, refined mineral. (National Occupational Health & Safety Commission [NOHSC: 1003(1995)])
- Canada : The American Conference of Governmental Industrial Hygienists (ACGIH) has assigned mineral oil mist a threshold limit value (TLV) of 5 mg/m³(3) as a Time Weighted Average (TWA) for a normal 8-hour workday and a 40-hour workweek and a short-term exposure limit (STEL) of 10 mg/m³(3) for periods not to exceed 15 minutes. Exposures at the STEL concentration should not be repeated more than four times a day and should be separated by intervals of at least 60 minutes. [ACGIH 1994, p. 28]
- EU : Occupational Exposure Standard (OES) of 5 mg/m³, 8-hour time-weighted average reference period for oil mist.
- USA : The American Conference of Governmental Industrial Hygienists (ACGIH) has assigned mineral oil mist a threshold limit value (TLV) of 5 mg/m³(3) as a Time Weighted Average (TWA) for a normal 8-hour workday and a 40-hour workweek and a short-term exposure limit (STEL) of 10 mg/m³(3) for periods not to exceed 15 minutes. Exposures at the STEL concentration should not be repeated more than four times a day and should be separated by intervals of at least 60 minutes. [ACGIH 1994, p. 28]

Occupational Exposure Limits

Biological limit values

- : No data available.

Exposure controls:

Individual protection measures, such as personal protective equipment:

- eye / face protection : Chemical goggles or safety glasses (EN 166)
- skin protection : Wear suitable protective clothing.
- hand protection : Wear suitable gloves resistant to chemical penetration. (EN 374)
- respiratory protection : The use of Filtertype A (EN 141) is recommended If exceeding the Occupational Exposure Limit.
- others : Do not wear leather soled shoes.

Environmental exposure controls

- : Avoid release to the environment.

9. PHYSICAL AND CHEMICAL PROPERTIES

Information on basic physical and chemical properties:

- physical state : Oily liquid.
- colour : Yellow-brown.
- odour : Light odour of petroleum.
- flash point : 202°C
- density @ 15°C : 870 kg/m³
- solubility in water : Insoluble.
- viscosity @ 40°C : 31.2 cSt
- pour point : -24°C
- Other information : See Product Data Sheet for detailed information.

Gulf Oil International

16 Charles II St. SW1Y 4QU - London - United
Kingdom



SAFETY DATA SHEET

Page : 4

Revised edition no : 6

Date : 6 / 1 / 2014

Supersedes : 0 / 0 / 0

Gulf Harmony AW 32

10103/32/1/6

10. STABILITY AND REACTIVITY

Reactivity	: No data available.
Chemical stability	: Stable under normal conditions.
Possibility of hazardous reactions	: None under normal conditions.
Conditions to avoid	: Extremely high or low temperatures.
Incompatible materials	: Strong oxidizing agents.
Hazardous decomposition products	: None under normal conditions.

11. TOXICOLOGICAL INFORMATION

Information on toxicological effects:

- acute toxicity	: No specific toxicity data on this product available.
- irritation	: Not expected to be an irritant to eyes or skin. Inhalation of fumes or vapours may cause respiratory irritation.
- corrosivity	: No adverse health effects were noted.
- sensitisation	: No sensitization effects known.
- carcinogenicity	: This product contains mineral oils which are considered to be severely refined and not considered to be carcinogenic under IARC. All of the oils in this product have been demonstrated to contain less than 3% extractables by the IP 346 test.
- mutagenicity	: Not expected to be mutagenic.
- reproductive toxicity	: Not expected to be toxic.

Information on likely routes of exposure:

- after ingestion	: Ingestion may cause nausea, vomiting and diarrhoea.
- after inhalation	: Inhalation of vapours may cause respiratory irritation.
- after skincontact	: Prolonged or repeated skin contact with the material will remove natural oils and could lead to a dermatitis.
- after eyecontact	: Slight eye irritant upon direct contact.
Symptoms related to the physical, chemical and toxicological characteristics	: No adverse health effects were noted.
Delayed and immediate effects as well as chronic effects from short and long-term exposure	: No adverse health effects were noted
Other toxicological information	: No data available.

12. ECOLOGICAL INFORMATION

Toxicity	: No specific ecotoxicity data on this product available.
Persistence and degradability	: Not determined.
Bioaccumulative potential	: No data available.
Mobility in soil	: It is to be expected small mobility in soil. Some or a few components may get into the soil and may cause pollution of ground water. Product spreads on the water surface.
Results of PBT and vPvB assessment	: Not applicable.
Other adverse effects	: May contaminate water supplies.
Biodegradation	: No data available.



SAFETY DATA SHEET

Page : 5

Revised edition no : 6

Date : 6 / 1 / 2014

Supersedes : 0 / 0 / 0

Gulf Harmony AW 32

10103/32/1/6

13. DISPOSAL CONSIDERATIONS

- Waste Disposal** : Dispose in a safe manner in accordance with local/national regulations.
- Waste treatment methods** : See Directive 2001/118/EC
- Waste Code European Waste List** : 13 02 05 - mineral-based non-chlorinated engine, gear and lubricating oils.
15 01 10 - packaging containing residues of or contaminated by dangerous substances.

14. TRANSPORT INFORMATION

Not regulated.

15. REGULATORY INFORMATION

Safety, health and environmental regulations/legislation specific for the substance or mixture:

- **Australian Inventory of Chemical Substances (AICS)** : All components are in compliance with chemical notification requirements in Australia.
- **Canadian Environmental Protection Act (CEPA)** : All components are in compliance with the Canadian Environmental Protection Act (CEPA) and are present on the Domestic Substances List (DSL).
- **European Inventory of Existing Commercial Chemical Substances (EINECS)** : All components listed.
- **USA Toxic Substances Control Act (TSCA)** : All components of this material are on the US TSCA Inventory or are exempt.
- **Germany** : Water Hazard Class: 1 - low hazard to waters

16. OTHER INFORMATION

Revision Indicators

: None.

Key to abbreviations and acronyms used in the safety data sheet

: ACGIH = American Conference of Industrial Hygienists
CLP = Classification and Labelling of Substances and Preparations
EC = European Commission. EN = European Norm
IARC= International Agency for Research on Cancer
IP = Institute of Petroleum. ISO = International Organization for Standardization
NLGI = National Lubricating Grease Institute
PCA = Polycyclic Aromatics
TLV = Threshold Limit Value. TWA = Time Weighted Average
VG = Viscosity Grade

Key literature references and sources for data

: Concawe Report 01/53, Concawe Report 01/54, Concawe Report 05/87.
Regulations (EC) No 1907/2006, 1272/2008 & 453/2010 of the European Parliament and of the Council.

List of relevant R-phrases

: R36/38 : Irritating to eyes and skin.
R38: Irritating to skin.
R41: Risk of serious damage to eyes.
R43 : May cause sensitization by skin contact.
R48/20/22 : Harmful : danger of serious damage to health by prolonged exposure through inhalation and if swallowed.
R50/53 : Very toxic to aquatic organisms, may cause long-term adverse effects in the aquatic environment.

Training advice

: See information supplied by the manufacturer.

The contents and format of this SDS are in accordance with COMMISSION REGULATION (EU) No 453/2010 of 20 May 2010 amending Regulation (EC) No 1907/2006 of the European Parliament and of the Council on the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH).

DISCLAIMER OF LIABILITY The information in this SDS was obtained from sources which we believe are reliable. However, the information is provided without any warranty, express or implied, regarding its correctness. The conditions or methods of handling, storage, use or disposal of the product are beyond our control and may be beyond our knowledge. For this and other reasons, we do not assume responsibility and expressly disclaim liability for loss, damage or expense arising out of or in any way connected with the handling, storage, use or disposal of the product. This SDS was prepared and is to be used only for this

Gulf Oil International

16 Charles II St. SW1Y 4QU - London - United Kingdom

T : +44 207 800 6100 F : +44 207 800 6000



SAFETY DATA SHEET

Page : 6

Revised edition no : 6

Date : 6 / 1 / 2014

Supersedes : 0 / 0 / 0

Gulf Harmony AW 32

10103/32/1/6

product. If the product is used as a component in another product, this SDS information may not be applicable.

End of document

Material Safety Data Sheet



TWO CYCLE MOTOR OIL

1 . Product and company identification

Product name	: TWO CYCLE MOTOR OIL
Code	: TWO CYC
Material uses	: A low ash 2-cycle engine oil designed to lubricate conventional pre-mixed fuel/oil as well as oil injection lubricated engines powering air-cooled two-stroke cycle engines.
Manufacturer	: Petro-Canada Lubricants Inc. 2310 Lakeshore Road West Mississauga, Ontario Canada L5J 1K2
<u>In case of emergency</u>	: Suncor Energy: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).

2 . Hazards identification

Physical state	: Viscous liquid.
Odour	: Mild petroleum oil like.
WHMIS (Canada)	: Not controlled under WHMIS (Canada).
OSHA/HCS status	: While this material is not considered hazardous by the OSHA Hazard Communication Standard (29 CFR 1910.1200), this MSDS contains valuable information critical to the safe handling and proper use of the product. This MSDS should be retained and available for employees and other users of this product.
Emergency overview	: No specific hazard.
Routes of entry	: Dermal contact. Eye contact. Inhalation. Ingestion.
<u>Potential acute health effects</u>	
Inhalation	: No known significant effects or critical hazards.
Ingestion	: No known significant effects or critical hazards.
Skin	: Slightly irritating to the skin.
Eyes	: Slightly irritating to the eyes.
<u>Potential chronic health effects</u>	
Chronic effects	: No known significant effects or critical hazards.
Carcinogenicity	: Not listed as carcinogenic by OSHA, NTP or IARC.
Mutagenicity	: No known significant effects or critical hazards.
Teratogenicity	: No known significant effects or critical hazards.
Developmental effects	: No known significant effects or critical hazards.
Fertility effects	: No known significant effects or critical hazards.
Medical conditions aggravated by over-exposure	: Repeated or prolonged contact with spray or mist may produce chronic eye irritation and severe skin irritation. Repeated skin exposure can produce local skin destruction or dermatitis.

See toxicological information (Section 11)

3 . Composition/information on ingredients

Name	CAS number	%
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	Mixture	-

There are no additional ingredients present which, within the current knowledge of the supplier and in the concentrations applicable, are classified as hazardous to health or the environment and hence require reporting in this section.

3 . Composition/information on ingredients

The base oil may be a mixture of the following CAS#s: 8042-47-5, 64741-95-3, 64742-01-4, 64742-46-7, 64742-47-8, 64742-53-6, 64742-54-7, 64742-55-8, 64742-62-7, 72623-83-7, 72623-84-8, 72623-85-9, 72623-86-0, 72623-87-1, 178603-64-0, 178603-65-1, 178603-66-2, 445411-73-4

4 . First-aid measures

- Eye contact** : Check for and remove any contact lenses. Immediately flush eyes with plenty of water for at least 15 minutes, occasionally lifting the upper and lower eyelids. Get medical attention immediately.
- Skin contact** : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognised skin cleanser. Wash clothing before reuse. Clean shoes thoroughly before reuse. Get medical attention immediately.
- Inhalation** : Move exposed person to fresh air. If not breathing, if breathing is irregular or if respiratory arrest occurs, provide artificial respiration or oxygen by trained personnel. Loosen tight clothing such as a collar, tie, belt or waistband. Get medical attention immediately.
- Ingestion** : Wash out mouth with water. Do not induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.
- Protection of first-aiders** : No action shall be taken involving any personal risk or without suitable training. It may be dangerous to the person providing aid to give mouth-to-mouth resuscitation.
- Notes to physician** : No specific treatment. Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

5 . Fire-fighting measures

- Flammability of the product** : May be combustible at high temperature.
- Extinguishing media**
- Suitable** : Use an extinguishing agent suitable for the surrounding fire.
- Not suitable** : None known.
- Special exposure hazards** : Promptly isolate the scene by removing all persons from the vicinity of the incident if there is a fire. No action shall be taken involving any personal risk or without suitable training.
- Products of combustion** : Carbon oxides (CO, CO₂), nitrogen oxides (NO_x), sulphur oxides (SO_x), asphyxiants, smoke and irritating vapours as products of incomplete combustion.
- Special protective equipment for fire-fighters** : Fire-fighters should wear appropriate protective equipment and self-contained breathing apparatus (SCBA) with a full face-piece operated in positive pressure mode.
- Special remarks on fire hazards** : Low fire hazard. This material must be heated before ignition will occur.
- Special remarks on explosion hazards** : Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

6 . Accidental release measures

- Personal precautions** : No action shall be taken involving any personal risk or without suitable training. Evacuate surrounding areas. Keep unnecessary and unprotected personnel from entering. Do not touch or walk through spilt material. Avoid breathing vapour or mist. Provide adequate ventilation. Wear appropriate respirator when ventilation is inadequate. Put on appropriate personal protective equipment (see Section 8).
- Environmental precautions** : Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers. Inform the relevant authorities if the product has caused environmental pollution (sewers, waterways, soil or air).
- Methods for cleaning up**

6 . Accidental release measures

- Small spill**
- Stop leak if without risk. Move containers from spill area. Dilute with water and mop up if water-soluble. Alternatively, or if water-insoluble, absorb with an inert dry material and place in an appropriate waste disposal container. Dispose of via a licensed waste disposal contractor.
- Large spill**
- Stop leak if without risk. Move containers from spill area. Approach the release from upwind. Prevent entry into sewers, water courses, basements or confined areas. Wash spillages into an effluent treatment plant or proceed as follows. Contain and collect spillage with non-combustible, absorbent material e.g. sand, earth, vermiculite or diatomaceous earth and place in container for disposal according to local regulations (see section 13). Dispose of via a licensed waste disposal contractor. Contaminated absorbent material may pose the same hazard as the spilt product. Note: see section 1 for emergency contact information and section 13 for waste disposal.

7 . Handling and storage

- Handling**
- Put on appropriate personal protective equipment (see Section 8). Eating, drinking and smoking should be prohibited in areas where this material is handled, stored and processed. Workers should wash hands and face before eating, drinking and smoking. Remove contaminated clothing and protective equipment before entering eating areas. Do not ingest. Avoid contact with eyes, skin and clothing. Avoid breathing vapour or mist. Keep in the original container or an approved alternative made from a compatible material, kept tightly closed when not in use. Empty containers retain product residue and can be hazardous. Do not reuse container.
- Storage**
- Store in accordance with local regulations. Store in original container protected from direct sunlight in a dry, cool and well-ventilated area, away from incompatible materials (see section 10) and food and drink. Keep container tightly closed and sealed until ready for use. Containers that have been opened must be carefully resealed and kept upright to prevent leakage. Do not store in unlabelled containers. Use appropriate containment to avoid environmental contamination.

8 . Exposure controls/personal protection

Ingredient	Exposure limits
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	ACGIH TLV (United States). Notes: (Mineral oil) TWA: 5 mg/m ³ , (Inhalable fraction) 8 hour(s).

Consult local authorities for acceptable exposure limits.

- Recommended monitoring procedures**
- If this product contains ingredients with exposure limits, personal, workplace atmosphere or biological monitoring may be required to determine the effectiveness of the ventilation or other control measures and/or the necessity to use respiratory protective equipment.
- Engineering measures**
- No special ventilation requirements. Good general ventilation should be sufficient to control worker exposure to airborne contaminants. If this product contains ingredients with exposure limits, use process enclosures, local exhaust ventilation or other engineering controls to keep worker exposure below any recommended or statutory limits.
- Hygiene measures**
- Wash hands, forearms and face thoroughly after handling chemical products, before eating, smoking and using the lavatory and at the end of the working period. Appropriate techniques should be used to remove potentially contaminated clothing. Wash contaminated clothing before reusing. Ensure that eyewash stations and safety showers are close to the workstation location.
- Personal protection**
- Respiratory**
- Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator. Recommended: organic vapour filter

8 . Exposure controls/personal protection

Hands	: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary. Recommended: neoprene, nitrile, polyvinyl alcohol (PVA), Viton®.
Eyes	: Safety eyewear complying with an approved standard should be used when a risk assessment indicates this is necessary to avoid exposure to liquid splashes, mists or dusts.
Skin	: Personal protective equipment for the body should be selected based on the task being performed and the risks involved and should be approved by a specialist before handling this product.
Environmental exposure controls	: Emissions from ventilation or work process equipment should be checked to ensure they comply with the requirements of environmental protection legislation. In some cases, fume scrubbers, filters or engineering modifications to the process equipment will be necessary to reduce emissions to acceptable levels.

9 . Physical and chemical properties

Physical state	: Viscous liquid.
Flash point	: Open cup: 152°C (305.6°F) [Cleveland.]
Auto-ignition temperature	: Not available.
Flammable limits	: Not available.
Colour	: Blue-green.
Odour	: Mild petroleum oil like.
Odour threshold	: Not available.
pH	: Not available.
Boiling/condensation point	: Not available.
Melting/freezing point	: Not available.
Relative density	: 0.88 kg/L @ 15°C (59°F)
Vapour pressure	: Not available.
Vapour density	: Not available.
Volatility	: Not available.
Evaporation rate	: Not available.
Viscosity	: 20.9 cSt @ 40°C (104°F), 4.5 cSt @ 100°C (212°F), VI=132
Pour point	: -57°C (-71°F)
Solubility	: Insoluble in water.

10 . Stability and reactivity

Chemical stability	: The product is stable.
Hazardous polymerisation	: Under normal conditions of storage and use, hazardous polymerisation will not occur.
Materials to avoid	: Reactive with oxidising agents, reducing agents, alkalis and acids.
Hazardous decomposition products	: May release CO _x , NO _x , SO _x , aldehydes, methacrylate monomers, asphyxiants, smoke and irritating vapours when heated to decomposition.

11 . Toxicological information

Acute toxicity

Product/ingredient name	Result	Species	Dose	Exposure
-------------------------	--------	---------	------	----------

11 . Toxicological information

Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	LD50 Dermal	Rabbit	>2000 mg/kg	-
	LD50 Oral LC50 Inhalation Dusts and mists	Rat Rat	>5000 mg/kg >5.2 mg/l	- 4 hours

Conclusion/Summary : Not available.

Chronic toxicity

Conclusion/Summary : Not available.

Irritation/Corrosion

Conclusion/Summary : Not available.

Sensitiser

Conclusion/Summary : Not available.

Carcinogenicity

Conclusion/Summary : Not available.

Classification

Product/ingredient name	ACGIH	IARC	EPA	NIOSH	NTP	OSHA
Mixture of severely hydrotreated and hydrocracked and/or solvent-refined base oil (petroleum).	A4	-	-	-	-	-

Mutagenicity

Conclusion/Summary : Not available.

Teratogenicity

Conclusion/Summary : Not available.

Reproductive toxicity

Conclusion/Summary : Not available.

12 . Ecological information

Environmental effects : No known significant effects or critical hazards.

Aquatic ecotoxicity

Conclusion/Summary : Not available.

Biodegradability

Conclusion/Summary : Not available.

Other adverse effects : No known significant effects or critical hazards.

13 . Disposal considerations

Waste disposal

: The generation of waste should be avoided or minimised wherever possible. Significant quantities of waste product residues should not be disposed of via the foul sewer but processed in a suitable effluent treatment plant. Dispose of surplus and non-recyclable products via a licensed waste disposal contractor. Disposal of this product, solutions and any by-products should at all times comply with the requirements of environmental protection and waste disposal legislation and any regional local authority requirements. Waste packaging should be recycled. Incineration or landfill should only be considered when recycling is not feasible. This material and its container must be disposed of in a safe way. Care should be taken when handling emptied containers that have not been cleaned or rinsed out. Empty containers or liners may retain some product residues. Avoid dispersal of spilt material and runoff and contact with soil, waterways, drains and sewers.

Disposal should be in accordance with applicable regional, national and local laws and regulations.

Refer to Section 7: HANDLING AND STORAGE and Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION for additional handling information and protection of employees.

14 . Transport information

Regulatory information	UN number	Proper shipping name	Classes	PG*	Label	Additional information
TDG Classification	Not regulated.	-	-	-		-
DOT Classification	Not available.	Not available.	Not available.	-		-

PG* : Packing group

15 . Regulatory information

United States

HCS Classification : Not regulated.

Canada

WHMIS (Canada) : Not controlled under WHMIS (Canada).

This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations and the MSDS contains all the information required by the Controlled Products Regulations.

International regulations

Canada inventory : All components are listed or exempted.

United States inventory (TSCA 8b) : All components are listed or exempted.

Europe inventory : All components are listed or exempted.

International lists : **Australia inventory (AICS)**: All components are listed or exempted.

China inventory (IECSC): All components are listed or exempted.


Korea inventory: All components are listed or exempted.

Philippines inventory (PICCS): All components are listed or exempted.

16 . Other information

Hazardous Material Information System (U.S.A.)	:	<table border="1"> <tr> <td>Health</td><td>1</td></tr> <tr> <td>Flammability</td><td>1</td></tr> <tr> <td>Physical hazards</td><td>0</td></tr> <tr> <td>Personal protection</td><td>B</td></tr> </table>	Health	1	Flammability	1	Physical hazards	0	Personal protection	B
Health	1									
Flammability	1									
Physical hazards	0									
Personal protection	B									

National Fire Protection Association (U.S.A.) :

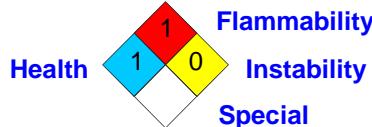

References : Available upon request.

TM Trademark of Suncor Energy Inc. Used under licence.

Date of printing : 2/2014.

Date of issue : 19 January 2012

Date of previous issue : 10/6/2010.

Responsible name : Product Safety - RS

➤ Indicates information that has changed from previously issued version.

16 . Other information

For Copy of (M)SDS

: The Canadian Controlled Products Regulations (CPR) (Under the Hazardous Products Act, part of the WHMIS legislation) only apply to WHMIS Controlled (i.e., hazardous) products. Therefore, the CPR and the 3-year update rule specified therein do not apply to WHMIS Non-Controlled products. Although this is true, customarily Petro-Canada reviews and updates Non-Controlled product MSDS if a customer requests such an update. These Non-Controlled product updates are given a lower priority than Controlled products but are handled as soon as practicable. If you would like to verify if the MSDS you have is the most current, or you require any further information, please contact:

Internet: lubricants.petro-canada.ca/msds

Lubricants:

Western Canada, telephone: 1-800-661-1199; fax: 1-800-378-4518

Ontario & Central Canada, telephone: 1-800-268-5850; fax: 1-800-201-6285

Quebec & Eastern Canada, telephone: 1-800-576-1686; fax: 1-800-201-6285

For Product Safety Information: (905) 804-4752

Notice to reader

To the best of our knowledge, the information contained herein is accurate. However, neither the above-named supplier, nor any of its subsidiaries, assumes any liability whatsoever for the accuracy or completeness of the information contained herein.

Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.



SAFETY DATA SHEET

SECTION 1

PRODUCT AND COMPANY IDENTIFICATION

PRODUCT

Product Name: MOBIL 1 ESP FORMULA 5W-30
Product Description: Synthetic Base Stocks and Additives
Product Code: 2015101010K0, 476341-85
Intended Use: Engine oil

COMPANY IDENTIFICATION

Supplier: East Coast Lubes Pty Ltd (Queensland and Northern Territory)
A.B.N. 37 117 203 611
Cnr North and Mort Streets
Toowoomba, Queensland 4350 Australia

24 Hour Emergency Telephone 1300 131 001

Supplier General Contact 1800 069 019

Supplier: Southern Cross Lubes (Victoria and Tasmania, New South Wales and Australian Capital Territory)
58-66 Ajax Road
Altona, Victoria 3018, Australia

24 Hour Emergency Telephone 1300 131 001

Product Technical Information

Supplier General Contact

1300 466 245

1300 552 861

Supplier: Perkal Pty Ltd Trading as Statewide Oil (Western Australia)
A.B.N. 43 009 283 363
14 Beete Street
Welshpool, Western Australia 6106 Australia

24 Hour Emergency Telephone (8:00am to 4:30pm Mon to Fri) 1300 919 904

Product Technical Information

Supplier General Contact

(08) 9350 6777

(08) 9350 6777

Supplier: Perkal Pty Ltd Trading as Statewide Oil (South Australia)
A.B.N. 43 009 283 363
6-10 Streiff Rd
Wingfield, South Australia 5013 Australia

24 Hour Emergency Telephone (8:00am to 4:30pm Mon to Fri) 1300 919 904

Product Technical Information

Supplier General Contact

(08) 8359 8995

(08) 8359 8995



SECTION 2

HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

Contains: C14-16-18 ALKYL PHENOL May produce an allergic reaction.

Other hazard information:

Physical / Chemical Hazards:

No significant hazards.

Health Hazards:

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

Environmental Hazards:

No significant hazards.

NOTE: This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

SECTION 3

COMPOSITION / INFORMATION ON INGREDIENTS

This material is defined as a mixture.

Hazardous Substance(s) or Complex Substance(s) required for disclosure

Name	CAS#	Concentration*	GHS Hazard Codes
C14-16-18 ALKYL PHENOL	Confidential	0.1 - < 1%	H317, H373
POLYOLEFIN POLYAMINE SUCCINIMIDE	147880-09-9	1 - < 5%	None

* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume. Other ingredients determined not to be hazardous up to 100%.

SECTION 4

FIRST AID MEASURES

INHALATION

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

SKIN CONTACT



Product Name: MOBIL 1 ESP FORMULA 5W-30

Revision Date: 28 Feb 2020

Page 3 of 10

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

EYE CONTACT

Flush thoroughly with water. If irritation occurs, get medical assistance.

INGESTION

First aid is normally not required. Seek medical attention if discomfort occurs.

NOTE TO PHYSICIAN

None

SECTION 5

FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA

Appropriate Extinguishing Media: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

Inappropriate Extinguishing Media: Straight streams of water

FIRE FIGHTING

Fire Fighting Instructions: Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

Hazardous Combustion Products: Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulphur oxides

FLAMMABILITY PROPERTIES

Flash Point [Method]: >200°C (392°F) [ASTM D-92]

Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0

Autoignition Temperature: N/D

SECTION 6

ACCIDENTAL RELEASE MEASURES

NOTIFICATION PROCEDURES

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

PROTECTIVE MEASURES

Avoid contact with spilled material. See Section 5 for fire fighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.



Product Name: MOBIL 1 ESP FORMULA 5W-30

Revision Date: 28 Feb 2020

Page 4 of 10

SPILL MANAGEMENT

Land Spill: Stop leak if you can do so without risk. Recover by pumping or with suitable absorbent.

Water Spill: Stop leak if you can do so without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

ENVIRONMENTAL PRECAUTIONS

Large Spills: Dyke far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

SECTION 7

HANDLING AND STORAGE

HANDLING

Avoid contact with used product. Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or earthing procedures. However, bonding and earthing may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

Static Accumulator: This material is a static accumulator.

STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

Material is defined under the National Standard [NOHSC:1015] Storage and Handling of Workplace Dangerous Goods.

SECTION 8

EXPOSURE CONTROLS / PERSONAL PROTECTION

Exposure limits/standards for materials that can be formed when handling this product:

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

Biological limits

No biological limits allocated.



ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions.
Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

Respiratory Protection: If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

Particulate

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Hand Protection: Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

Nitrile, Viton

No protection is ordinarily required under normal conditions of use.

Eye Protection: If contact is likely, safety glasses with side shields are recommended.

Skin and Body Protection: Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

Specific Hygiene Measures: Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

GENERAL INFORMATION

Physical State: Liquid
Form: Clear
Colour: Amber
Odour: Characteristic
Odour Threshold: N/D

IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

Relative Density (at 15 °C): 0.851
Flammability (Solid, Gas): N/A
Flash Point [Method]: >200°C (392°F) [ASTM D-92]
Flammable Limits (Approximate volume % in air): LEL: 0.9 UEL: 7.0
Autoignition Temperature: N/D
Boiling Point / Range: N/D
Decomposition Temperature: N/D
Vapour Density (Air = 1): > 2 at 101 kPa
Vapour Pressure: < 0.013 kPa (0.1 mm Hg) at 20 °C
Evaporation Rate (n-butyl acetate = 1): N/D
pH: N/A
Log Pow (n-Octanol/Water Partition Coefficient): > 3.5
Solubility in Water: Negligible
Viscosity: 72.8 cSt (72.8 mm²/sec) at 40 °C | 12.1 cSt (12.1 mm²/sec) at 100°C
Oxidizing Properties: See Hazards Identification Section.

OTHER INFORMATION

Freezing Point: N/D
Melting Point: N/A
Pour Point: -36°C (-33°F)

SECTION 10

STABILITY AND REACTIVITY

STABILITY: Material is stable under normal conditions.

CONDITIONS TO AVOID: Excessive heat. High energy sources of ignition.

INCOMPATIBLE MATERIALS: Strong oxidisers

HAZARDOUS DECOMPOSITION PRODUCTS: Material does not decompose at ambient temperatures.

POSSIBILITY OF HAZARDOUS REACTIONS: Hazardous polymerization will not occur.

SECTION 11

TOXICOLOGICAL INFORMATION

INFORMATION ON TOXICOLOGICAL EFFECTS

Hazard Class	Conclusion / Remarks
Inhalation	
Acute Toxicity: No end point data for	Minimally Toxic. Based on assessment of the components.



Product Name: MOBIL 1 ESP FORMULA 5W-30

Revision Date: 28 Feb 2020

Page 7 of 10

material.	
Irritation: No end point data for material.	Negligible hazard at ambient/normal handling temperatures.
Ingestion	
Acute Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Skin	
Acute Toxicity: No end point data for material.	Minimally Toxic. Based on assessment of the components.
Skin Corrosion/Irritation: No end point data for material.	Negligible irritation to skin at ambient temperatures. Based on assessment of the components.
Eye	
Serious Eye Damage/Irritation: No end point data for material.	May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.
Sensitisation	
Respiratory Sensitization: No end point data for material.	Not expected to be a respiratory sensitizer.
Skin Sensitization: No end point data for material.	Not expected to be a skin sensitizer. Based on assessment of the components.
Aspiration: Data available.	Not expected to be an aspiration hazard. Based on physico-chemical properties of the material.
Germ Cell Mutagenicity: No end point data for material.	Not expected to be a germ cell mutagen. Based on assessment of the components.
Carcinogenicity: No end point data for material.	Not expected to cause cancer. Based on assessment of the components.
Reproductive Toxicity: No end point data for material.	Not expected to be a reproductive toxicant. Based on assessment of the components.
Lactation: No end point data for material.	Not expected to cause harm to breast-fed children.
Specific Target Organ Toxicity (STOT)	
Single Exposure: No end point data for material.	Not expected to cause organ damage from a single exposure.
Repeated Exposure: No end point data for material.	Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components.

OTHER INFORMATION

For the product itself:

Component concentrations in this formulation would not be expected to cause skin sensitization, based on tests of the components, this formulation, or similar formulations.

Diesel engine oils: Not carcinogenic in animals tests. Used and unused diesel engine oils did not produce any carcinogenic effects in chronic mouse skin painting studies. Oils that are used in gasoline engines may become hazardous and display the following properties: Carcinogenic in animal tests. Caused mutations in vitro. Possible allergen and photoallergen. Contains polycyclic aromatic compounds (PAC) from combustion products of gasoline and/or thermal degradation products.

Contains:

Synthetic base oils: Not expected to cause significant health effects under conditions of normal use, based on laboratory studies with the same or similar materials. Not mutagenic or genotoxic. Not sensitising in test animals and humans.

IARC Classification:

The following ingredients are cited on the lists below: None.



Product Name: MOBIL 1 ESP FORMULA 5W-30

Revision Date: 28 Feb 2020

Page 8 of 10

--REGULATORY LISTS SEARCHED--

1 = IARC 1

2 = IARC 2A

3 = IARC 2B

SECTION 12

ECOLOGICAL INFORMATION

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

ECOTOXICITY

Material -- Not expected to be harmful to aquatic organisms.

MOBILITY

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.
Expected to partition to sediment and wastewater solids.

SECTION 13

DISPOSAL CONSIDERATIONS

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

DISPOSAL RECOMMENDATIONS

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

Empty Container Warning Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

SECTION 14

TRANSPORT INFORMATION

LAND (ADG) : Not Regulated for Land Transport



Product Name: MOBIL 1 ESP FORMULA 5W-30
Revision Date: 28 Feb 2020
Page 9 of 10

SEA (IMDG): Not Regulated for Sea Transport according to IMDG-Code

Marine Pollutant: No

AIR (IATA): Not Regulated for Air Transport

SECTION 15

REGULATORY INFORMATION

This material is not considered hazardous according to Australia Model Work Health and Safety Regulations.

Product is not regulated according to Australian Dangerous Goods Code.

No Poison Schedule number allocated by the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP) established under the Therapeutic Goods Act.

AS1940 COMBUSTIBLE CLASS: C2

REGULATORY STATUS AND APPLICABLE LAWS AND REGULATIONS

Listed or exempt from listing/notification on the following chemical inventories (May contain substance(s) subject to notification to the EPA Active TSCA inventory prior to import to USA): AIIC, DSL, ENCS, IECSC, KECI, PICCS, TCSI, TSCA

SECTION 16

OTHER INFORMATION

KEY TO ABBREVIATIONS AND ACRONYMS:

N/D = Not determined, N/A = Not applicable, STEL = Short-Term Exposure Limit, TWA = Time-Weighted Average

KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):

H317: May cause allergic skin reaction; Skin Sensitization, Cat 1

H373: May cause damage to organs through prolonged or repeated exposure; Target Organ, Repeated, Cat 2

H413: May cause long lasting harmful effects to aquatic life; Chronic Env Tox, Cat 4

THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:

Composition: Component Table information was modified.

Composition: No components information was added.

Composition: No components information was deleted.

Section 15: National Chemical Inventory Listing information was modified.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to insure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to insure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to



Product Name: MOBIL 1 ESP FORMULA 5W-30

Revision Date: 28 Feb 2020

Page 10 of 10

handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, re-publication or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

DGN: 7053753DAU (1009979)

Prepared by: Exxon Mobil Corporation
EMBSI, Clinton NJ USA

Contact Point: See Section 1 for Local Contact number

End of (M)SDS

Safety Data Sheet



SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

Delo 400 LE SAE 15W-40

Product Use: Heavy Duty Motor Oil

Product Number(s): 219719, 222220, 278058

Synonyms: Delo 400 LE SAE 15W-40 ISOCLEAN Certified

Company Identification

Chevron Products Company

a division of Chevron U.S.A. Inc.

6001 Bollinger Canyon Rd.

San Ramon, CA 94583

United States of America

www.chevronlubricants.com

Transportation Emergency Response

CHEMTRIC: (800) 424-9300 or (703) 527-3887

Health Emergency

Chevron Emergency & Information Center: Located in the USA. International collect calls accepted. (800) 231-0623 or (510) 231-0623

Product Information

email : lubemsds@chevron.com

Product Information: 1 (800) 582-3835, LUBETEK@chevron.com

SECTION 2 HAZARDS IDENTIFICATION

CLASSIFICATION: Acute aquatic toxicant: Category 3. Chronic aquatic toxicant: Category 3.

Environmental Hazards: Harmful to aquatic life with long lasting effects.

PRECAUTIONARY STATEMENTS:

Prevention: Avoid release to the environment.

Disposal: Dispose of contents/container in accordance with applicable local/regional/national/international regulations.

HAZARDS NOT OTHERWISE CLASSIFIED: Not Applicable

SECTION 3 COMPOSITION/ INFORMATION ON INGREDIENTS

COMPONENTS	CAS NUMBER	AMOUNT
Highly refined mineral oil (C15 - C50)	Mixture	70 - 99 %weight
Zinc alkyl dithiophosphate	68649-42-3	1 - < 2.5 %weight

SECTION 4 FIRST AID MEASURES

Revision Number: 9

Revision Date: January 20, 2020

1 of 8

Delo 400 LE SAE 15W-40

SDS : 17108

Description of first aid measures

Eye: No specific first aid measures are required. As a precaution, remove contact lenses, if worn, and flush eyes with water.

Skin: No specific first aid measures are required. As a precaution, remove clothing and shoes if contaminated. To remove the material from skin, use soap and water. Discard contaminated clothing and shoes or thoroughly clean before reuse.

Ingestion: No specific first aid measures are required. Do not induce vomiting. As a precaution, get medical advice.

Inhalation: No specific first aid measures are required. If exposed to excessive levels of material in the air, move the exposed person to fresh air. Get medical attention if coughing or respiratory discomfort occurs. If exposure to hydrogen sulfide (H₂S) gas is possible during an emergency, wear an approved, positive pressure air-supplying respirator. Move the exposed person to fresh air. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Get immediate medical attention.

Most important symptoms and effects, both acute and delayed

IMMEDIATE HEALTH EFFECTS

Eye: Not expected to cause prolonged or significant eye irritation.

Skin: Contact with the skin is not expected to cause prolonged or significant irritation. Contact with the skin is not expected to cause an allergic skin response. Not expected to be harmful to internal organs if absorbed through the skin.

Ingestion: Not expected to be harmful if swallowed.

Inhalation: Not expected to be harmful if inhaled. Contains a petroleum-based mineral oil. May cause respiratory irritation or other pulmonary effects following prolonged or repeated inhalation of oil mist at airborne levels above the recommended mineral oil mist exposure limit. Symptoms of respiratory irritation may include coughing and difficulty breathing. Hydrogen sulfide has a strong rotten-egg odor. However, with continued exposure and at high levels, H₂S may deaden a person's sense of smell. If the rotten egg odor is no longer noticeable, it may not necessarily mean that exposure has stopped. At low levels, hydrogen sulfide causes irritation of the eyes, nose, and throat. Moderate levels can cause headache, dizziness, nausea, and vomiting, as well as coughing and difficulty breathing. Higher levels can cause shock, convulsions, coma, and death. After a serious exposure, symptoms usually begin immediately.

The U.S. National Institute for Occupational Safety and Health (NIOSH) considers air concentrations of hydrogen sulfide gas greater than 100 ppm to be Immediately Dangerous to Life and Health (IDLH).

DELAYED OR OTHER HEALTH EFFECTS: Not classified

Indication of any immediate medical attention and special treatment needed

Note to Physicians: Administration of 100% oxygen and supportive care is the preferred treatment for poisoning by hydrogen sulfide gas. For additional information on H₂S, see Chevron MSDS No. 301.

SECTION 5 FIRE FIGHTING MEASURES

EXTINGUISHING MEDIA: Use water fog, foam, dry chemical or carbon dioxide (CO₂) to extinguish flames.

PROTECTION OF FIRE FIGHTERS:

Fire Fighting Instructions: This material will burn although it is not easily ignited. See Section 7 for proper handling and storage. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus.

Combustion Products: Highly dependent on combustion conditions. A complex mixture of airborne solids, liquids, and gases including carbon monoxide, carbon dioxide, and unidentified organic compounds will be evolved when this material undergoes combustion. Combustion may form oxides of: Phosphorus, Zinc, Sulfur.

SECTION 6 ACCIDENTAL RELEASE MEASURES

Protective Measures: Eliminate all sources of ignition in vicinity of spilled material.

Spill Management: Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable regulations.

Reporting: Report spills to local authorities and/or the U.S. Coast Guard's National Response Center at (800) 424-8802 as appropriate or required.

SECTION 7 HANDLING AND STORAGE

General Handling Information: Avoid contaminating soil or releasing this material into sewage and drainage systems and bodies of water.

Precautionary Measures: Do not breathe gas. Wash thoroughly after handling. Keep out of the reach of children.

Unusual Handling Hazards: Toxic quantities of hydrogen sulfide (H₂S) may be present in storage tanks and bulk transport vessels which contain or have contained this material. Persons opening or entering these compartments should first determine if H₂S is present. See Exposure Controls/Personal Protection -Section 8. Do not attempt rescue of a person over exposed to H₂S without wearing approved supplied-air or self-contained breathing equipment. If there is a potential for exceeding one-half the occupational exposure standard, monitoring of hydrogen sulfide levels is required. Since the sense of smell cannot be relied upon to detect the presence of H₂S, the concentration should be measured by the use of fixed or portable devices.

Static Hazard: Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary but may not, by themselves, be sufficient. Review all operations which have the potential of generating and accumulating an electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures.

Container Warnings: Container is not designed to contain pressure. Do not use pressure to empty container or it may rupture with explosive force. Empty containers retain product residue (solid, liquid, and/or vapor) and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, static electricity, or other sources of ignition. They may explode and cause injury or death. Empty containers should be completely drained, properly closed, and promptly returned to a drum reconditioner or disposed of properly.

SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

GENERAL CONSIDERATIONS:

Consider the potential hazards of this material (see Section 2), applicable exposure limits, job activities, and other substances in the work place when designing engineering controls and selecting personal protective equipment. If engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, the personal protective equipment listed below is recommended. The user should read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances.

ENGINEERING CONTROLS:

Use in a well-ventilated area.

PERSONAL PROTECTIVE EQUIPMENT

Eye/Face Protection: No special eye protection is normally required. Where splashing is possible, wear safety glasses with side shields as a good safety practice.

Skin Protection: No special protective clothing is normally required. Where splashing is possible, select protective clothing depending on operations conducted, physical requirements and other substances in the workplace. Suggested materials for protective gloves include: 4H (PE/EVAL), Nitrile Rubber, Silver Shield, Viton.

Respiratory Protection: No respiratory protection is normally required.

If material is heated and emits hydrogen sulfide, determine if airborne concentrations are below the occupational exposure limit for hydrogen sulfide. If not, wear an approved positive pressure air-supplying respirator. For more information on hydrogen sulfide, see Chevron MSDS No. 301. If user operations generate an oil mist, determine if airborne concentrations are below the occupational exposure limit for mineral oil mist. If not, wear an approved respirator that provides adequate protection from the measured concentrations of this material. For air-purifying respirators use a particulate cartridge.

Use a positive pressure air-supplying respirator in circumstances where air-purifying respirators may not provide adequate protection.

Occupational Exposure Limits:

Component	Agency	Form	TWA	STEL	Ceiling	Notation
Highly refined mineral oil (C15 - C50)	ACGIH	--	5 mg/m3	10 mg/m3	--	--
Highly refined mineral oil (C15 - C50)	OSHA Z-1	--	5 mg/m3	--	--	--

Consult local authorities for appropriate values.

SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

Attention: the data below are typical values and do not constitute a specification.

Color: Light to Brown

Physical State: Liquid

Odor: Petroleum odor

Odor Threshold: No data available

pH: Not Applicable

Vapor Pressure: No data available

Vapor Density (Air = 1): No data available

Initial Boiling Point: No data available

Solubility: Soluble in hydrocarbons; insoluble in water

Freezing Point: Not Applicable

Melting Point: No data available

Density: 0.877 kg/l @ 15°C (59°F) (Typical)

Viscosity: 14.60 mm²/s @ 100°C (212°F) (Minimum)

Evaporation Rate: No data available

Decomposition temperature: No data available

Octanol/Water Partition Coefficient: No data available

FLAMMABLE PROPERTIES:

Flammability (solid, gas): Not Applicable

Flashpoint: (Cleveland Open Cup) 204 °C (399 °F) (Minimum)

Autoignition: No data available

Flammability (Explosive) Limits (% by volume in air): Lower: Not Applicable Upper: Not Applicable

SECTION 10 STABILITY AND REACTIVITY

Reactivity: May react with strong acids or strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

Chemical Stability: This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

Incompatibility With Other Materials: Not applicable

Hazardous Decomposition Products: Alkyl Mercaptans (Elevated temperatures), Hydrogen Sulfide (Elevated temperatures)

Hazardous Polymerization: Hazardous polymerization will not occur.

SECTION 11 TOXICOLOGICAL INFORMATION

Information on toxicological effects

Serious Eye Damage/Irritation: The eye irritation hazard is based on evaluation of data for product components.

Skin Corrosion/Irritation: The skin irritation hazard is based on evaluation of data for product components.

Skin Sensitization: The skin sensitization hazard is based on evaluation of data for product components.

Acute Dermal Toxicity: The acute dermal toxicity hazard is based on evaluation of data for product components.

Acute Oral Toxicity: The acute oral toxicity hazard is based on evaluation of data for product components.

Acute Inhalation Toxicity: The acute inhalation toxicity hazard is based on evaluation of data for product components.

Acute Toxicity Estimate: Not Determined

Germ Cell Mutagenicity: The hazard evaluation is based on data for components or a similar material.

Carcinogenicity: The hazard evaluation is based on data for components or a similar material.

Reproductive Toxicity: The hazard evaluation is based on data for components or a similar material.

Specific Target Organ Toxicity - Single Exposure: The hazard evaluation is based on data for components or a similar material.

Specific Target Organ Toxicity - Repeated Exposure: The hazard evaluation is based on data for components or a similar material.

ADDITIONAL TOXICOLOGY INFORMATION:

During use in engines, contamination of oil with low levels of cancer-causing combustion products occurs. Used motor oils have been shown to cause skin cancer in mice following repeated application and continuous exposure. Brief or intermittent skin contact with used motor oil is not expected to have serious effects in humans if the oil is thoroughly removed by washing with soap and water.

This product contains petroleum base oils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils requires a cancer warning under the OSHA Hazard Communication Standard (29 CFR 1910.1200). These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as; carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A), or possibly carcinogenic to humans (Group 2B).

These oils have not been classified by the American Conference of Governmental Industrial Hygienists (ACGIH) as: confirmed human carcinogen (A1), suspected human carcinogen (A2), or confirmed animal carcinogen with unknown relevance to humans (A3).

SECTION 12 ECOLOGICAL INFORMATION

ECOTOXICITY

This material is expected to be harmful to aquatic organisms and may cause long-term adverse effects in the aquatic environment.

The product has not been tested. The statement has been derived from the properties of the individual components.

MOBILITY

No data available.

PERSISTENCE AND DEGRADABILITY

This material is not expected to be readily biodegradable. The biodegradability of this material is based on an

evaluation of data for the components or a similar material.

The product has not been tested. The statement has been derived from the properties of the individual components.

POTENTIAL TO BIOACCUMULATE

Bioconcentration Factor: No data available.

Octanol/Water Partition Coefficient: No data available

SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. Oil collection services are available for used oil recycling or disposal. Place contaminated materials in containers and dispose of in a manner consistent with applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods.

SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

DOT Shipping Description: NOT REGULATED AS HAZARDOUS MATERIAL UNDER 49 CFR

IMO/IMDG Shipping Description: NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER THE IMDG CODE

ICAO/IATA Shipping Description: NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER ICAO

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC code:

Not applicable

SECTION 15 REGULATORY INFORMATION

EPCRA 311/312 CATEGORIES: Not applicable

REGULATORY LISTS SEARCHED:

01-1=IARC Group 1	03=EPCRA 313
01-2A=IARC Group 2A	04=CA Proposition 65
01-2B=IARC Group 2B	05=MA RTK
02=NTP Carcinogen	06=NJ RTK
	07=PA RTK

The following components of this material are found on the regulatory lists indicated.

Zinc alkyl dithiophosphate 06, 07

CHEMICAL INVENTORIES:

All components comply with the following chemical inventory requirements: AICS (Australia), DSL (Canada), KECD (Korea), NZIoC (New Zealand), PICCS (Philippines), TSCA (United States).

One or more components does not comply with the following chemical inventory requirements: EINECS (European Union), ENCS (Japan), IECSC (China), TCSI (Taiwan).

NEW JERSEY RTK CLASSIFICATION:

Under the New Jersey Right-to-Know Act L. 1983 Chapter 315 N.J.S.A. 34:5A-1 et. seq., the product is to be identified as follows: PETROLEUM OIL (Motor oil)

SECTION 16 OTHER INFORMATION

NFPA RATINGS: Health: 0 Flammability: 1 Reactivity: 0

HMIS RATINGS: Health: 0 Flammability: 1 Reactivity: 0

(0-Least, 1-Slight, 2-Moderate, 3-High, 4-Extreme, PPE:- Personal Protection Equipment Index recommendation, *- Chronic Effect Indicator). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

REVISION STATEMENT: SECTION 02 - Environmental Classification information was added.

SECTION 02 - Hazard Statements information was added.

SECTION 02 - Hazards Otherwise Not Classified information was modified.

SECTION 02 - Precautionary Statements information was added.

SECTION 03 - Composition information was modified.

SECTION 08 - General Considerations information was modified.

SECTION 09 - Physical/Chemical Properties information was deleted.

SECTION 09 - Physical/Chemical Properties information was modified.

SECTION 12 - Ecological Information information was modified.

SECTION 15 - Chemical Inventories information was modified.

SECTION 15 - New Jersey Right To Know information was modified.

SECTION 15 - Regulatory Information information was added.

Revision Date: January 20, 2020

ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:

TLV	-	Threshold Limit Value	TWA	-	Time Weighted Average
STEL	-	Short-term Exposure Limit	PEL	-	Permissible Exposure Limit
GHS	-	Globally Harmonized System	CAS	-	Chemical Abstract Service Number
ACGIH	-	American Conference of Governmental Industrial Hygienists	IMO/IMDG	-	International Maritime Dangerous Goods Code
API	-	American Petroleum Institute	SDS	-	Safety Data Sheet
HMIS	-	Hazardous Materials Information System	NFPA	-	National Fire Protection Association (USA)
DOT	-	Department of Transportation (USA)	NTP	-	National Toxicology Program (USA)
IARC	-	International Agency for Research on Cancer	OSHA	-	Occupational Safety and Health Administration
NCEL	-	New Chemical Exposure Limit	EPA	-	Environmental Protection Agency
SCBA	-	Self-Contained Breathing Apparatus			

Prepared according to the 29 CFR 1910.1200 (2012) by Chevron Energy Technology Company, 6001 Bollinger Canyon Road, San Ramon, CA 94583.

The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.

Appendix D. Spill Report Form

Form is also available online at:

http://www.gov.nu.ca/sites/default/files/NT%20NU%20Spill%20Report%20Form_0.pdf



Canada

NT-NU SPILL REPORT

OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS

NT-NU 24-HOUR SPILL REPORT LINE

TEL: (867) 920-8130

FAX: (867) 873-6924

EMAIL: spills@gov.nt.ca

REPORT LINE USE ONLY

A	REPORT DATE: MONTH – DAY – YEAR		REPORT TIME	<input type="checkbox"/> ORIGINAL SPILL REPORT, OR <input type="checkbox"/> UPDATE # _____ TO THE ORIGINAL SPILL REPORT	REPORT NUMBER _____
B	OCCURRENCE DATE: MONTH – DAY – YEAR		OCCURRENCE TIME		
C	LAND USE PERMIT NUMBER (IF APPLICABLE)		WATER LICENCE NUMBER (IF APPLICABLE)		
D	GEOGRAPHIC PLACE NAME OR DISTANCE AND DIRECTION FROM NAMED LOCATION		REGION <input type="checkbox"/> NWT <input type="checkbox"/> NUNAVUT <input type="checkbox"/> ADJACENT JURISDICTION OR OCEAN		
E	LATITUDE DEGREES	MINUTES	SECONDS	LONGITUDE DEGREES	MINUTES SECONDS
F	RESPONSIBLE PARTY OR VESSEL NAME		RESPONSIBLE PARTY ADDRESS OR OFFICE LOCATION		
G	ANY CONTRACTOR INVOLVED		CONTRACTOR ADDRESS OR OFFICE LOCATION		
H	PRODUCT SPILLED		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES	U.N. NUMBER	
	SECOND PRODUCT SPILLED (IF APPLICABLE)		QUANTITY IN LITRES, KILOGRAMS OR CUBIC METRES	U.N. NUMBER	
I	SPILL SOURCE		SPILL CAUSE	AREA OF CONTAMINATION IN SQUARE METRES	
J	FACTORS AFFECTING SPILL OR RECOVERY		DESCRIBE ANY ASSISTANCE REQUIRED	HAZARDS TO PERSONS, PROPERTY OR ENVIRONMENT	
K	ADDITIONAL INFORMATION, COMMENTS, ACTIONS PROPOSED OR TAKEN TO CONTAIN, RECOVER OR DISPOSE OF SPILLED PRODUCT AND CONTAMINATED MATERIALS				
L	REPORTED TO SPILL LINE BY	POSITION	EMPLOYER	LOCATION CALLING FROM	TELEPHONE
M	ANY ALTERNATE CONTACT	POSITION	EMPLOYER	ALTERNATE CONTACT LOCATION	ALTERNATE TELEPHONE
REPORT LINE USE ONLY					
N	RECEIVED AT SPILL LINE BY STATION OPERATOR	POSITION	EMPLOYER	LOCATION CALLED YELLOWKNIFE, NT	REPORT LINE NUMBER (867) 920-8130
LEAD AGENCY <input type="checkbox"/> EC <input type="checkbox"/> CCG <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> INAC <input type="checkbox"/> NEB <input type="checkbox"/> TC			SIGNIFICANCE <input type="checkbox"/> MINOR <input type="checkbox"/> MAJOR <input type="checkbox"/> UNKNOWN		FILE STATUS <input type="checkbox"/> OPEN <input type="checkbox"/> CLOSED
AGENCY		CONTACT NAME		CONTACT TIME	REMARKS
LEAD AGENCY					
FIRST SUPPORT AGENCY					
SECOND SUPPORT AGENCY					
THIRD SUPPORT AGENCY					

PAGE 1 OF _____