
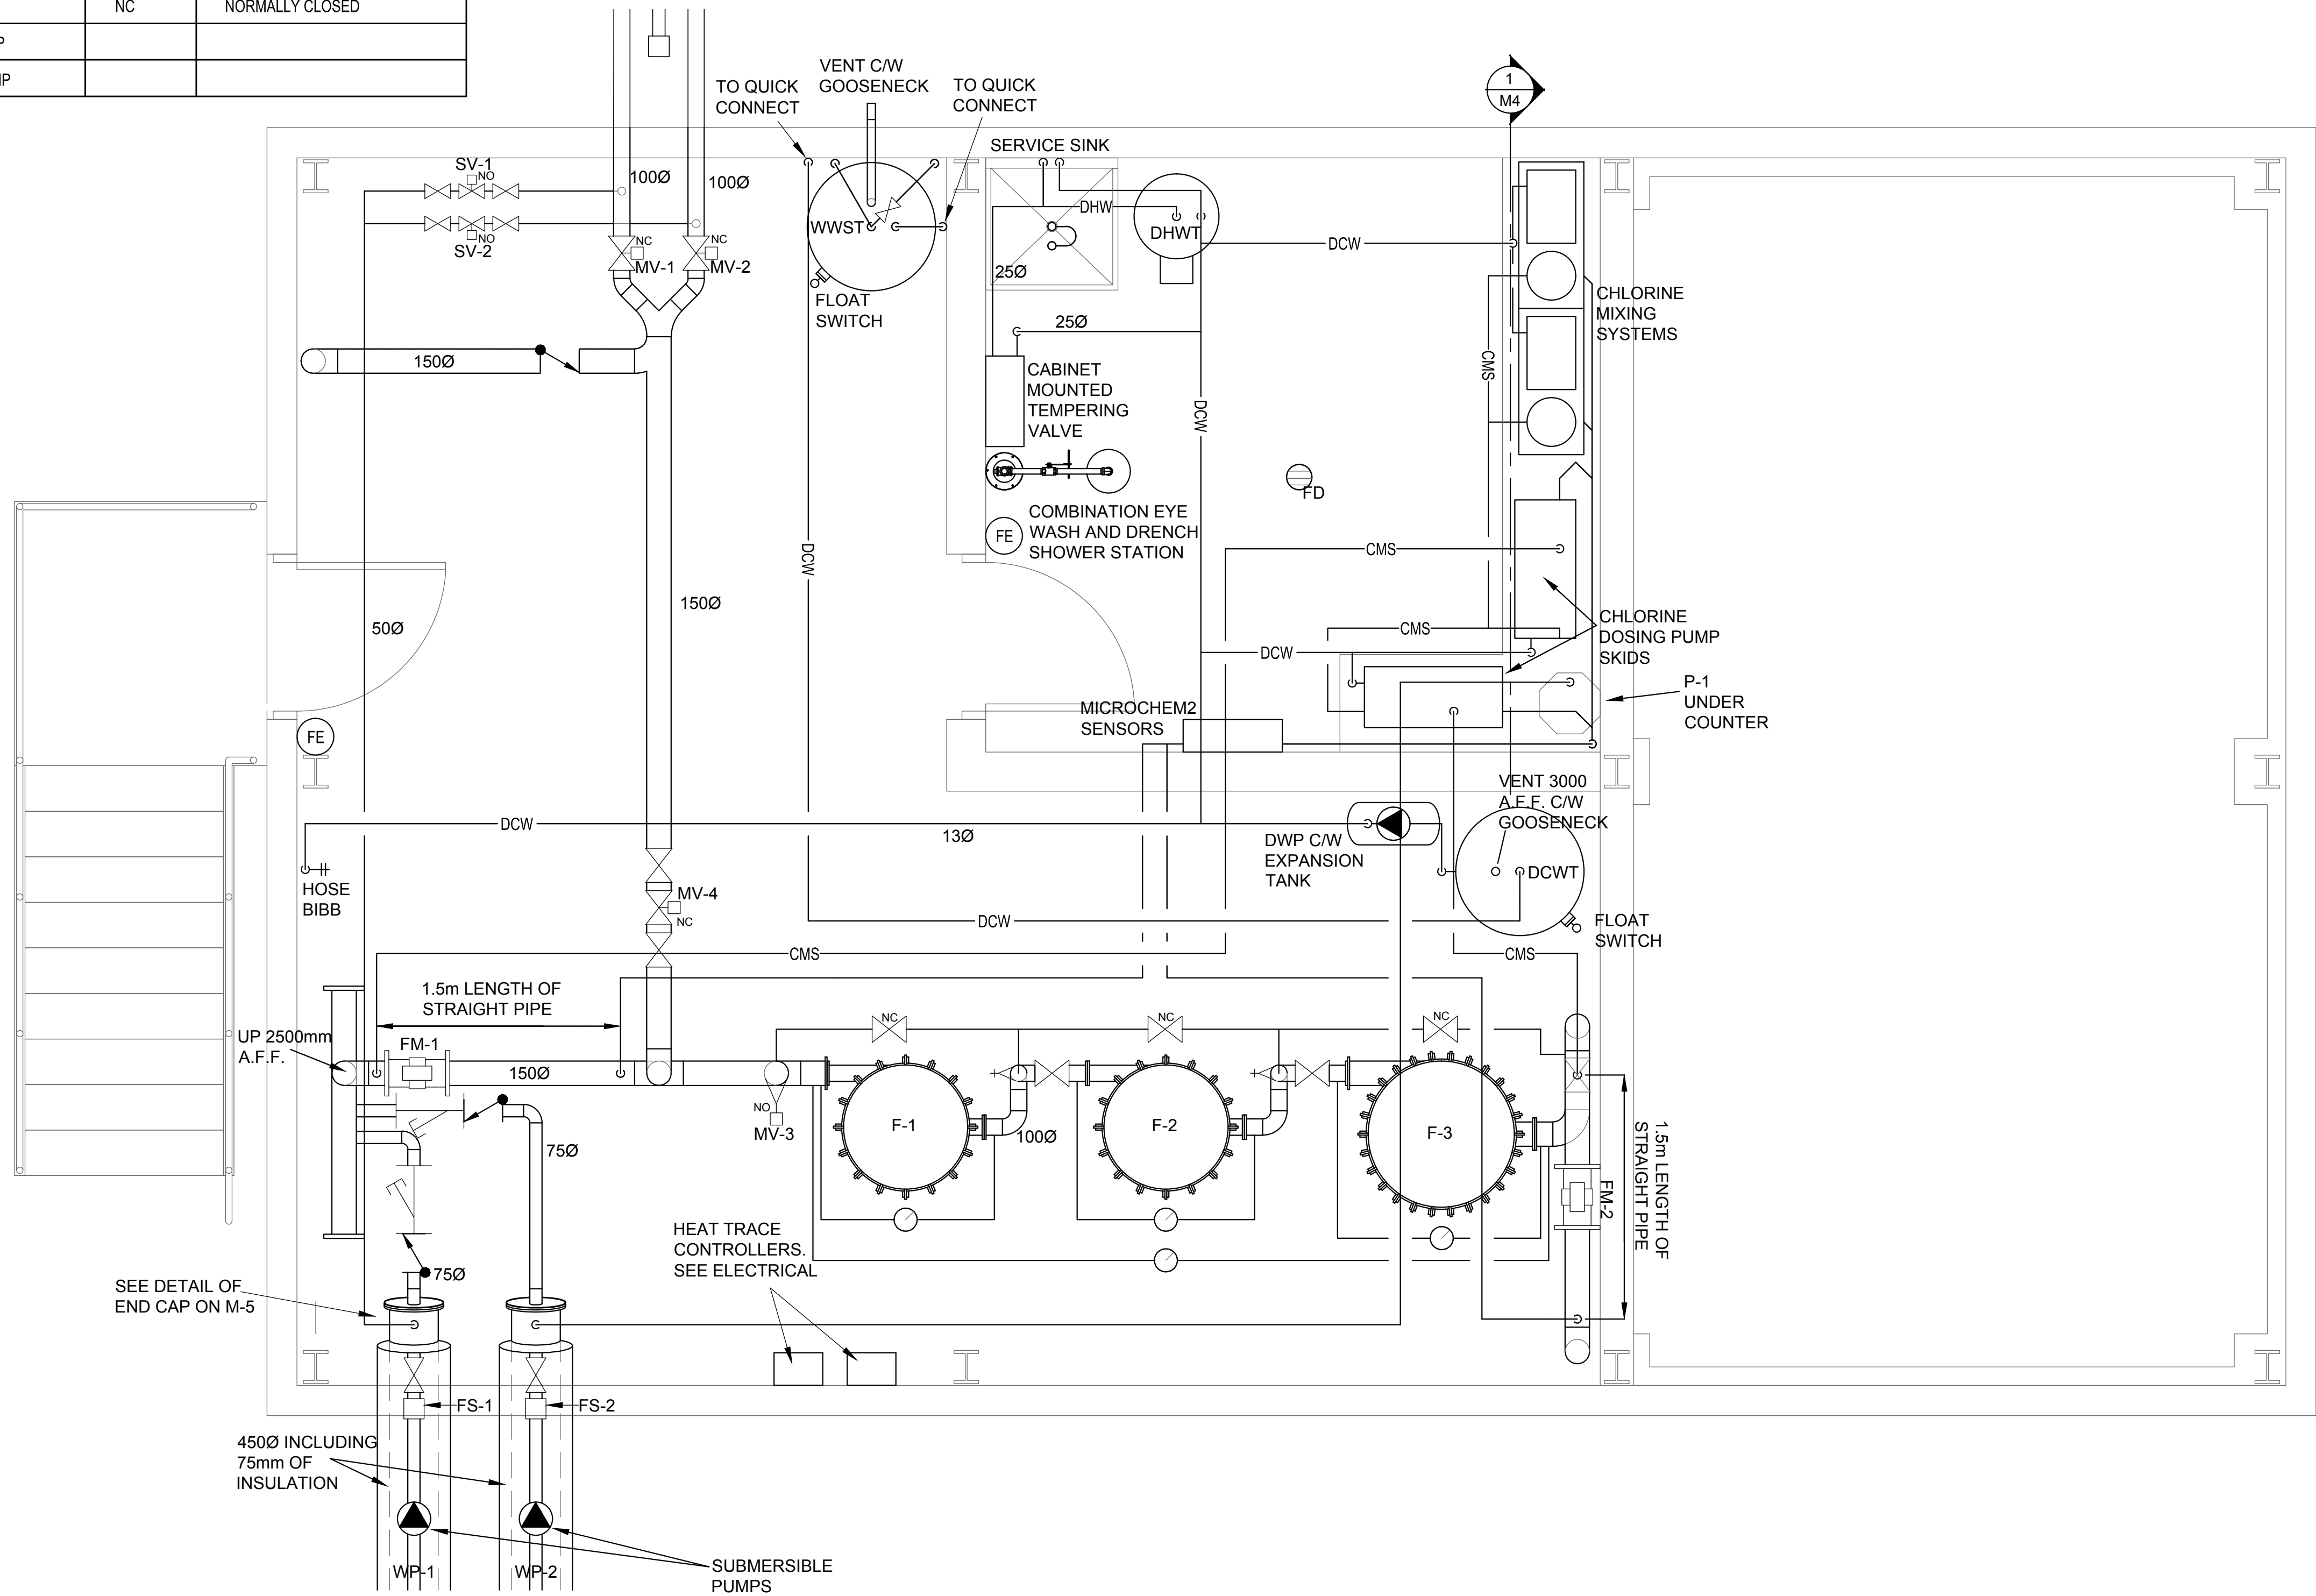



LEGEND			
CMS	CHEMICAL SUPPLY	DWP	DOMESTIC WATER PUMP
DHW	DOMESTIC HOT WATER	FS	FLOW SWITCH
DCW	DOMESTIC COLD WATER	F	FILTER TANK
SAN	SANITARY	MV	MOTORIZED VALVE
	BALL VALVE	SV	SOLENOID VALVE
	CHECK VALVE	DCWT	DOMESTIC COLD WATER TANK
	PUMP	WWST	WASTE WATER STORAGE TANK
	PRESSURE GAUGE	CS	CHLORINE SENSOR
	FIRE EXTINGUISHER	DHWT	DOMESTIC HOT WATER TANK
FM	FLOW METER	DP	DIFFERENTIAL PRESSURE GAUGE
CFM	CHEMICAL FLOW METER	NO	NORMALLY OPEN
SP	SUMP PUMP	NC	NORMALLY CLOSED
WP	SUBMERSIBLE PUMP		
CP	CHLORINATION PUMP		



1
M1
PLUMBING PLAN - HIGH ELEVATION
1:25



CONSULTANT NAME AND ADDRESS:




CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613)225-1123
FAX. (613)225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	R.S.	ISSUED FOR CONSTRUCTION
5	28/03/16	R.S.	REISSUED FOR TENDER
4	14/04/14	R.S.	REISSUED FOR TENDER
3	13/02/14	R.S.	ISSUED FOR TENDER
2	15/01/14	R.S.	ISSUED FOR 99% REVIEW
1	25/11/13	R.S.	ISSUED FOR 50% REVIEW

NO.	DATE:	BY:	DESCRIPTION:
	(dd/mm/yy)		

STAMP	CONSULTANT: CEML
	DRAWN BY: R.S.
	DESIGNED BY: M.M.
	APPROVED BY: M.M.
	DATE: SEPTEMBER 2016

STAMP	CONSULTANT:
	DRAWN BY:
	DESIGNED BY:
	APPROVED BY:
	DATE:

PERMIT TO PRACTICE CHIARELLI ENGINEERING MANAGEMENT LTD. Signature:  Date: 2016-09-19 PERMIT NUMBER: P 732 NWTNU Association of Professional Engineers and Geoscientists

LOCATION:


IGLOOLIK
QIKIQTAALUK REGION OF NUNAVUT
XOA OLO

PROJECT:
IMPROVEMENT OF
WATER SUPPLY SYSTEM

DRAWING TITLE:
PLUMBING LAYOUT -
HIGH ELEVATION

MECH FILE NAME: 13-072	DWG NO: M1	OF: 5	SCALE: AS NOTED
---------------------------	---------------	----------	--------------------


CONSULTANT NAME AND ADDRESS:




CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613) 225-1123
FAX. (613) 225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	R.S.	ISSUED FOR CONSTRUCTION
5	28/03/16	R.S.	REISSUED FOR TENDER
4	14/04/14	R.S.	REISSUED FOR TENDER
3	13/02/14	R.S.	ISSUED FOR TENDER
2	15/01/14	R.S.	ISSUED FOR 99% REVIEW
1	25/11/13	R.S.	ISSUED FOR 50% REVIEW

NO.	DATE: (dd/mm/yy)	BY:	DESCRIPTION:
-----	---------------------	-----	--------------

STAMP	CONSULTANT: CEML
	DRAWN BY: R.S.
	DESIGNED BY: M.M.
	APPROVED BY: M.M.
	DATE: SEPTEMBER 2016

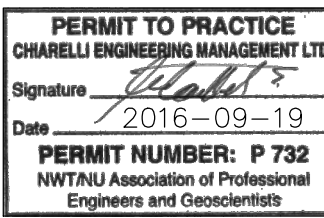STAMP	CONSULTANT:
	DRAWN BY:
	DESIGNED BY:
	APPROVED BY:
	DATE:


LOCATION:


IGLOOLIK
QIKIQTAALUK REGION OF NUNAVUT
XOA OLO

PROJECT:
IMPROVEMENT OF
WATER SUPPLY SYSTEM


DRAWING TITLE:
PLUMBING LAYOUT -
LOW ELEVATION

MECH. FILE NAME: 13-072	DWG. NO: M2	OF: 5	SCALE: AS NOTED
----------------------------	----------------	----------	--------------------

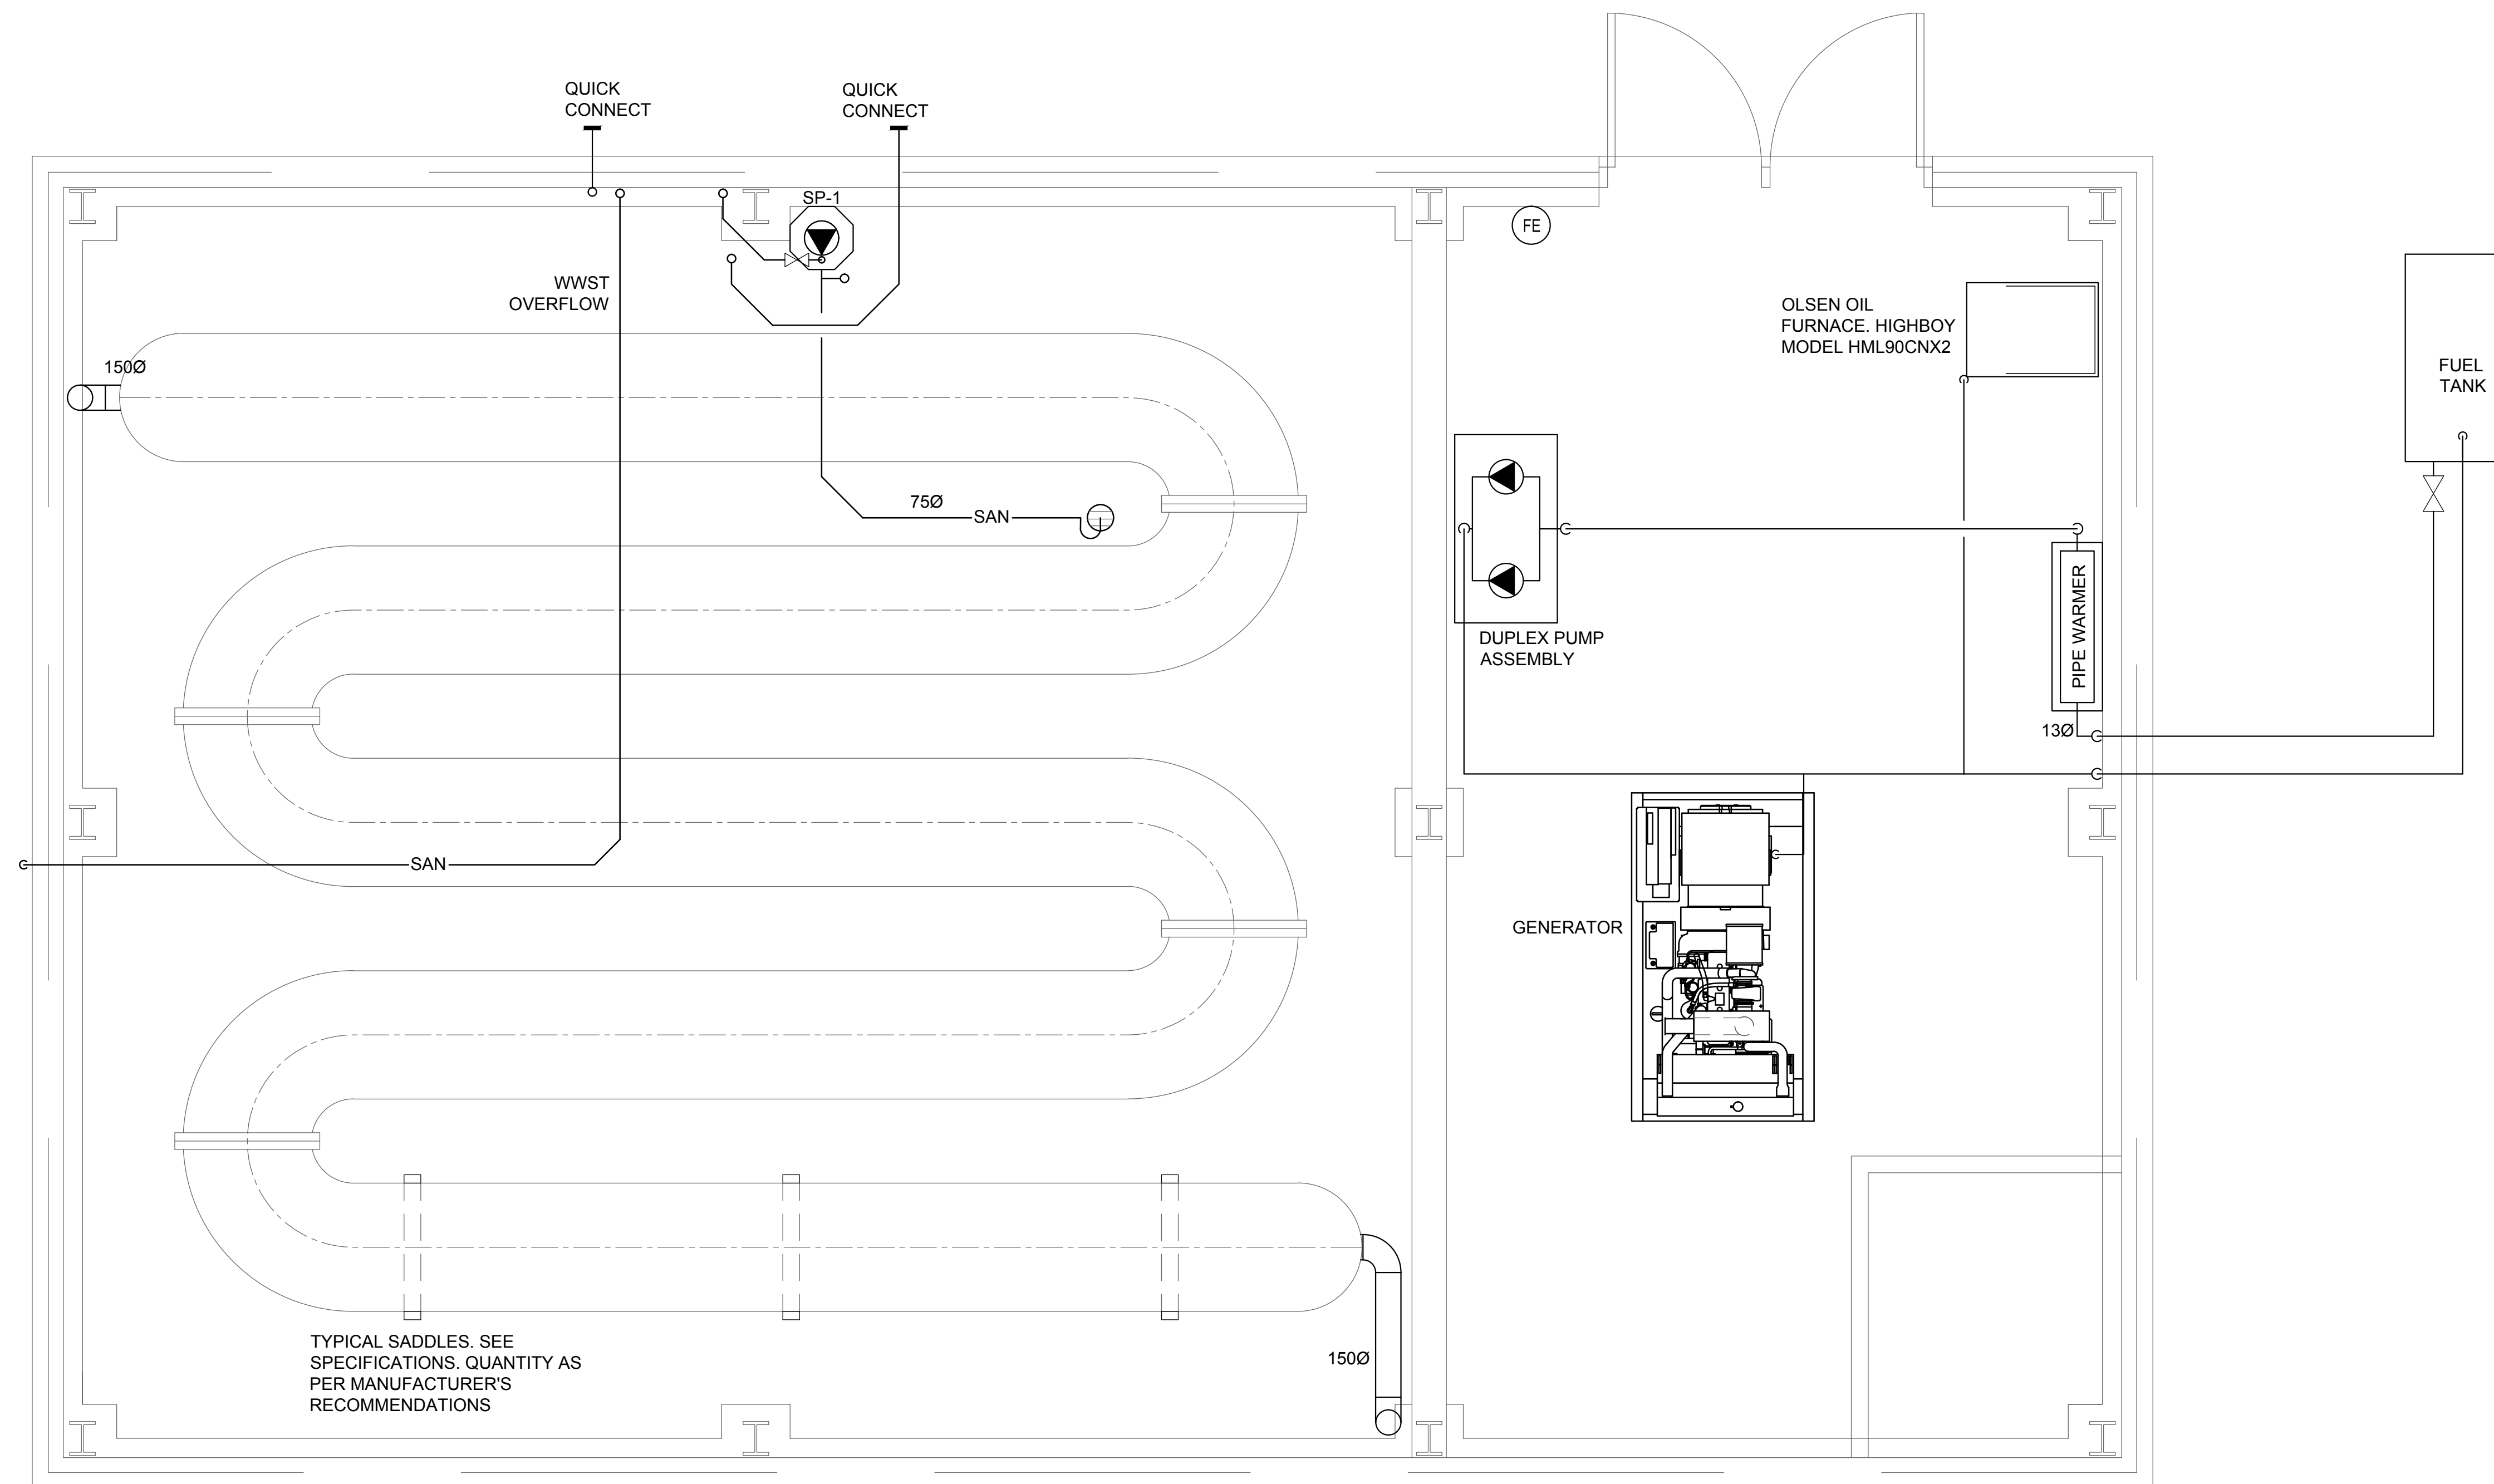

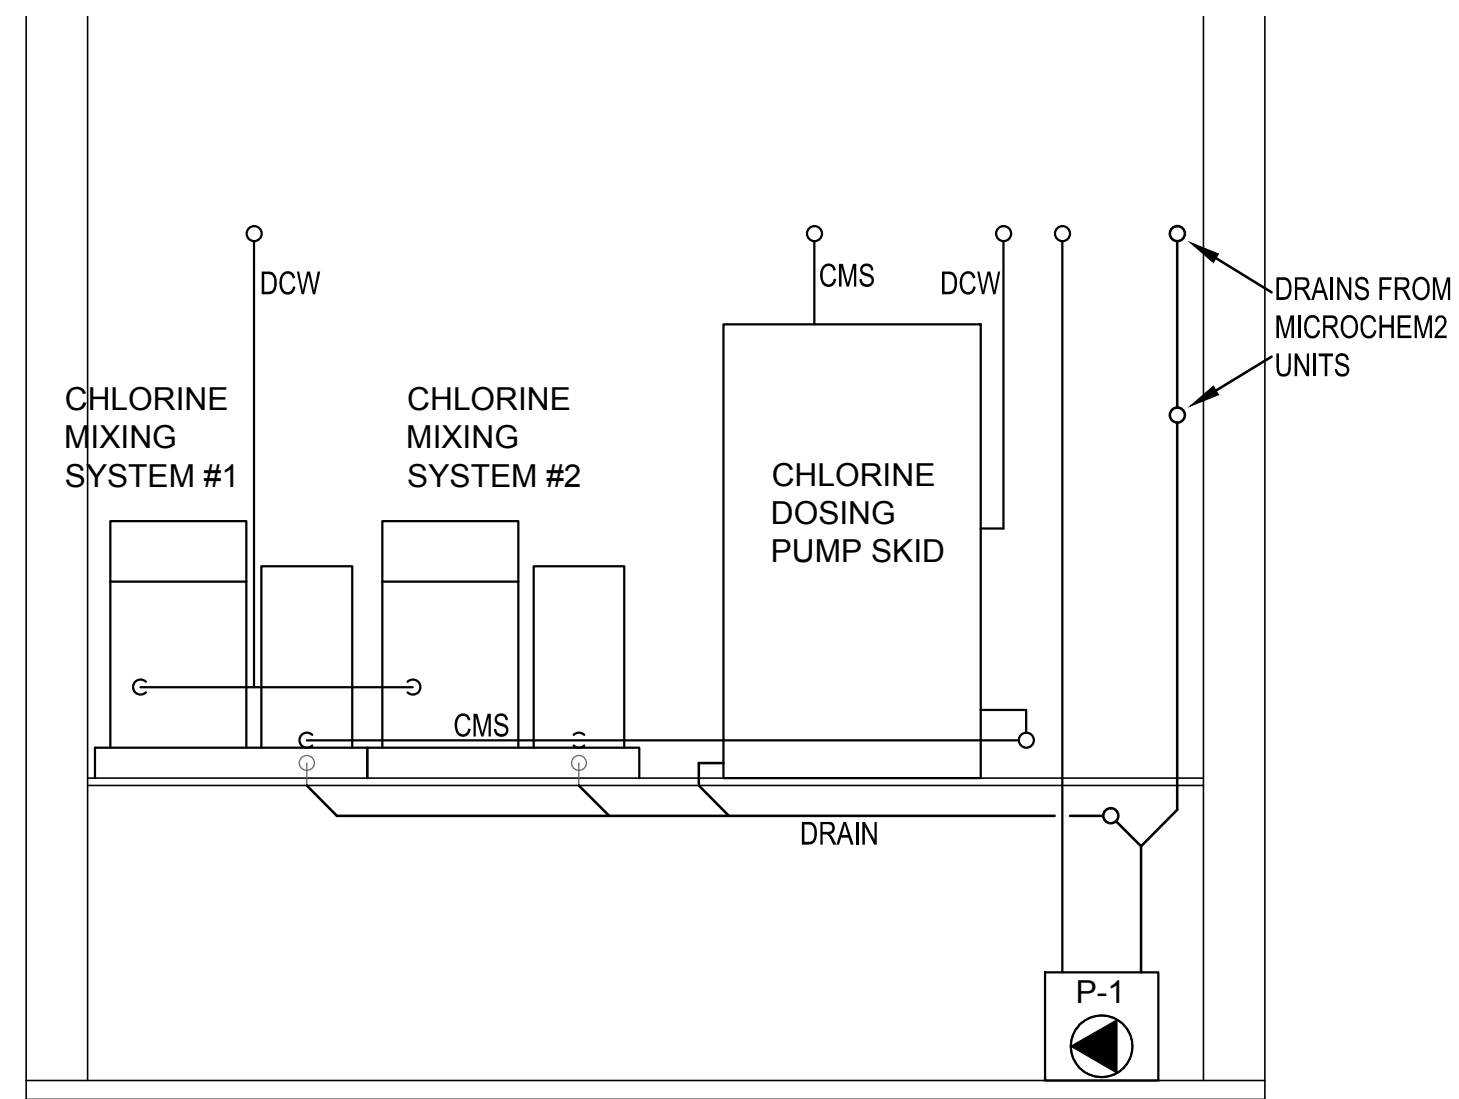

1
M4
CHEMICAL TANK DETAIL
1:25

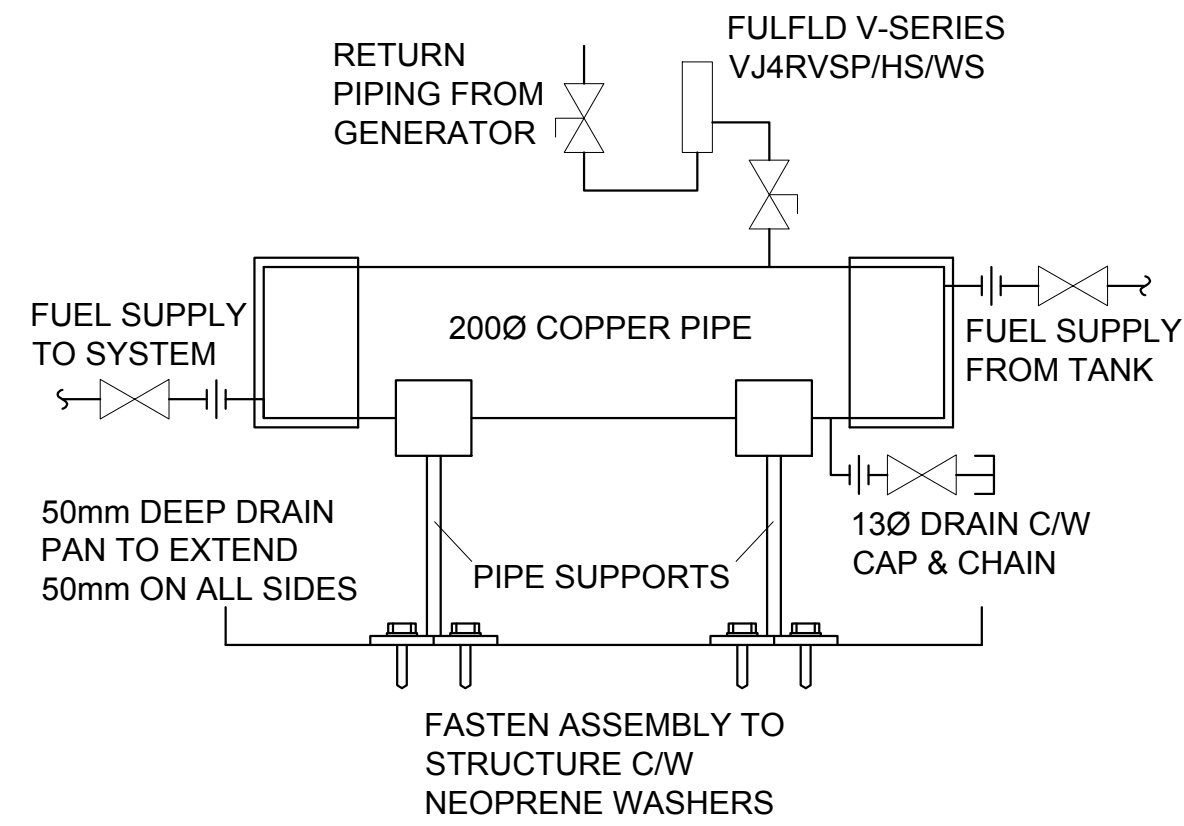

2
M4
FUEL PIPE WARMER DETAIL
1:10


1. SEQUENCE OF OPERATION DOMESTIC WATER PUMP (DWP):

- THE DOMESTIC STORAGE TANK WILL BE FILLED BY ONE OF THE WATER TRUCKS VIA AN OUTSIDE INLET THAT WILL PERMIT THE FILLING OF THE TANK. THERE WILL BE A LOW WATER ALARM TO ADVISE THE OPERATOR THAT THE TANK IS LOW.
- UPON A DROP IN PRESSURE, THE PUMP WILL START AND PROVIDE WATER TO BOTH THE SINK AND THE TO THE DOMESTIC HOT WATER TANK.
- ONCE THE SUPPLY FIXTURES ARE CLOSED, THE PRESSURE IN THE SYSTEM WILL INCREASE AND SHUT OFF AT 40 PSIG AND SHUT OFF.

2. SEQUENCE OF OPERATION SUMP PUMP (SP-1):


- THE DRAIN FROM THE SERVICE SINK AND THE FLOOR DRAINS WILL DRAIN INTO A SUMP PUMP PACKAGE THAT WILL DISCHARGE INTO A WASTEWATER STORAGE TANK. THERE WILL BE A HIGH WATER ALARM TO ADVISE THE OPERATOR OF WHEN THE TANK IS TO BE DRAINED OR IF THE PUMP FAILED TO START.

GENERATOR
NOT RUNNING

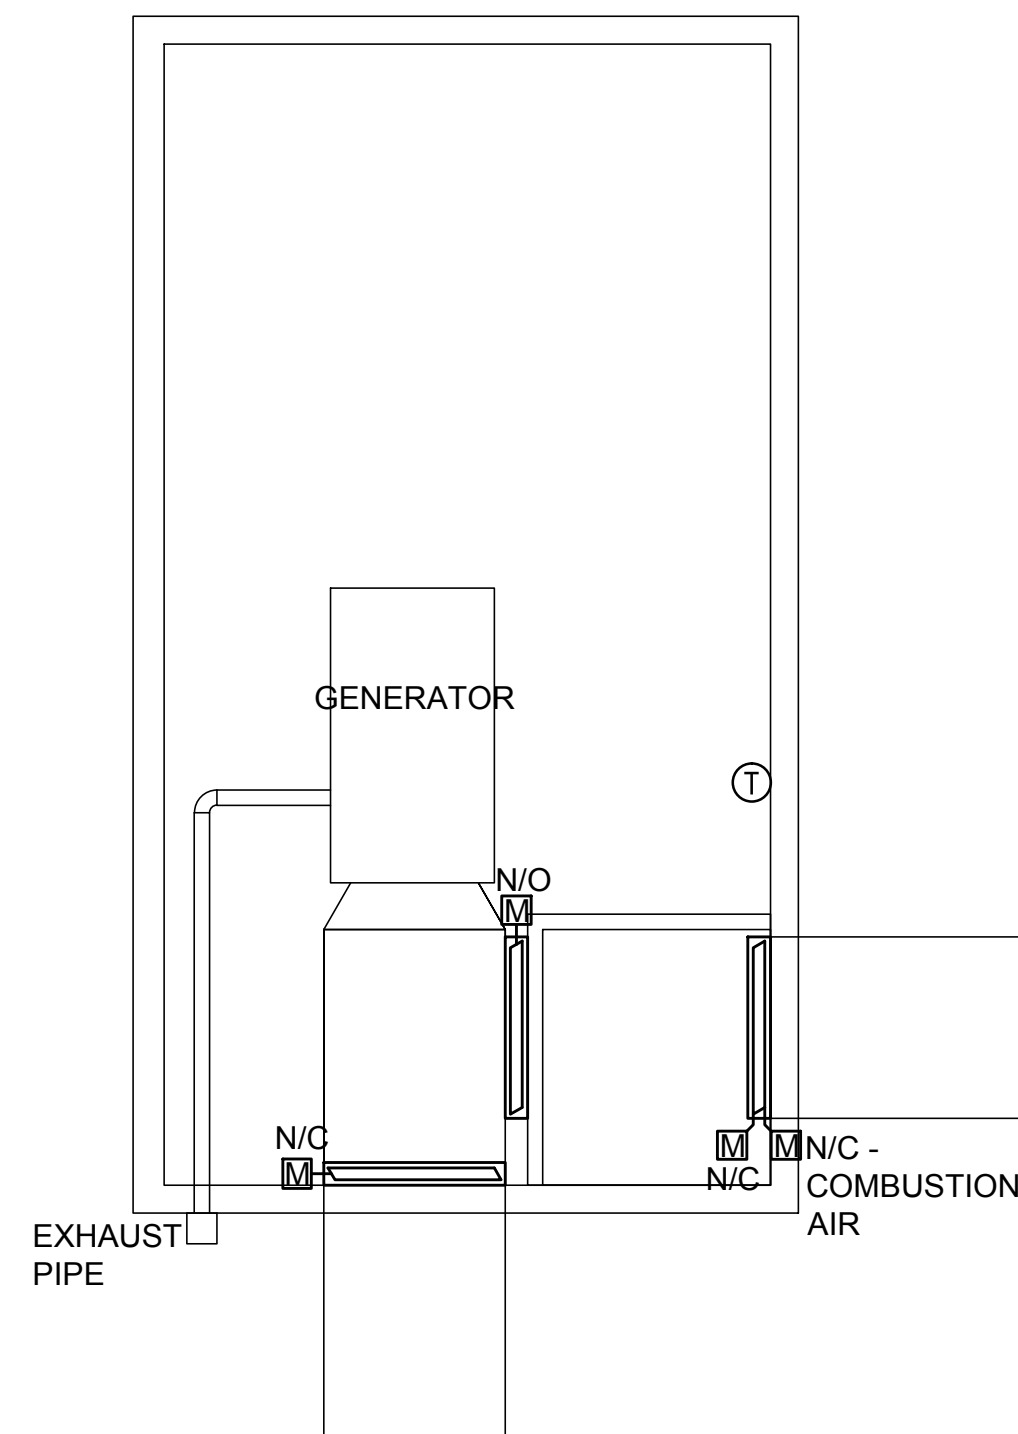


3
M4
GENERATOR SEQUENCE
NTS


GENERATOR RUNNING.
ROOM IS COLDER THAN
THERMOSTAT SET POINT

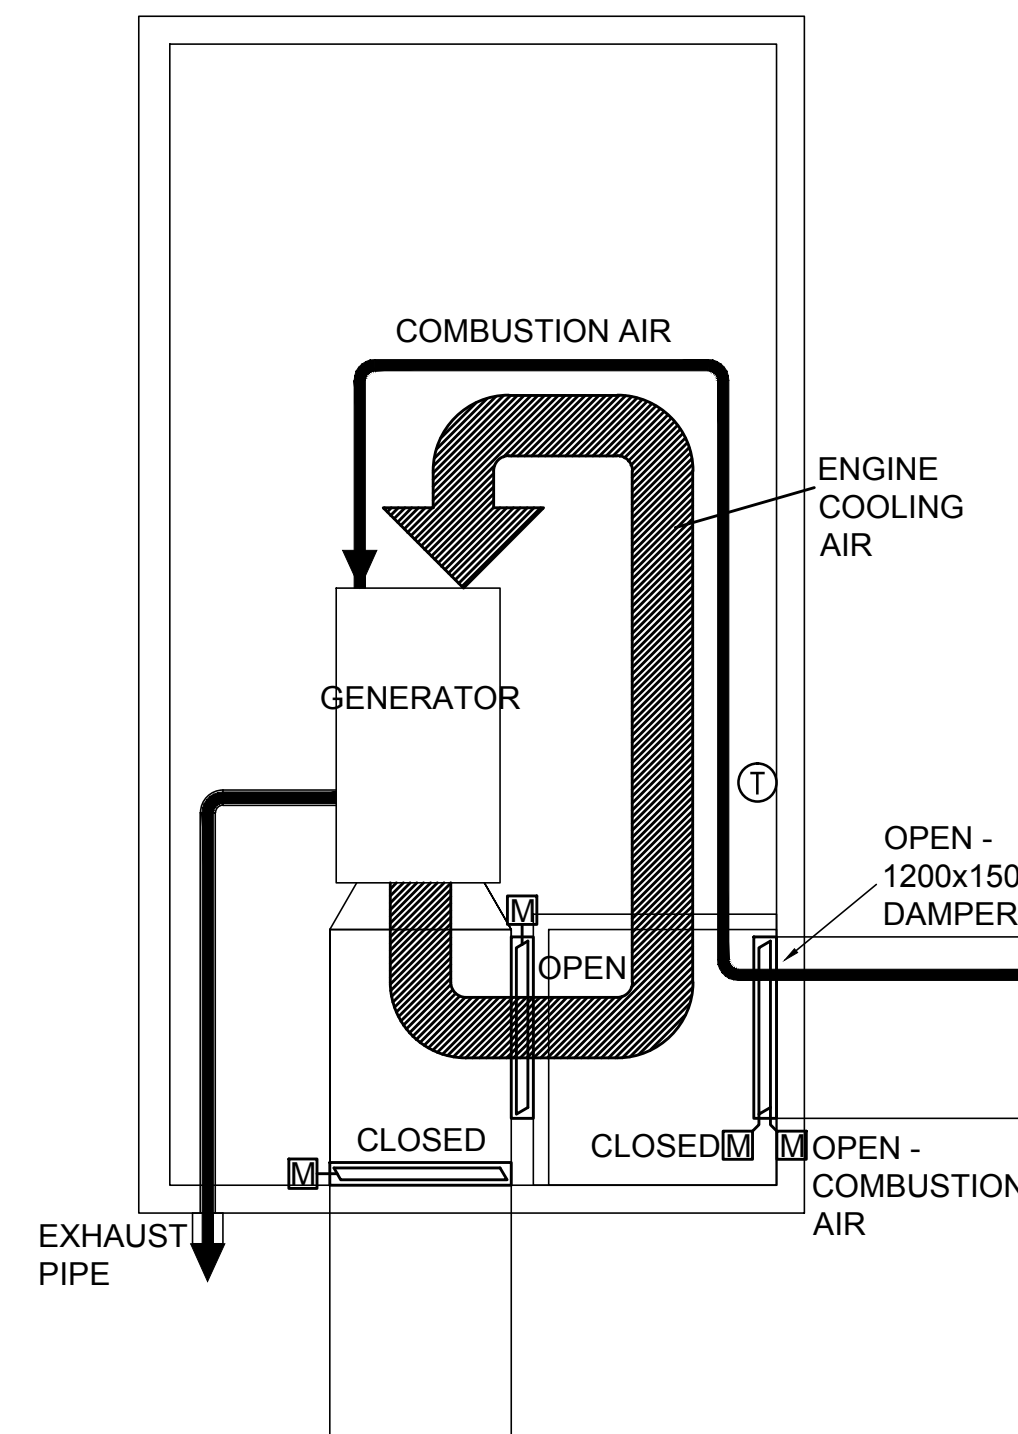

GENERATOR IS RUNNING.
ROOM IS WARMER THAN
THERMOSTAT SET POINT

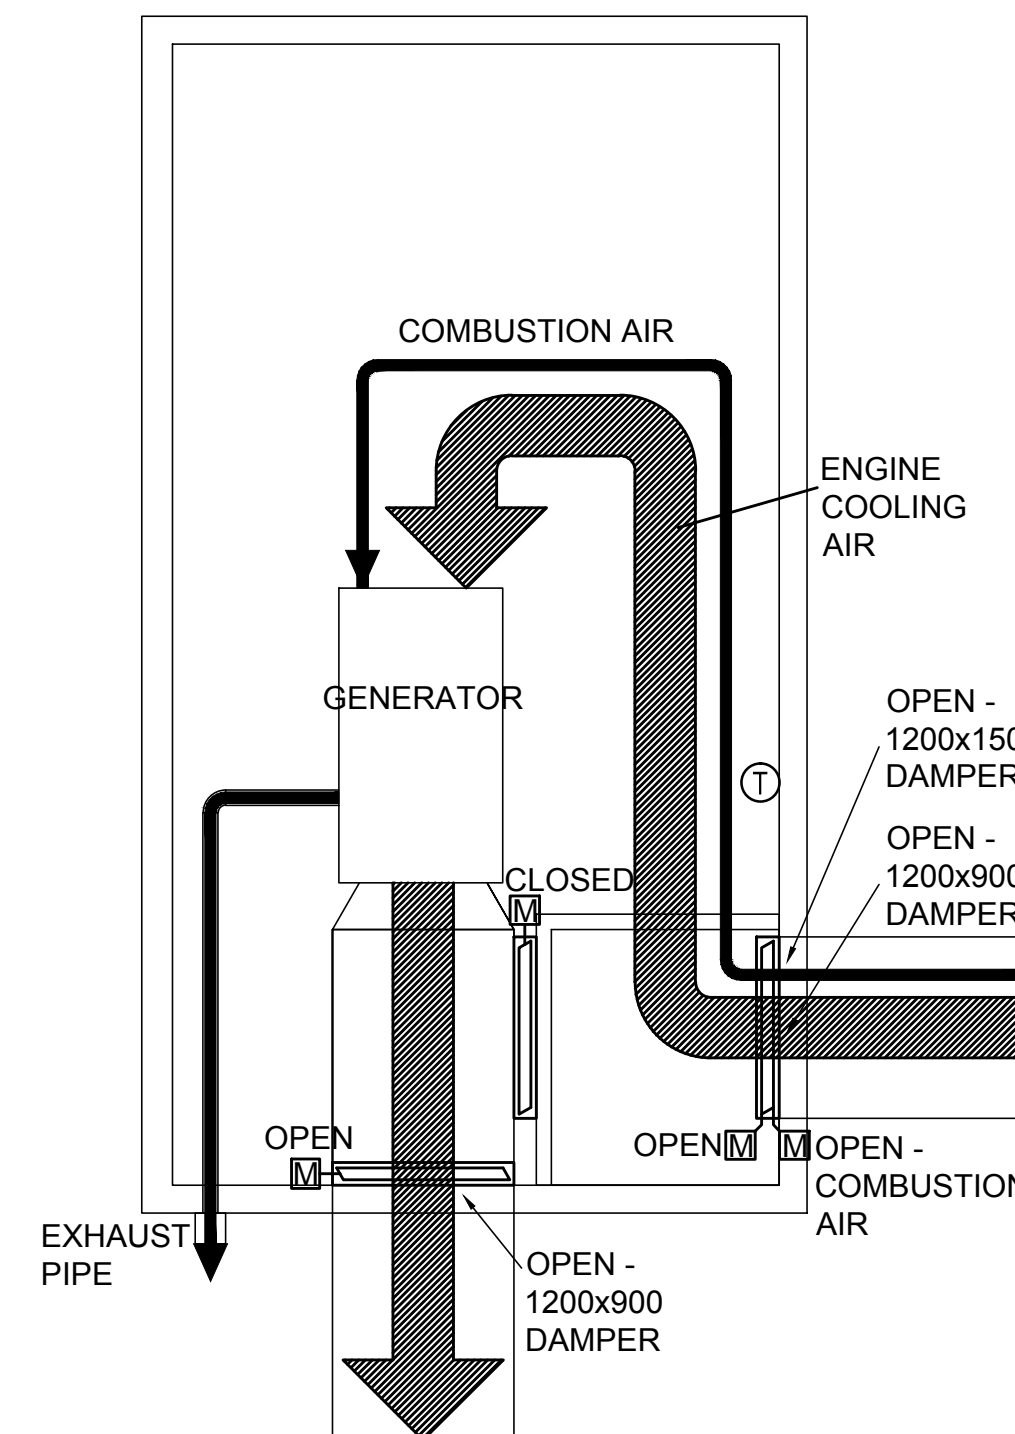

CONSULTANT NAME AND ADDRESS:



CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613)225-1123
FAX. (613)225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	R.S.	ISSUED FOR CONSTRUCTION
5	28/03/16	R.S.	REISSUED FOR TENDER
4	14/04/14	R.S.	REISSUED FOR TENDER
3	13/02/14	R.S.	ISSUED FOR TENDER
2	15/01/14	R.S.	ISSUED FOR 99% REVIEW
1	25/11/13	R.S.	ISSUED FOR 50% REVIEW

NO.	DATE:	BY:	DESCRIPTION:
1	09/09/13	R.S.	ISSUED FOR 50% REVIEW

STAMP	CONSULTANT: CEML
	DRAWN BY: R.S.
	DESIGNED BY: M.M.
	APPROVED BY: M.M.
	DATE: SEPTEMBER 2016

STAMP	CONSULTANT: CEML
	DRAWN BY: R.S.
	DESIGNED BY: M.M.
	APPROVED BY: M.M.
	DATE: SEPTEMBER 2016

PERMIT TO PRACTICE	CHARELLI ENGINEERING MANAGEMENT LTD.
Signature	/s/ R.S.
Date	2016-09-19
PERMIT NUMBER: P 732	NTWNU Association of Professional Engineers and Geoscientists


LOCATION:	IGLOOLIK QIKIQTAALUK REGION OF NUNAVUT XOA OLO
-----------	--

PROJECT:	IMPROVEMENT OF WATER SUPPLY SYSTEM
----------	---------------------------------------

DRAWING TITLE:	MECHANICAL SECTIONS AND SCHEMATICS
----------------	--

MECH FILE NAME:	DWG NO:	OF:	SCALE:
13-072	M4	5	AS NOTED

CONSULTANT NAME AND ADDRESS:



CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613)225-1123
FAX. (613)225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6			
5			
4	19/09/16	R.S.	ISSUED FOR CONSTRUCTION
3	28/03/16	R.S.	REISSUED FOR TENDER
2	14/04/14	R.S.	REISSUED FOR TENDER
1	13/02/14	R.S.	ISSUED FOR TENDER
NO.	DATE: (dd/mm/yy)	BY:	DESCRIPTION:

STAMP	CONSULTANT: CEML
	DRAWN BY: R.S.
	DESIGNED BY: M.M.
	APPROVED BY: M.M.
	DATE: SEPTEMBER 2016

STAMP	CONSULTANT:
	DRAWN BY:
	DESIGNED BY:
	APPROVED BY:
	DATE:

PERMIT TO PRACTICE
CHIARELLI ENGINEERING MANAGEMENT LTD.
Signature: [Signature]
Date: 2016-09-19
PERMIT NUMBER: P 732
NWTNU Association of Professional
Engineers and Geoscientists

LOCATION:


IGLOOLIK
QIKIQTAALUK REGION OF NUNAVUT
XOA OLO

PROJECT:
IMPROVEMENT OF
WATER SUPPLY SYSTEM


DRAWING TITLE:

MECHANICAL
SECTIONS AND
SCHEMATICS

MECH FILE NAME: 13-072
DWG NO: M5
OF: 5
SCALE: AS NOTED

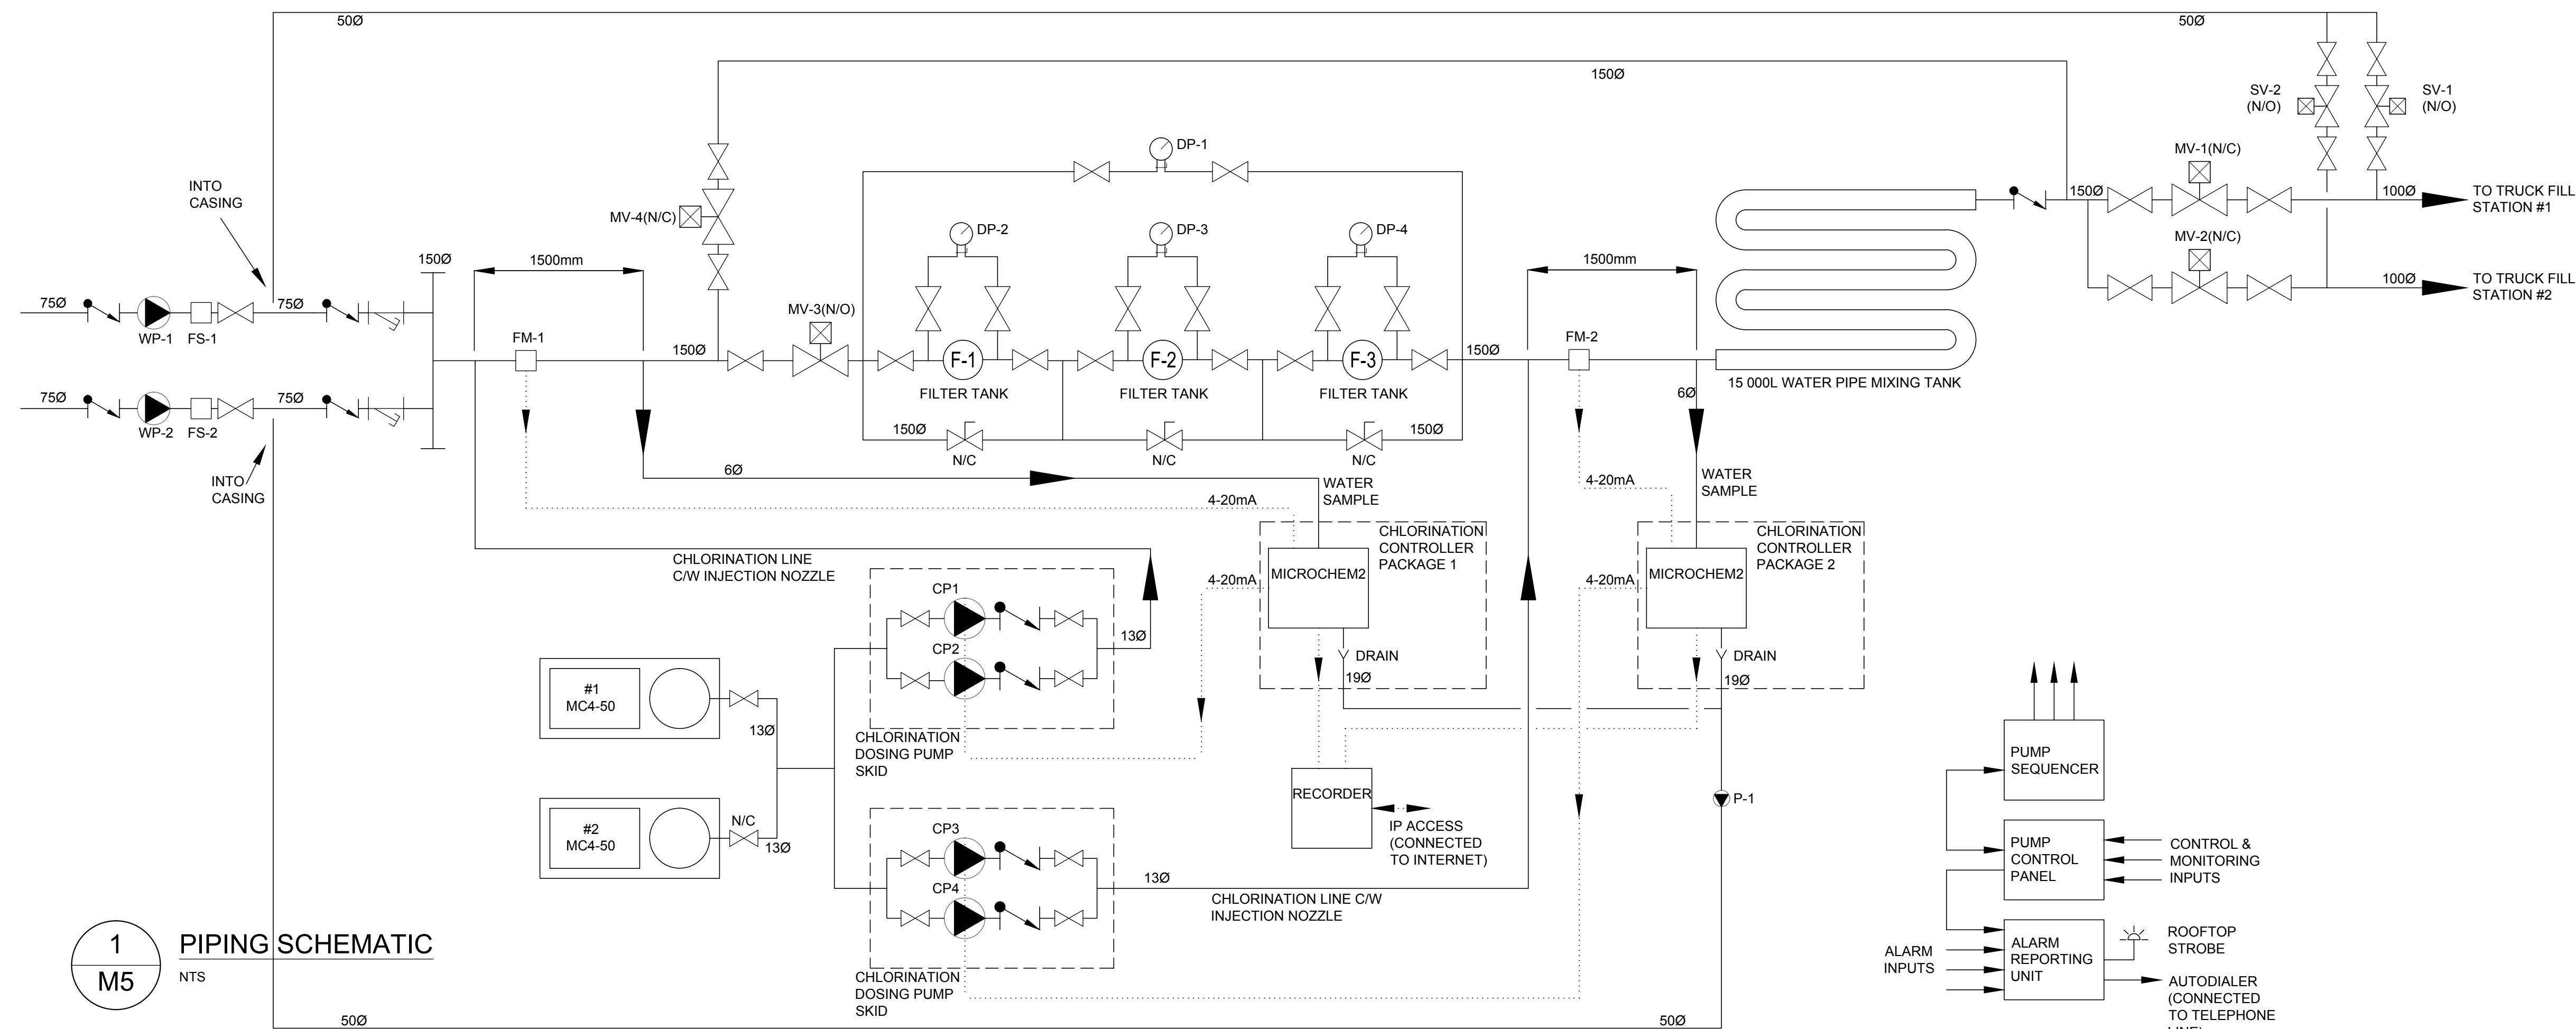


1
M5
PIPING SCHEMATIC
NTS

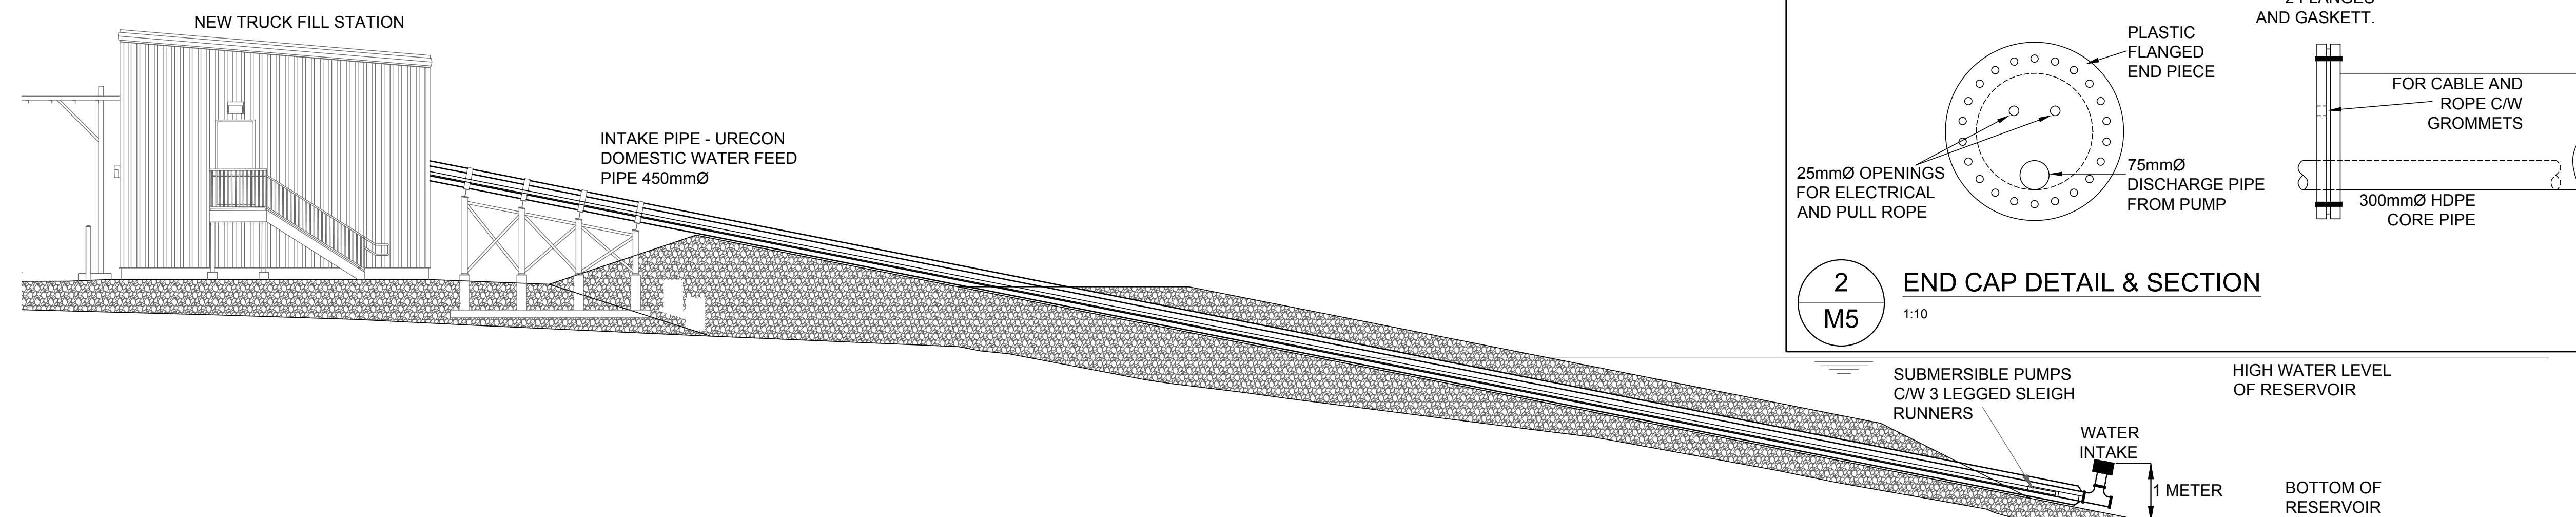


3
M5
INTAKE PIPE SECTION
1:100


2
M5
END CAP DETAIL & SECTION
1:10

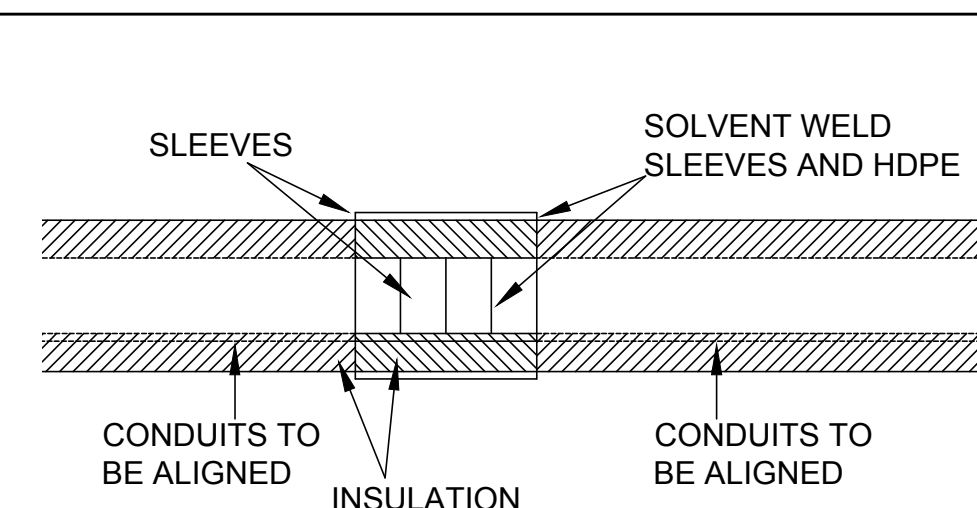

4
M5
INTAKE PIPE JOINT - TYPICAL
1:25

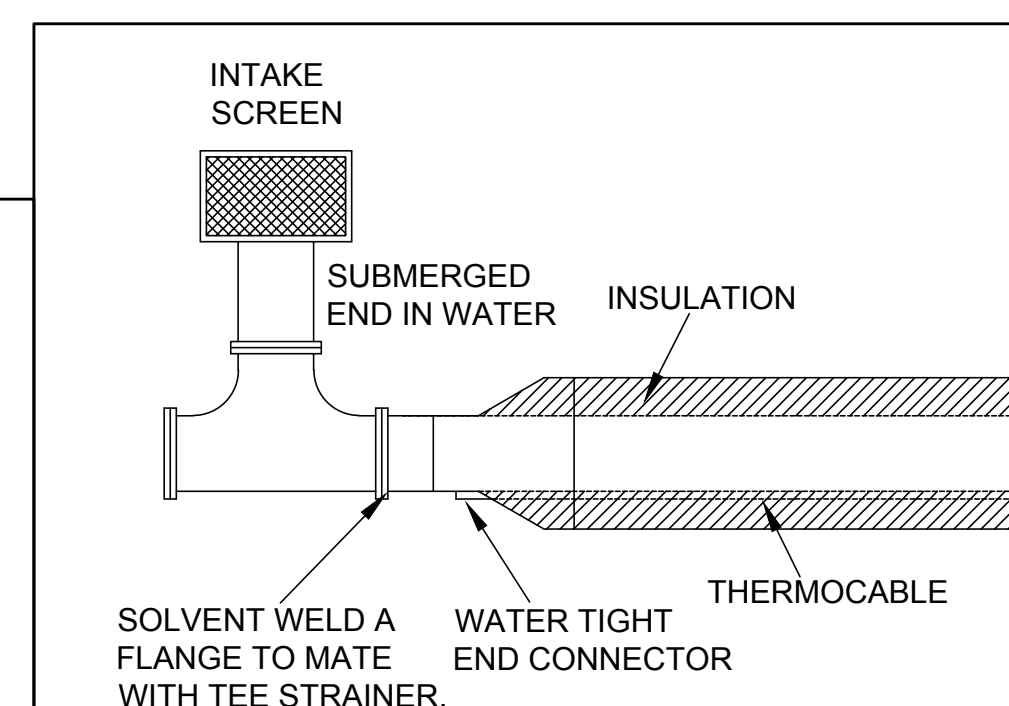

5
M5
SUBMERGED END CAP DETAIL
1:25

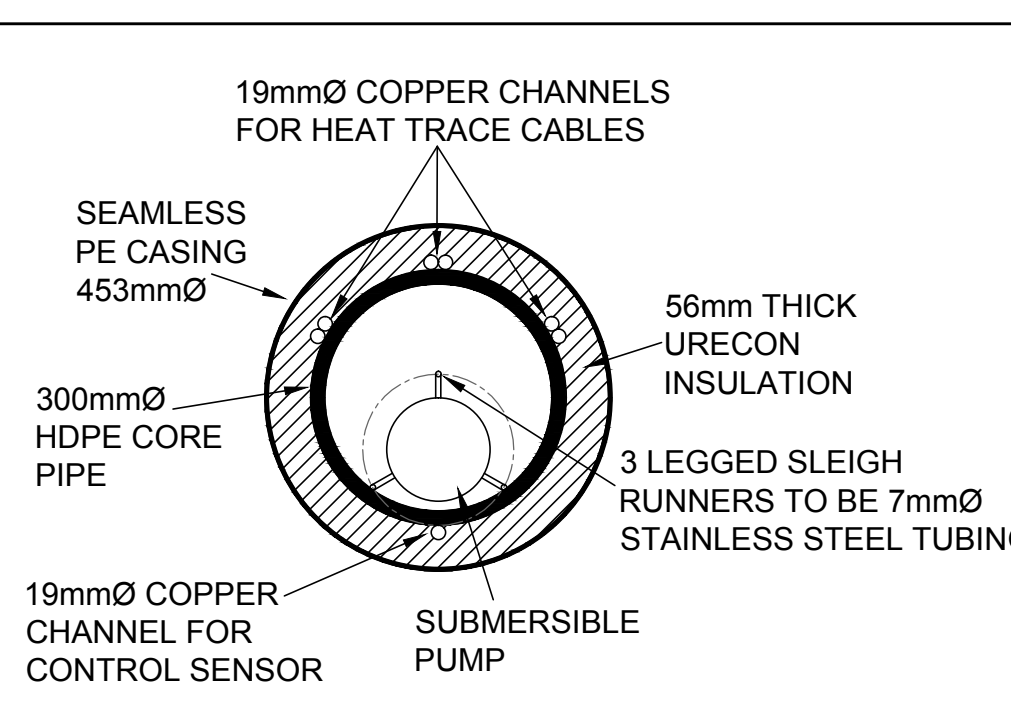

6
M5
INTAKE CROSS SECTION
1:10

ELECTRICAL SCOPE OF WORK

ALL WORK SHALL BE CARRIED OUT IN ACCORDANCE WITH:

- A) ELECTRICAL DRAWINGS 13-072 E1 THROUGH E6, NOTES AND SPECIFICATIONS
B) ALL APPLICABLE CODES, BYLAWS AND BEST-RECOMMENDED PRACTICES

FOR THE PURPOSES OF THIS PROJECT, 'PROVIDE' SHALL MEAN TO SUPPLY AND INSTALL.

FOR THE PURPOSES OF THIS PROJECT, 'DEMOLISH' SHALL MEAN MATERIALS AND EQUIPMENT ARE TO BE REMOVE THEIR INSTALLED LOCATION AND DROPPED OFF, UNLESS MATERIAL IS RECYCLABLE. IN WHICH CASE IT SHALL BE IN FERROUS AND NON-FERROUS CONTAINERS SUPPLIED BY CONTRACTOR. THE REMAINDER SHALL BE CONS GARBAGE. CONTRACTOR SHALL BE RESPONSIBLE FOR DISPOSAL OF GARBAGE IN ACCORDANCE WITH STANDARDS AND REGULATIONS, AND PROVIDE HIS OWN WASTE REMOVAL SERVICES

WHERE MATERIALS AND EQUIPMENT ARE IDENTIFIED AS 'SALVAGE', THEY SHALL BE REMOVED FROM THEIR INS LOCATION WITHOUT DAMAGE AND HANDED TO THE OWNER AT THE DESIGNATED DROP LOCATION WITHIN THE FACI

MAKE PRIOR ARRANGEMENTS AND CAREFULLY PLAN THE DISCONNECTING AND SHUT-DOWN OF ANY EQUIPMEI OWNERS FACILITIES DEPARTMENT. GIVE MINIMUM 48 HOURS NOTICE OF ANY SHUT-DOWN.

IT IS THE RESPONSIBILITY OF THIS CONTRACTOR TO CAREFULLY COORDINATE HIS WORK WITH THAT OF OWNER'S FOR THE BEST SUCCESS OF THIS PROJECT.

CONTRACTOR TO:

- A. VERIFY EQUIPMENT ROUTING.
B. VERIFY ALL DIMENSIONS PRIOR TO EQUIPMENT PURCHASE.
C. VERIFY ALL LIGHTING VOLTAGE PRIOR TO EQUIPMENT PURCHASE.
D. PROTECT BUILDING STRUCTURE FROM DAMAGE.
E. ENSURE ADJACENT AREAS ARE NOT AFFECTED BY ANY WORK ON THIS PROJECT.
F. RETURN ALL RECYCLABLE MATERIALS (COPPER, METAL, BUILDING WIRE, ETC) TO OWNER.
G. PROVIDE SEISMIC RESTRAINTS PER SPECIFICATION. PROVIDE STRUCTURAL DESIGN AND SHOP DR/ STAMPED BY STRUCTURAL ENGINEER.
H. SUBMIT FOUR (4) HARD COPIES OF EQUIPMENT SHOP DRAWINGS OR ELECTRONIC COPIES OF SHOP DR FOR APPROVAL BY THE ENGINEER PRIOR TO COMMENCING ANY WORK OR ORDERING OF ANY EQUIPMENT.
I. OBTAIN RELATED PERMITS TO CARRY OUT THE WORK OF THIS PROJECT.

THE NUMBERS INSIDE HEXAGONS SHOWN ON THE PLANS REFER TO THE NUMBERED POINTS BELOW. NOT ALL ARE SHOWN ON THE PLANS.

1. CONTRACTOR TO COORDINATE UPGRADE OF THE HIGH VOLTAGE LINE TO THE PUMPING STATION WITH ENERGY CORPORATION (LOCAL POWER UTILITY), INCLUDING:
A. UPGRADING THE FEEDER TO 3 PHASE.
B. RELOCATION OR MODIFICATION OF THE END OF THE LINE DUE TO CONSTRUCTION OF THE NEW PUMPING AND/OR ACCESS ROAD,
C. ENSURING TEMPORARY POWER TO THE EXISTING PUMPING STATION DURING THE CONSTRUCTION OF TI PUMPING STATION, AND
D. REPLACEMENT OF THE SINGLE PHASE 25 KVA TRANSFORMER WITH 3x 25 KVA TRANSFORMERS.
2. PROVIDE BURIED CABLE AND CONDUIT BETWEEN EXISTING POWER POLE AND NEW TRUCK FILL. STATIC BETWEEN NEW TRUCK FILL STATION AND OLD TRUCK FILL STATION; SIZED ACCORDING TO SINGLE LINE DIAGRA
3. PROVIDE MAIN 250A CIRCUIT BREAKER, CURRENT TRANSFORMER CABINET AND 13JAW REVENUE METER BASE.

4. PROVIDE MAIN PANELBOARD P-1 TO BE 120/208V/3PH/60CCT/400AF SURFACE MOUNT WITH 250A MAIN BREAKER. PROVIDE SUBPANEL P-2 TO BE 120/208V/3PH/30CCT/100AF SURFACE MOUNT TO BE PROTECTED BY 100A/3PH BREAKER IN PANEL P-1. PROVIDE TWO 120V/15A CIRCUIT BREAKERS IN PANEL P-2 AS SPARES
5. PROVIDE GENSET FOR BACKUP EMERGENCY POWER. INCLUDED ARE GENSET CONTROLLER AND GENSET LOAD CENTRE. PROVIDE 280A RATED AUTOMATIC TRANSFER SWITCH (ATS) TO SWITCH BETWEEN NORMAL GRID AND EMERGENCY BACKUP POWER. PROVIDE 208V/3P/30A CIRCUIT BREAKER IN PANEL P-2 FOR GENSET LOAD CENTRE.
6. PROVIDE WALL-MOUNTED THERMOSTAT (TS-1) TO CONTROL GENERATOR VENTILATION DAMPERS. PROVIDE 120V/15A CIRCUIT BREAKER IN PANEL P-2 AND PROVIDE WIRING TO DAMPER MOTORS.
7. PROVIDE COMBINATION BATTERY PACK PICTOGRAM EXIT SIGN DUAL-HEAD EMERGENCY LIGHT PACKS TO BE MOUNTED ABOVE DOORWAYS WHERE INDICATED. EMERGENCY LIGHTING CIRCUIT TO BE ON SAME CIRCUIT AS INTERIOR LIGHTING CIRCUIT ON PANEL P-2. PROVIDE 120V/15A DUPLEX RECEPTACLE ABOVE DOORWAY NEXT TO EACH COMBO PACK.
8. PROVIDE INTERIOR LIGHTING WHERE INDICATED. 'A' LUMINAIRES ARE TO BE SUSPENDED BY CHAINS AT 3m AFF. PROVIDE WALL-MOUNTED SWITCHES WHERE INDICATED. PROVIDE 120V/15A CIRCUIT BREAKER IN PANEL P-2 FOR INTERIOR LIGHTING.
9. PROVIDE EXTERIOR LIGHTING WHERE INDICATED. DESIGNATED 'B' LUMINAIRE ARE TO BE MOUNTED ADJACENT TO DOORWAY ENTRY AT TOP OF STAIRS. DESIGNATED 'C' LUMINAIRES ARE TO BE MOUNTED AT 4m AGL. OUTDOOR LIGHTS TO BE CONTROLLED BY COMBINATION OF PHOTOCELL AND TIMER. PROVIDE 120V/15A CIRCUIT BREAKER IN PANEL P-2 FOR EXTERIOR LIGHTING.
10. PROVIDE CONVENIENCE RECEPTACLES WHERE INDICATED, TO BE WALL-MOUNTED STANDARD 300mm AFF. PROVIDE TWO 120V/15A CIRCUIT BREAKERS IN PANEL P-2 FOR THE RECEPTACLE CIRCUITS. RECEPTACLES WITHIN 1.5m OF WATER ZONES TO BE GFCI PROTECTED.
11. PROVIDE DIRECT ELECTRICAL CONNECTION TO CEILING EXHAUST FAN (EF). EF TO BE CONNECTED TO SAME CIRCUIT AS INTERNAL LIGHTING AND ALWAYS POWERED 'ON'.
12. PROVIDE DIRECT ELECTRICAL CONNECTION TO BACKUP UNIT HEATERS UH-1 ~ 5; EACH UNIT TO BE PROTECTED BY ITS OWN 208V/3P/15A CIRCUIT BREAKER IN PANEL P-1. UNITS TO BE INDIVIDUALLY CONTROLLED BY INTERNAL THERMOSTATS, SET TO 5°C LOWER THAN FURNACE THERMOSTAT. EACH UNIT SPECIFIED TO HAVE INTEGRAL DISCONNECT SWITCHES. PROVIDE WALL-MOUNT BRACKETS AND MOUNT UNITS BELOW MAXIMUM HEIGHT OF 8'.
13. PROVIDE 120V/15A CIRCUIT BREAKER IN PANEL P-2 FOR OIL-FIRED FURNACE. PROVIDE WALL SWITCH IN GENERATOR ROOM BETWEEN EXIT DOORWAY AND FURNACE UNIT, SEPARATE FROM ANY OTHER CONTROLS, AND LABELED AS "FURNACE SHUTOFF".
14. PROVIDE 120V/1P/15A CIRCUIT BREAKER IN PANEL P-2 FOR DUPLEX OIL PUMP CONTROLLER (DPC) IN GENERATOR ROOM. PROVIDE DIRECT ELECTRICAL CONNECTION TO DPC, TO BE SPECIFIED AS HAVING INCLUDED DISCONNECT SWITCH.
15. PROVIDE 120V/25A CIRCUIT BREAKER IN PANEL P-2 FOR DOMESTIC WATER PUMP (DWP). PROVIDE DIRECT ELECTRICAL CONNECTION TO DWP.
16. PROVIDE 208V/3P/15A CIRCUIT BREAKER IN PANEL P-1 FOR DOMESTIC HOT WATER TANK (DHW). PROVIDE DIRECT ELECTRICAL CONNECTION TO DHWT WHERE INDICATED.
17. PROVIDE TWO 120V/15A CIRCUIT BREAKERS IN PANEL P-2 FOR TWO PUMPS (SP-1, & P-1). PROVIDE DEDICATED WALL-MOUNTED 120V GFCI-PROTECTED DUPLEX OUTLETS AT EACH PUMP LOCATION.
18. PROVIDE 120V/20A CIRCUIT BREAKER IN PANEL P-2 AND DEDICATED CSA CONFIGURATION 5-20R RECEPTACLE FOR CHLORINE MIXING SYSTEM (CMS) SKID. A BACKUP UNIT IS TO BE PROVIDED BUT ONLY ONE POWERED AT A TIME.
19. PROVIDE 120V/15A CIRCUIT BREAKER IN PANEL P-2 FOR DIRECT ELECTRICAL CONNECTION TO CHLORINE DOSING PUMP (CDP) SKIDS. SKID INCLUDES QUAD RECEPTACLE FOR CONNECTION TO DOSING PUMPS AND CHLORINATION CONTROLLER PANELS (CCP).
20. PROVIDE TWO 208V/2P/30A CIRCUIT BREAKERS IN PANEL P-1 FOR HEAT TRACE CONTROLLERS (HTC-1 - 2). PROVIDE DEDICATED ELECTRICAL CONNECTION TO EACH HTC. EACH WATER INTAKE PIPE TO ALSO INCLUDE A THERMAL SENSOR KIT CW 3 TEMPERATURE PROBES FOR CONTROL AND PROTECTION.

21. PROVIDE TWO 208V/30A TIME DELAY CIRCUIT BREAKERS IN PANEL P-1 FOR SUBMERSIBLE WATER PUMPS (WP-1 AND WP-2). PROVIDE DIRECT ELECTRICAL CONNECTION TO EACH PUMP. PUMPS ARE TO BE CONTROLLED BY PUMP SEQUENCER UNIT, LOCATED AS SHOWN.
22. PROVIDE 120V/15A CIRCUIT BREAKER IN PANEL P-2 FOR ALARM CONTROL PANEL. PROVIDE 120V/15A DUPLEX RECEPTACLE FOR CONNECTION TO INCLUDED AC ADAPTER.
23. PROVIDE WALL-MOUNTED TELEPHONE JACK FOR CONNECTION TO AUTODIALER OF ALARM REPORTING UNIT. WIRE PHONE JACK BACK TO TELEPHONE DEMARCATION POINT OF BUILDING.
24. PROVIDE AMBER STROBE WARNING LIGHT TO BE MOUNTED EXTERIOR ABOVE LEVEL OF OUTDOOR LUMINAIRE 'B' AT FRONT CORNER OF BUILDING AS SHOWN. UNIT WILL FLASH IF ALARM CONTROLLER DETECTS ANY ALARM CONDITION.
25. PROVIDE EXTERIOR RATED WARNING LIGHT TO INDICATE WASTE WATER STORAGE TANK IS FULL.
26. PROVIDE CEILING-MOUNTED HEAT-DETECTORS IN EACH ROOM AS SHOWN. PUMP ROOM AND CHEMICAL MIXING ROOM ARE TO HAVE FIXED TEMPERATURE 135F UNITS AND GENERATOR ROOM IS TO HAVE FIXED TEMPERATURE 200F UNIT. PROVIDE LOW-VOLTAGE CABLES FOR CONNECTION BACK TO ALARM PANELBOARD.
27. PROVIDE WALL-MOUNTED THERMOSTAT TS-2 FOR LOW-TEMPERATURE ALARM AT LOCATION SHOWN. PROVIDE LOW-VOLTAGE WIRING TO ALARM PANELBOARD.
28. PROVIDE WEATHERPROOF CONTROL BOXES TO BE MOUNTED AT TRUCK TOP HEIGHT. PROVIDE STOP AND START PUSHBUTTONS, IN-USE INDICATOR LIGHTS, FIRE PUSHBUTTON AND FIRE STROBE LIGHT AND LINE-VOLTAGE CONNECTIONS BACK TO PUMP CONTROL PANELBOARD.
29. PROVIDE ALL NECESSARY CONTROL DEVICES AS DESCRIBED IN E5-1 SCHEMATIC (LOW-VOLTAGE TRANSFORMER, RELAYS, PUSHBUTTONS, SWITCHES, MOTORIZED VALVES, INDICATOR LIGHTS) AND CONNECTIONS BETWEEN DEVICES, ALARM REPORTING UNIT, EXPANDER & POWER SUPPLY AND PUMP CONTROL PANEL.
30. ONCE NEW TRUCK FILL STATION HAS BEEN COMMISSIONED, DEMOLISH ALL ELECTRICAL EQUIPMENT, WIRING AND CONDUIT IN OLD FILL STATION BUILDING.
31. PROVIDE NEW PANELBOARD PA-1 IN OLD PUMP STATION TO BE 120/208V/3PH/24CCT/60AF SURFACE-MOUNT. PROVIDE BURIED CONNECTION BACK TO PANEL P-1 AND PROVIDE 208V/3P/60A BREAKER IN PANEL P-1. PROVIDE TWO 120V/15A CIRCUIT BREAKERS IN PANEL PA-1 AS SPARES
32. PROVIDE INTERIOR LIGHTING OF LUMINAIRE TYPE 'A'; TO BE CHAIN-SUSPENDED FROM CEILING AT 3m AFF. PROVIDE WALL-MOUNTED LIGHT SWITCHES WHERE INDICATED. PROVIDE 120V/15A CIRCUIT BREAKER IN PANEL PA-1 FOR INTERIOR LIGHTING.
33. PROVIDE COMBINATION BATTERY PACK PICTOGRAM EXIT SIGN, DUAL-HEAD EMERGENCY LIGHTS TO BE MOUNTED DIRECTLY ABOVE DOORWAYS. POWER TO BE ON SAME CIRCUIT AS INTERIOR LIGHTING. PROVIDE DUPLEX 120V RECEPTACLES TO BE WALL-MOUNTED NEXT TO EACH COMBO UNIT.
34. PROVIDE WALL-MOUNTED CONVENIENCE RECEPTACLES WHERE INDICATED, TO BE WALL-MOUNTED AT 300mm AFF. PROVIDE TWO 120V/15A CIRCUIT BREAKERS IN PANEL P-2 TO POWER RECEPTACLES IN EACH ROOM.
35. PROVIDE INTERNET CONNECTION, WALL JACK AND REQUIRED ETHERNET CABLING FOR DATA RECORDER.
36. TRACE ALL CIRCUITS OF PANELBOARDS RELATED TO THIS PROJECT AND PROVIDE NEATLY TYPED, UPDATED CIRCUIT DIRECTORIES IN A PLASTIC HOLDER ON THE INSIDE DOORS OF ALL PANELBOARDS, WITH COPY IN MANUAL.
37. IDENTIFY AND LABEL EACH DEDICATED RECEPTACLE FOR ITS INTENDED USE ONLY.
38. IDENTIFY ALL PULL BOXES, JUNCTION BOXES, FIXTURES, CONTROL PANELS, MOTOR STARTERS, AND DISCONNECT SWITCHES WITH PERMANENT MARKER IDENTIFICATION INDICATING PANEL AND CIRCUIT NUMBERS.
39. CLEAN AREA OF ANY DEBRIS CREATED DURING DEMOLITION WORK.
40. AFTER CONSTRUCTION COMPLETION, MARK UP DRAWINGS INDICATING ANY AND ALL DEVIATIONS FROM THE DRAWINGS AND PROVIDE TWO COPIES TO OWNER.

PUMP STATION OVERVIEW:

MAJOR COMPONENTS:

1. PUMP SEQUENCER: ITS FUNCTION IS TO SEQUENCE THE 2 SUBMERSIBLE PUMPS (WP-1 AND WP-2), SO THAT EACH PUMP IS EXERCISED EQUALLY OVER TIME. IN CASE OF A PUMP FAILURE (DETERMINED BY THE RELEVANT FLOW SWITCH FS-1 OR FS-2), THE SEQUENCE SWITCHES TO THE NEXT AVAILABLE PUMP AND INITIATES AN ALARM CONDITION.
2. PUMP CONTROLLER: IT TIES ALL CONTROL DEVICES AND SENSORS TOGETHER. THE CONTROL LIGHTS INDICATE WHICH FILLING STATION IS IN USE AND WHICH PUMP IS RUNNING. IT ALSO INDICATES SOME OF THE ALARM CONDITIONS AND PROVIDES AN EMERGENCY POWER OFF AND RESET PUSHBUTTONS.
3. ALARM REPORTING UNIT: ITS FUNCTION IS TO TURN ON THE ROOFTOP STROBE AT ANY OF THE 10 ALARM CONDITIONS AND TO DIAL PRE-PROGRAMMED PHONE NUMBERS WITH A RECORDED MESSAGE WARNING OF THE ALARM CONDITION.

OPERATION:

4. DEPRESSING THE "ON" PUSHBUTTON OF FILLING STATION #1 LOCATED ON THE FILLING ARM WILL START THE CHLORINATION LOOP, CLOSE VALVE SV-1 AND OPEN MV-1. THIS OPERATION TAKES APPROX. 3 SECONDS. AFTER A 3 SECOND DELAY, THE PUMP SEQUENCER STARTS THE "NEXT" AVAILABLE PUMP. DEPRESSING THE SAME "ON" PUSHBUTTON AGAIN WILL HAVE NO IMPACT.
5. PUMPING MUST BE STOPPED BY DEPRESSING THE "OFF" PUSHBUTTON OF FILLING STATION #1. DEPRESSING THE "OFF" PUSHBUTTON WILL STOP THE CHLORINATION AND THE PUMP IT STARTED. IT ALSO CLOSSES VALVE MV-1 AND OPENS VALVE SV-1 WHICH DRAINS THE OUTSIDE PORTION OF THE FILL ARM.
6. THE PROCESS IS IDENTICAL FOR FILL STATION #2 (EXCEPT IT WORKS WITH VALVES MV-2 AND SV-2).

THE CHLORINATION LOOP:


7. THE MICROCHEM2 CHLORINE CONTROLLER PACKAGE (CCP-1) IS THE CONTROLLING UNIT FOR THE PRIMARY CHLORINATION PROCESS. SINCE THE WATER FLOW IN THE MAIN 100mm WATER PIPE CAN VARY DEPENDING ON WHETHER 1 OR 2 WATER PUMPS ARE RUNNING, THE CONDITION OF THE FILTERS AND WATER LEVEL IN THE LAGOON, THE FLOW IS PRECISELY MEASURED BY THE FLOW METER (FM-1). THE CCP-1 SENDS A 4-20mA SIGNAL TO ITS CHLORINE DOSING PUMP (CDP-1) THAT IS PROPORTIONAL TO THE WATER FLOW MEASURED BY FM-1. A WATER SAMPLE IS TESTED CONTINUALLY BY CHLORINATION AND pH/TEMPERATURE PROBES CONNECTED TO CCP-1 AND CCP-1 WILL ADJUST THE AMOUNT OF CHLORINE PUMPED BY CDP-1 TO ENSURE THE REQUIRED LEVEL OF PRIMARY CHLORINATION.
8. CCP-2 IS A POST-CHLORINATION LOOP IDENTICAL TO CCP-1. ITS FUNCTION IS TO CHECK CHLORINATION LEVEL OF WATER DELIVERED TO TRUCKS AND ADD CHLORINE IF REQUIRED. THE FLOW IS PRECISELY MEASURED BY THE FLOW METER (FM-2). THE CCP-2 SENDS A 4-20mA SIGNAL TO ITS CHLORINE DOSING PUMP (CDP-2) THAT IS PROPORTIONAL TO THE WATER FLOW MEASURED BY FM-2. A WATER SAMPLE IS TESTED CONTINUALLY BY CHLORINATION AND pH/TEMPERATURE PROBES CONNECTED TO CCP-2 AND CCP-2 WILL ADJUST THE AMOUNT OF CHLORINE PUMPED BY CDP-2 TO ENSURE THE REQUIRED LEVEL OF POST-CHLORINATION.
9. THE INFORMATION GATHERED BY CCP-1 AND CCP-2 (WATER DELIVERY, CHLORINATION AND pH LEVELS, TEMPERATURE) CAN BE STORED IN THE DATA RECORDER AND ACCESSED THROUGH A USB PORT OR REMOTELY THROUGH AN IP ADDRESS.
10. ONLY ONE OF THE CDP SUBCOMPONENT DOSING PUMPS (CP-1 OR CP-2) IS "ON". THE SECOND PUMP IS A BACKUP IN CASE THAT THE ACTIVE PUMP HAS FAILED. THIS MUST BE SWITCHED MANUALLY. THE CDP DOSING PUMP SKID ALSO CONTAINS CALIBRATION AND CLEANING ACCESSORIES.
11. THE CHLORINE SOLUTION FOR THE DOSING PUMPS IS PREPARED BY AN "MC4-50" CHLORINE MIXING SYSTEM (CMS). HERE AGAIN THE SECOND SYSTEM IS A BACKUP IF THE ACTIVE ONE FAILS. IT IS RECOMMENDED TO KEEP THE BACKUP SYSTEM DRY & CLEAN AND ONLY ACTIVATE IT UNTIL IT IS REQUIRED.

SYSTEM FAILURES AND ALARMS:

12. THE ALARMS ARE LISTED IN THE ALARM REPORTING TABLE. THERE ARE 10 ALARMS CONNECTED TO THE ALARM REPORTING UNIT. IT ALSO CAN ACCOMMODATE ANOTHER 6 ALARM INPUTS IN THE FUTURE IF REQUIRED.
13. SOME OF THE ALARM LEVELS ARE SETTABLE: A). - THE LOW TEMPERATURE ALARM ON THERMOSTAT TS-1 LOCATED IN THE MAIN PUMPING ROOM, AND B). - PRESSURE DROPS ACROSS THE WATER FILTERS MEASURED BY DP-1. DP-1 HAS TWO ADJUSTABLE ALARM SETTINGS: HIGH (H) - WHEN ONE TRUCK IS BEING FILLED (ONE WATER PUMP IS RUNNING), AND HIGH-HIGH (HH) WHEN TWO TRUCKS ARE BEING FILLED (TWO WATER PUMPS ARE RUNNING). THE SETTINGS OF DP-1 WILL NEED TO BE ESTABLISHED BY EXPERIENCE. HOWEVER, THE PRESSURE SHOULD NOT EXCEED 15LB ACROSS THE FILTER BANK WHEN TWO PUMPS ARE RUNNING (HH). THE HIGHER THE ALLOWED PRESSURE DROP ACROSS THE FILTERS, OVER TIME IT WILL TAKE LONGER TO FILL THE TRUCKS AS THE FILTERS CATCH MORE SEDIMENT, BUT THE FILTERS WILL NEED TO BE CLEANED LESS FREQUENTLY.



CONSULTANT NAME AND ADDRESS:



CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL: (613)225-1123
FAX: (613)225-7298
E-MAIL: info@cemltdtowa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	B.P.	ISSUED FOR CONSTRUCTION
5	28/03/16	B.P.	REISSUED FOR TENDER
4	14/04/14	B.P.	REISSUED FOR TENDER
3	13/02/14	B.P.	ISSUED FOR TENDER
2	15/01/14	B.P.	ISSUED FOR 99% REVIEW
1	25/11/13	B.P.	ISSUED FOR 50% REVIEW

NO.	DATE	BY:	DESCRIPTION
1	25/11/13	B.P.	ISSUED FOR 50% REVIEW
2	15/01/14	B.P.	ISSUED FOR 99% REVIEW
3	13/02/14	B.P.	ISSUED FOR TENDER
4	14/04/14	B.P.	REISSUED FOR TENDER
5	28/03/16	B.P.	REISSUED FOR TENDER
6	19/09/16	B.P.	ISSUED FOR CONSTRUCTION
7			
8			
9			
10			

LOCATION	CONSULTANT:
	DRAWN BY:
	DESIGNED BY:
	APPROVED BY:
	DATE:
	CONSULTANT:
	DRAWN BY:
	DESIGNED BY:
	APPROVED BY:
	DATE:

ELECTRICAL
SCOPE OF WORK, LEGEND AND
MAJOR EQUIPMENT SCHEDULE


MECH FILE NAME:	DWG NO:	DP:	SCALE:
13-072 E	E1	6	AS NOTED

ELECTRICAL SYMBOL LEGEND

SYMBOL	DESCRIPTION
	TYPE 'A' LIGHT FIXTURE ROUGH SERVICE CEILING/SUSPEND MOUNT 79W, 5725lm, 4100K, CRIG6, ASYMMETRIC BEAM, MVOLT DRIVER
	TYPE 'B' LIGHT FIXTURE EXTERIOR WALL-PACK 19W, 1017lm, 5000K, 120V, PHOTOELECTRIC CELL, DARK BRONZE FINISH
	TYPE 'C' LIGHT FIXTURE EXTERIOR WALL-PACK 45W, 3149lm, 5000K, 120V, PHOTOELECTRIC CELL, DARK BRONZE FINISH
	PENDANT-MOUNT STROBE WARNING LIGHT, WEATHERPROOF 12W, 2Mcp, 60lm/min, 90-130VAC, 3/4" CONDUIT ENTRY, AMBER LENS
	COMBO ALUMINUM 6V 36W CAPACITY BATTERY UNIT W/ 2x PAR18 4W LED HEADS, LED BACKLIT PICTOGRAM SIGN, 120/347VAC INPUT
	SINGLE POLE WALL-MOUNT SWITCH
	WALL-MOUNT DUPLEX RECEPTACLE CSA CONFIGURATION 5-15R
	WALL-MOUNT DUPLEX RECEPTACLE CSA CONFIGURATION 5-15R ON DEDICATED CIRCUIT
	WALL-MOUNT DUPLEX RECEPTACLE WITH INTEGRAL GFCI PROTECTION
	WALL-MOUNT DUPLEX RECEPTACLE WITH INTEGRAL GFCI ON DEDICATED CIRCUIT
	WALL-MOUNT QUAD RECEPTACLE CSA CONFIGURATION 5-15R
	WALL-MOUNT SPECIAL PURPOSE DIRECT CONNECTION TO EQUIPMENT VOLTAGE, NUMBER OF PHASES AND CIRCUIT BREAKER AMPERAGE AS STATED
	TELEPHONE JACK WALL-MOUNT
	DATA JACK WALL-MOUNT
	ELECTRICAL DISTRIBUTION PANEL
	ELECTRICAL POWER PANEL
	ELECTRICAL PANEL, LOW-VOLTAGE OR SPECIAL-PURPOSE
	WATT-HOUR REVENUE METER
	EMERGENCY DIESEL ENGINE-GENERATOR SET 208V 3ø 60Hz 80kW 100KVA 278A
	AUTOMATIC TRANSFER SWITCH SOLID NEUTRAL, 3-POLE, 3ø, 260A, 208V, C/W WINDOW KIT
	UNFUSED DISCONNECT SWITCH
	MOTOR, SINGLE-PHASE
	MOTOR, THREE-PHASE
	EXHAUST FAN CEILING-MOUNTED
	HEAT DETECTOR CEILING-MOUNTED
	THERMOSTAT, WALL-MOUNT
	FLOW SWITCH
	LEVEL SWITCH
	MOTORIZED VALVE
	DIFFERENTIAL PRESSURE METER
	FLOW METER
	MOTORIZED DAMPER
	MOTORIZED DAMPER PARALLEL BLADE
	HEAT TRACE CABLE
	HEAT TRACE CONTROLLER
	UNIT HEATERS

EQUIPMENT LIST: IGLOOLIK

1. MB, MAIN BREAKER, 250 AMPS, 250V, 3 POLE BREAKER IN A NEMA 4 ENCLOSURE, IR PER SPEC
2. G, EMERGENCY GENERATOR, DIESEL ENGINE-GENERATOR, STANDBY, AIR CHARGED-AIR COOLED, 3 PHASE, 120/208 V, 80KW, 100 KVA, C/W MAIN BREAKER, LOAD CENTRE AND GFI RECEPTACLE, COMPLETE WITH AN INTEGRATED CONTROLLER, BATTERY CHARGER AND STARTING BATTERIES, BLOCK HEATER AND FIRE ALARM CAPABLE CONTROL PANEL WITH TROUBLESHOOTING AND MAINTENANCE ASSISTANCE CAPABILITIES. MONITORING THE FOLLOWING: VOLTAGES, FREQUENCY, CURRENTS, KILOWATTS AND THE FOLLOWING ALARMS AND FAULTS: LOW OIL LEVEL, LOW COOLANT LEVEL, HIGH ENGINE TEMPERATURE, NO START UP, ENGINE OVER-SPEED, MIN/MAX, ALTERNATOR VOLTAGE, MIN/MAX, BATTERY VOLTAGE AND EMERGENCY STOP AND THE FOLLOWING ENGINE PARAMETERS: HOURS COUNTER, OIL PRESSURE, COOLANT TEMPERATURE, ENGINE SPEED, BATTERY VOLTAGE, BATTERY CHARGING AMPS, ROOM TEMPERATURE AND STATUS OF COOLANT HEATER (CURRENT).
3. ATS, AUTOMATIC TRANSFER SWITCH, SOLID NEUTRAL, 3 POLE, 3 PHASE, 120/208 V, 260 AMPS, C/W WINDOW KIT, ASCO CAT. NUMBER: 300 3 260 C 1 C 123 120/208V, 60 HZ, OR EQUIVALENT, IR PER SPEC, MONITORING THE FOLLOWING: A.T.S. POSITION, VOLTAGES, FREQUENCY AND CURRENTS, KILOWATTS, ATS TROUBLE.
4. P1, PANEL BOARD, 120/208V, 3 PHASE, 4 WIRE, 400 AMP FRAME, SURFACE MOUNT, 60 CIRCUITS, NEMA 4 ENCLOSURE. C/W 250A/3P MAIN BREAKER AND THE FOLLOWING LOAD BREAKERS: 100A/3P, 2X 100A/3P TIME DELAY, 60A/3P, 2X 30A/2P, 7X 15A/3P. IRS PER SPEC.
5. P2, PANEL BOARD, 120/208V, 3 PHASE, 4 WIRE, 100 AMP FRAME, 30 CIRCUITS, SURFACE MOUNT, NEMA 4 ENCLOSURE. C/W THE FOLLOWING LOAD BREAKERS: 30A/2P, 25A/1P, 20A/1P AND 13X 15A/1P. IRS PER SPEC
6. PA-1, PANEL BOARD, 120/208V, 3 PHASE, 4 WIRE, 60 AMP FRAME, 24 CIRCUITS, SURFACE MOUNT, NEMA 4 ENCLOSURE. C/W THE FOLLOWING LOAD BREAKERS: 4X 15A/1P. IRS PER SPEC
7. UH-1 TO 5, 4KW 208V 3PHASE UNIT HEATER, C/W INTERNAL THERMOSTAT AND 40A DISCONNECT SWITCH. CHROMOLOX MODEL NUMBER: LUH-04-83-34-40-1. C/W WALL-MOUNT BRACKET MODEL NUMBER: WUH-01A
8. LIGHT 'A': SUSPEND MOUNT LED ROUGH SERVICE FIXTURE, LITHONIA LIGHTING MODEL NUMBER: VAP 79LED ASY, C/W 8" CHAIN MOUNT BRACKET MODEL: VAPCMB MS18
9. LIGHT 'B': 19W 1017LM LED WALL LUMINAIRE C/W PHOTOCELL, LITHONIA LIGHTING MODEL NUMBER: TWS LED 1 50K 120 PE DBXD
10. LIGHT 'C': 45W 3149LM LED WALL LUMINAIRE C/W PHOTOCELL, LITHONIA LIGHTING MODEL NUMBER: TWP LED 20C 700 50K T3M 120 PE DBXD
11.EXIT SIGNS: COMBO ALUMINUM LED PICTOGRAM EXIT SIGN, DUAL HEAD 4W PAR18 LED LIGHTS AND 36W BATTERY PACK, AMLITE MODEL: CARPWO636 U M-2SMALJ WHT/ATD
12. ALARM REPORTING UNIT: BARNETT ENGINEERING MODEL: B1290 PROTALK PLUS, C/W ONE EXPANDER UNIT MODEL: B1292 AND ONE BATTERY BACKUP POWER SUPPLY MODEL: OPTION 004
13. STROBE: PENDANT-MOUNT STROBE WARNING LIGHT, WEATHERPROOF, ¾" CONDUIT ENTRY, AMBER LENS. APPLIED STROBE TECHNOLOGY MODEL: AST-2-90-130-AC-AM
14. FIRE BEACON: RED, FLASHING LED, 24V AC/DC, WERMA SIGNALTECHNIK PART NUMBER: 22410075
15. HD-1 TO 2, FIXED TEMPERATURE 135F MOISTURE-PROOF HEAT DETECTOR, MIRCOM MODEL: CF-135MP
16. HD-3: FIXED TEMPERATURE 200F MOISTURE-PROOF HEAT DETECTOR, MIRCOM MODEL: CF-200MP
17. K0 TO 3: 4PDT, 120VAC COIL RELAY
18. K4 TO 5: 4PDT, 24VAC COIL RELAY
19. HTC-1 TO 2: HEAT TRACE CONTROLLER, URECON MODEL NUMBER: UTC-2030-11, WITH GROUND FAULT DETECTION CIRCUITRY, 120-240VAC, 30A, 2 POLES IN A NEMA 4 PAINTED STEEL ENCLOSURE. CONTROLS FACTORY SET @ 3°C AND HIGH LIMIT: 65°C FOR PROTECTION OF PLASTIC PIPING. EACH HTC TO CONTROL: 2 HEAT TRACE CABLES, AND 3 RTD TEMPERATURE SENSORS, PER INTAKE PIPE. FOR INSTALLATION DETAILS OF HEAT TRACE COMPONENTS SEE: SPEC 224201_13-072 REV PLUMBING SPECIALTIES AND ACCESSORIES, SECTION 2.8: INTAKE PIPES.
20. HEAT TRACE CABLES: THERMOCABLE MODEL# C13-240-COJ, 12AWG BUS WIRES WITH OUTPUT OF 9.75 W/m @ 208VAC AND MAXIMUM CIRCUIT LENGTH OF 220m. EACH INTAKE PIPE TO HAVE A REDUNDANT SET OF THREE SPARE HEAT TRACE CABLES PULLED UPON INSTALLATION.
21. 100 Ω RTD TEMPERATURE SENSOR URECON MODEL: ERTD-15-G WITH 15 m OF GREY PVC LEAD WIRE.
22. 100 Ω RTD TEMPERATURE SENSOR URECON MODEL: ERTD-15-R WITH 15 m OF RED PVC LEAD WIRE.
23. 100 Ω RTD TEMPERATURE SENSOR URECON MODEL: ERTD-30-G WITH 30 m OF GREY PVC LEAD WIRE.

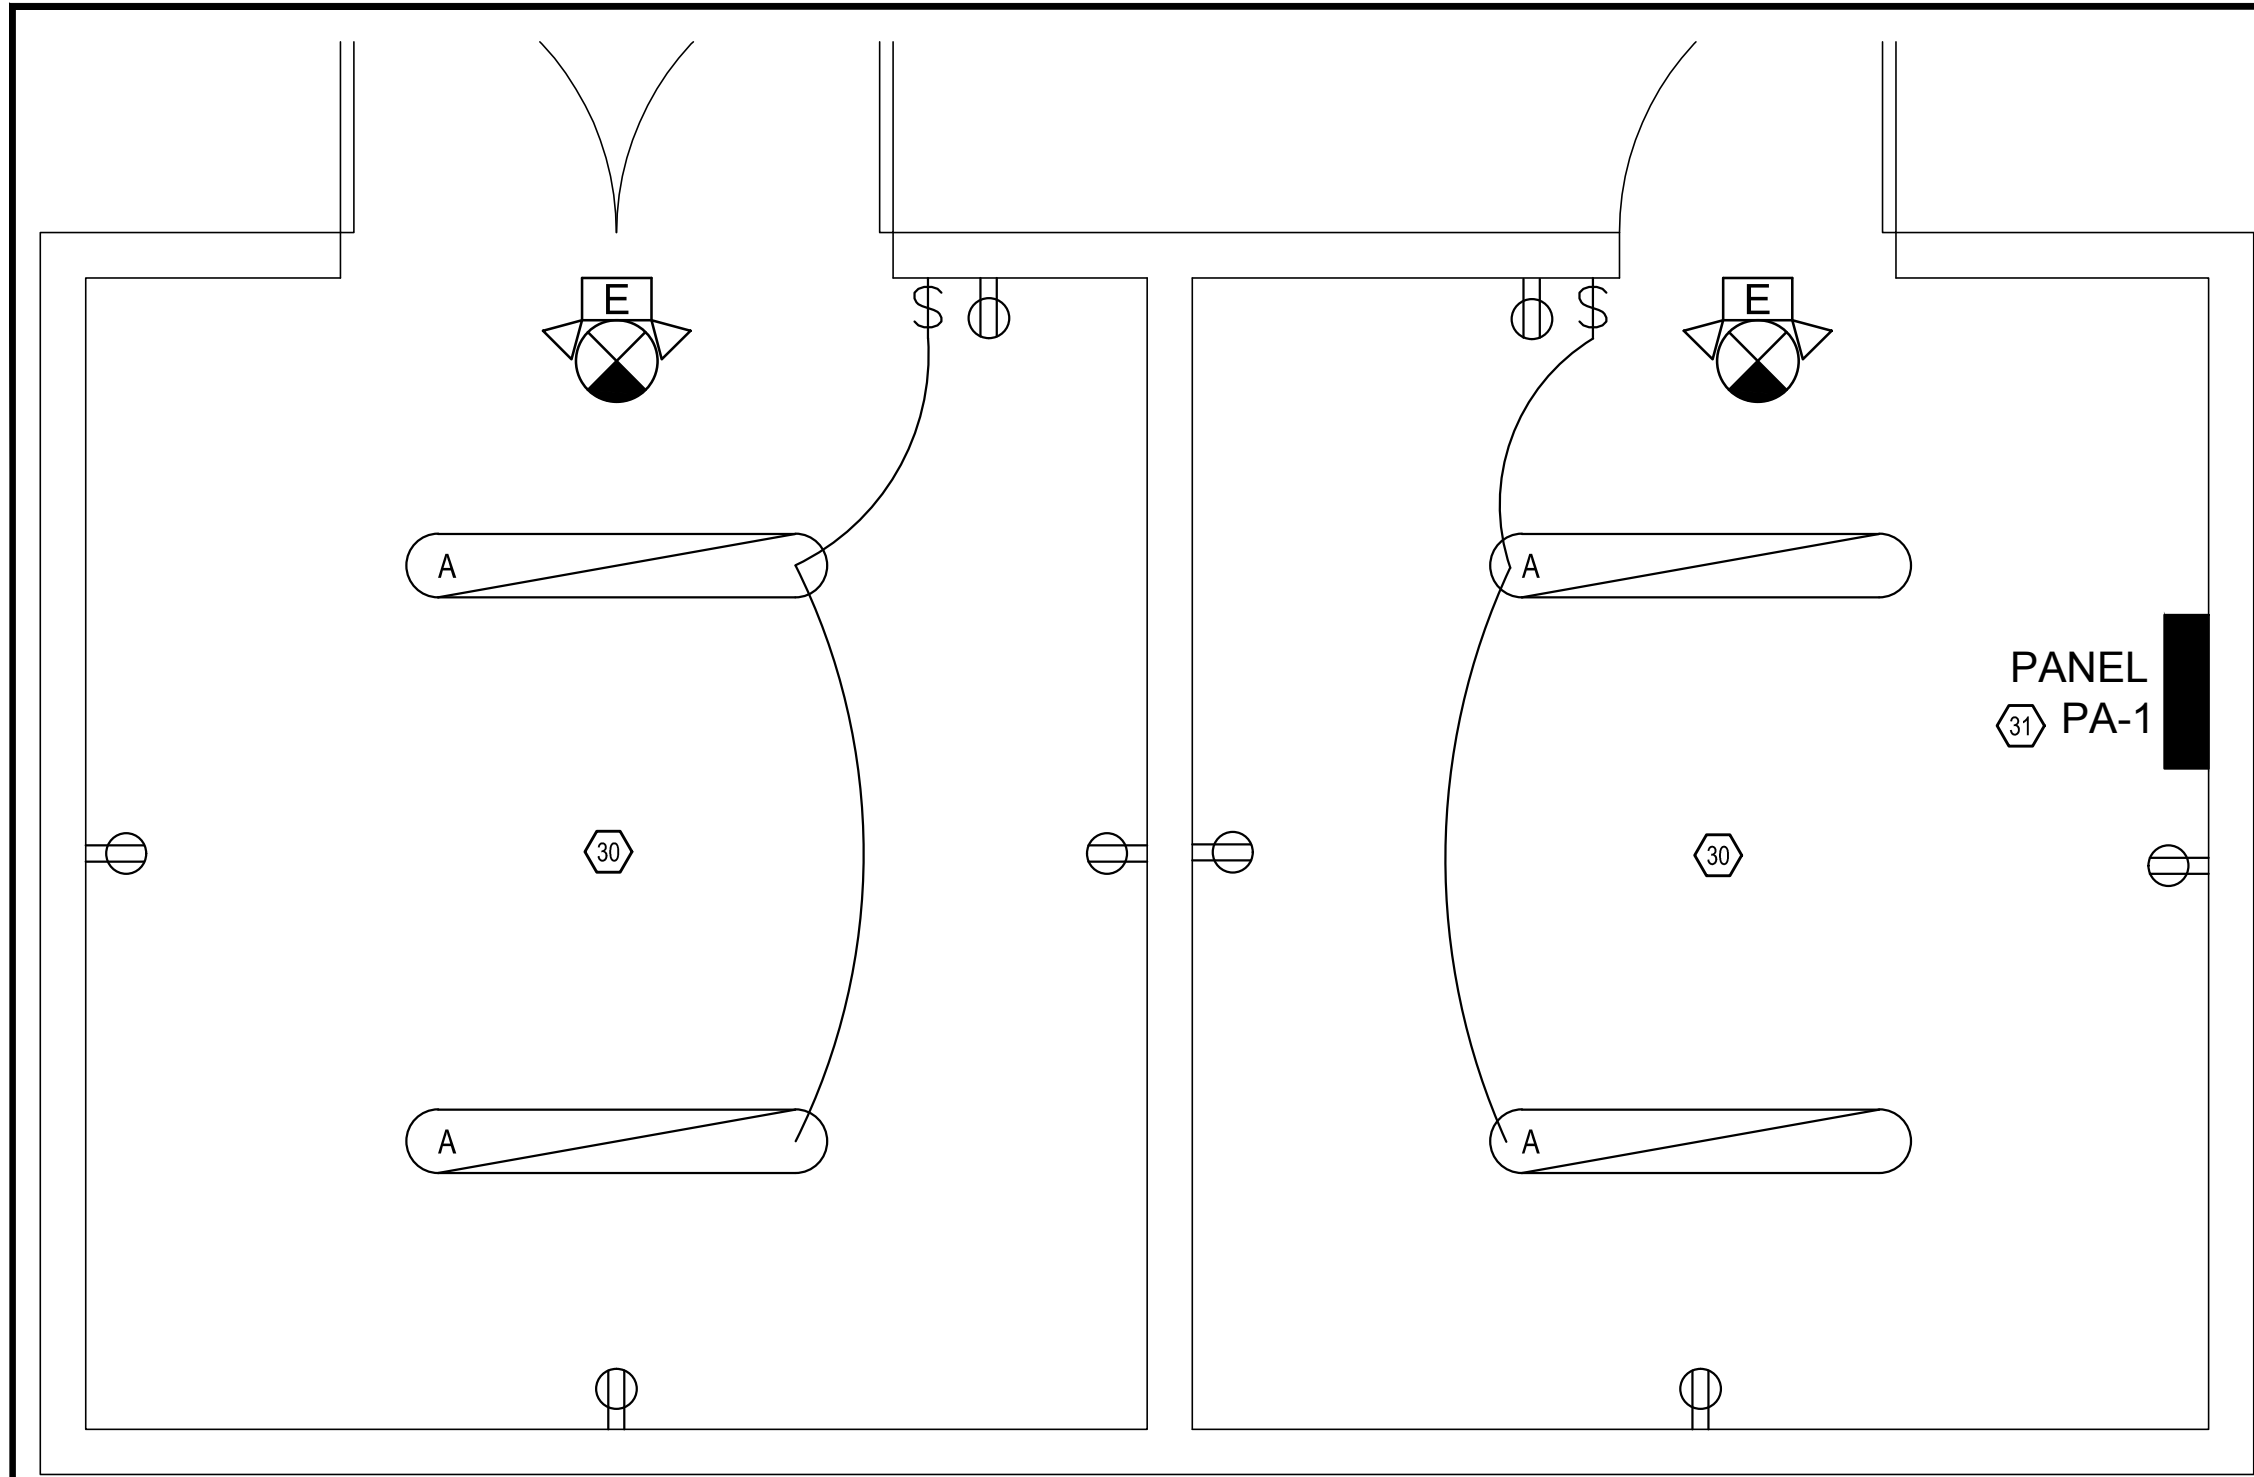


- DEMOLISH ALL EXISTING ELECTRICAL EQUIPMENT IN DECOMMISSIONED PUMP STATION.
- PROVIDE NEW PANEL PA-1 TO REPLACE OLD PANEL, AND PROVIDE NEW U/G FEED FROM NEW PUMP STATION.
- PROVIDE ONE DUPLEX CONVENIENCE RECEPTACLE AT EACH ENTRANCE AND ON EACH WALL.
- PROVIDE WALL-MOUNTED LIGHT SWITCHES AT EACH ENTRANCE AND SUFFICIENT LIGHTING FIXTURES 'A' TO PROVIDE 50LX ILLUMINATION FOR EACH ROOM.
- PROVIDE COMBINATION BATTERY PACK/ PICTOGRAM EXIT SIGN AND DUAL 4W LED EMERGENCY LIGHTS ABOVE DOORWAY TO EACH EXTERNAL DOOR.

2
E3
N/A


ELECTRICAL LAYOUT - EXAMPLE DECOMMISSIONED PUMP STATION

1
E3
1:25

ELECTRICAL LAYOUT - LOWER LEVEL - NORMAL POWER AND LIGHTING

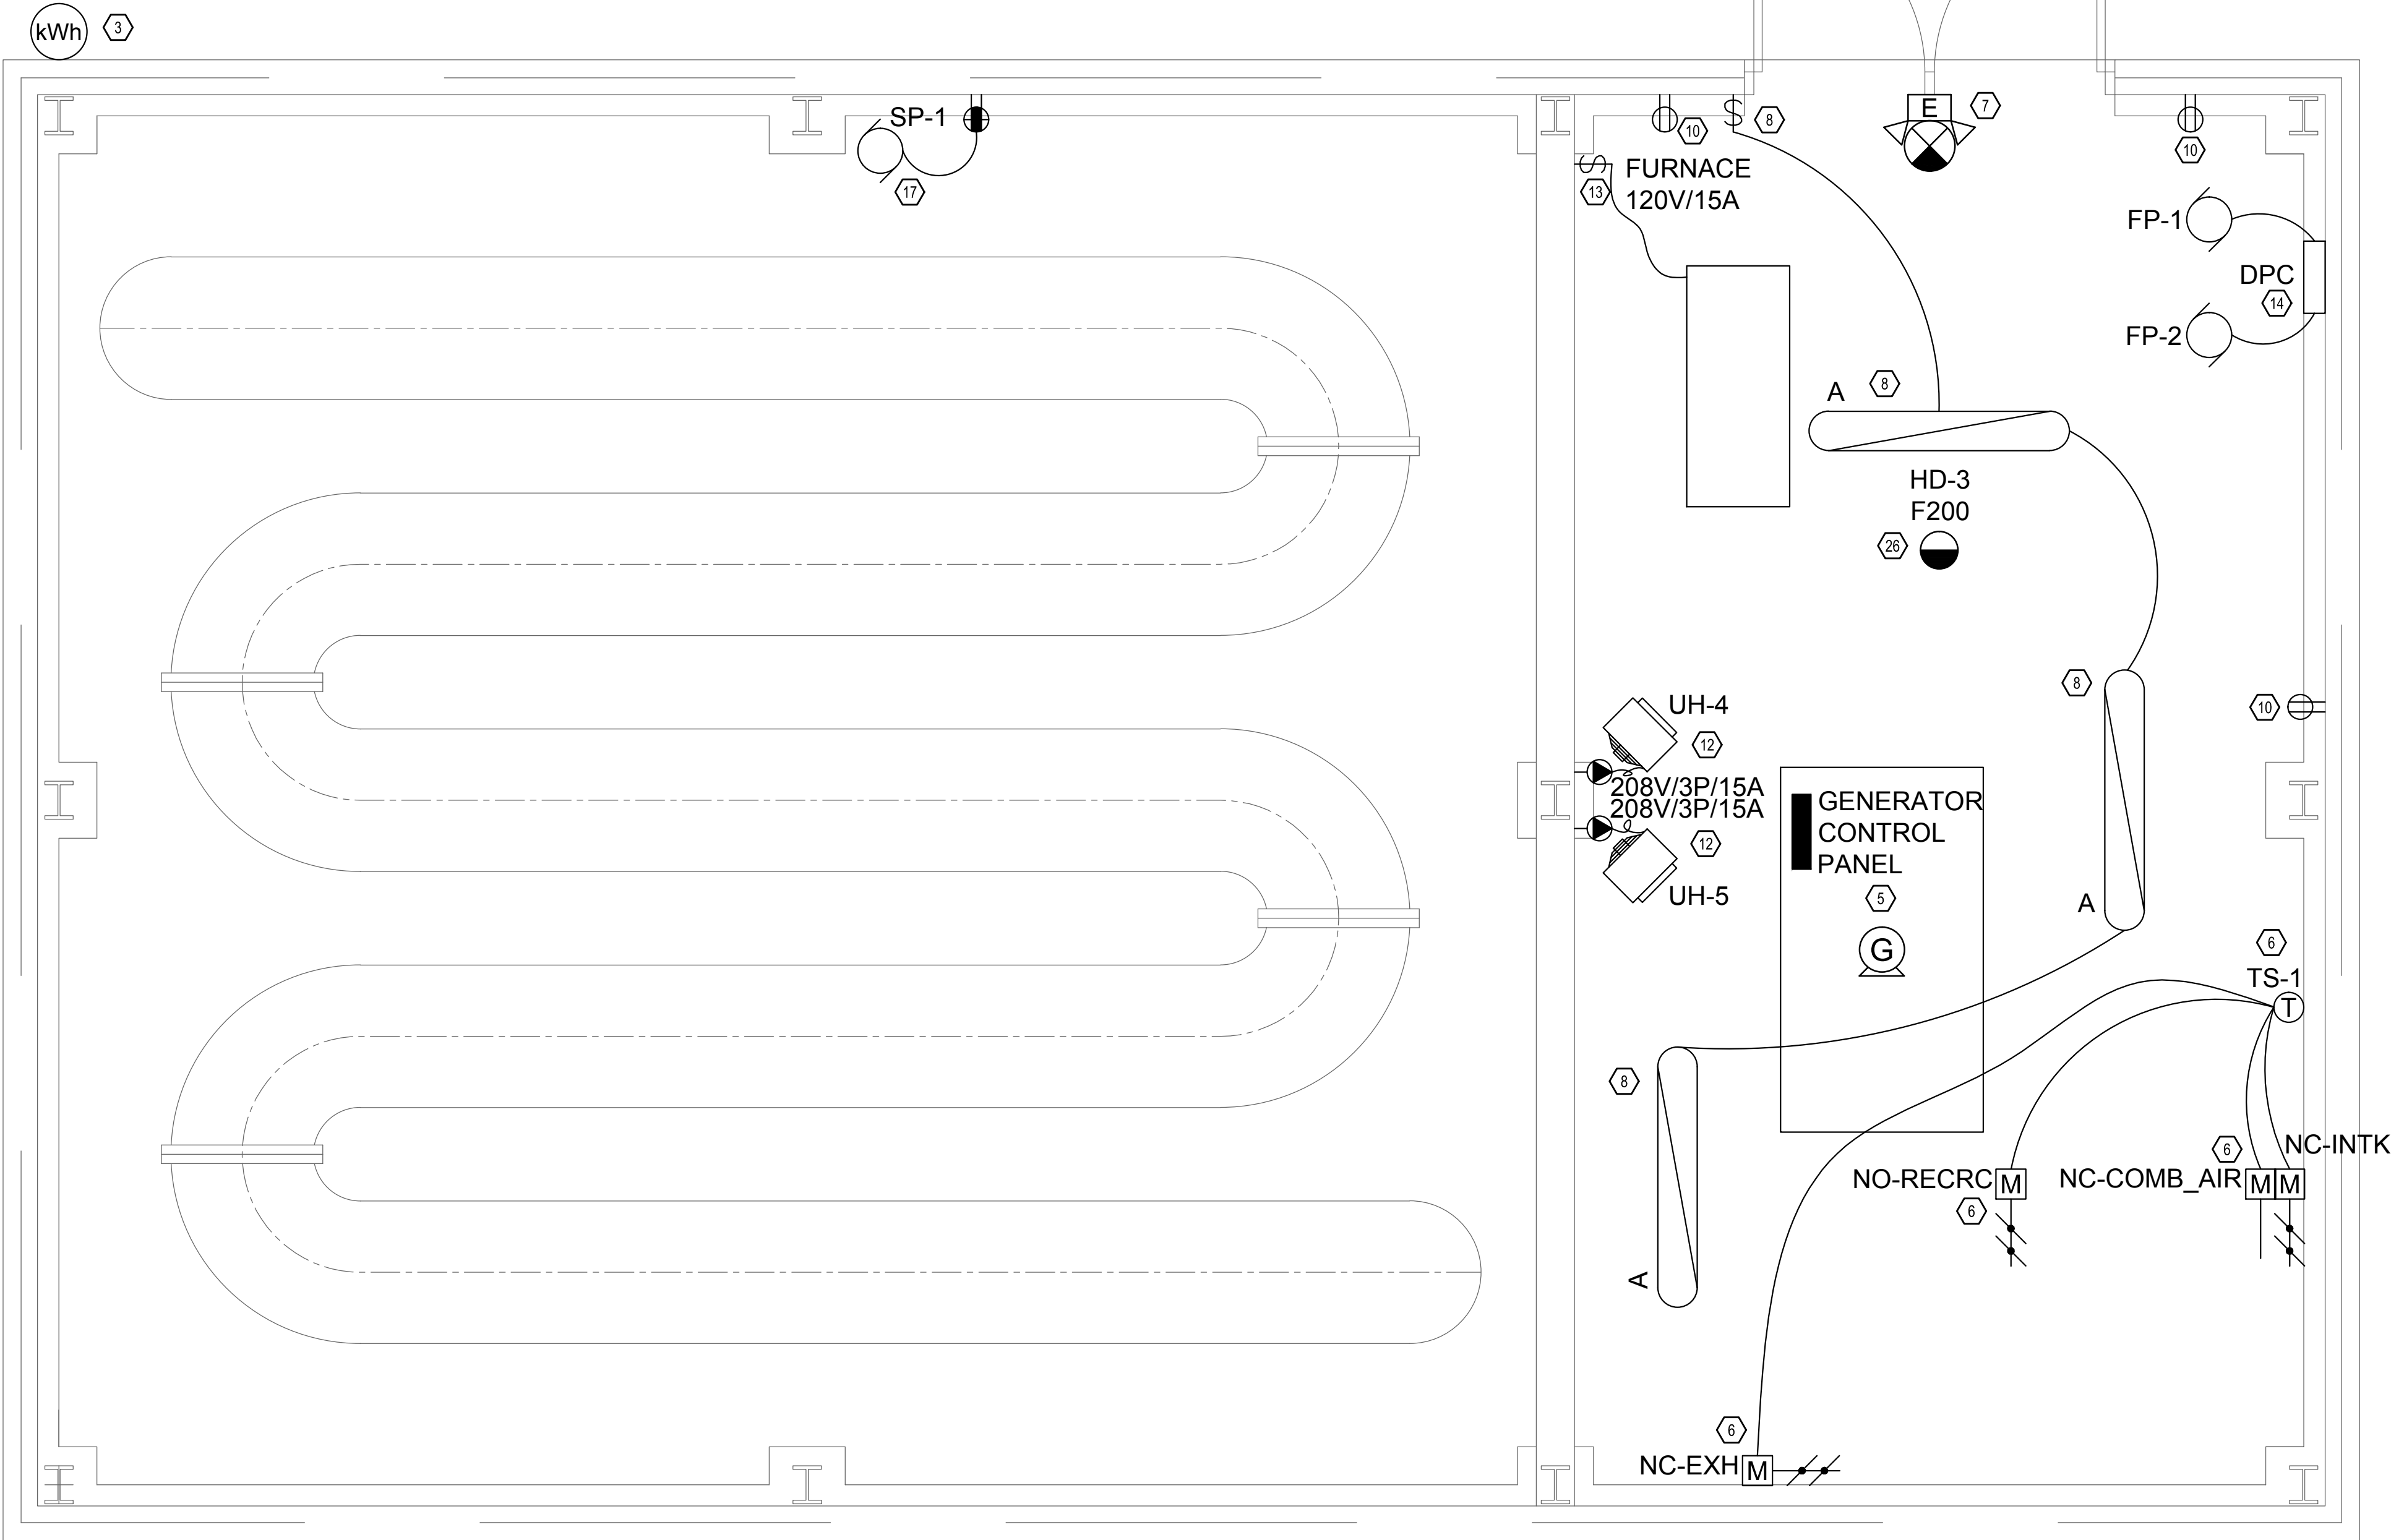

CONSULTANT NAME AND ADDRESS:

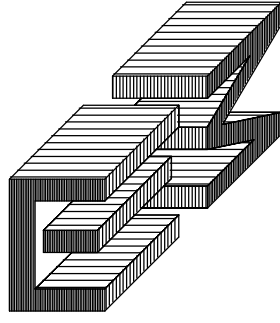

CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613)225-1123
FAX. (613)225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	B.P.	ISSUED FOR CONSTRUCTION
5	28/03/16	B.P.	REISSUED FOR TENDER
4	14/04/14	B.P.	REISSUED FOR TENDER
3	13/02/14	B.P.	ISSUED FOR TENDER
2	15/01/14	B.P.	ISSUED FOR 99% REVIEW
1	25/11/13	B.P.	ISSUED FOR 50% REVIEW

DATE: 16/09/16	BY: M.M. WILLET	DESCRIPTION: SEP 2016
STAMP: REGISTERED PROFESSIONAL ENGINEER NWT/NU		
CONSULTANT: C.E.M.L.		
DRAWN BY: B.P.		
DESIGNED BY: N.K.		
APPROVED BY: M.M.		
DATE: SEPTEMBER 2016		

STAMP: PERMIT TO PRACTICE CHIARELLI ENGINEERING MANAGEMENT LTD. Signature: M.M. WILLET Date: 2016-09-19 PERMIT NUMBER: P 732 NWT/NU Association of Professional Engineers and Geoscientists		CONSULTANT: C.E.M.L.
		DRAWN BY: B.P.
		DESIGNED BY: N.K.
		APPROVED BY: M.M.
		DATE: SEPTEMBER 2016

LOCATION:

IGLOOLIK
QIKIQTAALUK REGION OF NUNAVUT
XOA OLO


PROJECT:

IMPROVEMENT OF
WATER SUPPLY SYSTEM

DRAWING TITLE:

ELECTRICAL POWER &
LIGHTING LAYOUT
LOWER LEVEL

CONSULTANT NAME AND ADDRESS:




CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613)225-1123
FAX. (613)225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	B.P.	ISSUED FOR CONSTRUCTION
5	28/03/16	B.P.	REISSUED FOR TENDER
4	14/04/14	B.P.	REISSUED FOR TENDER
3	13/02/14	B.P.	ISSUED FOR TENDER
2	15/01/14	B.P.	ISSUED FOR 99% REVIEW
1	25/11/13	B.P.	ISSUED FOR 50% REVIEW
No.	DATE: (dd/mm/yy)	BY:	DESCRIPTION:

STAMP	CONSULTANT: CEML
	DRAWN BY: B.P.
	DESIGNED BY: N.K.
	APPROVED BY: M.M.
	DATE: SEPTEMBER 2016

STAMP	CONSULTANT:
	DRAWN BY:
	DESIGNED BY:
	APPROVED BY:
	DATE:

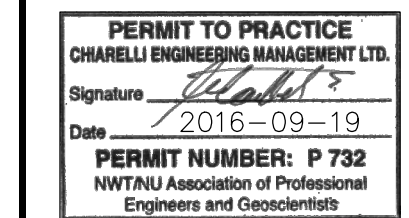


LOCATION:


IGLOOLIK
QIKIQTAALUK REGION OF NUNAVUT
XOA OLO

PROJECT:
IMPROVEMENT OF
WATER SUPPLY SYSTEM


DRAWING TITLE:
ELECTRICAL POWER &
LIGHTING LAYOUT
UPPER LEVEL

MECH FILE NAME:	DWG NO:	OF:	SCALE:
13-072 E	E4	6	AS NOTED


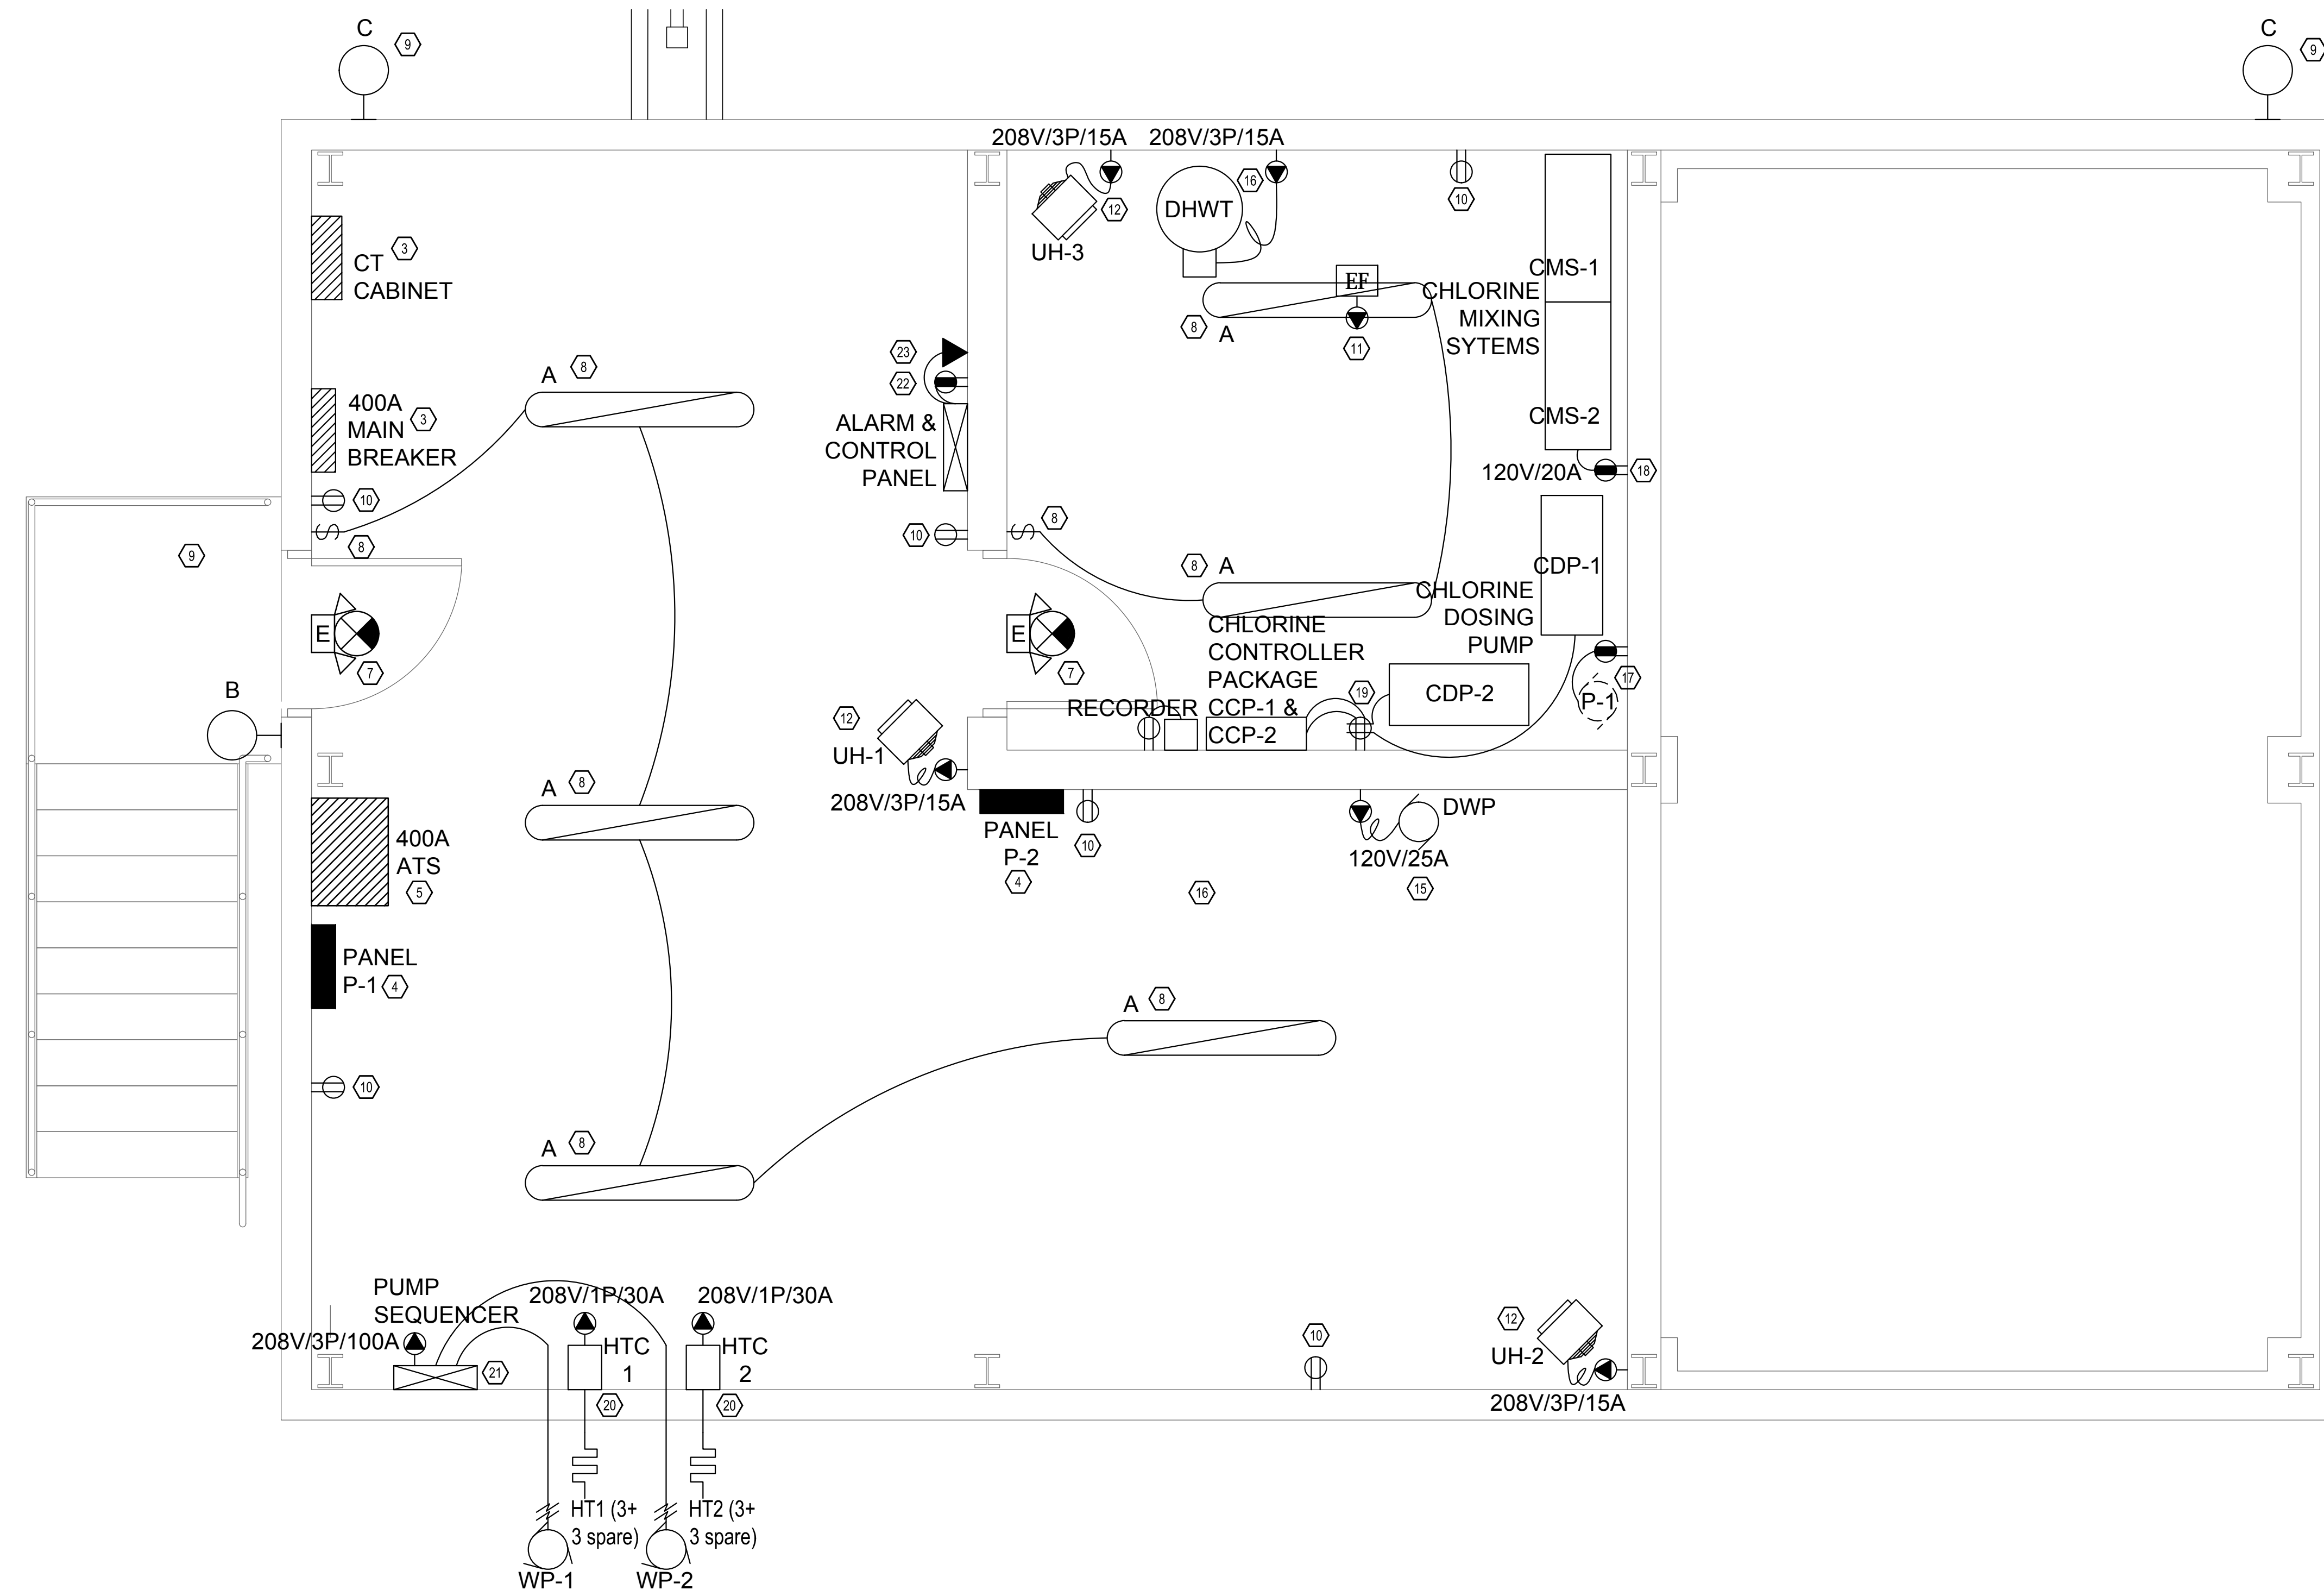


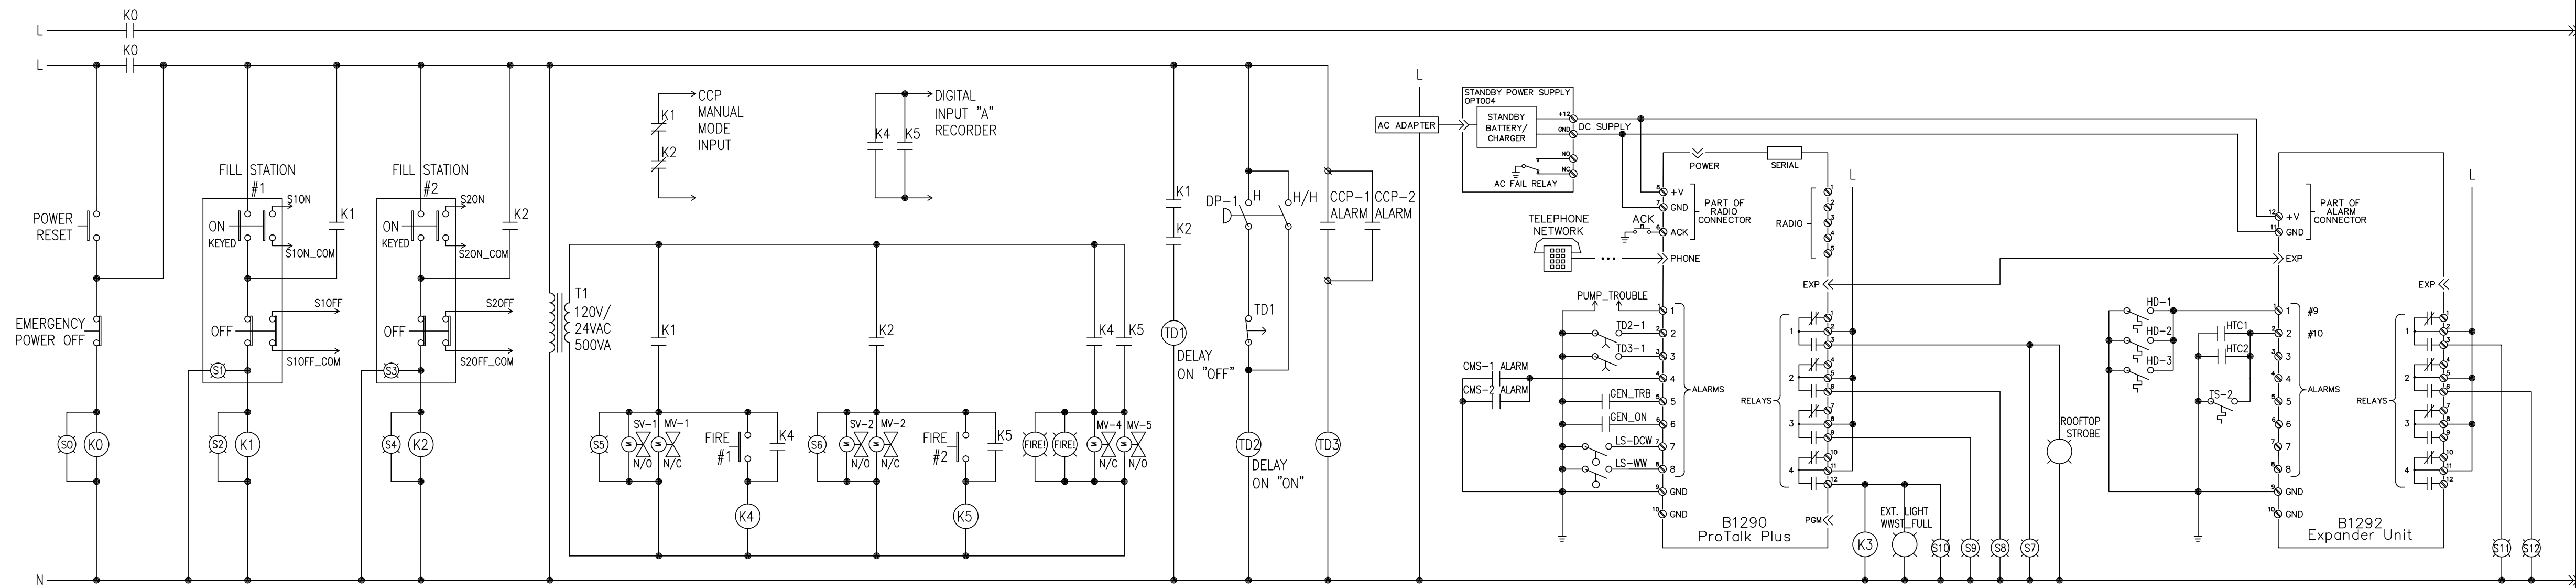

1
E5
PUMP CONTROL SYSTEM & ALARM SYSTEM LADDER LOGIC DIAGRAM
N/A

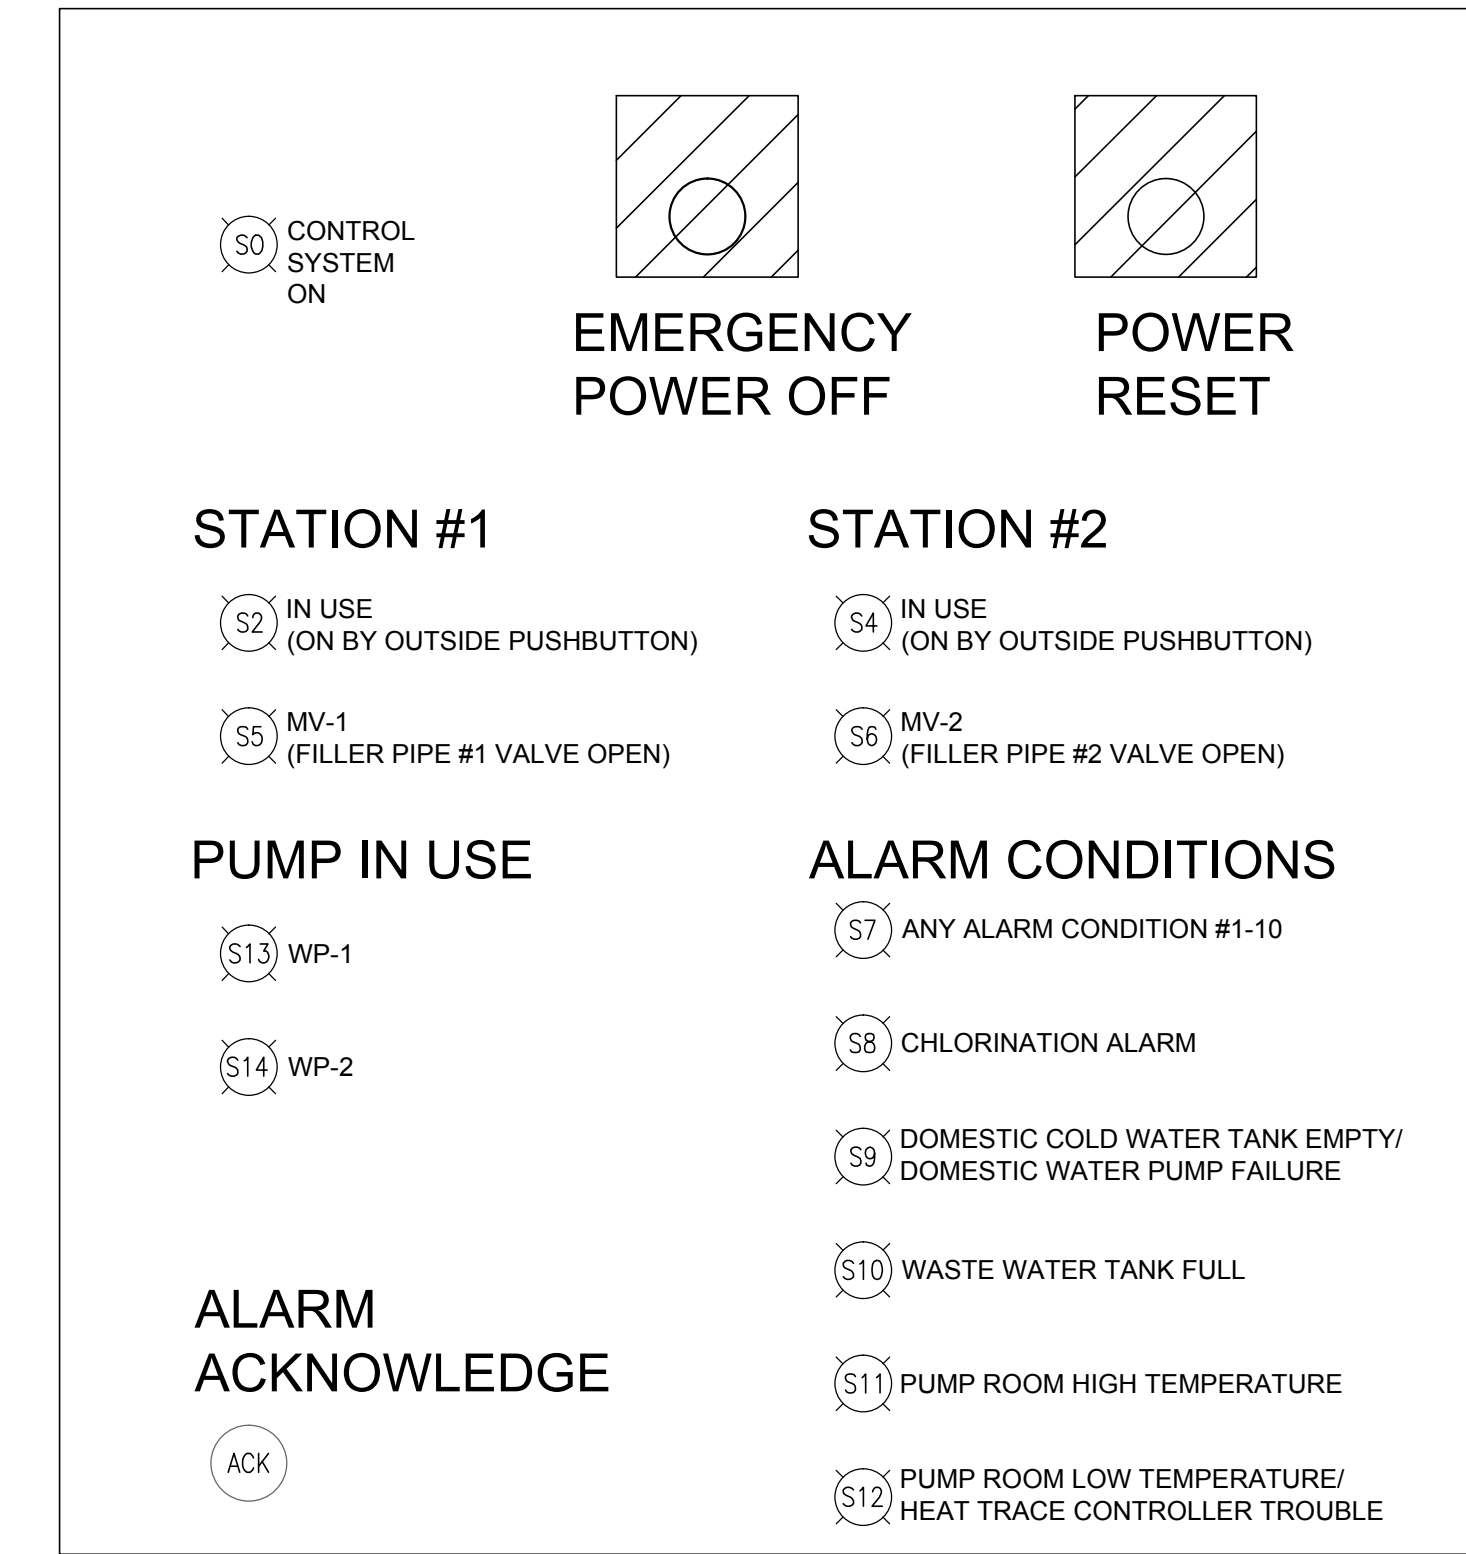

2
E5
PUMP CONTROL SYSTEM PANELBOARD LAYOUT
N/A

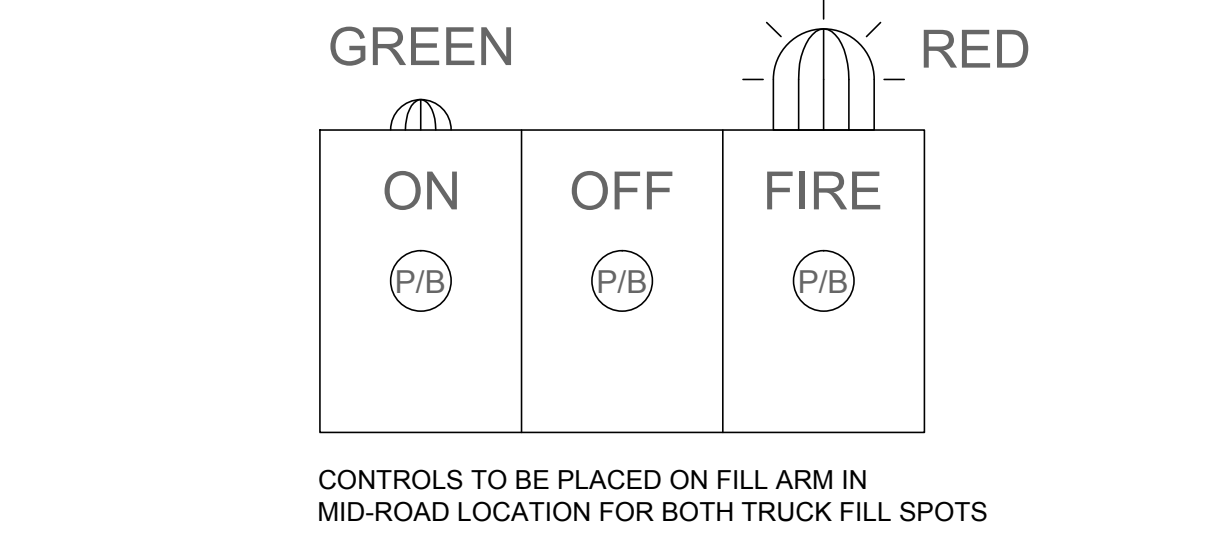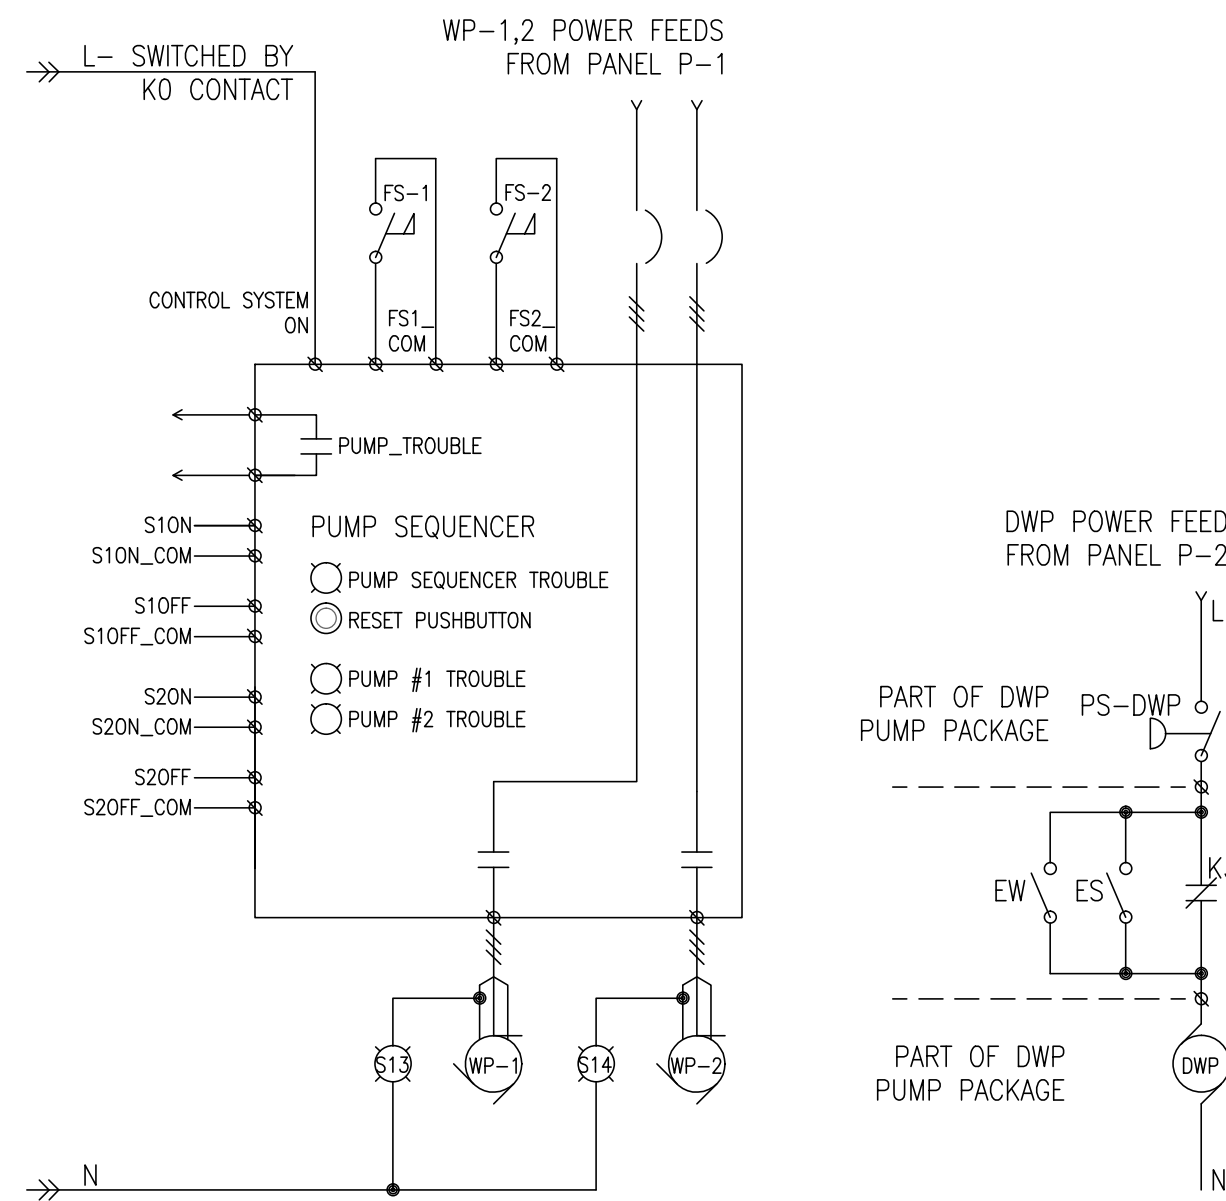

3
E5
FILL ARM CONTROL BOX LAYOUT
N/A

ALARM REPORTING UNIT			
ALARM #	ALARM DESCRIPTION	ALARM CONDITION	ALARM GENERATED BY
1	PUMP TROUBLE	NO FLOW OF WATER WHEN PUMP TURNED ON	PUMP SEQUENCER & WATER PUMP FLOW SWITCHES FS-1 - 2
2	FILTER BLOCKED	INSUFFICIENT FLOW OF WATER WHEN PUMP IS RUNNING	DIFFERENTIAL PRESSURE SWITCH DP-1
3	CHLORINATION STOPPED	INSUFFICIENT FLOW OF CHLORINE WHEN CCP-1 OR CCP-2 IS RUNNING	CHLORINATION CONTROLLER PANEL CCP-1 OR CCP-2
4	CHLORINE FEED TROUBLE	CHLORINE MIXING SYSTEM TROUBLE	CHLORINE MIXING SYSTEM CMS-1 OR CMS-2
5	EMERGENCY GENERATOR TROUBLE	ANY OUT-OF-SPEC CONDITION	GENERATOR CONTROLLER
6	EMERGENCY GENERATOR RUNNING	NORMAL GRID POWER LOST	AUTOMATIC TRANSFER SWITCH ATS
7	WATER STORAGE TANK EMPTY	LOW LEVEL IN DOMESTIC COLD WATER STORAGE TANK	FRESH WATER STORAGE TANK LOW LEVEL FLOAT SWITCH LS-DCW
8	WASTE WATER TANK FULL	HIGH LEVEL IN WASTE WATER STORAGE TANK	WASTE WATER STORAGE TANK HIGH LEVEL FLOAT SWITCH LS-WW
9	PUMP STATION HIGH TEMPERATURE	HIGH PUMP STATION ROOM TEMPERATURE	3 ROOM HEAT DETECTORS HD-1 - 3
10	PUMP STATION LOW TEMPERATURE	LOW PUMP STATION ROOM TEMPERATURE / HEAT TRACE TROUBLE	ROOM THERMOSTAT & 2 HEAT TRACE CONTROLLERS

- ALARMS:
- ALARM ACTIVATES IF A FLOW SWITCH (FS-1 OR FS-2) SENSES NO FLOW IN 15 (ADJUSTABLE) SECONDS AFTER ITS RELEVANT PUMP (WP-1 OR WP-2) IS TURNED ON.
ACTION: CHECK THE PUMP CONTROLLER, DETERMINE WHICH PUMP FAILED AND WHY. REPAIR THE PROBLEM, RESET THE PUMP SEQUENCER AND ACKNOWLEDGE THE ALARM CONTROLLER.
 - ALARM ACTIVATES IF A DIFFERENTIAL PRESSURE SWITCH (DP-1) SENSES HIGHER THAN SET (H) (ADJUSTABLE) PRESSURE ACROSS FILTERS IN 15 SECONDS (ADJUSTABLE) AFTER ONE PUMP IS TURNED ON. ALARM ACTIVATES IF A DIFFERENTIAL PRESSURE METER (DP-1) SENSES HIGHER THAN SET H/H (ADJUSTABLE) PRESSURE ACROSS FILTERS IN 15 SECONDS (ADJUSTABLE) AFTER TWO PUMPS ARE TURNED ON.
ACTION: CLEAN ALL 3 WATER FILTERS, ONE AT A TIME. ACKNOWLEDGE ALARM CONTROLLER.
 - ALARM ACTIVATES IF EITHER CHLORINATION CONTROLLER PANELS CCP-1 OR CCP-2 SENSES OUT-OF-SPEC CONDITIONS FOR 15 SECONDS (ADJUSTABLE).
ACTION: DETERMINE THE REASON FOR THE CHLORINATION CONTROLLER ALARM. FIX THE PROBLEM AND RESET THE CHLORINATION CONTROLLERS AND ACKNOWLEDGE THE ALARM CONTROLLER.
 - ALARM ACTIVATES IF CHLORINE MIXING SYSTEM SENSES TROUBLE.
ACTION: CHECK THE CHLORINE MIXING SYSTEM AND FIX THE PROBLEM. RESET THE CHLORINE MIXING SYSTEM AND ACKNOWLEDGE ALARM CONTROLLER.
 - ALARM ACTIVATES IF GENERATOR CONTROLLER SENSES OUT-OF-SPEC CONDITION WITH GENERATOR.
ACTION: CHECK THE GENERATOR CONTROLLER AND DETERMINE THE CAUSE FOR THE ALARM. FIX THE PROBLEM AND RESET THE GENERATOR CONTROLLER AND ACKNOWLEDGE ALARM CONTROLLER.
 - ALARM ACTIVATES IF NORMAL GRID POWER IS LOST AND AUTOMATIC TRANSFER SWITCH ENGAGES EMERGENCY GENERATOR.
ACTION: DETERMINE THE REASON WHY THE GENERATOR IS RUNNING. ENSURE THE GENERATOR HAS ENOUGH FUEL IF THE POWER OUTAGE IS PROLONGED. ACKNOWLEDGE ALARM CONTROLLER.
 - ALARM ACTIVATES IF DOMESTIC COLD WATER STORAGE TANK (DCWST) LOW LEVEL FLOAT SWITCH (LS-DCW) DETECTS LOW WATER LEVEL.
ACTION: ARRANGE TO RE-FILL THE DCWST AND ACKNOWLEDGE THE ALARM.
 - ALARM ACTIVATES IF WASTE WATER STORAGE TANK (WWST) HIGH LEVEL FLOAT SWITCH (LS-WW) DETECTS HIGH WATER LEVEL.
ACTION: ARRANGE TO PUMP OUT THE WWST AND ACKNOWLEDGE THE ALARM.
 - ALARM ACTIVATES IF ANY OF THE ROOM FIRE ALARM HEAT DETECTORS (HD-1, -2 OR -3) SENSES HIGH ROOM TEMPERATURE.
ACTION: DETERMINE THE REASON FOR THE HIGH TEMPERATURE. FIX THE PROBLEM. ACKNOWLEDGE THE ALARM.
 - ALARM ACTIVATES IF THE ROOM THERMOSTAT (TS-2) SENSES LOW ADJUSTABLE ROOM TEMPERATURE OR IF ANY OF THE 2 HEAT TRACE CONTROLLERS SENSES TROUBLE WITH THE HEAT TRACE CABLES.
ACTION: DETERMINE WHAT IS CAUSING THE ALARM. TAKE APPROPRIATE ACTION: (A) PROVIDE TEMPORARY HEAT SOURCE FOR THE PUMP ROOM IF THE ROOM TEMPERATURE FALLS BELOW SET POINT (10°C ADJUSTABLE), OR (B) DETERMINE WHICH HEAT TRACE CONTROLLER ALARMED AND TAKE ACTION TO FIX THE PROBLEM. ACKNOWLEDGE THE ALARM.

- ALARM REPORTING UNIT RELAYS:
- PROGRAMMED TO TURN "ON" WITH ANY OF THE 1-10 ALARM INPUTS. TURNS "ON" AN OUTDOOR STROBE BEACON LOCATED OUTSIDE THE PUMP STATION TO DISPLAY THAT THE PUMP STATION REQUIRES ATTENTION. TURNS "ON" AN INDICATOR LIGHT ON THE MAIN PANEL LABELED "ANY ALARM CONDITION #1-10"
 - PROGRAMMED TO TURN "ON" WITH EITHER ALARM INPUT #3 OR #4. TURNS "ON" AN INDICATOR LIGHT ON THE MAIN PANEL LABELED "CHLORINATION ALARM"
 - PROGRAMMED TO TURN "ON" WITH ALARM INPUT #7. TURNS "ON" AN INDICATOR LIGHT ON THE MAIN PANEL LABELED "FRESH WATER TANK EMPTY OR DWP PUMP FAILURE"
 - PROGRAMMED TO TURN "ON" WITH ALARM INPUT #8. TURNS "ON" AN INDICATOR LIGHT ON THE MAIN PANEL LABELED "WASTE WATER TANK FULL". TURNS "ON" AN OUTDOOR WARNING LAMP TO INDICATE FULL TANK REQUIRING SERVICE. FULL WWST WILL DISABLE (K3) DOMESTIC WATER PUMP TO PREVENT OVERFILL, UNLESS EMERGENCY EYEWASH (EW) OR EMERGENCY SHOWER (ES) IS USED.
- ALARM EXPANDER UNIT RELAYS:
- PROGRAMMED TO TURN "ON" WITH ALARM INPUT #9. TURNS "ON" AN INDICATOR LIGHT ON THE MAIN PANEL LABELED "PUMP ROOM HIGH TEMPERATURE"
 - PROGRAMMED TO TURN "ON" WITH ALARM INPUT #10. TURNS "ON" AN INDICATOR LIGHT ON THE MAIN PANEL LABELED "PUMP ROOM LOW TEMPERATURE / HEAT TRACE CONTROLLER TROUBLE"

PUMP SEQUENCER OPERATION:
BY DEPRESSING THE "ON" PUSHBUTTON AT FILL STATION #1 OR #2 (SEQUENCER INPUT CONTACTS S10N OR S20N) THE SEQUENCER STARTS THE "NEXT" PUMP WITH A DELAY OF 3 SECONDS.
DEPRESSING THE SAME "ON" PUSHBUTTON AGAIN WILL DO NOTHING UNTIL THE RELEVANT "OFF" BUTTON IS PRESSED.
ONCE THE PUMP IS RUNNING, IT CAN BE TURNED "OFF" BY DEPRESSING THE "OFF" PUSHBUTTON (SEQUENCER INPUT CONTACTS S10FF OR S20FF) AT THE INITIATING FILL STATION.
DEPRESSING THE SAME "OFF" PUSHBUTTON AGAIN WILL DO NOTHING.
BASED ON THE ABOVE, 1 OR 2 PUMPS CAN RUN SIMULTANEOUSLY.

THE SEQUENCE OF THE "NEXT PUMP" IS WP-1 -> WP-2 -> WP-1 -> WP-2 -> ETC...

FLOW SWITCHES WILL PROVIDE FEEDBACK SO THAT WHEN A PUMP IS TURNED "ON" IT ACTUALLY DELIVERS WATER.
IF THE FLOW SWITCH OF ITS RELEVANT PUMP IS NOT "ON" WITHIN 15 SECONDS, THE PUMP SEQUENCER WILL TURN THAT PUMP "OFF" AND TURN THE "NEXT" PUMP "ON".
THIS WILL CAUSE THE AFFECTED PUMP TO BE TAKEN OUT FROM THE SEQUENCE OF THE "NEXT PUMP". IT WILL ALSO TURN "ON" A "PUMP # TROUBLE" ALARM LIGHT AND TURN "ON" A SET OF DRY OUTPUT ALARM CONTACTS "PUMP TROUBLE".
LATCHING OF A FAILED PUMP "OFF" CAN BE RESET BY DEPRESSING A "RESET" BUTTON ON THE PUMP SEQUENCER.

CONSULTANT NAME AND ADDRESS:

CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613)225-1123
FAX. (613)225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	B.P.	ISSUED FOR CONSTRUCTION
5	28/03/16	B.P.	REISSUED FOR TENDER
4	14/04/14	B.P.	REISSUED FOR TENDER
3	13/02/14	B.P.	ISSUED FOR TENDER
2	15/01/14	B.P.	ISSUED FOR 99% REVIEW
1	25/11/13	B.P.	ISSUED FOR 50% REVIEW
NO.	DATE: (dd/mm/yy)	BY:	DESCRIPTION:
STAMP	CONSULTANT: CEML DRAWN BY: B.P. DESIGNED BY: N.K. APPROVED BY: M.M. DATE: SEPTEMBER 2016		
STAMP	CONSULTANT: DRAWN BY: DESIGNED BY: APPROVED BY: DATE:		

PERMIT TO PRACTICE

CHIARELLI ENGINEERING MANAGEMENT LTD.

Signature:

Date: 2016-09-19

PERMIT NUMBER: P 732

NWTNU Association of Professional Engineers and Geoscientists

DRAWN BY:

DESIGNED BY:

APPROVED BY:

DATE:


LOCATION: IGLOOLIK
QIKIQTAALUK REGION OF NUNAVUT
XOA OLO

PROJECT: IMPROVEMENT OF
WATER SUPPLY SYSTEM

DRAWING TITLE: PUMP CONTROL & ALARM
SYSTEM SCHEMATIC AND
SEQUENCE OF OPERATIONS


MECH FILE NAME: 13-072 E	DWG NO: E5	OF: 6	SCALE: AS NOTED
-----------------------------	---------------	----------	--------------------


CONSULTANT NAME AND ADDRESS:



CHIARELLI ENGINEERING
MANAGEMENT LTD.
203-100 CRAIG HENRY DR.
NEPEAN, ONTARIO K2G 5W3
TEL. (613) 225-1123
FAX. (613) 225-7298
E-MAIL: info@cemlottawa.com
MECH. PROJECT No: 13-072

10			
9			
8			
7			
6	19/09/16	B.P.	ISSUED FOR CONSTRUCTION
5	28/03/16	B.P.	REISSUED FOR TENDER
4	14/04/14	B.P.	REISSUED FOR TENDER
3	13/02/14	B.P.	ISSUED FOR TENDER
2	15/01/14	B.P.	ISSUED FOR 99% REVIEW
1	25/11/13	B.P.	ISSUED FOR 50% REVIEW
NO.	DATE: (dd/mm/yy)	BY:	DESCRIPTION:

STAMP	CONSULTANT: CEML
	DRAWN BY: B.P.
	DESIGNED BY: N.K.
	APPROVED BY: M.M.
	DATE: SEPTEMBER 2016

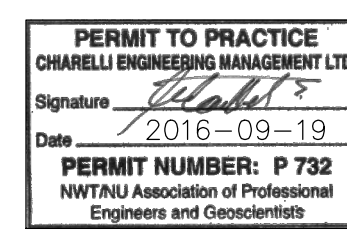STAMP	CONSULTANT:
	DRAWN BY:
	DESIGNED BY:
	APPROVED BY:
	DATE:

LOCATION:

IGLOOLIK
QIKIQTAALUK REGION OF NUNAVUT
XOA OLO

PROJECT:

IMPROVEMENT OF
WATER SUPPLY SYSTEM

DRAWING TITLE:

LOW-VOLTAGE
ELECTRICAL LAYOUT
UPPER LEVEL

MECH FILE NAME:	DWG NO:	OF:	SCALE:
13-072 E	E6	6	AS NOTED

