

Hamlet of Pangnirtung

Water Reservoir Operations and Maintenance Manual

Type of Document:

FINAL Rev 2

Project Name:

Hamlet of Pangnirtung Water Licence Renewal

Project Number:

FRE-00232735-A5

Prepared By:

Stephen Bliss, P.Eng.

Reviewed By:

Eric Bell, P.Eng.

exp Services Inc.
140 Carleton Street, Suite 200
Fredericton, NB E3B 3T4
Canada
T: +1.506.452.9000
F: +1.506.459.3954
www.exp.com

Date Submitted:

November 8, 2024



Legal Notification

This report was prepared by **exp** Services Inc. for the account of the Hamlet of Pangnirtung, NU.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. **Exp** Services Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

Table of Contents

Legal Notification.....	i
Table of Contents	ii
Executive Summary	iii
1 Introduction.....	1
2 Construction	2
3 Operation and Maintenance	3
3.1 General	3
3.2 Sub-Drainage System	3
3.3 Five-Year Reservoir Clean	3
3.4 River Intake Piping/Diesel Pump	4
3.5 Reservoir Fill Piping.....	5
3.6 Diversion Ditches/Culverts	5
4 Contact Information	6

Appendix 1 – Figure 1 : Pump Suction Pipe Location

Drawing C100: Reservoir Site Plan, Misc. Civil Works and New Truck Fill Location
Drawing C102: Earth Infrastructure Repairs, Sections and Details
Drawing C200: New Truck Fill Site Plan, Intake Profiles and Details



exp Quality System Checks	
Project No.: FRE-00232735-A5	Date: November 8, 2024
Type of Document: FINAL	Revision No.: 2
Prepared By: Stephen Bliss, P.Eng.	<i>Stephen Bliss</i>
Reviewed By: Eric Bell, P.Eng.	<i>Eric Bell</i>

Executive Summary

In 2017, the Hamlet of Pangnirtung, NU, had to renew its Water Licence. One condition arising from the process was the requirement to provide an Operations and Maintenance Manual for the Water Supply System (an O&M Manual for the Water Treatment Plant/Truck-Fill Station is provided under a separate cover). The Water Supply System consists of the water intake (at the Duval River) and the storage reservoir.

This O&M Manual aids in the establishment of standardized maintenance methods.

The maintenance schedule for the reservoir/water intake piping is as follows:

- Annual maintenance as described below.
- Five-year cleaning of the reservoir.

A detailed description of the maintenance requirements is contained herein, including the contact information for individuals that may need to be called upon.

1 Introduction

As a condition for the renewal of the Hamlet of Pangnirtung's Water License, the Water Supply System (Water Reservoir and Intake Piping) are required to have an Operations and Maintenance Manual. The O&M Manual for the Truck-Fill Station is under a separate cover.

The ongoing improvements that are being undertaken for the operation of the water reservoir in Pangnirtung include following recommendations of best practices for operation water reservoirs from a variety of published sources and industry practices. This includes the information that is referenced by the American Water Workers Association (AWWA), the Good Engineering Practices for Northern Water and Sewer Systems (NT) and other referenced guidelines.

2 Construction

The water reservoir servicing the Hamlet of Pangnirtung was originally constructed in the mid-1980's. The reservoir (N66°08.97' and W65°40.70') is located just to the east of the Duval River, the primary water source for the Hamlet. The reservoir has a nominal capacity of 120,000 m³; current annual water use is in the order of 55,000 to 60,000 m³.

The reservoir is 40m X 140m along the bottom and 125m X 225m along the top. The 10m depth includes an ice allowance of 1.8m which reduces the effective storage to about 71,000 m³ for the ten-month period of ice cover.

Water is drawn from the Duval River (refer to Fig. 1, Appendix 1) via a wheel-mounted pump and a 200mm diameter high density polyethylene (HDPE) fill pipe (refer to Fig. 2, Appendix 1). The pump and pump-suction intake are only in place during the duration of the reservoir filling (filling is generally completed prior to the end of August). The pump and pump suction are then drained, winterized and returned to storage.

The truck-fill station is located on the east side (refer to Fig. 2; operation and maintenance guidelines of this facility are under a separate cover).

The construction of the reservoir also included two (2) drainage diversion ditches along the southeast side to prevent contamination. The first ditch intercepts all the runoff from a near-by hill and directs it around the reservoir. The second ditch, downslope from the first, is to control runoff from the cut-off berm constructed as part of the first diversion ditch.

The inside and outside slopes of the reservoir are 4:1.

The liner is 80 mil HDPE overlain with protective layers of fine and coarse gravel. This polyethylene liner is designed specifically for flexible geomembrane applications. It contains approximately 97.5% polyethylene, 2.5% carbon black and trace amounts of antioxidants and heat stabilizers. HDPE Liners have outstanding chemical resistance, mechanical properties, environmental stress crack resistance, dimensional stability and thermal aging characteristics. This liner material has excellent resistance to UV radiation and is suitable for exposed conditions.

A sub-drain system was installed to control the effect groundwater could have on the liner (i.e., lifting of the liner). This drainage system consists of perforated 200mm polyethylene piping (laterals) placed under the reservoir in both across and length-wise in a 20m X 25m grid.

3 Operation and Maintenance

3.1 General

Operation of the reservoir consists of the annual filling operation. A diesel-powered pump (rated at 31.67 L/s) is used to fill the reservoir through the 200mm fill pipe. The pump is located to the southwest of the reservoir adjacent to the Duval River (refer to Fig. 2).

The time to fill the reservoir (based on 55,000 m³ volume change) would be in the order of 20 days pumping at 24h per day. After the reservoir is cleaned (every 5 years), the time to fill the reservoir (120,000 m³) would be in the order of 44 days (pumping at 24h per day).

Maintenance of the reservoir and intake pipe primarily consists of inspecting the various components of each. The GN Municipal Engineer and Public Works Foreman are to conduct an annual inspection that would include:

- Fence/gates
- Berm surface and slopes
- Liner (signs of erosion and liner exposure)
- Piping
- Ditching

Any deficiencies are to be noted and brought to the attention of the Hamlet SAO. The extent of any repairs required will determine the timeline to have the repairs done.

NOTE: Given the importance of the Water Reservoir to the Hamlet, when working in the area with mechanical equipment, care must be taken regarding fuels and lubricating oils. DO NOT refuel any mobile equipment near the reservoir. Spill kits must be available when working around the reservoir with mobile equipment.

3.2 Sub-Drainage System

The sub-drain system connects to a header pipe which drains under the north berm (via a manhole) to a ditch. In the event that the outfall freezes, the manhole is equipped with a sump to allow the system to be drained using a portable pump.

The system laterals are accessible from the top of the reservoir berms for cleaning or thawing. In the event of a blockage, a pressure sewer flusher can be used to remove the blockage.

3.3 Five-Year Reservoir Clean

Every five (5) years, the reservoir is to be drained, cleaned of any sedimentation build-up, any required repairs (to either the reservoir and truck-fill station intake piping that are below

the water level) are completed, and the reservoir refilled. The time to complete this work could be in the order of 10-13 weeks, broken down as follows:

- Draining reservoir: 2-3 weeks;
- Clean reservoir: 1-2 weeks (could be longer if repairs to the liner or liner protection are required);
- Fill reservoir (120,000 m³): 6-7 weeks;
- Time allowance to allow suspended sediments to settle: 1 week.

A “temporary” water supply will be required during this period with the Duval River as the source. It will be necessary to chlorinate each truckload of water prior to delivery.

With the extent of the work involved, and where time is of the essence, the Hamlet will be contracting out the work required to clean the reservoir. The procedures to be undertaken to retain a contractor to complete this work are as follows:

- Early in the year (Year 4) prior to the year designated as a cleaning year (Year 5), start the planning process and develop a Request for Proposals for cleaning (the timing is to catch the sealift for any equipment required – equipment to be shipped in Year 4);
- Contractor mobilizes in Year 5;
- A month prior to the Contractor beginning, notify residents of the timelines and the need to reduce water consumption;
- Before truck-fill is unserviceable, fill all the water tanks in town;
- Cleaning the reservoir occurs, make any repairs required, refill;
- After filling, wait 5-7 days to allow any sediment to settle; and
- Truck-fill station returns to operation.
- Actions taken, including repairs, are compiled in a report and presented to the Hamlet.

3.4 River Intake Piping/Diesel Pump

The river intake piping (pump suction) and the diesel pump are brought out of storage and used during the filling of the reservoir. The intake piping is to be inspected for cracks and leaks and to confirm any gaskets are present and properly seated. The strainer/check valve is inspected for blockages and to confirm the check valve is operational. **Note: local knowledge indicates there are no fish in the Duval River (there have been no studies completed to confirm this), therefore, a specific-sized stainer is not required. Strainer sizing is to be based on minimizing debris being pulled from the river and deposited into the reservoir.**

The diesel pump is inspected and serviced prior to being put into operation (refer to the manufacturer’s servicing instructions). Care must be taken when refueling the pump. Spill prevention and best practices for refueling must be observed for this facility.

3.5 Reservoir Fill Piping

The “permanent” intake (filler) pipe should have a constant grade as it travels up the slope to allow it to drain freely when not in use. The piping is to be inspected prior to use and upon completion of the reservoir filling. Repairs to the pipe would be “as required”.

3.6 Diversion Ditches/Culverts

The diversion ditches are to be inspected for excessive erosion and/or siltation. Either conditions will require repairs using mechanical equipment (e.g. excavators).

Culverts are to be inspected for blockages or excessive corrosion. Blockages are to be removed with high-pressure hoses or steam systems (depending on the blockage). Excessive corrosion will require the culvert be replaced.

4 Contact Information

The following is a list of contacts that can be used to address any issues with the Water Supply System:



Bhabesh Roy	Municipal Engineer/PM Hamlet of Pangnirtung Ph.: 867 473 8953 Cell: 613 922 856
Jack Hicks	Senior Administrative Officer Ph.: 867 473 8953
Jimmy Keenianak	Municipal Foreman Ph.: 867 473 8986
Andrew Keenianak	Water Treatment Plant Operator Ph.: 867 473 4036 Cell: 867-473-1308
Joseph Monteith	Water Resource Officer/Inspector, CIRNAC Ph.: 867 975 4296 E-mail: joseph.monteith@rcaanc-cirnac.gc.ca

Appendix 1 – Figure 1 : Pump Suction Pipe Location

Drawing C100: Reservoir Site Plan, Misc. Civil Works and New Truck Fill Location

Drawing C102: Earth Infrastructure Repairs, Sections and Details

Drawing C200: New Truck Fill Site Plan, Intake Profiles and Details

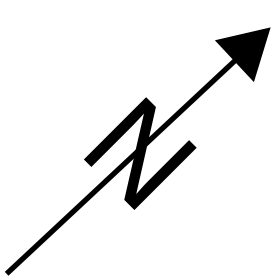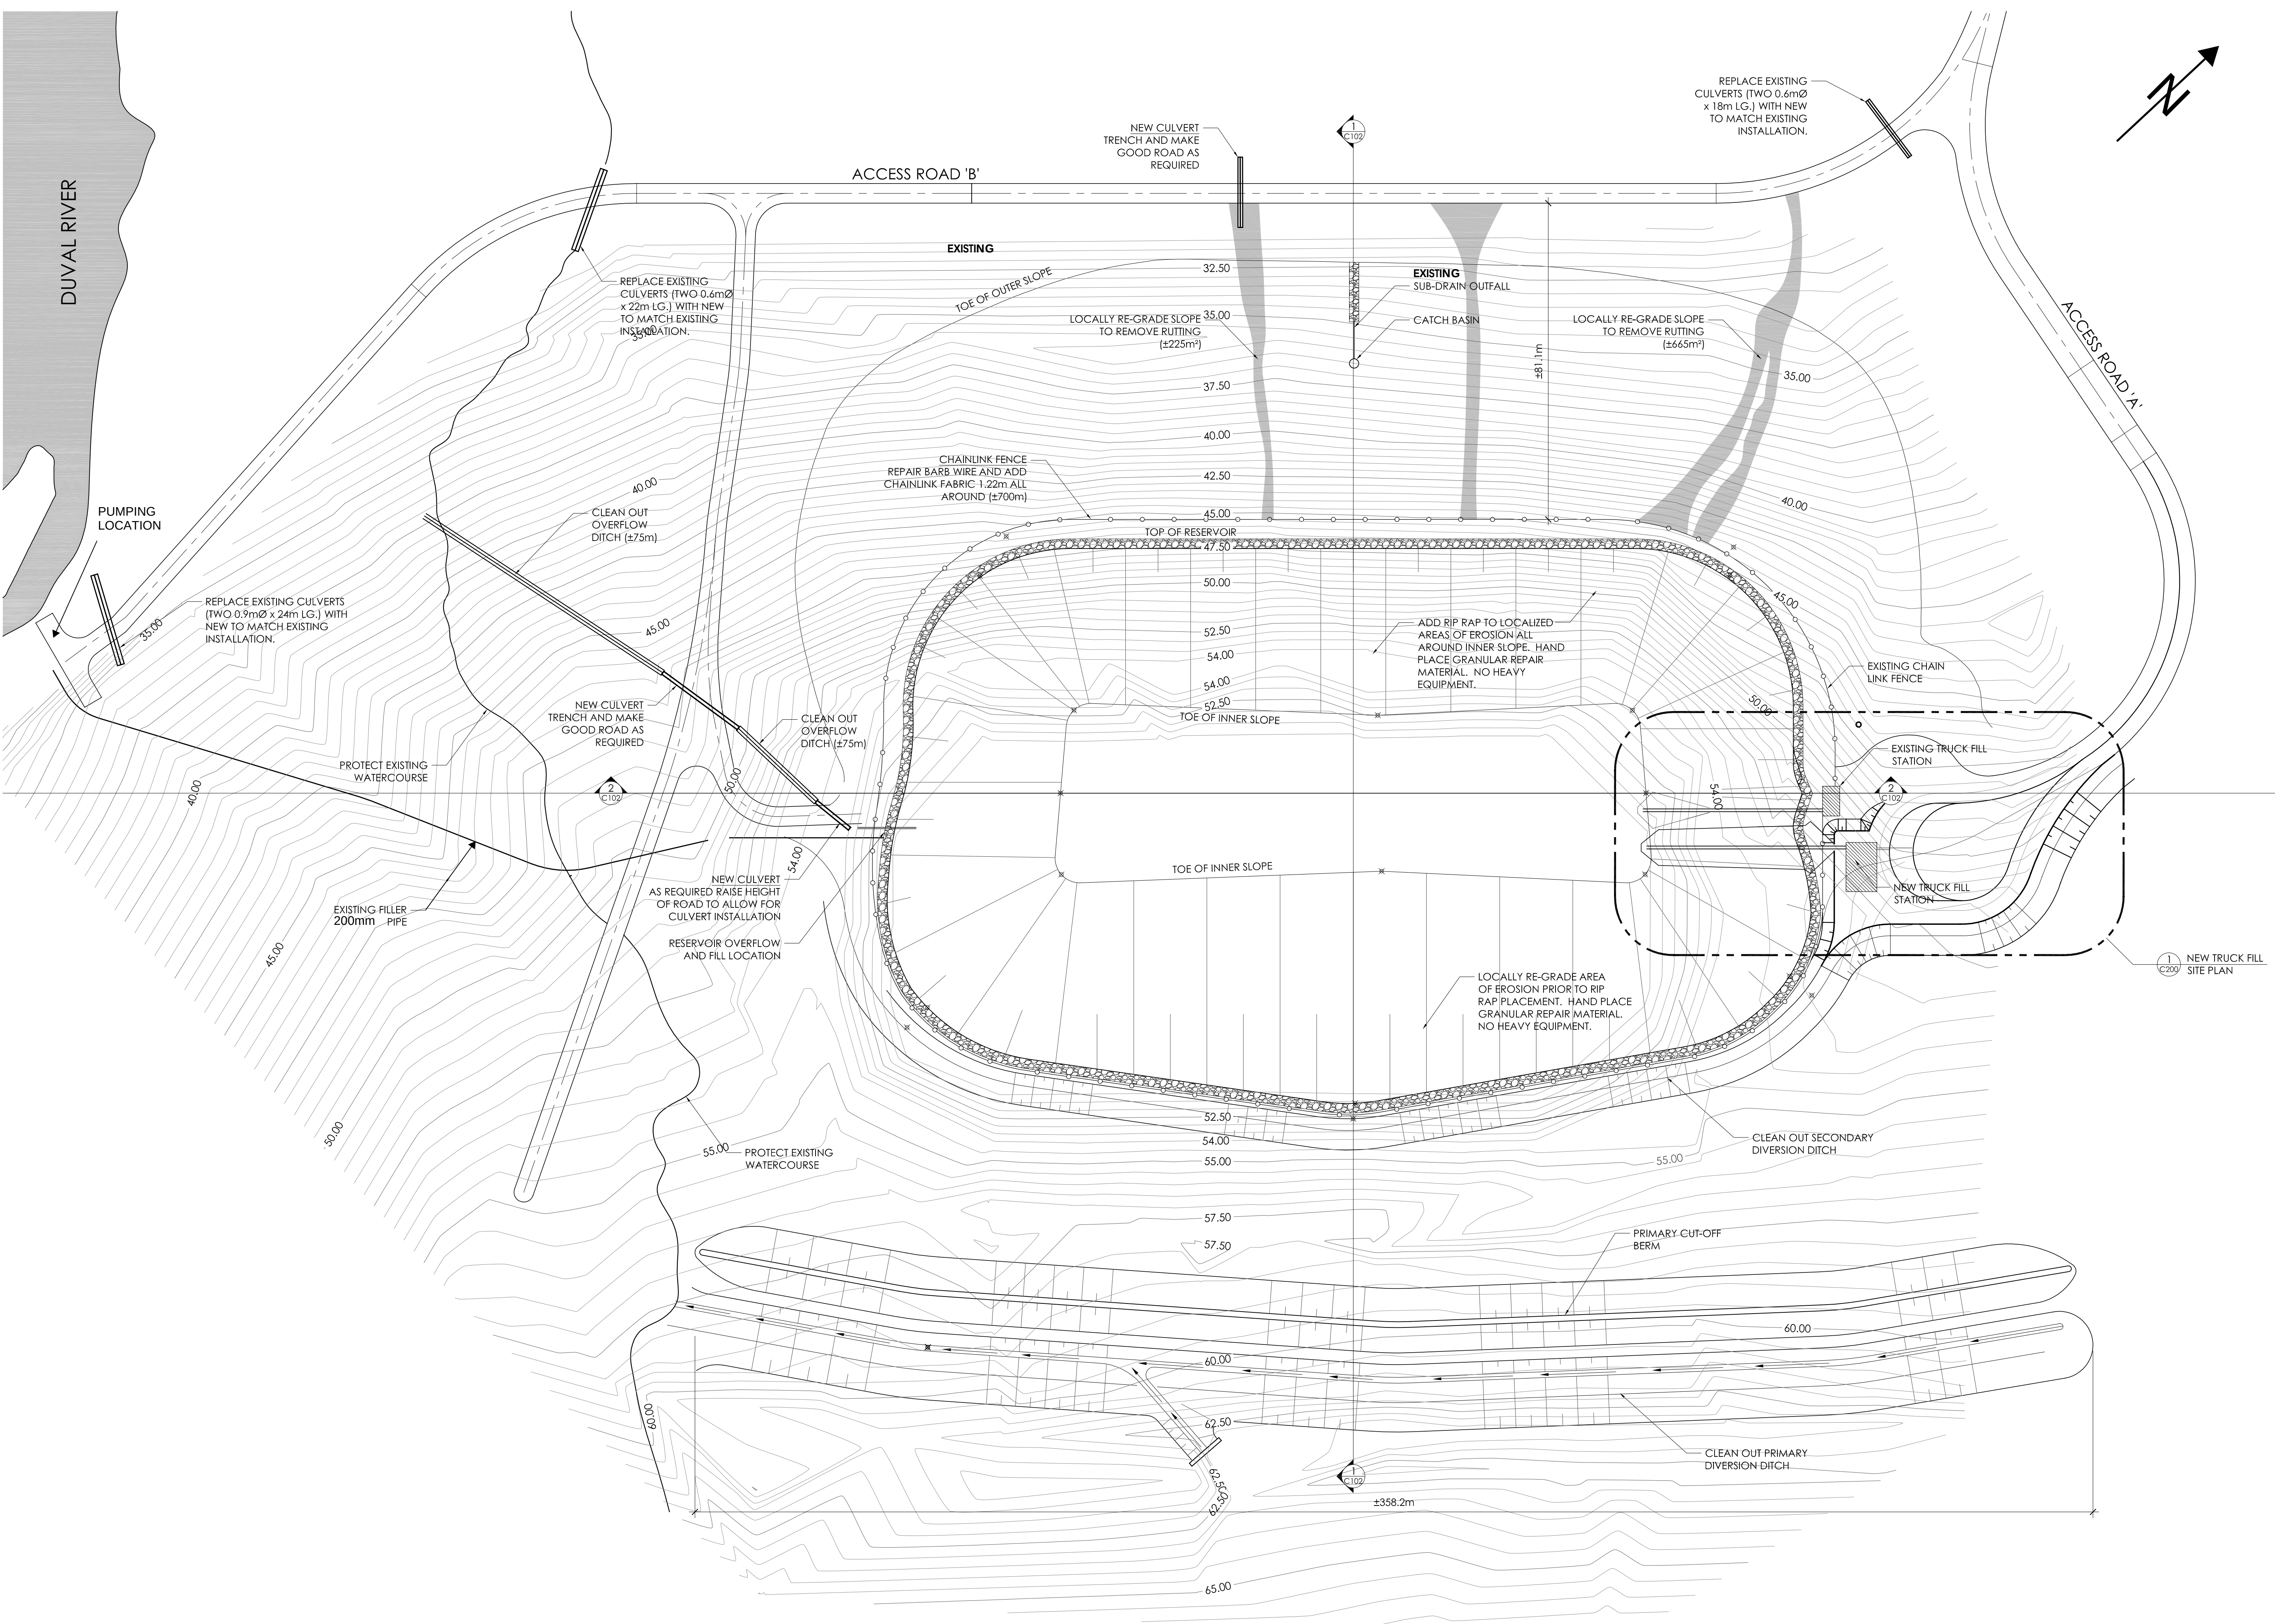

- 1. THIS DRAWING IS NOT TO BE SCALED.
- 2. UNITS ARE IN METRES UNLESS NOTED OTHERWISE.
- 3. CONTRACTOR IS TO VERIFY ALL ELEVATIONS ON SITE.
- 4. ALL PARTIES USING THESE DRAWINGS SHALL REVIEW THEM PRIOR TO QUOTING AND CONSTRUCTION OF ANY AND ALL ASPECTS OF THE WORK AND REPORT ANY ERRORS, OMISSIONS AND/OR DEFICIENCIES IMMEDIATELY TO ARKTIS SOLUTIONS INC.
- 5. CONTRACTOR TO FIELD VERIFY ALL ELEVATIONS PRIOR TO SUPPLY OF MATERIALS AND/OR FABRICATION. CONTRACTOR TO COMPLETE LAND SURVEY AND SUBMIT AS SHOP DRAWING FOR REVIEW AND ACCEPTANCE BY ARKTIS SOLUTIONS INC. COST OF SURVEY TO BE PAID BY AN ALLOWANCE PER SECTION 01 21 00.

NOT FOR CONSTRUCTION

03	02/03/14	ISSUED FOR TENDER
02	01/13/14	ISSUED AT 99% COMPLETE
01	11/25/13	ISSUED AT 50% COMPLETE
No.	DATE:	REVISION:



ARKTIS SOLUTIONS
P.O. BOX 242, GJOA HAVEN, NU, X0B 1J0
TEL: (867) 446-4129 Fax: (866) 475-1147

THIS DRAWING IS THE SOLE PROPERTY OF ARKTIS SOLUTIONS INC. UNAUTHORIZED REPRODUCTION IS NOT PERMITTED.

DRAWN BY:	GF,KH	DESIGNED BY:	GF
DATE:	NOVEMBER 2013	CHECKED BY:	GF,MH
SCALE:	AS NOTED	PLOT DATE:	01/13/14

PROJECT:


OPTIMIZATION OF DRINKING WATER SUPPLY
PANGNIRTUNG, NUNAVUT

DRAWING NAME:
RESERVOIR SITE PLAN
MISC. CIVIL WORKS AND
NEW TRUCK FILL LOCATION


DRAWING NO.:
C100

1
C100
RESERVOIR SITE PLAN
1:750


Figure 2

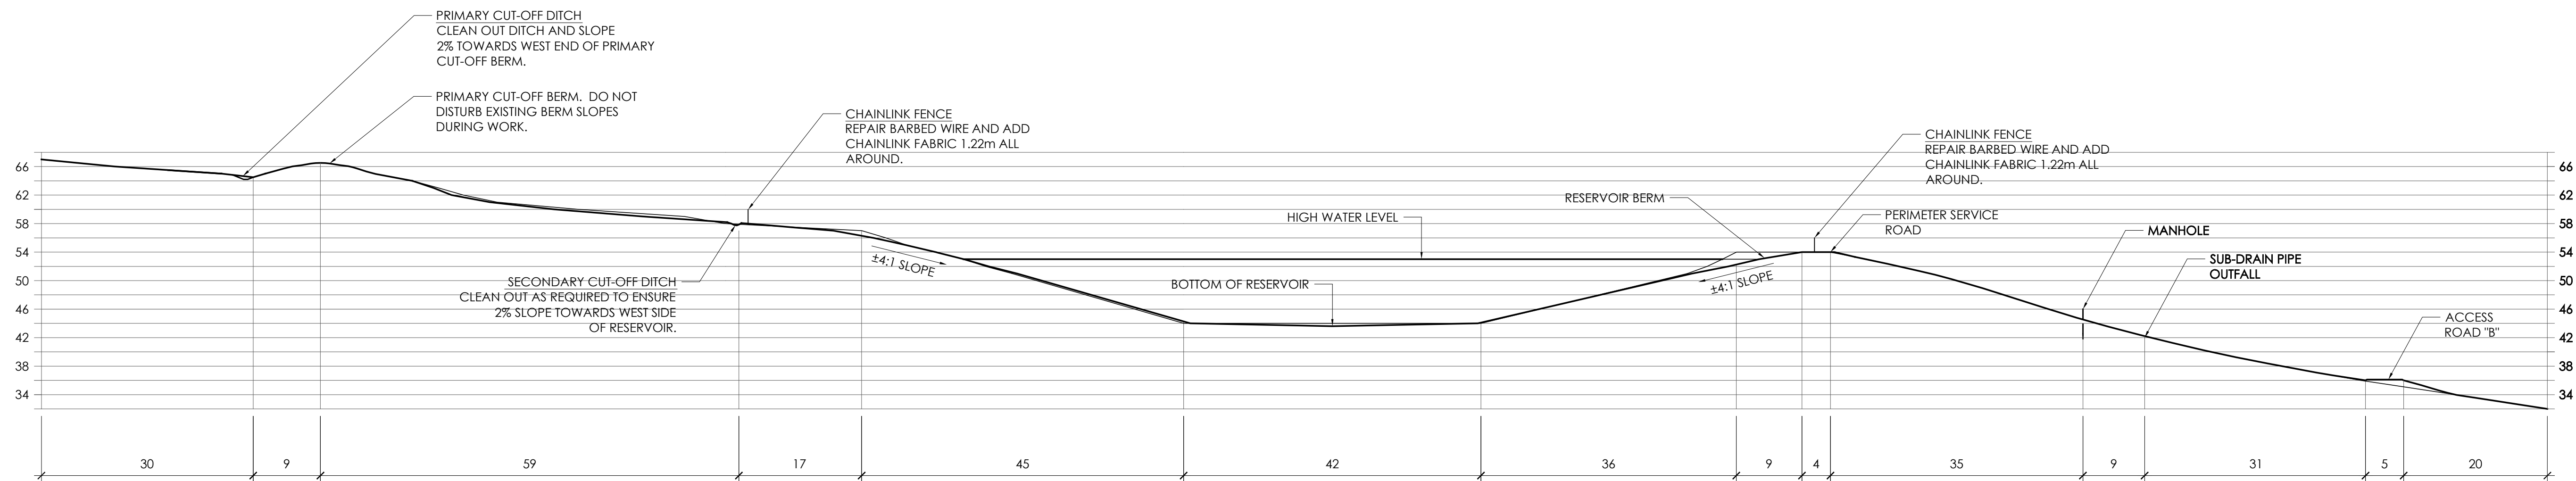


1 N-S SECTION
SCALE 1:500

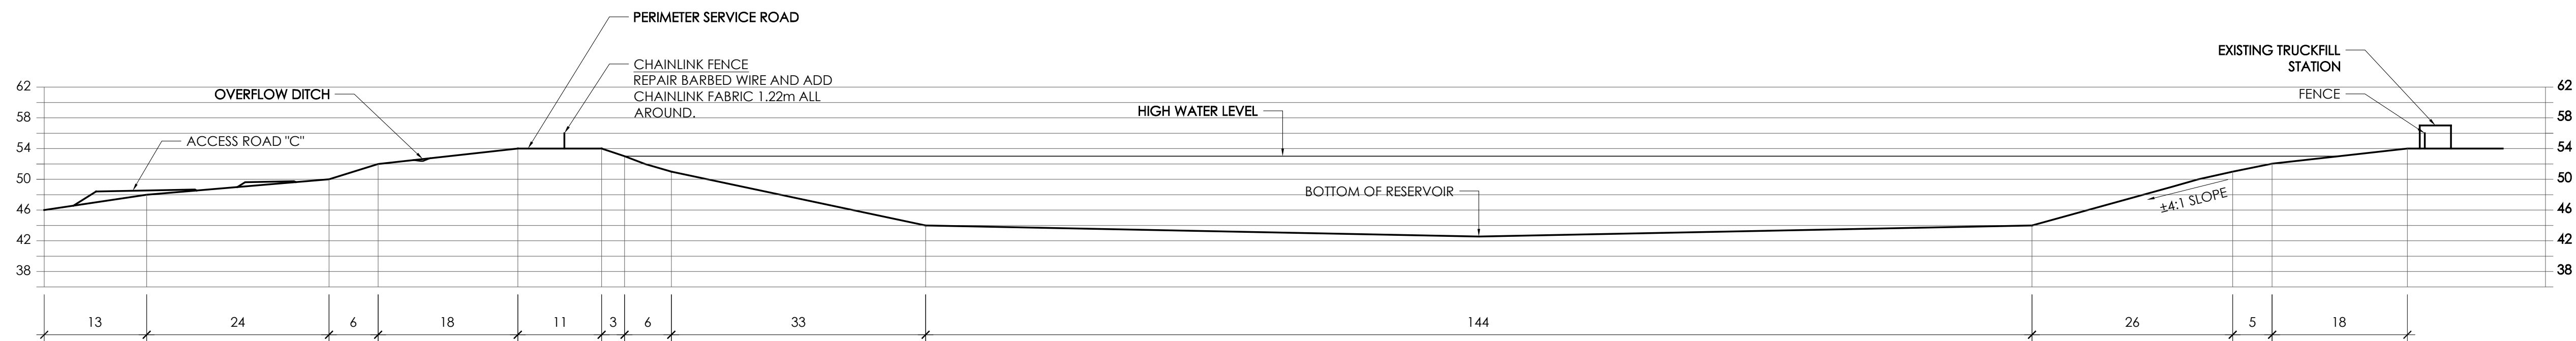


2 E-W SECTION
SCALE 1:500

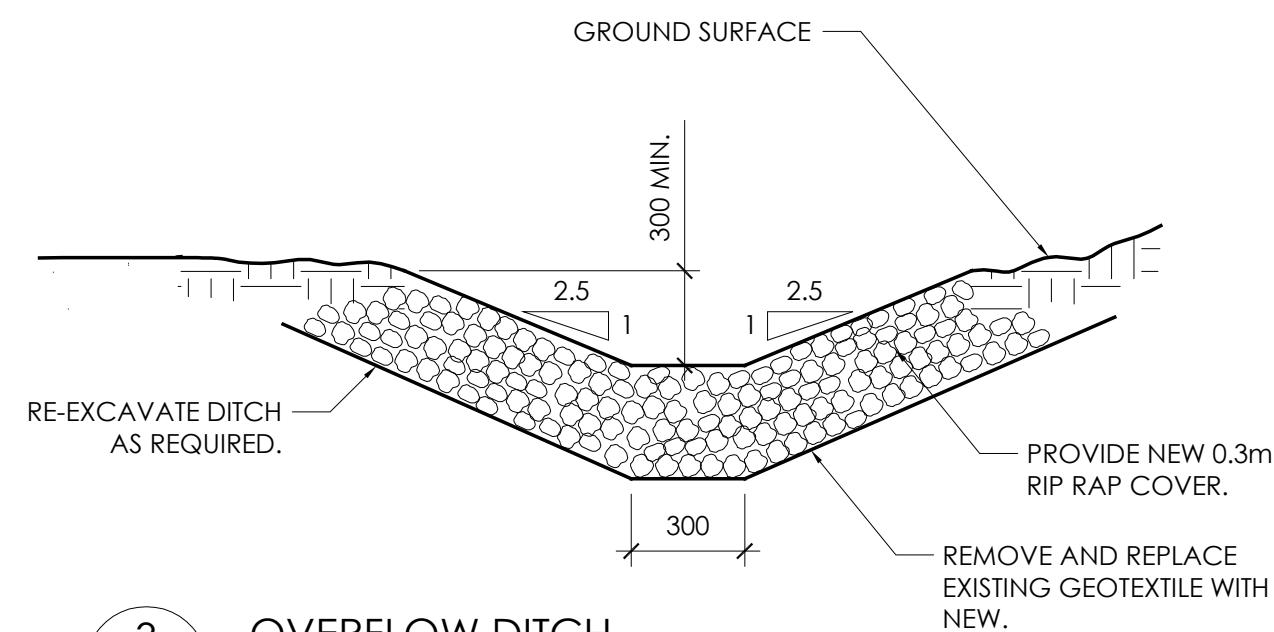


3 OVERFLOW DITCH
SCALE 1:20

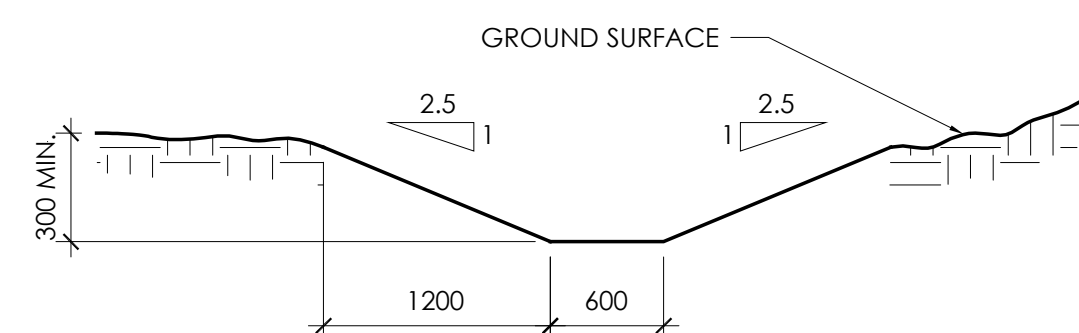


4 TYPICAL DITCH
SCALE 1:40

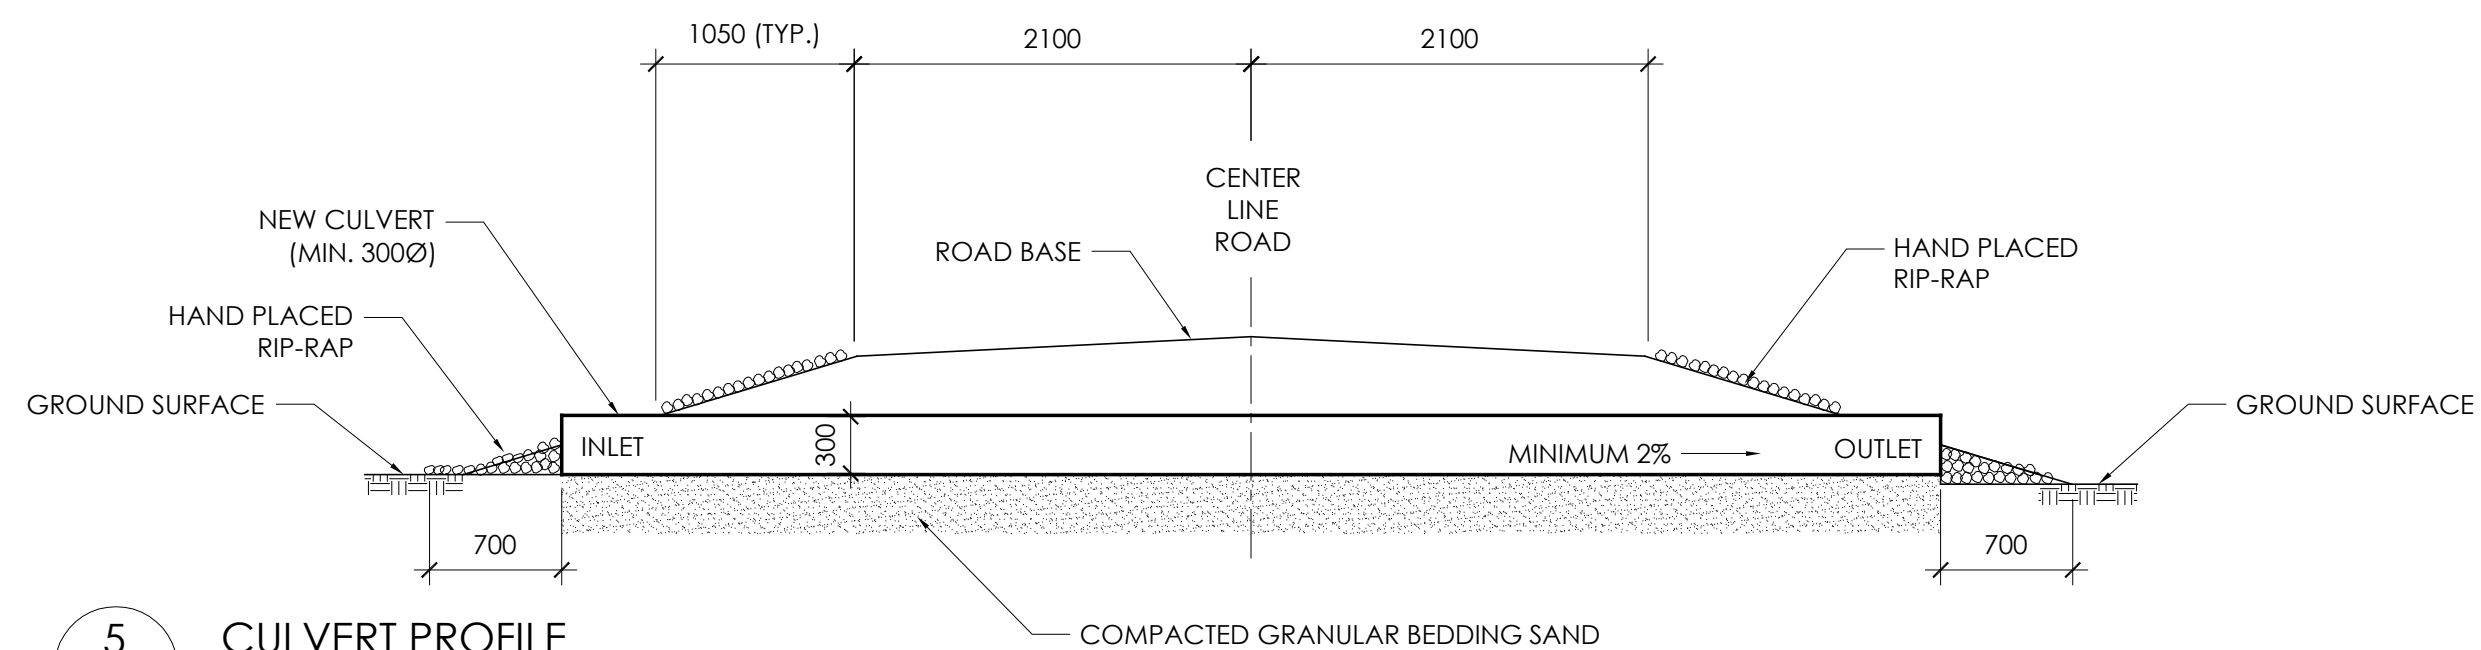

5 CULVERT PROFILE
SCALE 1:40

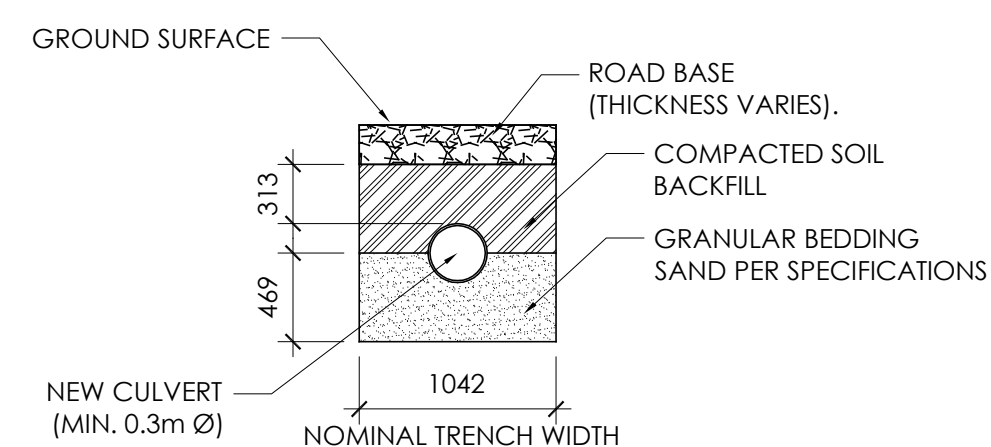


6 CULVERT SECTION SCALE
SCALE 1:40

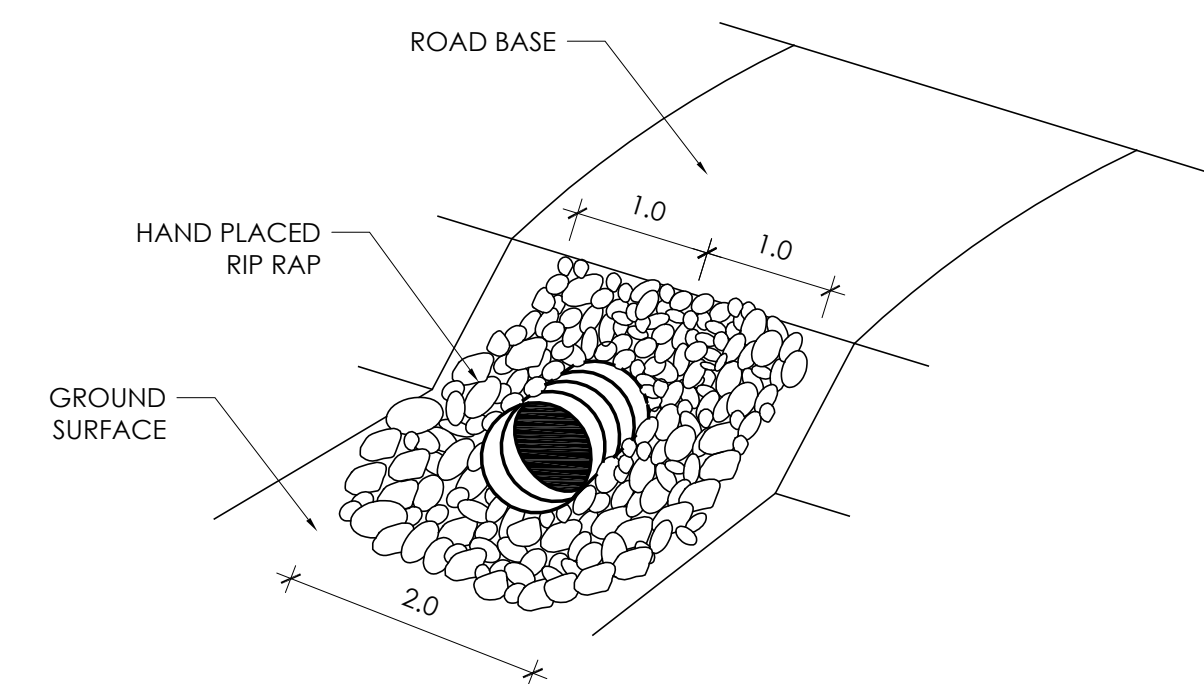

7 CULVERT ISOMETRIC
NOT TO SCALE




- THIS DRAWING IS NOT TO BE SCALED.
- UNITS ARE IN METRES UNLESS NOTED OTHERWISE.
- CONTRACTOR IS TO VERIFY ALL ELEVATIONS ON SITE.
- ALL PARTIES USING THESE DRAWINGS SHALL REVIEW THEM PRIOR TO QUOTING AND CONSTRUCTION OF ANY AND ALL ASPECTS OF THE WORK AND REPORT ANY ERRORS, OMISSIONS AND/OR DEFICIENCIES IMMEDIATELY TO ARKTIS SOLUTIONS INC.
- CONTRACTOR TO FIELD VERIFY ALL ELEVATIONS PRIOR TO SUPPLY OF MATERIALS AND/OR FABRICATION. CONTRACTOR TO COMPLETE LAND SURVEY AND SUBMIT AS SHOP DRAWING FOR REVIEW AND ACCEPTANCE BY ARKTIS SOLUTIONS INC. COST OF SURVEY TO BE PAID BY AND ALLOWANCE PER SECTION 01 21 00.

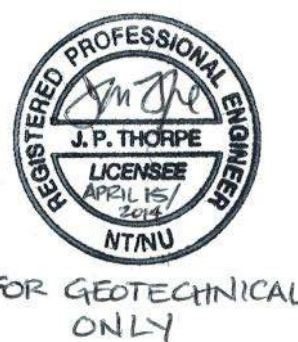

ISSUED FOR TENDER
NOT FOR CONSTRUCTION

03	04/16/14	ISSUED FOR TENDER
02	01/13/14	ISSUED AT 99% COMPLETE
01	11/25/13	ISSUED AT 50% COMPLETE
No.	DATE:	REVISION:

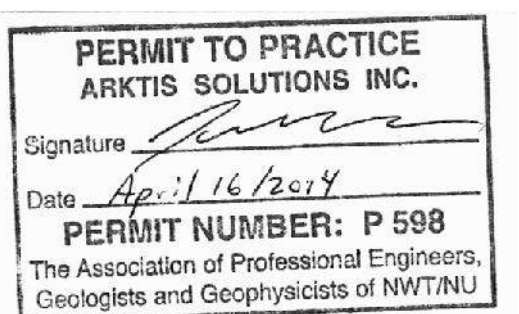

THIS DRAWING IS THE SOLE PROPERTY OF ARKTIS SOLUTIONS INC.
UNAUTHORIZED REPRODUCTION IS NOT PERMITTED.

DRAWN BY:	GF,KH	DESIGNED BY:	GF
DATE:	NOVEMBER 2013	CHECKED BY:	GF,MH
SCALE:	AS NOTED	PLOT DATE:	04/15/14

PROJECT:


**OPTIMIZATION OF
DRINKING WATER
SUPPLY**

PANGNIRTUNG, NUNAVUT

DRAWING NAME:
**EARTH INFRASTRUCTURE
REPAIRS
SECTIONS AND DETAILS**


DRAWING NO.:
C102



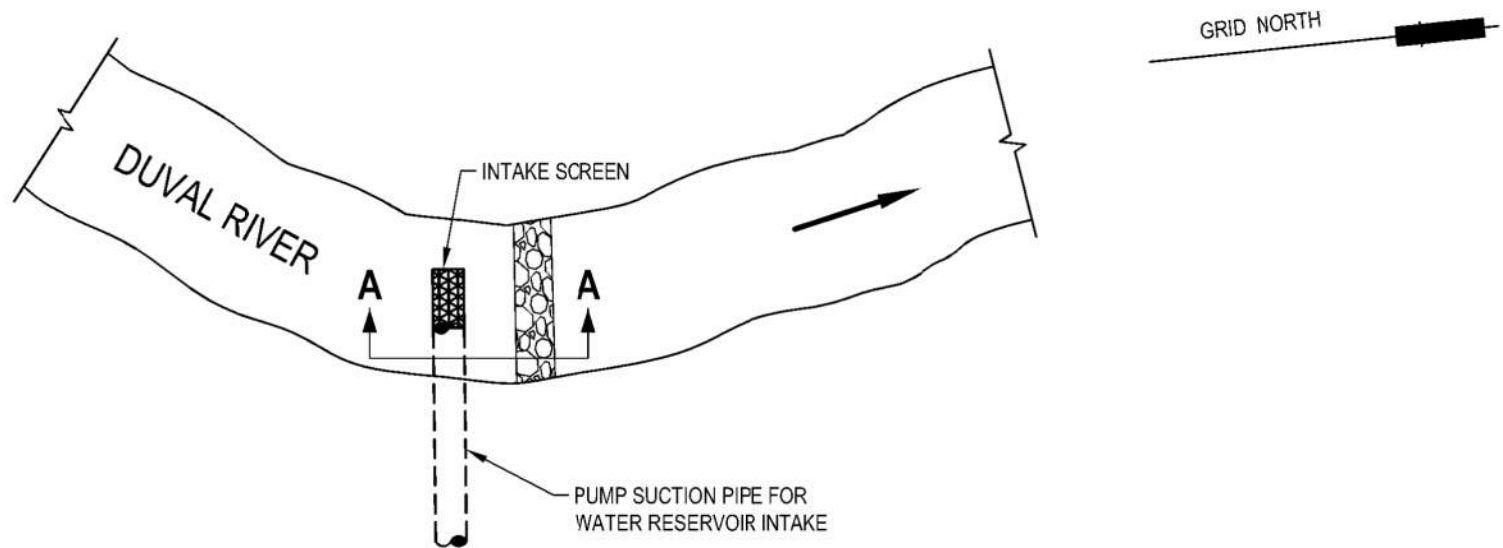

PLAN VIEW

N.T.S.

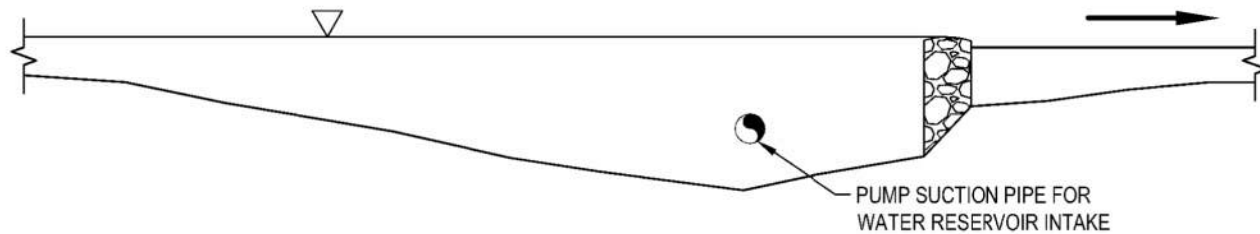

SECTION A-A

N.T.S.

PROJECT STATUS

exp Services Inc.

t: +1.506.452.9000 | f: +1.506.459.3954

1133 Regent Street, Suite 300

Fredericton, NB, E3B 3Z2

CANADA

www.exp.com



Project Title

HAMLET OF PANGNIRTUNG, NU
WATER SYSTEM SUPPLY

Dwg. Title:

PUMP SUCTION PIPE
LOCATION FOR WATER
RESERVOIR INTAKE PIPE

Drawn By:

Project No.

CB

FRE-00232735-A0

Dwg Standards

Ckd By:

Dwg. No.

Rev. No.

Designed By:

SGB

FIG.1

Design Checked
By:

BUILDINGS • EARTH & ENVIRONMENT • ENERGY • INDUSTRIAL • INFRASTRUCTURE • SUSTAINABILITY