

CLYDE RIVER TRUCKFILL CLYDE RIVER, NT

OPERATIONS AND MAINTENANCE MANUAL

VOLUME 1 OF 2



Prepared for:
Government of Northwest Territories
Department of Public Works and Services
Bag 1000
Iqaluit, NT
X0A 0H0

Prepared by:
Dillon Consulting Limited
#201, 5102 - 51 Street
Yellowknife, NT.
X1A 1S7



Department of Public Works and Services Project No. 4-001-659
Dillon Project No. 96-3817

June 22, 1998

1.0 INTRODUCTION

1.1 Project Title

CLYDE RIVER TRUCKFILL

CLYDE RIVER, NT

JUNE 1998

Set No. 2 of 4

Distribution:

Set 1: Jerry Natanine, Truckfill Station, Clyde River, NT
Set 2: David Parker, Dept. of Public Works and Services, Iqaluit, NT
Set 3: Vincent Tam, P.W.S., Technical Services Div., Yellowknife, NT
Set 4: Dillon Consulting Limited, Yellowknife, NT

1.2 Revision Data

Date	Description	Pages

1.3 Changes after Commissioning

Date	Change

1.4 Project Representatives

OWNER: GOVERNMENT OF NORTHWEST TERRITORIES
Department of Public Works and Services
Bag 1000
Iqaluit, NT
X0A 0H0
CONTACT: Mr. David Parker, P.Eng
Project Officer
Phone: (867) 979-5150
Fax: (867) 979-4748

CONTRACTOR: KUDLIK CONSTRUCTION LTD.
P.O. Box 175
Rankin Inlet, NT
X0C 0GO
CONTACT: Mr. Sylvio Ricard, P. Eng
Project Manager
Phone: (867) 645-2839
Fax: (867) 645-2493

MECHANICAL/ELECTRICAL:

GUY FAUTEUX AND FILS INC
20010, Victor Street
Saint-Janvier, Quebec
J7J 1P4
CONTACT: Guy Fauteux, ing.
Phone: (514) 437-4001
Fax: (514) 430-7106

CONSULTANT: Dillon Consulting Limited
#201, 5102 - 51 Street
Yellowknife, NT
X1A 1S7
CONTACT: Mr. Gary Strong, P.Eng.
Project Manager
Phone: (403) 920-4555
Fax: (403) 873-3328

2.0

TABLE OF CONTENTS

Page No.

1.0 INTRODUCTION

1.1	Project Title	1.1
1.2	Revision Data	1.1
1.3	Changes After Commissioning	1.2
1.4	Project Representatives	1.2

3.0 DESIGN DATA

3.1	Design Concept Brief	3.1
-----	----------------------------	-----

4.0 SCHEMATICS AND FUNCTIONAL DATA

4.1	General	4.1
-----	---------------	-----

5.0 COMPONENT DATA

5.1	General	5.1
-----	---------------	-----

6.0 OPERATING PROCEDURES

6.1	General	6.1
6.2	Start-up Procedures	6.1
6.2.1	Start-up from Utility Power	6.1
6.3	Normal Operating Procedures	6.2
6.3.1	Truckfilling Procedure	6.2
6.3.2	Chlorination Process	6.4
6.3.3	Intake Screen Backwashing	6.11
6.3.4	Heat Trace System	6.11
6.3.5	Heating System	6.16
6.4	Special Procedures	6.17
6.4.1	Truckfill Pump Removal	6.17
6.5	Trouble Shooting Procedures	6.19
6.5.1	Alarm System	6.19

7.0 MAINTENANCE PROCEDURES

7.1	General	7.1
7.2	Maintenance Logs	7.2

8.0 TESTING AND CERTIFICATION DATA

8.1	General	8.1
-----	---------------	-----

2.0	<u>TABLE OF CONTENTS</u>	<u>Page No.</u>
1.0 INTRODUCTION		
1.1	Project Title	1.1
1.2	Revision Data	1.1
1.3	Changes After Commissioning	1.2
1.4	Project Representatives	1.2
3.0 DESIGN DATA		
3.1	Design Concept Brief	3.1
4.0 SCHEMATICS AND FUNCTIONAL DATA		
4.1	General	4.1
5.0 COMPONENT DATA		
5.1	General	5.1
6.0 OPERATING PROCEDURES		
6.1	General	6.1
6.2	Start-up Procedures	6.1
6.2.1	Start-up from Utility Power	6.1
6.3	Normal Operating Procedures	6.2
6.3.1	Truckfilling Procedure	6.2
6.3.2	Chlorination Process	6.4
6.3.3	Intake Screen Backwashing	6.11
6.3.4	Heat Trace System	6.11
6.3.5	Heating System	6.16
6.4	Special Procedures	6.17
6.4.1	Truckfill Pump Removal	6.17
6.5	Trouble Shooting Procedures	6.19
6.5.1	Alarm System	6.19
7.0 MAINTENANCE PROCEDURES		
7.1	General	7.1
7.2	Maintenance Logs	7.2
8.0 TESTING AND CERTIFICATION DATA		
8.1	General	8.1

...continued

TABLE OF CONTENTS (Cont'd)

Page No.

9.0 MANUFACTURER'S DATA AND SERVICE INFORMATION

9.1	Pipes, Pipe Support, Valves, Intake Screen, and Fittings	9.1
9.2	Pumps	9.1
9.3	Meters and Gauges	9.1
9.4	Water Treatment	9.1
9.5	Heating System	9.1
9.6	Electrical Panels and Associated Items	9.2
9.7	Uninterruptible Power System	9.2
9.8	Control Panel, Remote Control, and Associated Items	9.2
9.9	Alarm Items	9.2
9.10	Luminaires	9.2
9.11	Heat Trace System	9.3
9.12	Laboratory and Safety Equipment	9.3
9.13	Miscellaneous Items	9.3

LIST OF TABLES

	<u>Page No.</u>
Table 4.1 Water Treatment System	4.3
Table 4.2 Power Distribution System	4.6
Table 4.3 Controls and Alarms	4.8
Table 4.4 Heat Trace System	4.11
Table 5.1 Components, Manufactures, and Suppliers	5.2
Table 7.1 Maintenance Tasks by Equipment	7.4
Table 7.2 Maintenance Tasks by Schedule	7.1
Table 7.3 Spare Parts and Miscellaneous Equipment	7.10

LIST OF FIGURES

	<u>Page No.</u>
Figure 4.1 Water Treatment System	4.2
Figure 4.2 Power Distribution System	4.5
Figure 4.3 Controls and Alarms	4.7
Figure 4.4 Intake Casing, Intake Pipe and Cables	4.9
Figure 4.5 Heat Trace System	4.10

LIST OF DRAWINGS

<u>Drawing No.</u>	<u>Page No.</u>
101 COVER SHEET	A1
102 TRUCKFILL STATION SITE PLAN AND PROFILE	A2
103 STEEL SKID FOUNDATION AND STRUCTURAL DETAIL	A3
201 ARCHITECTURE ELEVATION	A4
202 TRUCKFILL STATION LAYOUT, WALL AND ROOF DETAILS	A5
301 PROCESS, MECHANICAL PLAN AND EQUIPMENT SCHEDULE ..	A6
401 MECHANICAL ELEVATION, ANCHOR AND DETAILS	A7
402 INTAKE DETAILS	A8
501 ELECTRICAL SINGLE LINE, PLAN, ELEVATION, AND DETAILS ...	A9
502 ELECTRICAL CONTROLS, WEST ELEVATION, AND PANELS ...	A10

3 Background Design Data

3.0 DESIGN DATA

3.1 General

This section contains the predesign report entitled "Truckfill Stations - Arctic Bay & Clyde River, NWT Predesign Report" as originally published. The page numbering, figure numbers, table numbers, headers, footers, and appendices are independent of this manual's organization.

TABLE OF CONTENTS

	<u>Page No.</u>
1.0 INTRODUCTION	1
2.0 SYSTEM DESIGN STANDARDS	3
2.1 Design Criteria	3
2.2 Design Standards	3
2.3 Design Parameters	4
2.4 Cost Analysis	5
3.0 WATER QUANTITY REQUIREMENTS	6
3.1 Water Quality and Water Treatment	9
3.1.1 Arctic Bay	9
3.1.2 Clyde River	11
3.1.3 Disinfection	11
4.0 TRUCKFILL STATION	16
4.1 Building Foundation	16
4.2 Truckfill Controls and Metering	16
4.3 Conveyance Piping	17
4.4 Power Supply	20
4.5 Freeze Protection	24
4.6 Monitoring and Alarms	25
4.7 Building Construction	26
4.8 Building Layout	27
4.9 Site Layout	30
4.10 Spares and Ancillary Components	35
5.0 SUMMARY AND IMPLEMENTATION	38

...continued

TABLE OF CONTENTS (Cont'd)

LIST OF FIGURES

	<u>Page No.</u>
Figure 3.1 - Population Projections, Arctic Bay	7
Figure 3.2 - Population Projections, Clyde River	8
Figure 3.3 - Arctic Bay Water Samples	10
Figure 3.4 - Clyde River Water Samples	12
Figure 4.1 - Truckfill Pump Selection - Arctic Bay	18
Figure 4.2 - Truckfill Pump Selection - Clyde River	19
Figure 4.3 - Process Schematic	21
Figure 4.4 - Clyde River Building Layout	28
Figure 4.5 - Arctic Bay Building Layout	29
Figure 4.6 - Clyde River Site Plan	31
Figure 4.7 - Clyde River Intake Profile	32
Figure 4.8 - Arctic Bay Site Plan	33
Figure 4.9 - Arctic Bay Intake Profile	34

APPENDICES

APPENDIX A - Geotechnical Report Arctic Bay

APPENDIX B - Geotechnical Report Clyde River

APPENDIX C - Cost Estimate Data

APPENDIX D - Sample Calculations

1.0 INTRODUCTION

General

The Government of the Northwest Territories (GNWT) identified the installation of truckfill stations in the communities of Arctic Bay and Clyde River as priorities in the 1997/98 fiscal period. The implementation of these initiatives was combined by the Department of Public Works and Services (PW&S) into one project. The facilities will have many similar components in the design and construction, and it was determined by PW&S that there will be economies in scale in the completion of these projects as one design assignment. In October of 1996, Dillon Consulting Limited was retained to complete the engineering services related to this assignment.

Background

Planning studies for the water supply systems in Arctic Bay and Clyde River were completed by Dillon in 1995. These planning studies identified the conceptual water supply system for each community. The water supply systems, as set out in the planning studies, and stated in the project terms of reference, are as follows:

"The new facility shall accommodate the following design characteristics:

It is assumed that power to the site will be provided by on site power generation, however the consultant is to investigate the construction of a power line to the site and provide a cost analysis for both alternatives.

Pumphouse / Truckfill Building

- *Truckfill pumps (1 duty, 1 standby).*
- *In-line chlorination through the truckfill line.*
- *Insulated and heat traced overhead truckfill arm, with water totalizer meter.*
- *Building heating and light.*
- *System controls / monitoring.*
- *Spares for the critical components subject to breakdown.*

- *One year supply of consumable (ie. chlorine)*
- *Adequate storage space for chlorine chemicals, space should be secure.*
- *On site power source for the station to be diesel motor / generator sets (1 duty) and are to be low RPM units.*
- *Heat trace (1 duty, 1 standby) c/w heat trace monitoring capability.*
- *Bench / cupboard for storage.*
- *Eyewash station.*
- *Exterior Fuel Tank.*
- *Interior day tank c/w (1 duty, 1 standby) fuel transfer pumps.*
- *Metal skid foundation for portability.*
- *Truckfill intake to be, single intake with screen and intake protection.*
- *Insulated and heat traced intake pipe at minimum length."*

Report Approach

This design concept brief will develop the planning concepts for the water supply system to a design level of detail. Where alternative approaches are possible, these will be discussed, and cost estimates developed. Recommendations for each of the component systems will be made. The report will deal with each of the community water supply systems individually. Where components can be maintained through both facilities to reduce costs, this will be identified.

2.0 SYSTEM DESIGN STANDARDS

2.1 Design Criteria

The design criteria for this project will be completed in accordance with the parameters set out by the GNWT, "Water and Sewage Facilities Capital Programs" and as modified by the terms of reference. These are as follows:

Facility	Design Horizon	Design Economic Life	Design Expected Life
Building	20	20	40
Pumps	10	20	20
Pipelines	20	20	30

Where the:

- Design horizon is the period used to establish capacity requirements for a facility.
- Design economic life is the period used in the economic analysis to establish the present value (or equivalent capital cost) of a facility.
- Design expected life is the practical maximum expected life of a facility assuming no premature failure, destruction or obsolescence.

2.2 Design Standards

The following is a list of the design standards to be used in the development of the water supply system. These are derived from the GNWT "General Terms of Reference for Water and Sanitation" (GTR), and the "National Building Code" (NBC), and "Capital Standards Criteria, September 1993," MACA.

Water Consumption Rates			Reference
Domestic	90 litres per capita per day		MACA
Commercial	$0.00023 \times \text{population}$		MACA
Total Consumption per Capita	$90 \times (1.0 + 0.00023 \times \text{pop.})$		MACA
Fire Demand	910 litres per minute for 60 minute duration		MACA & Fire Marshal
Discount Rates	4%, 8% and 12%		MACA

Environmental Conditions		
	Arctic Bay	Clyde River
Design Minimum Temp.	-43°C	-41°C
Degree Days (18°C)	11693	11006
Snow Load	1.9 kPa	3.2 kPa
SS	0.1 kPa	0.2 kPa
SR		
Wind Pressures	0.5 kPa	0.8 kPa

2.3 Design Parameters

The project terms of reference identified the following as design parameters for the facilities.

- *"Facilities must be simple to operate and maintain by local forces with limited equipment, and parts and materials which are available locally.*
- *Reliability of the facility is extremely important.*
- *The facility must be efficient and cost effective.*
- *The truckfill supply shall have a minimum pumping capacity of 1000 L/min.*
- *All equipment and pipes must be self draining after each use cycle, where practical. When self draining of any major component cannot practically be accommodated, some other means of frost protection should be incorporated.*
- *All major components must be capable of recovering from a frozen condition, in an operable state, if there is any possibility of freezing.*
- *Provisions of spares for all equipment is required, particularly components that have bulbs, fuses, relays, timers, etc.*
- *The first year supply of consumable, such as calcium hypochlorite, must be a requirement of the construction contract.*
- *Provision for standby power generation at the truckfill station is in accordance with GNWT's Municipal and Community Affairs Guidelines.*
- *The electrical drawings are to be provided to an industrial electrical standard and all drawings must have adequate detail to ensure that they are easily understood by*

local and northern contractors.

- *If the truckfill station is constructed at some location other than the site, the building is to be mounted on skids should relocation be required.*
- *Fuel storage at the truckfill station must provide for spill containment.*
- *Water supplied from the truckfill station must be metered.*
- *A copy of the design must be submitted to the NWT Water Board, for review.*
- *Provision for an alarm system which indicates loss of power and low building temperature, is required."*

2.4 Cost Analysis

Throughout this document, there are cost analysis of various options. The analysis have been carried out as outlined in the GTR as described below:

Capital Cost

Cost of construction for the facility

Annual Operation and Maintenance Costs

The cost of operation, which may include manpower, energy requirements, fuel, general maintenance (light bulbs, paint), and equipment replacement.

Life Cycle Costs

The calculation of the total facility cost over a 20-Year period. This includes the capital, operations and maintenance costs. The life cycle value is shown as a present value which is calculated at a discount rate of 4%, 8% and 12%.

3.0 WATER QUANTITY REQUIREMENTS

The water supply system for the communities is to meet the 20-Year demand. The program implementation schedule and fiscal budgets set out by the GNWT indicate that the construction of the facility will be completed in 1997 and therefore, Year 0 of the facility is 1997. In the planning study completed by Dillon, Year 0 was set at 1998. The water consumption data from the planning study has been brought forth into this document, and updated to reflect the change in the design horizon.

The following illustrates the historical population and water consumption data for the communities.

ARCTIC BAY		
Year	Population	Water Consumption (lcd)
1976	387	N/A
1978	414	34
1986	480	50
1994	592	73.9

CLYDE RIVER			
Year	Population	Growth Rate of Population	Water Consumption (lcd)
1974	350	4.6%	N/A
1979	439	4.5%	20.6
1981	443	1.2%	N/A
1986	471	3.7%	N/A
1989	500	2.0%	49.2
1991	565	2.4%	49.9
1993	592	1.5%	48.0
1994	601	1.5%	N/A

The Bureau of Statistics for the Northwest Territories provides population projections for all communities in the NWT with a population in excess of 100 people. **Figure 3.1** shows the population growth and annual water consumption for the community of Arctic Bay and **Figure 3.2** for Clyde River. Based on the values presented in this table, the 20-Year design population and consumption for Arctic Bay are 973 people and 39,100 m³ respectively, and for Clyde River are 1,076 people and 44,100 m³.

Design Year	Year	Population	Consumption		
			Litres per Capita	Daily (litres)	Annual (cubic metres)
0	1997	628	103.0	64,700	23,600
1	1998	637	103.2	65,700	24,000
2	1999	651	103.5	67,400	24,600
3	2000	666	103.8	69,100	25,200
4	2001	682	104.1	71,000	25,900
5	2002	698	104.4	72,900	26,600
6	2003	714	104.8	74,800	27,300
7	2004	730	105.1	76,700	28,000
8	2005	747	105.5	78,800	28,800
9	2006	763	105.8	80,700	29,500
10	2007	780	106.1	82,800	30,200
11	2008	797	106.5	84,900	31,000
12	2009	815	106.9	87,100	31,800
13	2010	833	107.2	89,300	32,600
14	2011	852	107.6	91,700	33,500
15	2012	871	108.0	94,100	34,300
16	2013	890	108.4	96,500	35,200
17	2014	910	108.8	99,000	36,100
18	2015	931	109.3	101,800	37,200
19	2016	952	109.7	104,400	38,100
20	2017	973	110.1	107,100	39,100

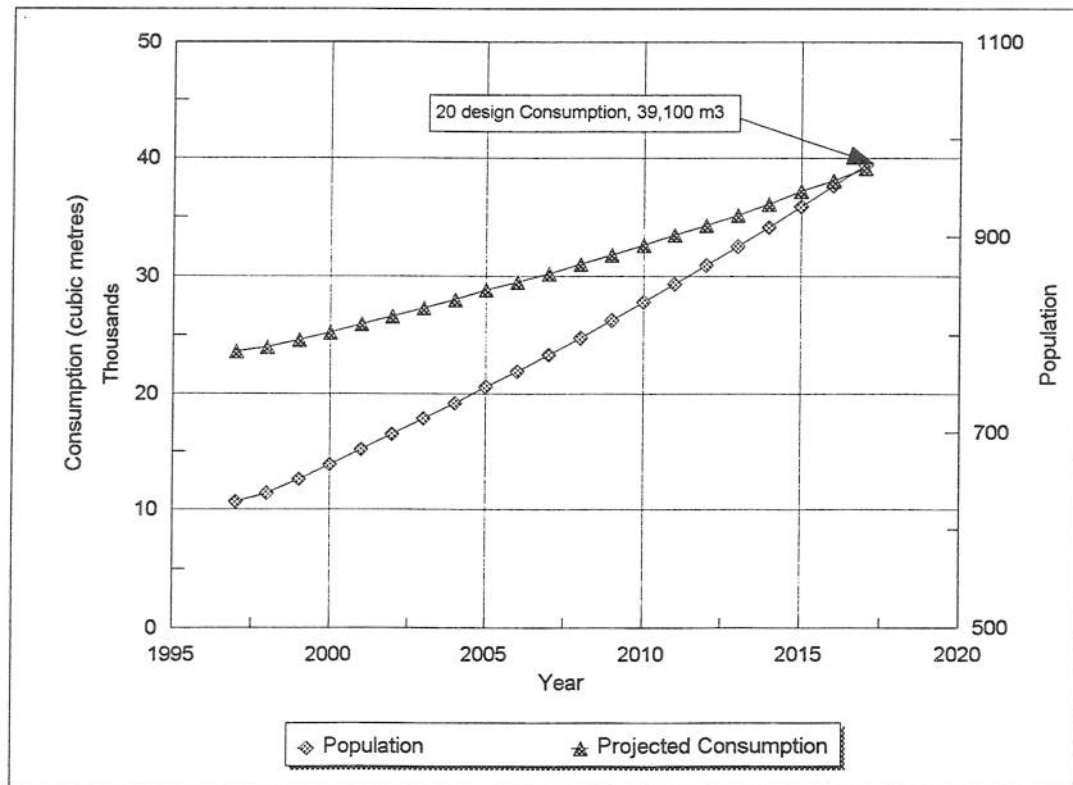


Figure 3.1 Population Projections, Arctic Bay
Predesign Report, Arctic Bay & Clyde River Truck Fill Station, NWT

Design Year	Year	Population	Consumption		
			Litres per Capita	Daily (litres)	Annual (cubic metres)
0	1997	655	103.6	67,900	24,800
1	1998	672	103.9	69,800	25,500
2	1999	688	104.2	71,700	26,200
3	2000	706	104.6	73,800	26,900
4	2001	723	105.0	75,900	27,700
5	2002	742	105.4	78,200	28,500
6	2003	760	105.7	80,300	29,300
7	2004	779	106.1	82,700	30,200
8	2005	799	106.5	85,100	31,100
9	2006	819	107.0	87,600	32,000
10	2007	840	107.4	90,200	32,900
11	2008	861	107.8	92,800	33,900
12	2009	882	108.3	95,500	34,900
13	2010	905	108.7	98,400	35,900
14	2011	927	109.2	101,200	36,900
15	2012	951	109.7	104,300	38,100
16	2013	975	110.2	107,400	39,200
17	2014	999	110.7	110,600	40,400
18	2015	1,024	111.2	113,900	41,600
19	2016	1,050	111.7	117,300	42,800
20	2017	1,076	112.3	120,800	44,100

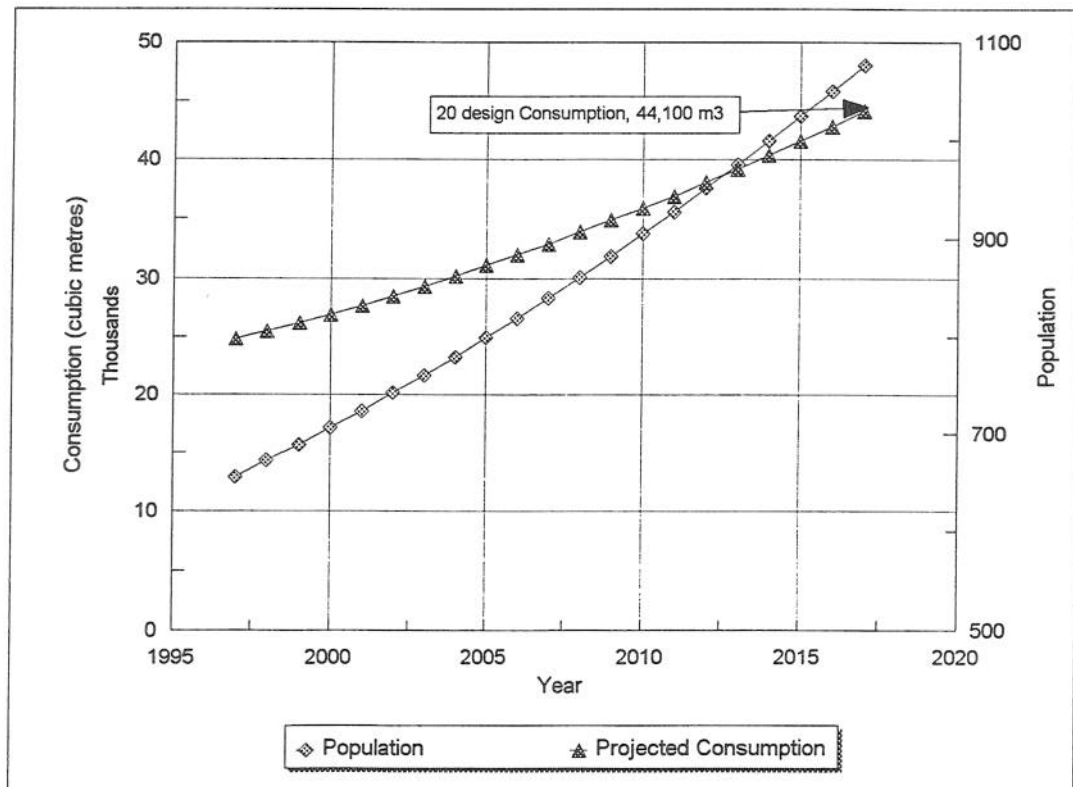


Figure 3.2 Population Projections, Clyde River
Predesign Report, Arctic Bay & Clyde River Truck Fill Station, NWT

3.1 Water Quality and Water Treatment

3.1.1 Arctic Bay

The long term water supply for Arctic Bay has been identified as Marcil Lake. The community has indicated that they accept this water source, and that they find the water aesthetically acceptable.

Water quality testing has been completed on this water source by various parties, including Dillon during the previous planning assignment. **Figure 3.3** summarizes the water sample data completed on Marcil Lake in previous studies.

Parameters tested were selected to provide indicators of the water quality of the raw water source. The test results indicate that there is not a particular area of concern with the water source. The water quality meets the requirements of the Guidelines for Canadian Drinking Water Quality (1996) (GCDWQ) for all parameters except turbidity. The guidelines require an average level of turbidity below the level of 1.0 NTU (Nephelometric Turbidity Units). However, the guidelines allow the average level of turbidity to be less than 5.0 NTU if it can be shown that disinfection is not affected by the higher level of turbidity.

The water data indicates that turbidity ranged from 1 to 15 NTU with an average of 6.2 over the test samples. The historic use of the water source by the community with no reported problems of water related disease attributed to the raw water source, suggests that the presence of the slightly elevated levels of turbidity do not affect the disinfection of the water. The number of data sets available is limited, and the data doesn't provide a clear understanding of the temporal water characteristics.

In discussions with MACA it was decided that the truckfill station is to be designed to allow for the addition of filtration to remove the turbidity in the future. This addition will be made if the operation of the facility and the results of the sampling program indicate that the turbidity levels are problematic.

Monitoring of the raw water source should be done as part of the operation of the facility. The parameters to be tested for should include the major ions and turbidity. Monthly testing should be completed of the raw water supply to develop a more extensive data base to allow for future treatment assessment. Parameters to be tested for are to include; balance, bicarbonate, chloride, carbonate, conductance, fluoride, hardness, calcium, iron, potassium, magnesium, manganese, sodium, sulphate, nitrate, nitrite, pH, total alkalinity, TDS, and turbidity.

Date Sampled -	Sept 28/78	Sept 28/78	August 3/79	August	March 15/84	July 16/84	May 9/85	July 25/85
Organic Carbon	4.0	2.0	5.1	4.6				
BOD	<1.0		0.6	0.5				
COD	2.4		<10	<10				
Nitrogen	0.07	0.09	0.048	0.042				0.20
Ammonia	<0.05	0.12	<0.05	<0.05				
Total Kjeldahl N	<0.1		0.2	<0.01				
Total Phosphorus	0.10		<0.016					
Ortho Phosphate	0.06	0.06	<0.016	<0.016				
Silica	0.5	0.75	1.3	1.0				
Sulphate	4.0	1.7	2.3	2.3	3.0	9.7	1.5	1.5
Chloride	1.7	2.4	2.6	2.64	2.0	1.1	2.2	0.2
Carbonate			0	0				
Bicarbonate	9.8	83	71					
Total Hardness	7.4	11.3	76.1	54.6				
Oil & Grease	3.8	2.4	2	<1				
Phenol	0.049		0.012	0.014				
PH	7.6		7.65	7.43	7.4	6.6	6.86	7.56
Turbidity	15.0	14.0	1.0	1.0	7.0	12.0	6.6	6.1
Colour	20.0	5.0	5.0	5.0	5.0	2.0	10.0	12.5
Conductivity	66.0		159	121	33.0	25.0	35.0	27.9
Suspended Solids	6.8	3.6	<1	<1	8.0	<5	<5	
Total Dissolved Solids	48.0		72	60		<5	28	
Mercury	0.02		<0.02	<0.02	0.17	0.01		
Silver	<0.02	<0.02	<0.02	<0.02				
Aluminum	0.4	1.4	<0.01	<0.01				
Arsenic	<0.005		<0.005	<0.005	0.0013	<0.001	<0.001	
Boron	<0.005	<0.005	0.023	0.008				
Barium	<0.026	<0.038	0.012	0.013				
Beryllium	<0.005	<0.005	<0.005	<0.005				
Calcium	1.5	2.2	16.8	11.8	1.5	1.9	2.5	2.0
Cadmium	<0.01	<0.01	<0.01	<0.01	0.0004	<0.1		
Cobalt	<0.01	<0.01	<0.01	<0.01				
Chromium	<0.01	<0.01	<0.01	<0.01	0.043			
Copper	0.009	<0.005	0.009	<0.005	0.0042	0.0020		
Iron	0.41	0.59	0.05	0.02	0.120	0.0842		0.23
Potassium	0.4	0.7	0.4	0.5	0.4	<0.5	1.1	0.50
Lithium	<0.05	<0.05	<0.05	<0.05				
Magnesium	0.9	1.4	8.3	6.1	1.3	1.1	1.41	0.8
Manganese	0.007	<0.005	<0.005	<0.005				0.004
Molybdenum	<0.02	<0.02	<0.02	<0.02				
Sodium	1.2	0.8	2.26	1.79	1.4	0.9	1.49	1.6
Nickel	<0.02	<0.02	<0.02	<0.02	<1.0	<1.0		
Lead	<0.02	<0.02	<0.02	<0.02	0.0012	<0.001		
Zinc	0.03	<0.02	0.04	<0.02	0.018	<0.010		
Total Hardness					9.1	9.3	14	8.3
Total Alkalinity					9.4	6.1	8.8	9.0

1989	July 24/89	July 23/92	July 7/93	July 23/94	July 23/94	July 23/94	July 23/94	Guidelines	Guidelines
1.0								Maximum	Acceptable
								Aesthetic	Objective
								Concentratio	
0.5				0.002	0.004	0.002	0.004		
0.9	<0.02	0.04	0.033	0.039	0.039	0.04	0.038		
	<0.005	0.008	0.009						
<0.01									
1.2				0.686	0.680		0.625		
<1.0	3.0	2.0	<3			0.645			<500
3.0	2.5	1.9	2.62	1.65	1.75	1.85	1.66		<250
0									
10									
						<0.002	0.007		
7.0	6.6	6.67	6.61	6.83	6.79	6.88	6.85		6.5-8.5
3.4	6.6	7.2	5.4	3.8	3.7	3.3	4.5	1 NTU	<5 NTU
7.0	7.0	10	6.0	<5	<5	<5	<5		<15 TCU
34.0	23	25.0	28.5	28.9	29.4	29.2	29.0		
	3.0	3	3.0	28.0	34	38	26		
23.0	38.0	22	23.0	8	4	4	<3		<500
		0.08							
		<0.0005	<0.0003						
2.0	1.8	17.7	1.7	1.84	1.72	1.77	1.87		
	0.0011	<0.0002	<0.0009					0.005	<1.0
	0.0030	0.0020	0.0047					0.05	<3.0
0.01	0.0010	0.0030	0.00097						
0.09	0.172	0.182	0.193						
0.3	0.4	0.4	0.6	0.25	0.26	0.26	0.27		
1.4	1.0	1.1	1.0	1.06	1.07	1.07	1.09		
0.01									<0.05
1.8	1.0	1.2	1.0	1.16	1.24	1.17	1.18		<200
	6.7	<1	0.3						
	<0.001	0.001	0.002					<0.01	
0.04	0.006	0.0030	0.076						<5.0
12.0	8.6	49	8	8.9	8.7	8.8	9.2	500	80-100
10.0	6.2	7	5.1	7.4	7.4	7.4	7.4		

Figure 3.3 Arctic Bay Water Samples
Arctic Bay & Clyde River Truckfill Stations, NWT

3.1.2 Clyde River

Historic water sampling has been completed on the selected water source from 1983 to date. **Figure 3.4** illustrates the sample collection and analysis completed. The 1994 samples were collected from various depths. The results of the samples indicated that the water is of good quality with no major areas of concern.

Turbidity levels are slightly elevated, the average is 3.0 NTU, which is within the guidelines.

Two samples indicate that the pH is below the aesthetic guidelines. The community has not raised concerns with the taste of the water, however, should continued sampling indicate that the water is consistently below the guideline, remedial treatment is to be considered. Treatment would consist of the addition of Soda Ash (NaCO_3) to the water. This can be completed automatically or manually. Due to fluctuations in the pH, monthly testing of the water for pH, and pH control manually is recommended. A supply of Soda Ash, and a hach pH Kit will be included in the design. The design of the facility will not address this issue.

There has been concerns expressed by MACA and/or the community with respect to late spring water quality. In other communities, water quality deteriorates over the winter due to a decrease in the level of dissolved oxygen. Sampling to date indicates that this will not be a concern at Clyde River. However, if in future a concern is raised, the small lake can be aerated using a compressor and a hose to convey air to the intake screen. This system is in place elsewhere in the NWT (Rankin Inlet). No provision in the design of the facility is required to address this future installation.

3.1.3 Disinfection

The GCDWQ require that the disinfection process for raw water also have a residual disinfection component. This is achieved through the use of chlorination. A typical residual chlorination level is 1 part per million (ppm). Many communities in the NWT find the taste of chlorine unpleasing, and residual levels are often set at 0.5 ppm. Several chemicals are available for disinfection of domestic water supplies. These include:

- Gaseous Chlorine
- Sodium hypochlorite (liquid)
- Calcium hypochlorite (solid)