

**MUNICIPALITY OF GRISE FIORD**

# **Environmental Emergency Contingency Plan for Municipal Water Licence**

**February 2026**

## Document Control

Date	Document Title	Author	Details
October 2020	Spill Contingency Plan Municipality of Grise Fiord, Nunavut	Government of Nunavut – Department of Community and Government Services	Initial document
January 2026	Municipality of Grise Fiord Environmental Emergency Contingency Plan for Municipal Water Licence	Government of Nunavut – Department of Transportation and Infrastructure Nunavut	Updated to standardized template and included the storage capacity of the fuel tanks at the licenced facilities (water supply facility)
February 2026	Municipality of Grise Fiord Environmental Emergency Contingency Plan for Municipal Water Licence	Government of Nunavut – Department of Transportation and Infrastructure Nunavut	Added best practice spill prevention procedures to sewage collection

# Table of Contents

<b>1.0</b>	<b>Introduction</b>	<b>1</b>
1.1	Purpose of Plan .....	1
1.2	Objectives .....	1
1.3	Health and Safety.....	2
1.4	Municipality of Grise Fiord Environmental Policy .....	2
<b>2.0</b>	<b>Site and System Description</b>	<b>3</b>
2.1	General Site Description .....	3
2.2	Water, Sewage, and Waste Disposal Activities .....	3
	2.2.1    Water Supply and Treatment .....	3
	2.2.2    Sewage Collection.....	4
	2.2.3    Solid Waste Collection and Disposal.....	4
2.3	Hazardous Materials in the Community.....	4
<b>3.0</b>	<b>Spill Response Organization</b>	<b>6</b>
3.1	Community Contact Information and Responsibilities.....	7
3.2	Off-Site Resources.....	8
<b>4.0</b>	<b>Spill Reporting Procedure</b>	<b>10</b>
4.1	NWT/NU Spill Report Line .....	10
<b>5.0</b>	<b>Action Plans</b>	<b>12</b>
5.1	Initial Action .....	12
5.2	Environmental and Human Health Protection and Mitigation Measures – General Procedures .....	12
5.3	Mitigative Measures: Hydrocarbon Spills.....	13
	5.3.1    Hydrocarbon Spill on Soil, Gravel, Rock, or Vegetation.....	13
	5.3.2    Hydrocarbon Spill on Water .....	13
	5.3.3    Hydrocarbon Spill on Ice and Snow .....	13

**Municipality of Grise Fiord  
Environmental Emergency Contingency Plan for Municipal Water Licence  
February 2026**

5.3.4	Hydrocarbon Contaminated Material Storage and Transfer .....	14
5.4	Mitigative Measures: Sewage .....	14
5.4.1	Sewage Spill on Soil, Gravel, Rock, or Vegetation .....	14
5.4.2	Sewage Spill into Water .....	15
5.4.3	Sewage Spill on Ice and Snow .....	15
5.4.4	Disposal .....	15
5.5	Mitigative Measures: Solid Waste .....	15
5.5.1	Solid Waste Spill on Soil, Gravel, Rock, or Vegetation.....	15
5.5.2	Solid Waste Spill into Water .....	15
5.5.3	Solid Waste Spill on Ice and Snow .....	15
5.5.4	Disposal .....	16
5.6	Mitigative Measures: Hazardous Materials.....	16
5.6.1	Hazardous Solid Waste Spill on Soil, Gravel, Rock, or Vegetation .	16
5.6.2	Hazardous Solid Waste Spill into Water .....	16
5.6.3	Hazardous Solid Waste Spill on Ice and Snow .....	16
5.6.4	Disposal .....	16
5.7	Transferring, Storing, and Managing Spill Related Wastes .....	17
5.8	Spill Recovery Assessment.....	17
<b>6.0</b>	<b>Spill Response Resources</b>	<b>19</b>
6.1	Additional Personnel.....	19
6.2	Spill Response Equipment Inventory .....	19
<b>7.0</b>	<b>Training</b>	<b>20</b>
<b>8.0</b>	<b>Annual Review of this Environmental Emergency Contingency Plan</b>	<b>21</b>

**Figures**

---

Figure 1 Municipality of Grise Fiord Licenced Infrastructure and Surrounding Area..... 3

**Tables**

---

Table 1 Potential Hazardous Materials in Municipality of Grise Fiord ..... 5  
Table 3 Spill Response for Municipal Infrastructure..... 8  
Table 3 Spill Kit Inventory ..... 19

**Appendices**

---

A Spill Report Form  
B Maps  
C Safety Data Sheets

## 1.0 Introduction

This Environmental Emergency Contingency Plan relates to the collection, transportation, storage, and treatment operations associated with water supply, sewage and solid waste for the Municipality of Grise Fiord, Nunavut. This plan applies to facility operations and spill events relating to sewage, solid waste, and water supply for NWB licensed facilities.

**Date this plan was prepared:** 2026-Jan-26

**Community:** Grise Fiord  
**Latitude:** 76°25'00"N  
**Longitude:** 82°53'45"W

### 1.1 Purpose of Plan

The impacts of spills can be catastrophic and may threaten or damage the environment, especially water supplies. As such, the Government of Nunavut (GN) requires contingency plans be written and fully implemented. The purpose of this Environmental Emergency Contingency Plan is to provide a plan of action for spills (sewage, solid waste, and petroleum products) that may occur as a result of water supply and treatment, sewage collection and treatment, and solid waste collection and disposal operations undertaken within the Municipality of Grise Fiord, Nunavut.

The Plan also focuses on the health and safety of both workers and the public. This Environmental Emergency Contingency Plan will assist in implementing corrective options quickly to minimize environmental damage. Furthermore, it defines the responsibilities of key personnel and outlines procedures to contain and recover spills of sewage, solid waste, and hydrocarbon products arising from water, sewage, and solid waste, collection, transportation, storage, and treatment operations effectively and efficiently. It will assist the Municipality in meeting the regulatory requirements related to reporting events to the appropriate authorities within the prescribed time period.

### 1.2 Objectives

The objectives of this Emergency Contingency Plan are to:

- Ensure the health and safety of workers and the general public (first priority at all times);

- Provide a plan with procedures so that the Municipality and their Spill Response Team can rapidly respond to a spill situation and minimize injury to individuals and environmental damage;
- Comply with all existing regulations;
- Cooperate with other groups and agencies;
- Be prepared and able to provide an integrated team approach with various Municipal departments and Federal and Territorial agencies; and
- Keep staff, government officials, and residents informed.

### **1.3 Health and Safety**

Health and safety of workers and the public always takes priority. All activities must follow the requirements of the Nunavut Safety Act.

### **1.4 Municipality of Grise Fiord Environmental Policy**

It is the policy of the Municipality of Grise Fiord to fully comply with all applicable legislation to ensure the protection of the environment in the territory of Nunavut. The legislation includes, but is not limited to:

- Nunavut Safety Act;
- Environmental Protection Act, Section 34 – Spill Contingency Planning and Reporting Regulations; and
- Nunavut Waters and Nunavut Surface Rights Tribunal Act.

The Municipality will cooperate with other groups committed to protecting the environment and shall ensure that Municipal employees, regulatory authorities, and the public are informed on the policies and procedures developed to help protect the environment and the residents of Grise Fiord.

## 2.0 Site and System Description

### 2.1 General Site Description

This Environmental Emergency Contingency Plan is to be implemented within the Municipal boundaries of Grise Fiord, Nunavut. The community and surrounding area are shown in Figure 1.



Figure 1 Municipality of Grise Fiord Licenced Infrastructure and Surrounding Area

Detailed scaled maps showing the licenced facilities, potential contaminants, and the relative location of spill kits and environmental sensitive areas are provided in **Appendix B**.

### 2.2 Water, Sewage, and Waste Disposal Activities

#### 2.2.1 Water Supply and Treatment

The Municipality provides daily trucked services for water delivery. Drinking water is obtained from Airport River approximately 800 m northwest of the existing water supply facility pumphouse, approximately 550 metres northwest of the future water supply facility, and after treatment is distributed to water trucks via the facility truck fill arm. The Municipality operates water delivery trucks that fill at the water supply facility and deliver water to storage tanks at each building.

### **2.2.2 Sewage Collection**

Sewage collection is provided by the Municipality. Each building is equipped with a sewage holding tank that is pumped out daily by the Municipality's sewage trucks. During pump-out operations, operators inspect hose connections and valves prior to transfer and ensure proper vacuum sequencing is followed. Residual sewage within suction lines is cleared before hose disconnection to minimize dripping and prevent localized contamination during transport. Sewage is transported via vacuum truck to the Sewage Treatment Facility lagoon (Figure 1).

Sewage effluent is presently discharged into the adjacent wetland treatment area for effluent polishing then into the final receiving environment Jones Sound (marine ecosystem), which extends towards Baffin Bay.

Potential environmental emergencies include:

- House tank spill;
- Tank truck spill; and
- Uncontrolled spill/discharge from the lagoon, of untreated or partially treated sewage.

### **2.2.3 Solid Waste Collection and Disposal**

The Municipality of Grise Fiord provides regular solid waste pickup for the Community's residents, businesses, and institutions. Solid waste is trucked to the Municipality's Solid Waste Management Facility (Figure 1).

Potential environmental emergencies include:

- Fuel spill (from a truck);
- Uncontrolled discharge of landfill impacted surface water (leachate);
- Fire in the waste; and
- Hazardous waste spill.

## **2.3 Hazardous Materials in the Community**

Table 1 outlines potential hazardous materials present in the community. This is intended to be a list of commonly present hazardous materials and may not cover every hazardous material present in the community at any given time.


**Table 1 Potential Hazardous Materials in Municipality of Grise Fiord**

Material	Estimated Quantity in Community	Uses	Potential Discharge
Diesel fuel	0.62 cubic meters per capita per year for all materials combined expected at the solid waste disposal facility; 4000 L capacity diesel fuel storage tank for water supply facilities	Used to fuel pumps or generators	Failure in system, spill during refuelling, leak
Gasoline		Motor vehicle fuel	Vehicular accident, leak, spill during transfer
Lubricating Oil		Equipment lubrication	Valve or line failure, leak
Antifreeze and other coolants		Motor vehicles	Vehicular accident, spill during transfer
Hydraulic oil		Heavy equipment	Leak, valve or line failure, spill during transfer
Motor oil		Motor vehicles	Vehicular accident, leak
Batteries		Vehicle batteries	Improper storage or segregation
Jet A-1 Fuel		Aircraft fuel	Improper storage, spill during refuelling, leak
Propane		Household use	Leak, improper storage
Sewage	Up to 19,360 cubic metres		Berm breach, vehicular accident
Sodium Hypochlorite	Up to 800 Litres (annual storage)	Water treatment	Rupture, spill, overturned container

Safety Data Sheets for the safe handling of the potential hazardous materials is provided in **Appendix C**.

### 3.0 Spill Response Organization

The flowchart on the following page identifies the response organization and the chain of command for responding to a spill or release. This chart should be posted in a highly visible location in each community facility to provide quick access to the spill response process.

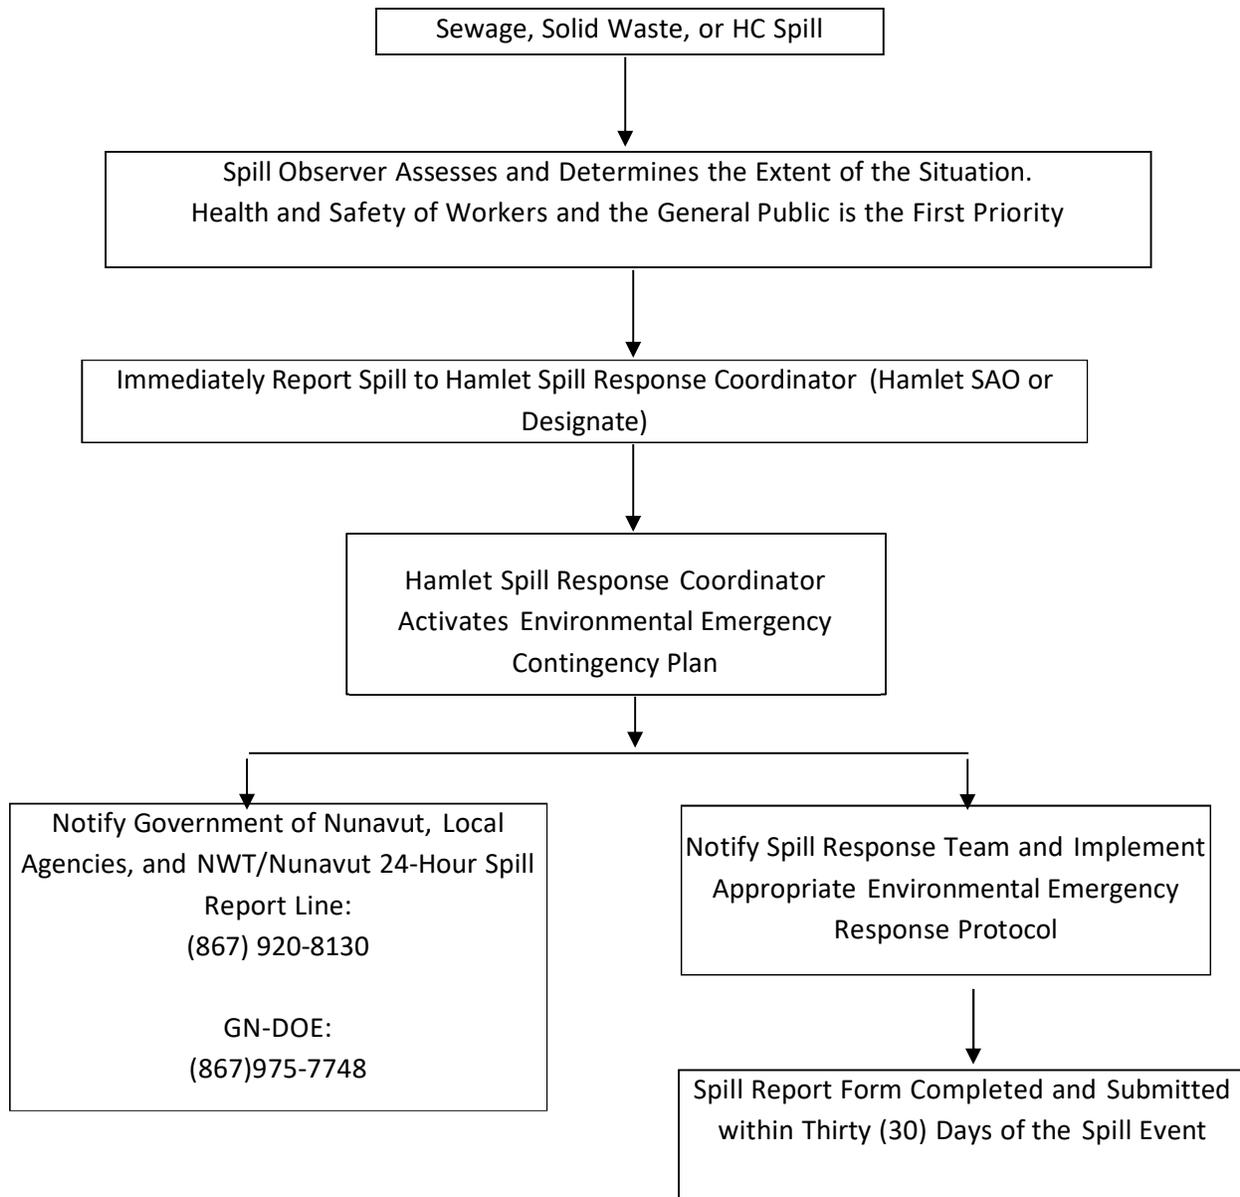

An immediately reportable spill is defined as a release of a substance that is likely to be an imminent environmental or human health hazard or meets or exceeds the volumes shown in the attached table. These spills must be reported to the Spill Report Line.

**24-Hour Spill Line:** 867-920-8130

**By regulation, all spills of any type, size, or location are considered reportable.**

### **3.1 Community Contact Information and Responsibilities**

The Senior Administrative Officer (SAO) or their designate will serve as the Spill Response Coordinator for the Municipality in the event of a sewage or HC spill during collection, transportation, storage, or treatment operations. The SAO of the Municipality of Grise Fiord will appoint and train appropriate personnel to make up the Spill Response Team, which normally consist of the following personnel:

- Spill Response Coordinator (SAO or designate); and
- Municipal Public Works Personnel.

Chief Administrative Officer:

Name: David General  
Phone: 867-980-9959  
Email: gfsao@qiniq.com

Maintenance Foreman or Work Foreman:

Name: Chris Dederick  
Phone: 867-980-9959  
Email: gfforeman@qiniq.com

The responsibilities of the Spill Response Coordinator are as follows:

- Assume complete authority over the spill scene and coordinate all personnel involved;
- Control access and ensure the health and safety of workers and the general public;
- Evaluate the spill situation and develop an overall plan of action;
- Activate the Environmental Emergency Contingency Plan for the Municipality of Grise Fiord
- Immediately report the spill to the NWT/Nunavut 24-Hour Spill Report Line at (867)920-8130, and other applicable regulatory or assistance agencies;
- Provide regulatory agencies with information regarding the status of the clean-up activities;
- Act as a spokesperson on behalf of the Municipality of Grise Fiord with regulatory agencies, the public, and the media;
- Prepare and submit a report on the spill incident to regulatory agencies within 30 days of the event; and
- Obtain the assistance of regulatory agencies, consultants, and/or contractors with the skills and equipment to deal with emergency situations deemed to be beyond the capabilities of Municipal staff.

Responsibilities for spill response by facility are outlined in Table 3.

**Table 2 Spill Response for Municipal Infrastructure**

<b>Facility</b>	<b>Name</b>	<b>Position</b>	<b>Phone</b>
WTP	David General	SAO	867-980-9959
SDF	David General	SAO	867-980-9959
SWDF	David General	SAO	867-980-9959
Other Locations	David General	SAO	867-980-9959

### **3.2 Off-Site Resources**

Off-site resources for assistance in the event of a spill are listed below. Assistance from outside the community may not be able to reach the site until at least the next business day.

**Municipality of Grise Fiord  
Environmental Emergency Contingency Plan for Municipal Water Licence  
February 2026**

24-Hour Spill Line	(867) 920-8130
Crown Indigenous Relations and Northern Affairs Canada	(867) 975-4295
Environment and Climate Change Canada Environmental Emergency Response	(780) 951-8861
Government of Nunavut	(867) 920-8130
Department of Fisheries and Oceans	(867) 979-8000
Grise Fiord Health Centre (day hours)	(867) 980-9923
Grise Fiord Health Centre (after hours)	(867) 980-4032
Municipality of Grise Fiord Fire Department	(867) 980-4422
Royal Canadian Mounted Police	(867) 980-0123

## 4.0 Spill Reporting Procedure

The Spill Response Coordinator must be notified immediately by any individual who is aware of any spill either by phone, email, or in person.

The following are the incident reporting procedures once the Spill Response Coordinator activates this Environmental Emergency Contingency Plan:

- Report spills immediately to the 24-Hour NWT/Nunavut Spill Report Line Phone (867) 920-8130;
- Report immediately to the Crown Indigenous Relations and Northern Affairs (CIRNAC) Manager, Water Resources in Iqaluit at (867) 975-4550 and Government of Nunavut, Department of Environment (GN-DOE) (867) 975-7748;
- Notify Municipality of Grise Fiord Fire Department; and
- Fill out the NWT/Nunavut Spill Report Form (**Appendix A**) within thirty (30) days of the spill event occurring.

### 4.1 NWT/NU Spill Report Line

All spills, as defined in this document, must be reported immediately to the 24-hour NWT/Nunavut Spill Report Line. The following information should be gathered prior to making the call:

- Date and time of spill (if known);
- Location and map coordinates (if known) and direction of flow of spill materials if moving;
- Party responsible for spill;
- Product/material spilled and quantity estimate;
- Cause of spill;
- Note whether spill has been contained or if it is still releasing into the environment;
- Extent of contaminated area;
- Factors affecting spill or recovery, such as weather conditions or terrain;
- Note whether spill containment is available;
- Action taken or proposed;
- If assistance is required;
- Possible hazards to individuals, property, or environment (e.g., fire, drinking water, fish, wildlife, etc.); and
- Health and safety issues.

**Municipality of Grise Fiord  
Environmental Emergency Contingency Plan for Municipal Water Licence  
February 2026**

The information collected should be brief, and rough estimates made to enable the Spill Report Line and the Spill Response Coordinator to assess the situation. The information is the same as to that required on the Nunavut Spill Report form that must be completely filled out and submitted within thirty days of the incident. This form is included as **Appendix A**.

## 5.0 Action Plans

### 5.1 Initial Action

The instructions to be followed by the first person on the spill scene are as follows:

- Always be alert and consider your safety and the safety of others first;
- If possible, estimate the volume of material that has been spilled;
- Assess the hazard of people in the vicinity of the spill;
- If possible, and safety permits, attempt to stop the release of product to minimize potential for environmental impacts;
- Immediately report the spill to the Spill Response Coordinator; and
- Resume any effective action to contain, mitigate, or terminate the flow of the spilled material.

### 5.2 Environmental and Human Health Protection and Mitigation Measures – General Procedures

The environmental protection and mitigation measures outlined in the following sections are to be taken by all personnel responding to a spill event. This will reduce the chance of environmental impairment and health hazards due to a spill, release, or other incident.

The following general clean-up procedures shall apply for all spill areas within the Municipality:

- Control access to the area and ensure the health and safety of workers and the general public;
- Always wear personal protective equipment (PPE);
- Smoking is prohibited during all spill response activities;
- Eliminate all ignition sources;
- Contain spills on soil or rock by construction of earthen dykes using available material. If soil is not available, place sorbent materials or a boom in the path of the spill. As the sorbent barrier becomes saturated, continually replace it. Fuel or other liquids lying in pools, or trenches are to be removed with pumps, buckets, or skimmers;
- If the ground is snow covered, create snow dykes, and line them with a chemically-compatible liner for containment and recovery of liquid;

- For fuel spills on water, deploy containment booms, and recovery as much fuel as possible with a work boat and skimmer if less than 1/10<sup>th</sup> of the area is covered in ice. If the area is frozen, burn fuel spills using igniters;
- Apply sorbent materials, if necessary;
- Assess potential for disturbance of wildlife, fish, and archaeological sites from spill or clean-up operations;
- Notify environmental authorities to discuss available and feasible disposal and clean-up options;
- Conduct required clean-up operations;
- Assess and appropriately treat any areas disturbed by clean-up activities with laboratory testing; and
- Ensure that the site has been completely restored. Resume operations, only once all work is finalized and laboratory testing confirmed.

Procedures for containing spills of specific contaminants are provided in the following sections.

### **5.3 Mitigative Measures: Hydrocarbon Spills**

Hydrocarbon spills include gasoline, diesel fuel, hydraulic fluid, lubricating oil, and aviation fuel. If possible, and safety permits, stop the flow of product, which is occurring, and eliminate all ignition sources. Smoking is prohibited during all spill response activities.

#### **5.3.1 Hydrocarbon Spill on Soil, Gravel, Rock, or Vegetation**

- Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm easily capture the spill after all vapours have dissipated;
- Remove the spill by using absorbent pads or excavating the soil, gravel, or snow; and
- Remove spill splashed on vegetation using particulate absorbent material.

#### **5.3.2 Hydrocarbon Spill on Water**

- Use containment boom to capture spill for recovery after vapours have dissipated;
- Use absorbent pads to capture small spills;
- Use a petroleum skimmer for larger spills; and
- GN-DOE requires that Environment Canada be consulted regarding clean-up methods.

#### **5.3.3 Hydrocarbon Spill on Ice and Snow**

- Build a containment berm around spill using snow;

- Remove spill using absorbent pads or particulate sorbent material;
- The contaminated ice and snow must be scraped and shovelled into plastic buckets with lids, 205 litre drums, and/or polypropylene bags; and
- GN-DOE requires that Environment Canada be consulted regarding clean-up methods.

#### **5.3.4 Hydrocarbon Contaminated Material Storage and Transfer**

Due to the absence of a landfarm, soil and gravel contaminated by hydrocarbons should be bagged, contained, and transported out of the community for proper disposal.

As space permits, small quantities of water, ice, snow, vegetation, and cleanup supplies contaminated by HC may be stored in labeled drums in the hazardous waste storage facility in accordance with normal operating procedures. If the quantity of contaminated material makes storage in drums unfeasible, the Municipality shall contact the appropriate regulatory agencies before removing any materials.

#### **5.4 Mitigative Measures: Sewage**

If possible, and safety permits, stop the flow of sewage escaping to the environment. In the event of a catastrophic failure of the sewage lagoon, which allowed a large volume of partially treated sewage to escape, efforts should focus on re-establishing containment. The following mitigative measures would follow:

- Control flow and attempt to pump sewage back into containment;
- Cordon off the area and warn the public;
- Maximize the length of the flow path of the sewage in the wetland through ditching and diversion berms;
- Sample along the flow path and direct efforts to areas of most concern; and
- Recover solids as best as possible while limiting the environmental impacts.

##### **5.4.1 Sewage Spill on Soil, Gravel, Rock, or Vegetation**

- Build a containment berm using soil material or snow and place a plastic tarp at the foot of the berm to easily capture the spill, and to prevent sewage from entering any water body; and
- Remove the spill by using vacuum trucks or excavating the soil, gravel, or snow.

#### **5.4.2 Sewage Spill into Water**

- Use containment boom to capture spill, and pump contaminated water into vacuum trucks;
- Deposit contaminated water in the Municipal sewage lagoon;
- As a minimum, monitor the affected water body by sampling for Biological Oxygen Demand (BOD), Total Suspended Solids (TSS), ammonia (NH<sub>3</sub>), and faecal coliforms (FC); and
- Environment Canada should be contacted regarding clean-up methods.

#### **5.4.3 Sewage Spill on Ice and Snow**

- Build a containment berm around spill using snow;
- Remove spilled sewage and contaminated snow and ice and dispose of it at the municipal sewage lagoon; and
- Environment Canada should be contacted regarding clean-up methods.

#### **5.4.4 Disposal**

All contaminated water, ice, snow, soil, and clean-up supplies will be deposited to the municipal sewage lagoon (liquid or frozen liquid) or landfill facility (solid), as appropriate. Environment Canada should be contacted regarding clean-up methods.

### **5.5 Mitigative Measures: Solid Waste**

#### **5.5.1 Solid Waste Spill on Soil, Gravel, Rock, or Vegetation**

- Physically remove the spilled solid waste from the area, and deposit in the municipal Solid Waste Management Facility.

#### **5.5.2 Solid Waste Spill into Water**

- Use containment boom to capture soil waste for recovery;
- Physically remove the spilled solid waste from the water, and deposit in the municipal Solid Waste Management Facility;
- Capture any sheen from the water using absorbent pads or skimmer, and deposit any used absorbent pads to the Municipal Solid Waste Disposal facility; and
- Environment Canada should be contacted regarding clean-up methods.

#### **5.5.3 Solid Waste Spill on Ice and Snow**

- Build a containment berm around spill using snow;

- Physically remove the spilled solid waste and deposit in the Municipal Solid Waste Management Facility; and
- Environment Canada should be contacted regarding clean-up methods.

#### **5.5.4 Disposal**

Any solid waste shall be transferred to the Municipal Solid Waste Management Facility.

### **5.6 Mitigative Measures: Hazardous Materials**

#### **5.6.1 Hazardous Solid Waste Spill on Soil, Gravel, Rock, or Vegetation**

- Physically remove the spilled hazardous solid waste from the area, and store in the Hazardous Waste Storage Area at the Municipal Solid Waste Management Facility.

#### **5.6.2 Hazardous Solid Waste Spill into Water**

- Use containment boom to capture solid hazardous waste for recovery;
- Physically remove the spilled solid waste from the water, and store in the Hazardous Waste Storage Area at the Municipal Solid Waste Management Facility; and
- Capture any sheen from the water using absorbent pads or skimmer and store any used absorbent pads as hazardous waste.

#### **5.6.3 Hazardous Solid Waste Spill on Ice and Snow**

- Build a containment berm around spill using snow; and
- Physically remove the spilled hazardous solid waste and store in the Hazardous Waste Storage Area at the Municipal Solid Waste Management Facility.

#### **5.6.4 Disposal**

Any solid hazardous waste shall be transferred to the Hazardous Waste Storage Area at Municipal Solid Waste Management Facility until it can be properly characterized and shipped out of the community.

The GN-DOE monitors the movement of hazardous waste through the use of a tracking document known as a Waste Manifest. A Waste Manifest must accompany all movements, and all parties must register with DOE by contacting:

- Sean Noble: (867) 975-7769, [snoble@gov.nu.ca](mailto:snoble@gov.nu.ca); and
- Michele LeBlanc-Havard: (867) 975-7726, [mleblanc-havard1@gov.nu.ca](mailto:mleblanc-havard1@gov.nu.ca).

## **5.7 Transferring, Storing, and Managing Spill Related Wastes**

Spills are generally cleaned up starting at the outer limit of the spill and working towards the point of the spill. Sorbent materials and hand tools such as cans and shovels are used for smaller spills. Larger spills can be contained with the use of a pump and/or heavy equipment. Spill wastes include used absorbent materials and containers of impacted water and snow. Sorbent materials should be placed in plastic bags or drums for proper disposal. The containers of impacted water and snow should be sealed and stored until disposal at an approved facility can be arranged. For most of the containment procedures, spilled petroleum products and materials used for containment will be placed into empty waste oil containers and sealed for proper disposal at an approved disposal facility.

Following a spill, all used materials need to be properly cleaned and/or replaced.

## **5.8 Spill Recovery Assessment**

Once a spill has been contained, community personnel will consult with the regulatory personnel assigned to the file to determine the level of remediation required. The regulatory personnel may request that a site-specific study be conducted to ensure appropriate remediation is met for the site.

After clean-up has been completed, the community should follow up with the 24-hour Spill Line to ensure that the spill report file has been closed. Closure of the spill file provides evidence that the spill was cleaned up to the regulator's satisfaction. This will help prevent the spill from being considered an environmental liability for the community in the event of a change of ownership, refinancing, or closure of the site. A copy of the spill report marked "Closed" can be provided on request for the community's files. The Spill Line also keeps copies of these reports on file.

To determine whether a spill has been successfully remediated, samples of the soil and/or water within the spill containment area and surrounding the area, are to be collected and sent to an accredited Canadian Association of Environmental Analytic Laboratories (CAEAL) laboratory to be analyzed for the chemical parameters contained expected in the spill material. If concentrations of the spill chemicals are not detected, or are at concentrations below the applicable Territorial, Federal, or CCME regulations/criteria, the spill clean-up will be determined a success. Clean-up operations may then cease.

**Municipality of Grise Fiord**  
**Environmental Emergency Contingency Plan for Municipal Water Licence**  
**February 2026**

Refer to the Environmental Monitoring Program and Quality Assurance/Quality Control Plan for the Municipality of Grise Fiord for a description of sampling protocols and parameters. Sampling and monitoring results (air, sediments, water, and soil) will be compared to the applicable land use classification of the site (residential, commercial, industrial, etc.), as contained within the Canadian Environmental Quality Guidelines (CCME, 2007). Should NWB Water License or Nunavut guideline criteria exist that are applicable to the situation, then the most stringent criteria should be followed.

Depending on the nature of the spill or emergency, the material requiring clean-up and handling must be handled and disposed of in accordance with Nunavut Guidelines for Industrial Waste Discharges or General Management of Hazardous Waste.

Refer to the Monitoring Program and Quality Assurance/Quality Control Plan, Municipality of Grise Fiord, for directions on obtaining sample bottles, conducting sampling, and laboratory analysis of samples. Refer to the following documents for the handling and disposal of liquid and solid waste within the Municipality of Grise Fiord:

- Solid Waste Management Facility Operation and Maintenance (O&M) Plan; and
- Sewage Treatment Facility Operation and Maintenance (O&M) Plan.

## 6.0 Spill Response Resources

### 6.1 Additional Personnel

In addition to Public Works staff, the Grise Fiord Fire Department is available to assist in spill response and clean-up activities. Personnel from the local RCMP Detachment will be available for securing the site from unauthorized individuals, closing roads, etc. The Community Health Centre has personnel to assist in the treatment of anyone injured during the emergency.

Environmental consulting companies can provide technical guidance and spill response impact evaluation, remediation, and post remedial confirmatory sampling.

### 6.2 Spill Response Equipment Inventory

Within the community, there is some equipment available to assist in responding to a spill including heavy equipment (i.e., vacuum trucks, dozer, front end loader, and grader), as well as various handheld tools including shovels. In addition, the municipal spill kits should be available during spill incident response operations. The municipal spill kits are located at the municipal public works mechanical garage as shown in **Appendix B**.

Each spill kit should contain the following supplies (Table 3):

**Table 3 Spill Kit Inventory**

Spill Kit Item	Quantity
360 litre polyethylene over pack drum	1
Oil sorbent booms (5" X 10')	6
Oil sorbent sheets (16.5" X 20" X 3/8")	100
Drain cover (36" X 36" X 1/16")	1
Caution tape (3" X 500')	1
1lb plugging compound	1
Nitrile gloves (pair)	4
Safety goggles (pair)	4
Tyvek coveralls (pair)	4
Instruction booklet	1
Printed disposable bags (24" X 48")	10

## 7.0 Training

All members of the Spill Response Team should be trained in the safe operation of all machinery and tools to help prevent sewage, solid waste, and hazardous material spills. All Public Works staff should also be trained for initial spill response. Annual refresher exercises should be conducted to review the procedures of this Environmental Emergency Contingency Plan with all members the Spill Response Team, including members of the local volunteer fire department, RCMP Detachment, and Community Health Centre.

Spill Response Team training should include the following aspects:

- Spill awareness and prevention;
- Methods of detection;
- Types of spills and seasonal considerations;
- Reporting procedures and initial responses;
- Spill response kit familiarization;
- Clean-up and site remediation methods; and
- Occupational health and safety including proper selection and use of protective equipment.

## **8.0 Annual Review of this Environmental Emergency Contingency Plan**

As part of the preparation of the Annual Report to the Nunavut Water Board as required by the Water License, the Municipality should review and update the information contained within this plan. The purpose of the update is to ensure all changes to regulations are incorporated into this plan, along with the use of any new technology or method advances, to prevent or stop a spill and to mitigate and/or remediate a spill. This ensures that the plan adapts as the Municipality grows, to ensure the community is properly prepared in the event of an incident.

Staff training must accompany the use of this document.

Annual refresher training of personnel should be completed after any revisions to this document have been approved. This will familiarize personnel with the updated plan, and to provide a rapid and coordinated response.

# Appendix A

## *Spill Report Form*

# NT-NU SPILL REPORT

## OIL, GASOLINE, CHEMICALS AND OTHER HAZARDOUS MATERIALS



Canada

**NT-NU 24-HOUR  
SPILL REPORT LINE**  
Tel: (867) 920-8130  
Email: [spills@gov.nt.ca](mailto:spills@gov.nt.ca)



A	Report Date:	MM	DD	YY	Report Time:	<input type="checkbox"/> Original Spill Report <b>OR</b> <input type="checkbox"/> Update # _____ to the Original Spill Report	Report Number:
	B	Occurrence Date:	MM	DD	YY		
C	Land Use Permit Number (if applicable):				Water Licence Number (if applicable):		
D	Geographic Place Name or Distance and Direction from the Named Location:					Region:	
						<input type="checkbox"/> NT <input type="checkbox"/> Nunavut <input type="checkbox"/> Trans-boundary or Ocean	
E	Latitude:			Longitude:			
		_____ Degrees	_____ Minutes	_____ Seconds	_____ Degrees		_____ Minutes _____ Seconds
F	Responsible Party or Vessel Name:			Responsible Party Address or Office Location:			
G	Any Contractor Involved:			Contractor Address or Office Location:			
H	Product Spilled: <input type="checkbox"/> Potential Spill			Quantity in Litres, Kilograms or Cubic Metres:		U.N. Number:	
I	Spill Source:			Spill Cause:		Area of Contamination in Square Metres:	
J	Factors Affecting Spill or Recovery:			Describe Any Assistance Required:		Hazards to Persons, Property or Environment:	
K	Summary of the spill incident and efforts / description of the incident:						
L	Reported to Spill Line by:	Position:		Employer:		Location Calling From:	Telephone:
M	Any Alternate Contact:	Position:		Employer:		Alternate Contact Location:	Alternate Telephone:

**REPORT LINE USE ONLY**

N	Received at Spill Line by:	Position:		Employer:		Location Called:	Report Line Number:
Lead Agency: <input type="checkbox"/> ECCC <input type="checkbox"/> CCG/TCMSS <input type="checkbox"/> GNWT <input type="checkbox"/> GN <input type="checkbox"/> ILA <input type="checkbox"/> CIRNAC <input type="checkbox"/> CER <input type="checkbox"/> Other: _____						File Status: <input type="checkbox"/> Open <input type="checkbox"/> Closed	
Agency:		Contact Name:		Contact Time:		Remarks:	
Lead Agency:							
First Support Agency:							
Second Support Agency:							
Third Support Agency:							

# **Appendix B**

## *Maps*

Sewage Disposal Facility

Solid Waste Disposal Facility

Hazardous Materials on Site:  
- Sewage  
- Diesel Fuel  
- Motor Oils

Hazardous Materials on Site:  
- Diesel fuel when pumping for resupply

Hazardous Materials on Site:  
- Leachate  
- Motor Oil  
- Diesel Fuels  
- Gasoline

Environmentally Sensitive Area:  
- Municipal Water Supply

Future Hazardous Materials on Site:  
- Granular Hypochlorite  
- Motor Oil  
- Diesel Fuel

Future Water Supply Facilities

Grise Fiord

Environmentally Sensitive Area:  
- Jones Sound

Spill Kit Storage Location

Existing Water Supply Facilities

Hazardous Materials on Site:  
- Granular Hypochlorite  
- Motor Oil  
- Diesel Fuel





Environmentally Significant Area:  
- Municipal Water Supply

Future Water Supply Facilities

Future Hazardous Materials:  
- Granular Hypochlorite  
- Diesel Fuel  
- Motor Oils

Grise Fiord

Environmentally Significant Area:  
- Jones Sound

Spill Kit Storage Location

Existing Water Supply Facilities

Hazardous Materials:  
- Granular Hypochlorite  
- Diesel Fuel  
- Motor Oils



→ Direction of Flow

Sewage Disposal Facility

Hazardous Materials on Site:  
- Sewage  
- Diesel Fuel  
- Motor Oil

Solid Waste Disposal Facility

Environmentally Sensitive Area:  
- Jones Sound



→ Direction of Flow

Hazardous Materials:  
- Motor Oil  
- Diesel Fuel  
- Gasoline

Sewage Disposal Facility

Solid Waste Disposal Facility

Environmentally Sensitive Area:  
- Jones Sound

Hazardous Materials:  
- Leachate



# **Appendix C**

*Safety Data Sheets*

**MATERIAL SAFETY DATA SHEET****Sodium Hypochlorite 3-20%****Section 01 - Product And Company Information**

**Product Identifier** ..... Sodium Hypochlorite (3-20%)

**Product Use** ..... Disinfectant, bleaching agent, source of available chlorine, deodorizer.

**Supplier Name**..... ClearTech Industries Inc.  
1500 Quebec Avenue  
Saskatoon, SK. Canada  
S7K 1V7

**Prepared By**..... ClearTech Industries Inc. Technical Department  
Phone: 800-387-7503

**24-Hour Emergency Phone**..... 800-387-7503

**Section 02 - Composition / Information on Ingredients**

**Ingredients**..... Sodium Hypochlorite 3.02-16.80%

**CAS Number**..... Sodium Hypochlorite 7681-52-9

**Synonym (s)**..... Industrial bleach, hypo, bleach, Javel water, household bleach, Hypochlor-12

**Section 03 - Hazard Identification**

**Inhalation**..... Irritant of the nose and throat, causing coughing, difficulty breathing, and pulmonary edema.



- Skin Contact / Absorption**..... Causes severe skin irritation with blistering and ulceration.
- Eye Contact**..... Causes severe irritation of the mucous membranes of the eyes. May cause severe eye damage.
- Ingestion**..... Burning of the mouth and throat, abdominal cramps, nausea, vomiting, diarrhea, shock. May lead to convulsions, coma, and even death.
- Exposure Limits**..... ACGIH/TLV-TWA: 0.5ppm (chlorine)

**Section 04 - First Aid Measures**

- Inhalation**..... Remove victim to fresh air. Give artificial respiration only if breathing has stopped. If breathing is difficult, give oxygen. Seek immediate medical attention.
- Skin Contact / Absorption**..... Remove contaminated clothing. Wash affected area with soap and water. Seek medical attention if irritation occurs or persists.
- Eye Contact**..... Contact lenses should never be worn when working with this product. Flush immediately with water for at least 20 minutes. Forcibly hold eyelids apart to ensure complete irrigation of eye tissue. Seek immediate medical attention.
- Ingestion**..... Do not induce vomiting. If vomiting occurs, lean victim forward to prevent breathing in vomitus. Give large amounts of water. Do not give anything by mouth to an unconscious or convulsing person. Seek immediate medical attention.
- Additional Information**..... Not available

**Section 05 - Fire Fighting Measures**

- Conditions of Flammability**..... Non-flammable
- Means of Extinction**..... Product does not burn. Use appropriate extinguishing media for material that is supplying the fuel to the fire.
- Flash Point**..... Not applicable
- Auto-ignition Temperature**..... Not applicable
- Upper Flammable Limit** ..... Not applicable



- Lower Flammable Limit**..... Not applicable
- Hazardous Combustible Products**... Decomposition may produce chlorine gas and/or hydrogen chloride gas.
- Special Fire Fighting Procedures**..... Wear NIOSH-approved self-contained breathing apparatus and protective clothing.
- Explosion Hazards**..... Pressure buildup in containers could result in an explosion when heated or in contact with acidic fumes. Vigorous reaction with oxidizable organic materials may result in a fire.

**Section 06 - Accidental Release Measures**

- Leak / Spill**..... Wear appropriate personal protective equipment. Ventilate area. Stop or reduce leak if safe to do so. Restrict access to spill area until clean up is complete. Prevent material from entering sewers, waterways or confined spaces. Soak up smaller spills with absorbent material that does not react with spilled material. Flush with water to remove any residue.
- Deactivating Materials**..... Spills can be carefully neutralized first with sodium sulphite, sodium metabisulphite or other dechlorination agent for no chlorine residual, then a pH adjustment may be required with hydrochloric acid until the pH is 7. Note neutralization reactions may produce heat so necessary precautions must be taken. Local regulatory agencies should also be contacted for proper disposal.

**Section 07 - Handling and Storage**

- Handling Procedures**..... Use proper equipment for lifting and transporting all containers. Use sensible industrial hygiene and housekeeping practices. Wash thoroughly after handling. Avoid all situations that could lead to harmful exposure.
- Storage Requirements**..... Store in a cool, dry, well-ventilated place. Keep container tightly closed, and away from incompatible materials. Venting of containers is advisable.

**Section 08 - Personal Protection and Exposure Controls**

**Protective Equipment**

- Eyes**..... Chemical goggles, full-face shield, or a full-face respirator is to be worn at all times when product is handled. Contact lenses should not be worn; they may contribute to severe eye injury.
- Respiratory**..... A NIOSH-approved respirator suitable for chlorine is recommended. Where a higher level of protection is required, use a self-contained breathing apparatus.



- Gloves**..... Impervious gloves of chemically resistant material (rubber or PVC) should be worn at all times. Wash contaminated clothing and dry thoroughly before reuse.
- Clothing**..... Body suits, aprons, and/or coveralls of chemical resistant material should be worn at all times. Wash contaminated clothing and dry thoroughly before reuse.
- Footwear**..... Impervious boots of chemically resistant material should be worn at all times.

### Engineering Controls

- Ventilation Requirements**..... Mechanical ventilation (dilution or local exhaust), process or personnel enclosure and control of process conditions must be provided in accordance with all fire codes and regulatory requirements. Supply sufficient replacement air to make up for air removed by exhaust systems..
- Other**..... Emergency shower and eyewash must be available and tested in accordance with regulations and be in close proximity.

## Section 09 - Physical and Chemical Properties

- Physical State**..... Liquid
- Odor and Appearance**..... Strong chlorine odour. Clear, greenish-yellow solution.
- Odor Threshold**..... Not available
- Specific Gravity (Water=1)**..... 1.17 at 20°C (12% trade)
- Vapor Pressure (mm Hg, 20C)**..... 12.1mm Hg at 20°C (12.5 wt %)
- Vapor Density (Air=1)**..... Not available
- Evaporation Rate**..... Not available
- Boiling Point**..... Slowly decomposes above 40°C.
- Freeze/Melting Point**..... ~ -15°C (12% trade)
- pH**..... < 12
- Water/Oil Distribution Coefficient**.... Not available
- Bulk Density**..... Not available



**% Volatiles by Volume**..... Not available

**Solubility in Water**..... Complete

**Molecular Formula**..... NaOCl

**Molecular Weight**..... 74.44

### Section 10 - Stability and Reactivity

**Stability**..... Unstable at temperatures above 40°C, in sunlight, and in contact with acid.

**Incompatibility**..... Incompatible with strong acids, ammonia, oxidizable materials, nickel, copper, tin, manganese, and iron.

**Hazardous Products of Decomposition**.. Chlorine (by reaction with acids), oxygen (by reaction with nickel, copper, tin, manganese, iron), sodium chloride, sodium chlorate, with increased temperature.

**Polymerization**..... Will not occur

### Section 11 - Toxicological Information

**Irritancy**..... Strong irritant

**Sensitization**..... Not available

**Chronic/Acute Effects**..... If over-exposed to the solution, there will be constant irritation of the eyes, nose, and throat.

**Synergistic Materials**..... Not available

**Animal Toxicity Data**..... LD<sub>50</sub>(oral, rat): 8910mg/kg (undiluted sodium hypochlorite)

**Carcinogenicity**..... Not considered to be carcinogenic (IARC and ACGIH).

**Reproductive Toxicity**..... Not available

**Teratogenicity**..... Not available

**Mutagenicity**..... Not available



**Section 12 - Ecological Information**

**Fish Toxicity**..... Not available  
**Biodegradability**..... Not available  
**Environmental Effects**..... Not available

**Section 13 - Disposal Consideration**

**Waste Disposal**..... Dispose in accordance with all federal, provincial, and/or local regulations including the Canadian Environmental Protection Act.

**Section 14 - Transport Information**

**TDG Classification**

**Shipping Name**..... HYPOCHLORITE SOLUTION  
**Class**..... 8 (not regulated at solutions below 7%)  
**Group**..... III (not regulated at solutions below 7%)  
**PIN Number**..... UN 1791(not regulated at solutions below 7%)  
**Other**..... Secure containers (full and/or empty) with suitable hold down devices during shipment and ensure all caps, valves, or closures are secured in the closed position.

**Section 15 - Regulatory Information**

**WHMIS Classification**.....E

**NOTE: THE PRODUCT LISTED ON THIS MSDS HAS BEEN CLASSIFIED IN ACCORDANCE WITH THE HAZARD CRITERIA OF THE CANADIAN CONTROLLED PRODUCTS REGULATIONS. THIS MSDS CONTAINS ALL INFORMATION REQUIRED BY THOSE REGULATIONS.**

**NSF Certification**.....Product is certified under NSF/ANSI Standard 60 for disinfection and oxidation at a maximum dosage for the following:

- sodium hypochlorite 5%: 174mg/L
- sodium hypochlorite 6%: 145mg/L
- sodium hypochlorite 7%: 125mg/L
- sodium hypochlorite 8%: 109mg/L
- sodium hypochlorite 9%: 97mg/L
- sodium hypochlorite 10%: 87mg/L
- sodium hypochlorite 11%: 79mg/L
- sodium hypochlorite 12%: 72mg/L
- sodium hypochlorite 13%: 67mg/L



sodium hypochlorite 14%: 62mg/L  
 sodium hypochlorite 15%: 58mg/L

sodium hypochlorite 16%: 55mg/L  
 sodium hypochlorite 17%: 51mg/L  
 sodium hypochlorite 18%: 48mg/L  
 sodium hypochlorite 19%: 46mg/L  
 sodium hypochlorite 20%: 43mg/L

**NOTE: Any product strength below 7% is not regulated by TDG.**

**Sanitizer Use:** to obtain 10 liters of a 200 mg/L solution as available chlorine, use 16.7 mL of Hypochlor-12 for each 10 liters of clean, potable water.

### Section 16 - Other Information

<b>Version #</b> .....	Two
<b>Preparation Date</b> .....	September 5, 2012
<b>Revision Date</b> .....	August 26, 2014
<b>Revision Note</b> .....	Updated ClearTech Information.

**Note:** The responsibility to provide a safe workplace remains with the user. The user should consider the health hazards and safety information contained herein as a guide and should take those precautions required in an individual operation to instruct employees and develop work practice procedures for a safe work environment. The information contained herein is, to the best of our knowledge and belief, accurate. However, since the conditions of handling and use are beyond our control, we make no guarantee of results, and assume no liability for damages incurred by the use of this material. It is the responsibility of the user to comply with all applicable laws and regulations.

**Attention: Receiver of the chemical goods / MSDS coordinator**

As part of our commitment to the Canadian Association of Chemical Distributors (CACD) Responsible Distribution<sup>®</sup> initiative, ClearTech Industries Inc. and its associated companies require, as a condition of sale, that you forward the attached Material Safety Data Sheet(s) to all affected employees, customers, and end-users. ClearTech will send any available supplementary handling, health, and safety information to you at your request.

If you have any questions or concerns please call our customer service or technical service department.



**ClearTech Industries Inc. - Locations**

**Corporate Head Office: 1500 Quebec Avenue, Saskatoon, SK, S7K 1V7**  
**Phone: 800-387-7503**  
**Fax: 888-281-8109**

**[www.ClearTech.ca](http://www.ClearTech.ca)**

<b>Location</b>	<b>Address</b>	<b>Postal Code</b>	<b>Phone Number</b>	<b>Fax Number</b>
Richmond, BC	12431 Horseshoe Way	V7A 4X6	800-387-7503	888-281-8109
Port Coquitlam BC	2023 Kingsway Avenue	V3C 1S9	800-387-7503	888-281-8109
Calgary, AB.	5516E - 40 <sup>th</sup> St. S.E.	T2C 2A1	800-387-7503	888-281-8109
Edmonton, AB.	11750 - 180 <sup>th</sup> Street	T5S 1N7	800-387-7503	888-281-8109
Saskatoon, SK.	North Corman Park	S7L 5Z3	800-387-7503	888-281-8109
Regina, SK.	555 Henderson Drive	S42 5X2	800-387-7503	888-281-8109
Winnipeg, MB.	340 Saulteaux Crescent	R3J 3T2	800-387-7503	888-281-8109
Mississauga, ON.	355 Admiral Blvd Unit #1	L5T 2N1	800-387-7503	888-281-8109

**24 Hour Emergency Number - All Locations - 800-387-7503**

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

---

### SECTION 1. IDENTIFICATION

Product name : GASOLINE, UNLEADED

Product code : 11949, 11000, 10999, 10998, 10995, 10993, 10991, 10990, 10989, 10988, 10987, 10474, 10473, 10461, 10455, 10111, 10108, 10097, 10096, 10040, 10039

Other means of identification : LVB87, Regular, Unleaded Gasoline (US Grade), Mid-Grade, Plus, Super, Supreme, SuperClean, RegularClean, Plus-Clean, Premium, marked or dyed gasoline, BOB, Blendstock for Oxygenate Blending, Conventional Gasoline, RUL, MUL, SUL, PUL, Additive Denaturant, LVBU (low volatility blend ultra), LVBR (low volatility blend regular).

#### Manufacturer or supplier's details

Company name of supplier : Petro-Canada  
Address : P.O. Box 2844, 150 - 6th Avenue South-West  
Calgary, Alberta T2P 3E3  
Canada, Telephone: 1-866-786-2671

Emergency telephone : CHEMTREC: 1-800-424-9300 (toll free) or +1 703-527-3887;  
^CR^Suncor Energy: +1 403-296-3000

#### Recommended use of the chemical and restrictions on use

Recommended use : Unleaded gasoline is used in spark ignition engines including motor vehicles, inboard and outboard boat engines, small engines such as chain saws and lawn mowers, and recreational vehicles.

---

### SECTION 2. HAZARDS IDENTIFICATION

#### GHS classification in accordance with the Hazardous Products Regulations

Flammable liquids : Category 1

Skin irritation : Category 2

Germ cell mutagenicity : Category 1B

Carcinogenicity : Category 1A

Reproductive toxicity : Category 2

Specific target organ toxicity - single exposure : Category 3 (Central nervous system)

Specific target organ toxicity - repeated exposure (Inhalation) : Category 1 (hematopoietic system)

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

Aspiration hazard : Category 1

### GHS label elements

Hazard pictograms :



Signal Word : Danger

Hazard Statements : H224 Extremely flammable liquid and vapor.  
H304 May be fatal if swallowed and enters airways.  
H315 Causes skin irritation.  
H336 May cause drowsiness or dizziness.  
H340 May cause genetic defects.  
H350 May cause cancer.  
H361 Suspected of damaging fertility or the unborn child.  
H372 Causes damage to organs (hematopoietic system) through prolonged or repeated exposure if inhaled.

Precautionary Statements :

#### Prevention:

P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.  
P233 Keep container tightly closed.  
P240 Ground and bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
P242 Use non-sparking tools.  
P243 Take action to prevent static discharges.  
P260 Do not breathe mist or vapors.  
P264 Wash skin thoroughly after handling.  
P270 Do not eat, drink or smoke when using this product.  
P271 Use only outdoors or in a well-ventilated area.  
P280 Wear protective gloves/ protective clothing/ eye protection/ face protection/ hearing protection.

#### Response:

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER/ doctor.  
P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water.  
P304 + P340 + P312 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/ doctor if you feel unwell.  
P308 + P313 IF exposed or concerned: Get medical advice/ attention.  
P331 Do NOT induce vomiting.

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

P332 + P313 If skin irritation occurs: Get medical advice/ attention.

P362 + P364 Take off contaminated clothing and wash it before reuse.

P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

### Storage:

P403 + P233 Store in a well-ventilated place. Keep container tightly closed.

P403 + P235 Store in a well-ventilated place. Keep cool.

P405 Store locked up.

### Disposal:

P501 Dispose of contents/ container to an approved waste disposal plant.

### Other hazards

None known.

## SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

### Components

Chemical name	Common Name/Synonym	CAS-No.	Concentration (% w/w)
Gasoline; Low boiling point naphtha - unspecified	Gasoline; Low boiling point naphtha - unspecified	86290-81-5	80 - 100
toluene	toluene	108-88-3	<= 40
benzene	benzene	71-43-2	0.006 - 1.5
ethanol	ethanol	64-17-5	<= 0.3
methanol	methanol	67-56-1	<= 0.08

## SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air.  
Artificial respiration and/or oxygen may be necessary.  
Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.  
Wash skin thoroughly with soap and water or use recognized skin cleanser.  
Wash clothing before reuse.  
Seek medical advice.
- In case of eye contact : Remove contact lenses.  
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.  
Obtain medical attention.

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

If swallowed	:	Rinse mouth with water. DO NOT induce vomiting unless directed to do so by a physician or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.
Most important symptoms and effects, both acute and delayed	:	Respiratory, skin and eye irritation; nausea; cancer. Inhalation may cause central nervous system effects. Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhea. Chronic exposure to benzene may result in increased risk of leukemia and other blood disorders.
An indication of immediate medical attention and special treatment needed, if necessary	:	Treat symptomatically. Contact poison treatment specialist immediately if large quantities have been ingested or inhaled.

### SECTION 5. FIRE-FIGHTING MEASURES

Suitable extinguishing media	:	Dry chemical Carbon dioxide (CO2) Water fog. Foam
Unsuitable extinguishing media	:	Do NOT use water jet.
Specific hazards during fire fighting	:	Cool closed containers exposed to fire with water spray.
Hazardous combustion products	:	Carbon oxides (CO, CO2), nitrogen oxides (NOx), polynuclear aromatic hydrocarbons, phenols, aldehydes, ketones, smoke and irritating vapours as products of incomplete combustion.
Further information	:	Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for fire-fighters	:	Wear self-contained breathing apparatus and full protective wear. Wear a positive-pressure supplied-air respirator with full face-piece.

### SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	:	For personal protection see section 8. Ensure adequate ventilation. Evacuate personnel to safe areas. Material can create slippery conditions. Mark the contaminated area with signs and prevent access to unauthorized personnel. Only qualified personnel equipped with suitable protective equipment may intervene.
---	---	---

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

Environmental precautions : If the product contaminates rivers and lakes or drains inform respective authorities.

Methods and materials for containment and cleaning up : Prevent further leakage or spillage if safe to do so.  
Remove all sources of ignition.  
Soak up with inert absorbent material.  
Non-sparking tools should be used.  
Ensure adequate ventilation.  
Contact the proper local authorities.

### SECTION 7. HANDLING AND STORAGE

Advice on safe handling : For personal protection see section 8.  
Smoking, eating and drinking should be prohibited in the application area.  
Use only with adequate ventilation.  
In case of insufficient ventilation, wear suitable respiratory equipment.  
Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity.  
Avoid contact with skin, eyes and clothing.  
Do not ingest.  
Keep away from heat and sources of ignition.  
Keep container closed when not in use.

Conditions for safe storage : Store in original container.  
Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Keep in a dry, cool and well-ventilated place.  
Keep in properly labeled containers.  
To maintain product quality, do not store in heat or direct sunlight.

### SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### Ingredients with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
Gasoline; Low boiling point naphtha -unspecified	86290-81-5	TWA	300 ppm	CA AB OEL
		STEL	500 ppm	CA AB OEL
		TWA	300 ppm	CA BC OEL
		STEL	500 ppm	CA BC OEL
		TWA	300 ppm	ACGIH
		STEL	500 ppm	ACGIH
toluene	108-88-3	TWA	20 ppm	CA BC OEL
		TWAEV	20 ppm	CA QC OEL
		TWA	50 ppm	CA AB OEL
		TWA	20 ppm	ACGIH

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

benzene	71-43-2	TWA	0.5 ppm	CA BC OEL
		STEL	2.5 ppm	CA BC OEL
		TWA	0.5 ppm	CA ON OEL
		STEL	2.5 ppm	CA ON OEL
		TWAEV	0.5 ppm	CA QC OEL
		STEV	2.5 ppm	CA QC OEL
		TWA	0.5 ppm	CA AB OEL
		STEL	2.5 ppm	CA AB OEL
		TWA	0.02 ppm	ACGIH
		STEL	0.1 ppm	ACGIH
ethanol	64-17-5	STEL	1,000 ppm	CA BC OEL
		STEV	1,000 ppm	CA QC OEL
		TWA	300 ppm	CA AB OEL
		STEL	500 ppm	CA AB OEL
		STEL	1,000 ppm	ACGIH
methanol	67-56-1	TWA	200 ppm	CA BC OEL
		STEL	250 ppm	CA BC OEL
		TWA	200 ppm	CA AB OEL
		STEL	250 ppm	CA AB OEL
		TWA	200 ppm	ACGIH
		STEL	250 ppm	ACGIH

**Engineering measures** : Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.  
Use only in well-ventilated areas.  
Ensure that eyewash station and safety shower are proximal to the work-station location.

### Personal protective equipment

**Respiratory protection** : Concentration in air determines protection needed.  
Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

**Filter type** : A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

**Hand protection Material** : polyvinyl alcohol (PVA), Viton(R). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

signs of hardening and cracks, they should be changed.

Remarks	:	Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Eye protection	:	Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	:	Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	:	Wash contaminated clothing before re-use.
Hygiene measures	:	Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

### SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Physical state	:	Clear liquid.
Color	:	Clear to slightly yellow or green, undyed liquid. May be dyed red for taxation purposes.
Odor	:	Gasoline
pH	:	No data available
Melting point and freezing point	:	No data available
Boiling point, or initial boiling point and boiling range	:	25 - 225 °C
Flash point	:	-50 - -38 °C Method: Tagliabue.
Flammability	:	Extremely flammable in presence of open flames and sparks. May accumulate static electrical charge. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back.
Upper explosion limit / Upper flammability limit	:	7.6 %(V)
Lower explosion limit / Lower flammability limit	:	1.3 %(V)
Vapor pressure	:	< 802.5 mmHg (20 °C)
Relative vapor density	:	3

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

Relative density	:	0.685 - 0.8
Density	:	No data available
Solubility(ies)	:	
Water solubility	:	insoluble
Partition coefficient: n-octanol/water	:	No data available
Autoignition temperature	:	257 °C
Decomposition temperature	:	No data available
Viscosity	:	
Viscosity, kinematic	:	No data available
Particle characteristics	:	
Particle size	:	Not applicable

### SECTION 10. STABILITY AND REACTIVITY

Reactivity	:	No dangerous reaction known under conditions of normal use.
Chemical stability	:	Stable under normal conditions.
Possibility of hazardous reactions	:	Hazardous polymerization does not occur.
Conditions to avoid	:	Extremes of temperature and direct sunlight.
Incompatible materials	:	Reactive with oxidising agents, acids and interhalogens.
Hazardous decomposition products	:	May release COx, NOx, phenols, polycyclic aromatic hydrocarbons, aldehydes, ketones, smoke and irritating vapours when heated to decomposition.

### SECTION 11. TOXICOLOGICAL INFORMATION

#### Information on likely routes of exposure

Eye contact  
Ingestion  
Inhalation  
Skin contact

#### Acute toxicity

Based on available data, the classification criteria are not met.

#### **Product:**

Acute oral toxicity	:	Acute toxicity estimate: > 2,000 mg/kg Method: Calculation method
Acute inhalation toxicity	:	Acute toxicity estimate: > 20 mg/L Exposure time: 4 h Test atmosphere: vapor Method: Calculation method

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

---

Acute dermal toxicity : Acute toxicity estimate: > 2,000 mg/kg  
Method: Calculation method

### Components:

#### **Gasoline; Low boiling point naphtha -unspecified:**

Acute oral toxicity : LD50 (Rat): 13,600 mg/kg

Acute dermal toxicity : LD50 (Rabbit): > 3,750 mg/kg

#### **toluene:**

Acute oral toxicity : LD50 (Rat): 5,580 mg/kg

Acute inhalation toxicity : LC50 (Rat): > 20 mg/l  
Exposure time: 4 h  
Test atmosphere: vapor

Acute dermal toxicity : LD50 (Rabbit): 12,125 mg/kg

#### **benzene:**

Acute oral toxicity : LD50 (Rat): 2,990 mg/kg

Acute inhalation toxicity : LC50 (Rat): 13700 ppm  
Exposure time: 4 h  
Test atmosphere: vapor

Acute dermal toxicity : LD50 (Rabbit): > 8,240 mg/kg

#### **ethanol:**

Acute oral toxicity : LD50 (Rat): 7,060 mg/kg

Acute inhalation toxicity : LC50 (Rat): > 32380 ppm  
Exposure time: 4 h  
Test atmosphere: vapor

#### **methanol:**

Acute oral toxicity : LD50 (Rat): 5,600 mg/kg

Acute dermal toxicity : LD50 (Rabbit): 15,800 mg/kg

### **Skin corrosion/irritation**

Causes skin irritation.

### **Serious eye damage/eye irritation**

Based on available data, the classification criteria are not met.

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

---

### Respiratory or skin sensitization

#### Skin sensitization

Based on available data, the classification criteria are not met.

#### Respiratory sensitization

Based on available data, the classification criteria are not met.

#### Germ cell mutagenicity

May cause genetic defects.

May cause cancer.

#### Reproductive toxicity

Suspected of damaging fertility or the unborn child.

#### STOT-single exposure

May cause drowsiness or dizziness.

#### STOT-repeated exposure

Causes damage to organs (hematopoietic system) through prolonged or repeated exposure if inhaled.

#### Aspiration toxicity

May be fatal if swallowed and enters airways.

---

## SECTION 12. ECOLOGICAL INFORMATION

### Ecotoxicity

#### Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae/aquatic plants : Remarks: No data available

Toxicity to microorganisms : Remarks: No data available

### Persistence and degradability

#### Product:

Biodegradability : Remarks: No data available

### Bioaccumulative potential

No data available

### Mobility in soil

No data available

### Other adverse effects

No data available

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

---

### SECTION 13. DISPOSAL CONSIDERATIONS

#### Disposal methods

- Waste from residues : The product should not be allowed to enter drains, water courses or the soil.  
Offer surplus and non-recyclable solutions to a licensed disposal company.  
Waste must be classified and labeled prior to recycling or disposal.  
Send to a licensed waste management company.  
Dispose of as hazardous waste in compliance with local and national regulations.  
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.
- Contaminated packaging : Contact local or business unit authorities for guidance on disposal of product.

---

### SECTION 14. TRANSPORT INFORMATION

#### International Regulations

##### IATA-DGR

- UN/ID No. : UN 1203  
Proper shipping name : Gasoline  
Class : 3  
Packing group : II  
Labels : Flammable Liquids  
Packing instruction (cargo aircraft) : 364

##### IMDG-Code

- UN number : UN 1203  
Proper shipping name : GASOLINE  
Class : 3  
Packing group : II  
Labels : 3  
EmS Code : F-E, S-E  
Marine pollutant : yes

#### Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

#### Domestic regulation

##### TDG

- UN number : UN 1203  
Proper shipping name : GASOLINE  
Class : 3  
Packing group : II  
Labels : 3  
ERG Code : 128  
Marine pollutant : yes

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

### Special precautions for user

The transport classification(s) provided herein are for informational purposes only, and solely based upon the properties of the unpackaged material as it is described within this Safety Data Sheet. Transportation classifications may vary by mode of transportation, package sizes, and variations in regional or country regulations.

## SECTION 15. REGULATORY INFORMATION

**NPRI Components** : toluene  
benzene  
ethanol  
methanol  
xylene  
Naphtha (petroleum), hydrotreated heavy; Low boiling point  
hydrogen treated naphtha  
ethylbenzene  
Solvent naphtha (petroleum), heavy arom.; Kerosine — un-  
specified  
naphthalene  
1,2,4-trimethylbenzene

### The ingredients of this product are reported in the following inventories:

DSL : All components of this product are on the Canadian DSL

### Canadian lists

No substances are subject to a Significant New Activity Notification.

## SECTION 16. OTHER INFORMATION

### Full text of other abbreviations

ACGIH : USA. ACGIH Threshold Limit Values (TLV)  
CA AB OEL : Canada. Alberta, Occupational Health and Safety Code (table  
2: OEL)  
CA BC OEL : Canada. British Columbia OEL  
CA ON OEL : Ontario Table of Occupational Exposure Limits made under  
the Occupational Health and Safety Act.  
CA QC OEL : Québec. Regulation respecting occupational health and safe-  
ty, Schedule 1, Part 1: Permissible exposure values for air-  
borne contaminants  
ACGIH / TWA : 8-hour, time-weighted average  
ACGIH / STEL : Short-term exposure limit  
CA AB OEL / STEL : Short term exposure limit  
CA AB OEL / TWA : Time weighted average  
CA AB OEL / TWA : 8-hour Occupational exposure limit  
CA AB OEL / STEL : 15-minute occupational exposure limit  
CA BC OEL / TWA : 8-hour time weighted average  
CA BC OEL / STEL : short-term exposure limit  
CA ON OEL / TWA : Time-Weighted Average Limit (TWA)  
CA ON OEL / STEL : Short-Term Exposure Limit (STEL)  
CA QC OEL / TWA EV : Time-weighted average exposure value

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## GASOLINE, UNLEADED

SDS Number: 000003000644

Version: 5.0

Revision Date: 2025/02/05

Print Date: 2025/02/13

CA QC OEL / STEV : Short-term exposure value

AIIC - Australian Inventory of Industrial Chemicals; ANTT - National Agency for Transport by Land of Brazil; ASTM - American Society for the Testing of Materials; bw - Body weight; CMR - Carcinogen, Mutagen or Reproductive Toxicant; DIN - Standard of the German Institute for Standardisation; DSL - Domestic Substances List (Canada); ECx - Concentration associated with x% response; ELx - Loading rate associated with x% response; EmS - Emergency Schedule; ENCS - Existing and New Chemical Substances (Japan); ErCx - Concentration associated with x% growth rate response; ERG - Emergency Response Guide; GHS - Globally Harmonized System; GLP - Good Laboratory Practice; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; IBC - International Code for the Construction and Equipment of Ships carrying Dangerous Chemicals in Bulk; IC50 - Half maximal inhibitory concentration; ICAO - International Civil Aviation Organization; IECSC - Inventory of Existing Chemical Substances in China; IMDG - International Maritime Dangerous Goods; IMO - International Maritime Organization; ISHL - Industrial Safety and Health Law (Japan); ISO - International Organisation for Standardization; KECI - Korea Existing Chemicals Inventory; LC50 - Lethal Concentration to 50 % of a test population; LD50 - Lethal Dose to 50% of a test population (Median Lethal Dose); MARPOL - International Convention for the Prevention of Pollution from Ships; n.o.s. - Not Otherwise Specified; Nch - Chilean Norm; NO(A)EC - No Observed (Adverse) Effect Concentration; NO(A)EL - No Observed (Adverse) Effect Level; NOELR - No Observable Effect Loading Rate; NOM - Official Mexican Norm; NTP - National Toxicology Program; NZIoC - New Zealand Inventory of Chemicals; OECD - Organization for Economic Co-operation and Development; OPPTS - Office of Chemical Safety and Pollution Prevention; PBT - Persistent, Bioaccumulative and Toxic substance; PICCS - Philippines Inventory of Chemicals and Chemical Substances; (Q)SAR - (Quantitative) Structure Activity Relationship; REACH - Regulation (EC) No 1907/2006 of the European Parliament and of the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals; SADT - Self-Accelerating Decomposition Temperature; SDS - Safety Data Sheet; TCSI - Taiwan Chemical Substance Inventory; TDG - Transportation of Dangerous Goods; TECI - Thailand Existing Chemicals Inventory; TSCA - Toxic Substances Control Act (United States); UN - United Nations; UNRTDG - United Nations Recommendations on the Transport of Dangerous Goods; vPvB - Very Persistent and Very Bioaccumulative; WHMIS - Workplace Hazardous Materials Information System

Revision Date : 2025/02/05

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

CA / EN

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

### SECTION 1. IDENTIFICATION

- Product name : DIESEL FUEL
- Product code : 10582, 11803, 11802, 11798, 12016, 11958, 11796, 11771, 11770, 11769, 11768, 11767, 11766, 11612, 11560, 11558, 11555, 11437, 11302, 10979, 10978, 10977, 10976, 10975, 10974, 10973, 10972, 10971, 10970, 10969, 10968, 10966, 10965, 10964, 10786, 10785, 10784, 10783, 10690, 10689, 10687, 10636, 10635, 10626, 10621, 10616, 10610, 10601, 10600, 10598, 10595, 10427, 10041
- Other means of identification : Seasonal Diesel, #2 Diesel, #1 Diesel, #2 Heating Oil, #1 Heating Oil, OSX, D50, Arctic Diesel, Farm Diesel, Marine Diesel, Low Sulphur Diesel, LSD, Ultra Low Sulphur Diesel, ULSD, Mining Diesel, Naval Distillate, Dyed Diesel, Marked Diesel, Coloured Diesel, Furnace special, Biodiesel blend (BX where X is representative of volume %), Renewable Diesel blend (RX where X is represent ative of volume %), Diesel Low Cloud (LC), Marine Gas Oil, Marine Gas Oil Dyed, Type A Diesel, Type B Diesel.

#### Manufacturer or supplier's details

- Company name of supplier : Petro-Canada  
Address : P.O. Box 2844, 150 - 6th Avenue South-West  
Calgary, Alberta T2P 3E3  
Canada, Telephone: 1-866-786-2671
- Emergency telephone : CHEMTREC: 1-800-424-9300 (toll free) or +1 703-527-3887;  
^CR^Suncor Energy: +1 403-296-3000

#### Recommended use of the chemical and restrictions on use

- Recommended use : Diesel fuels are distillate fuels suitable for use in high and medium speed internal combustion engines of the compression ignition type.  
Mining diesels, marine diesels, marine diesel oil, marine gas oil and naval distillates may have a higher flash point requirement.

### SECTION 2. HAZARDS IDENTIFICATION

#### GHS classification in accordance with the Hazardous Products Regulations

- Flammable liquids : Category 3
- Acute toxicity (Inhalation) : Category 4
- Skin irritation : Category 2

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

Eye irritation : Category 2B  
Carcinogenicity : Category 2  
Specific target organ toxicity : Category 2 (Liver, thymus, Bone)  
- repeated exposure  
Aspiration hazard : Category 1

### GHS label elements

Hazard pictograms :



Signal Word : Danger

Hazard Statements : H226 Flammable liquid and vapor.  
H304 May be fatal if swallowed and enters airways.  
H315 + H320 Causes skin and eye irritation.  
H332 Harmful if inhaled.  
H351 Suspected of causing cancer.  
H373 May cause damage to organs (Liver, thymus, Bone) through prolonged or repeated exposure.

Precautionary Statements : **Prevention:**  
P201 Obtain special instructions before use.  
P202 Do not handle until all safety precautions have been read and understood.  
P210 Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.  
P233 Keep container tightly closed.  
P240 Ground and bond container and receiving equipment.  
P241 Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
P242 Use non-sparking tools.  
P243 Take action to prevent static discharges.  
P260 Do not breathe mist or vapors.  
P264 Wash skin thoroughly after handling.  
P271 Use only outdoors or in a well-ventilated area.  
P280 Wear protective gloves/ protective clothing/ eye protection/ face protection/ hearing protection.

### Response:

P301 + P310 IF SWALLOWED: Immediately call a POISON CENTER/ doctor.  
P303 + P361 + P353 IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water.  
P304 + P340 + P312 IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

doctor if you feel unwell.  
P305 + P351 + P338 IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing.  
P308 + P313 IF exposed or concerned: Get medical advice/attention.  
P331 Do NOT induce vomiting.  
P332 + P313 If skin irritation occurs: Get medical advice/attention.  
P337 + P313 If eye irritation persists: Get medical advice/attention.  
P362 + P364 Take off contaminated clothing and wash it before reuse.  
P370 + P378 In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.

### Storage:

P403 + P235 Store in a well-ventilated place. Keep cool.  
P405 Store locked up.

### Disposal:

P501 Dispose of contents/ container to an approved waste disposal plant.

### Other hazards

None known.

## SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

### Components

Chemical name	Common Name/Synonym	CAS-No.	Concentration (% w/w)
Fuels, diesel; Gasoil — unspecified	Fuels, diesel; Gasoil — unspecified	68334-30-5	25 - 100
Alkanes, C10-20-branched and linear	Alkanes, C10-20-branched and linear	928771-01-1	<= 75
Fatty acids, C14-18 and C14-18-unsatd., Me esters	Fatty acids, C14-18 and C14-18-unsatd., Me esters	129756-24-7	<= 20
Fuel oil No. 2	Fuel oil No. 2	68476-30-2	<= 0.2

## SECTION 4. FIRST AID MEASURES

If inhaled : Move to fresh air.  
Artificial respiration and/or oxygen may be necessary.  
Seek medical advice.  
In case of skin contact : In case of contact, immediately flush skin with plenty of water

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

		for at least 15 minutes while removing contaminated clothing and shoes. Wash skin thoroughly with soap and water or use recognized skin cleanser. Wash clothing before reuse. Seek medical advice.
In case of eye contact	:	Remove contact lenses. Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes. Obtain medical attention.
If swallowed	:	Rinse mouth with water. DO NOT induce vomiting unless directed to do so by a physician or poison control center. Never give anything by mouth to an unconscious person. Seek medical advice.
Most important symptoms and effects, both acute and delayed	:	Harmful if inhaled. Respiratory, skin and eye irritation; nausea; cancer.
An indication of immediate medical attention and special treatment needed, if necessary	:	Treat symptomatically. For specialist advice physicians should contact the Poisons Information Service.

### SECTION 5. FIRE-FIGHTING MEASURES

Suitable extinguishing media	:	Dry chemical Carbon dioxide (CO <sub>2</sub> ) Water fog. Foam
Unsuitable extinguishing media	:	Do NOT use water jet.
Specific hazards during fire fighting	:	Cool closed containers exposed to fire with water spray.
Hazardous combustion products	:	Carbon oxides (CO, CO <sub>2</sub> ), nitrogen oxides (NO <sub>x</sub> ), sulphur oxides (SO <sub>x</sub> ), smoke and irritating vapours as products of incomplete combustion.
Further information	:	Prevent fire extinguishing water from contaminating surface water or the ground water system.
Special protective equipment for fire-fighters	:	Wear self-contained breathing apparatus for firefighting if necessary.

### SECTION 6. ACCIDENTAL RELEASE MEASURES

Personal precautions, protective equipment and emergency procedures	:	For personal protection see section 8. Ensure adequate ventilation. Evacuate personnel to safe areas. Material can create slippery conditions.
---	---	---

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

Mark the contaminated area with signs and prevent access to unauthorized personnel.  
Only qualified personnel equipped with suitable protective equipment may intervene.

Environmental precautions : If the product contaminates rivers and lakes or drains inform respective authorities.

Methods and materials for containment and cleaning up : Prevent further leakage or spillage if safe to do so.  
Remove all sources of ignition.  
Soak up with inert absorbent material.  
Non-sparking tools should be used.  
Ensure adequate ventilation.  
Contact the proper local authorities.

### SECTION 7. HANDLING AND STORAGE

Advice on safe handling : For personal protection see section 8.  
Smoking, eating and drinking should be prohibited in the application area.  
Use only with adequate ventilation.  
In case of insufficient ventilation, wear suitable respiratory equipment.  
Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity.  
Avoid contact with skin, eyes and clothing.  
Do not ingest.  
Keep away from heat and sources of ignition.  
Keep container closed when not in use.

Conditions for safe storage : Store in original container.  
Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Keep in a dry, cool and well-ventilated place.  
Keep in properly labeled containers.  
To maintain product quality, do not store in heat or direct sunlight.  
Ensure the storage containers are grounded/bonded.

### SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### Ingredients with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
Fuels, diesel; Gasoil — unspecified	68334-30-5	TWA	100 mg/m <sup>3</sup> (total hydrocarbons)	CA AB OEL
		TWA (inhalable fraction)	100 mg/m <sup>3</sup> (total hydrocar-	CA BC OEL

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

		and vapour)	bons)	
		TWAEV (inhalable fraction and vapour)	100 mg/m <sup>3</sup> (total hydrocarbons)	CA QC OEL
		TWA (Inhalable fraction and vapor)	100 mg/m <sup>3</sup> (total hydrocarbons)	ACGIH
Fuel oil No. 2	68476-30-2	TWA (Inhalable fraction and vapor)	100 mg/m <sup>3</sup> (total hydrocarbons)	CA AB OEL
		TWA (Inhalable fraction and vapor)	100 mg/m <sup>3</sup> (total hydrocarbons)	CA BC OEL
		TWAEV (Inhalable fraction and vapor)	100 mg/m <sup>3</sup> (total hydrocarbons)	CA QC OEL
		TWA (Inhalable fraction and vapor)	100 mg/m <sup>3</sup> (total hydrocarbons)	CA ON OEL
		TWA (Inhalable fraction and vapor)	100 mg/m <sup>3</sup> (total hydrocarbons)	ACGIH

**Engineering measures** : Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.  
Use only in well-ventilated areas.  
Ensure that eyewash station and safety shower are proximal to the work-station location.

**Personal protective equipment**

Respiratory protection : Concentration in air determines protection needed.  
Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines.  
Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.

Hand protection  
Material : neoprene, nitrile, polyvinyl alcohol (PVA), Viton(R). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals.

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

- Remarks : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
- Eye protection : Wear safety glasses with side shields or goggles. Wear face-shield if splashing hazard is likely. Chemical splash goggles and a full-face shield should be worn when handling this material.
- Skin and body protection : Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
- Protective measures : Wash contaminated clothing before re-use.
- Hygiene measures : Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

### SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Physical state : Bright oily liquid.
- Color : Clear to yellow (This product may be dyed red for taxation purposes)
- Odor : Mild petroleum oil like.
- pH : No data available
- Melting point and freezing point : No data available
- Boiling point, or initial boiling point and boiling range : 150 - 371 °C
- Flash point : > 40 °C  
Method: closed cup  
Marine Gas Oil/Naval Distillate: 60°C min  
Mining Diesel: 52°C min  
All other Diesel fuels: 40°C min
- Flammability : Flammable liquid
- Upper explosion limit / Upper flammability limit : 6 %(V)

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

Lower explosion limit / Lower flammability limit	:	0.7 %(V)
Vapor pressure	:	7.5 mmHg (20 °C)
Relative vapor density	:	4.5
Relative density	:	0.8 - 0.88
Density	:	No data available
Solubility(ies)	:	
Water solubility	:	insoluble
Partition coefficient: n-octanol/water	:	No data available
Autoignition temperature	:	204 °C
Decomposition temperature	:	No data available
Viscosity	:	
Viscosity, kinematic	:	1.3 - 4.1 cSt ( 40 °C)
Particle characteristics	:	
Particle size	:	Not applicable

---

### SECTION 10. STABILITY AND REACTIVITY

Reactivity	:	Stable at normal ambient temperature and pressure.
Chemical stability	:	Stable under normal conditions.
Possibility of hazardous reactions	:	Hazardous polymerization does not occur.
Conditions to avoid	:	Extremes of temperature and direct sunlight.
Incompatible materials	:	Reactive with oxidising agents and acids.
Hazardous decomposition products	:	May release COx, NOx, SOx, smoke and irritating vapours when heated to decomposition.

---

### SECTION 11. TOXICOLOGICAL INFORMATION

#### Information on likely routes of exposure

Eye contact  
Ingestion  
Inhalation  
Skin contact

#### Acute toxicity

Harmful if inhaled.

#### Product:

Acute oral toxicity : Remarks: Based on available data, the classification criteria

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

---

are not met.

Acute inhalation toxicity : Acute toxicity estimate: 11 mg/L  
Exposure time: 4 h  
Test atmosphere: vapor  
Method: Calculation method

Acute dermal toxicity : Remarks: Based on available data, the classification criteria are not met.

### **Components:**

#### **Fuels, diesel; Gasoil — unspecified:**

Acute oral toxicity : LD50 (Rat): 7,500 mg/kg

Acute inhalation toxicity : LC50 (Rat): 4.1 mg/l  
Exposure time: 4 h  
Test atmosphere: vapor

Acute dermal toxicity : LD50 (Mouse): 24,500 mg/kg

#### **Fuel oil No. 2:**

Acute oral toxicity : LD50 (Rat): 12,000 mg/kg

#### **Skin corrosion/irritation**

Causes skin irritation.

#### **Serious eye damage/eye irritation**

Causes eye irritation.

#### **Respiratory or skin sensitization**

##### **Skin sensitization**

Based on available data, the classification criteria are not met.

##### **Respiratory sensitization**

Based on available data, the classification criteria are not met.

##### **Germ cell mutagenicity**

Based on available data, the classification criteria are not met.  
Suspected of causing cancer.

##### **Reproductive toxicity**

Based on available data, the classification criteria are not met.

##### **STOT-single exposure**

Based on available data, the classification criteria are not met.

##### **STOT-repeated exposure**

May cause damage to organs (Liver, thymus, Bone) through prolonged or repeated exposure.

##### **Aspiration toxicity**

May be fatal if swallowed and enters airways.

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

---

### SECTION 12. ECOLOGICAL INFORMATION

#### Ecotoxicity

**Product:**

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae/aquatic plants : Remarks: No data available

Toxicity to microorganisms : Remarks: No data available

#### Persistence and degradability

**Product:**

Biodegradability : Remarks: No data available

#### Bioaccumulative potential

No data available

#### Mobility in soil

No data available

#### Other adverse effects

No data available

---

### SECTION 13. DISPOSAL CONSIDERATIONS

#### Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.  
Offer surplus and non-recyclable solutions to a licensed disposal company.  
Waste must be classified and labeled prior to recycling or disposal.  
Send to a licensed waste management company.  
Dispose of as hazardous waste in compliance with local and national regulations.  
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

Contaminated packaging : Contact local or business unit authorities for guidance on disposal of product.

---

### SECTION 14. TRANSPORT INFORMATION

#### International Regulations

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

---

### IATA-DGR

UN/ID No. : UN 1202  
Proper shipping name : Diesel fuel  
Class : 3  
Packing group : III  
Labels : Flammable Liquids  
Packing instruction (cargo aircraft) : 366

### IMDG-Code

UN number : UN 1202  
Proper shipping name : DIESEL FUEL  
Class : 3  
Packing group : III  
Labels : 3  
EmS Code : F-E, S-E  
Marine pollutant : yes

### Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

### Domestic regulation

#### TDG

UN number : UN 1202  
Proper shipping name : DIESEL FUEL  
Class : 3  
Packing group : III  
Labels : 3  
ERG Code : 128  
Marine pollutant : yes

### Special precautions for user

The transport classification(s) provided herein are for informational purposes only, and solely based upon the properties of the unpackaged material as it is described within this Safety Data Sheet. Transportation classifications may vary by mode of transportation, package sizes, and variations in regional or country regulations.

---

## SECTION 15. REGULATORY INFORMATION

**NPRI Components** : Solvent naphtha (petroleum), heavy arom.; Kerosine — unspecified  
naphthalene  
1,2,4-trimethylbenzene  
toluene  
propan-2-ol  
methanol

### The ingredients of this product are reported in the following inventories:

DSL : All components of this product are on the Canadian DSL

### Canadian lists

No substances are subject to a Significant New Activity Notification.

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

### SECTION 16. OTHER INFORMATION

#### Full text of other abbreviations

ACGIH	:	USA. ACGIH Threshold Limit Values (TLV)
CA AB OEL	:	Canada. Alberta, Occupational Health and Safety Code (table 2: OEL)
CA BC OEL	:	Canada. British Columbia OEL
CA ON OEL	:	Ontario Table of Occupational Exposure Limits made under the Occupational Health and Safety Act.
CA QC OEL	:	Québec. Regulation respecting occupational health and safety, Schedule 1, Part 1: Permissible exposure values for air-borne contaminants
ACGIH / TWA	:	8-hour time weighted average
CA AB OEL / TWA	:	8-hour time weighted average
CA BC OEL / TWA	:	8-hour time weighted average
CA ON OEL / TWA	:	8-hour time weighted average
CA QC OEL / TWAEV	:	Time-weighted average exposure value

AIIC - Australian Inventory of Industrial Chemicals; ANTT - National Agency for Transport by Land of Brazil; ASTM - American Society for the Testing of Materials; bw - Body weight; CMR - Carcinogen, Mutagen or Reproductive Toxicant; DIN - Standard of the German Institute for Standardisation; DSL - Domestic Substances List (Canada); ECx - Concentration associated with x% response; ELx - Loading rate associated with x% response; EmS - Emergency Schedule; ENCS - Existing and New Chemical Substances (Japan); ErCx - Concentration associated with x% growth rate response; ERG - Emergency Response Guide; GHS - Globally Harmonized System; GLP - Good Laboratory Practice; IARC - International Agency for Research on Cancer; IATA - International Air Transport Association; IBC - International Code for the Construction and Equipment of Ships carrying Dangerous Chemicals in Bulk; IC50 - Half maximal inhibitory concentration; ICAO - International Civil Aviation Organization; IECSC - Inventory of Existing Chemical Substances in China; IMDG - International Maritime Dangerous Goods; IMO - International Maritime Organization; ISHL - Industrial Safety and Health Law (Japan); ISO - International Organisation for Standardization; KECI - Korea Existing Chemicals Inventory; LC50 - Lethal Concentration to 50 % of a test population; LD50 - Lethal Dose to 50% of a test population (Median Lethal Dose); MARPOL - International Convention for the Prevention of Pollution from Ships; n.o.s. - Not Otherwise Specified; Nch - Chilean Norm; NO(A)EC - No Observed (Adverse) Effect Concentration; NO(A)EL - No Observed (Adverse) Effect Level; NOELR - No Observable Effect Loading Rate; NOM - Official Mexican Norm; NTP - National Toxicology Program; NZIoC - New Zealand Inventory of Chemicals; OECD - Organization for Economic Co-operation and Development; OPPTS - Office of Chemical Safety and Pollution Prevention; PBT - Persistent, Bioaccumulative and Toxic substance; PICCS - Philippines Inventory of Chemicals and Chemical Substances; (Q)SAR - (Quantitative) Structure Activity Relationship; REACH - Regulation (EC) No 1907/2006 of the European Parliament and of the Council concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals; SADT - Self-Accelerating Decomposition Temperature; SDS - Safety Data Sheet; TCSI - Taiwan Chemical Substance Inventory; TDG - Transportation of Dangerous Goods; TECI - Thailand Existing Chemicals Inventory; TSCA - Toxic Substances Control Act (United States); UN - United Nations; UNRTDG - United Nations Recommendations on the Transport of Dangerous Goods; vPvB - Very Persistent and Very Bioaccumulative; WHMIS - Workplace Hazardous Materials Information System

# SAFETY DATA SHEET

{ error: graphic  
file not found:  
E:\WWI\graphics

## DIESEL FUEL

SDS Number: 000003000395

Version: 9.0

Revision Date: 2025/02/13

Print Date: 2025/02/14

---

Revision Date : 2025/02/13

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

CA / EN

**Section 1: IDENTIFICATION**

**Product Name:** Propane

**Synonyms:** LPG (Liquefied Petroleum Gas); LP-Gas.

**Product Use:** Propane is commonly used as a fuel for heating, cooking, automobiles, forklift trucks, crop drying and welding and cutting operations. Propane is used in industry as a refrigerant, solvent and as a chemical feedstock.

**Restrictions on Use:** Not available.

**Manufacturer/Supplier:** Superior Propane  
Suite 400, 6750 Century Avenue  
Mississauga, ON L5N 2V8

**Phone Number:** 1-877-873-7467

**Emergency Phone:** CANUTEC 1-888-CAN-UTEC (226-8832) or 613-996-6666 or \*666 on a cellular phone

**Date of Preparation of SDS:** September 17, 2021

**Section 2: HAZARD(S) IDENTIFICATION****GHS INFORMATION**

**Classification:** Flammable Gases, Category 1  
Gases Under Pressure - Compressed Gas  
Simple Asphyxiant, Category 1

**LABEL ELEMENTS****Hazard****Pictogram(s):****Signal Word:** Danger

**Hazard Statements:** Extremely flammable gas.  
Contains gas under pressure; may explode if heated.  
May displace oxygen and cause rapid suffocation.

**Precautionary Statements**

**Prevention:** Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.

**Response:** Leaking gas fire: Do not extinguish unless leak can be stopped safely.  
Eliminate all ignition sources if safe to do so.

**Storage:** Store in a well ventilated place.

**Disposal:** Not applicable.

**Hazards Not Otherwise Classified:** Not applicable.

**Ingredients with Unknown Toxicity:** None.

This material is considered hazardous by the OSHA Hazard Communication Standard, (29 CFR 1910.1200). This material is considered hazardous by the Hazardous Products Regulations.

**Section 3: COMPOSITION / INFORMATION ON INGREDIENTS**

Hazardous Ingredient(s)	Common name / Synonyms	CAS No.	% vol./vol.
Propane	Not available.	74-98-6	90 - 99
Ethane	Not available.	74-84-0	0 - 5
1-Propene	Propylene	115-07-1	0 - 5
Butane	Not available.	106-97-8	0 - 2.5

**Section 4: FIRST-AID MEASURES**

- Inhalation:** Call a poison center or doctor if you feel unwell.
- Acute and delayed symptoms and effects:** May displace oxygen and cause rapid suffocation. Central nervous system depression can occur if product is present in concentrations that will reduce the oxygen content of air below 18 % (vol). Symptoms may include headache, lightheadedness, drowsiness, disorientation, vomiting and seizures. Unconsciousness and death may occur with severe oxygen deprivation. May cause respiratory irritation. Signs/symptoms may include cough, sneezing, nasal discharge, headache, hoarseness, and nose and throat pain.
- Eye Contact:** Rinse cautiously with water for at least 15 minutes. Remove contact lenses, if needed. Continue rinsing. Immediately call a poison center or doctor.
- Acute and delayed symptoms and effects:** Contact with rapidly expanding or liquefied gas may cause irritation and/or frostbite. The pain after contact with liquid can quickly subside. Permanent eye damage or blindness could result.
- Skin Contact:** Contact with rapidly expanding or liquefied gas may cause irritation and/or frostbite. If on skin: Wash with plenty of water. Get immediate medical advice/attention. Thaw frosted parts with lukewarm water. Do not rub affected area. Remove non-adhering contaminated clothing. Do not remove adherent material or clothing.
- Acute and delayed symptoms and effects:** Contact with rapidly expanding or liquefied gas may cause irritation and/or frostbite. Symptoms of frostbite include change in skin colour to white or grayish-yellow. The pain after contact with liquid can quickly subside.
- Ingestion:** Not a normal route of exposure.
- Acute and delayed symptoms and effects:** Not a normal route of exposure.
- General Advice:** In case of accident or if you feel unwell, seek medical advice immediately (show the label or SDS where possible).
- Note to Physicians:** Symptoms may not appear immediately.

**Section 5: FIRE-FIGHTING MEASURES****FLAMMABILITY AND EXPLOSION INFORMATION**

Extremely flammable gas. Contains gas under pressure; may explode if heated. Will be easily ignited by heat, sparks or flames. Will form explosive mixtures with air. Vapors from liquefied gas are initially heavier than air and spread along ground. Vapors may travel to source of ignition and flash back. Cylinders exposed to fire may vent and release flammable gas through pressure relief devices. Containers may explode when heated. Ruptured cylinders may rocket. **DO NOT EXTINGUISH A LEAKING GAS FIRE UNLESS LEAK CAN BE STOPPED.**

If a tank, rail car or tank truck is involved in a fire, ISOLATE for 1600 meters (1 mile) in all directions; also, consider initial evacuation for 1600 meters (1 mile) in all directions.

Fire involving Tanks: Fight fire from maximum distance or use unmanned hose holders or monitor nozzles. Cool containers with flooding quantities of water until well after fire is out. Do not direct water at source of leak or safety devices; icing may occur. Withdraw immediately in case of rising sound from venting safety devices or discoloration of tank. **ALWAYS** stay away from tanks engulfed in fire. For massive fire, use unmanned hose holders or monitor nozzles; if this is impossible, withdraw from area and let fire burn.

**Sensitivity to Mechanical Impact:** This material is not sensitive to mechanical impact.

**Sensitivity to Static Discharge:** This material is sensitive to static discharge.

**MEANS OF EXTINCTION**

**Suitable Extinguishing Media:** Small Fire: Dry chemical or CO<sub>2</sub>.

Large Fire: Water spray or fog. Move containers from fire area if you can do it without risk.

**Unsuitable Extinguishing Media:** Not available.

**Products of Combustion:** Oxides of carbon.

**Protection of Firefighters:** Leaking gas fire: Do not extinguish, unless leak can be stopped safely. Eliminate all ignition sources if safe to do so. Vapors may cause dizziness or asphyxiation without warning. Some may be irritating if inhaled at high concentrations. Contact with gas or liquefied gas may cause burns, severe injury and/or frostbite. Fire may produce irritating and/or toxic gases. Wear positive pressure self-contained breathing apparatus (SCBA). Structural firefighters' protective clothing will only provide limited protection. Always wear thermal protective clothing when handling refrigerated/cryogenic liquids.

**Section 6: ACCIDENTAL RELEASE MEASURES**

**Emergency Procedures:** As an immediate precautionary measure, isolate spill or leak area for at least 100 meters (330 feet) in all directions. Keep unauthorized personnel away. Stay upwind. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Keep out of low areas. **ELIMINATE** all ignition sources (no smoking, flares, sparks or flames in immediate area). All equipment used when handling the product must be grounded.

<b>Personal Precautions:</b>	Do not touch or walk through spilled material. Use personal protection recommended in Section 8.
<b>Environmental Precautions:</b>	Not normally required.
<b>Methods for Containment:</b>	Stop leak if you can do it without risk. If possible, turn leaking containers so that gas escapes rather than liquid. Use water spray to reduce vapors or divert vapor cloud drift. Avoid allowing water runoff to contact spilled material. Do not direct water at spill or source of leak.
<b>Methods for Clean-Up:</b>	Prevent spreading of vapors through sewers, ventilation systems and confined areas. Isolate area until gas has dispersed. CAUTION: When in contact with refrigerated/cryogenic liquids, many materials become brittle and are likely to break without warning.
<b>Other Information:</b>	See Section 13 for disposal considerations.

## Section 7: HANDLING AND STORAGE

### Handling:

Avoid breathing gas. Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking. Pressurized container: Do not pierce or burn, even after use. See Section 8 for information on Personal Protective Equipment.

### Storage:

Store in a well-ventilated place. Store away from incompatible materials. See Section 10 for information on Incompatible Materials. Keep out of the reach of children.

## Section 8: EXPOSURE CONTROLS / PERSONAL PROTECTION

### Exposure Guidelines Component

Propane [CAS No. 74-98-6]

**ACGIH:** Simple asphyxiant; Explosion hazard

**OSHA:** 1000 ppm (TWA), 1800 mg/m<sup>3</sup> (TWA);

Ethane [CAS No. 74-84-0]

**ACGIH:** Simple asphyxiant; Explosion hazard

**OSHA:** No PEL established.

Propylene [CAS No. 115-07-1]

**ACGIH:** 500 ppm (TWA); A4 (2005)

**OSHA:** No PEL established.

Butane [CAS No. 106-97-8]

**ACGIH:** 1000 ppm (STEL); Explosion hazard (2012)

**OSHA:** 800 ppm (TWA) [Vacated];

**PEL:** Permissible Exposure Limit

**TWA:** Time-Weighted Average

**C:** Ceiling

**Engineering Controls:**

Use ventilation adequate to keep exposures (airborne levels of dust, fume, vapour, gas, etc.) below recommended exposure limits.

**PERSONAL PROTECTIVE EQUIPMENT (PPE)****Eye/Face Protection:**

Wear safety glasses. Use equipment for eye protection that meets the standards referenced by CSA Standard CAN/CSA-Z94.3 and OSHA regulations in 29 CFR 1910.133 for Personal Protective Equipment.

**Hand Protection:**

Wear insulated neoprene gloves. Consult manufacturer specifications for further information.

**Skin and Body Protection:**

Wear protective clothing.

**Respiratory Protection:**

If engineering controls and ventilation are not sufficient to control exposure to below the allowable limits then an appropriate NIOSH/MSHA approved air-purifying respirator that meets the requirements of CSA Standard CAN/CSA-Z94.4, or self-contained breathing apparatus must be used. Supplied air breathing apparatus must be used when oxygen concentrations are low or if airborne concentrations exceed the limits of the air-purifying respirators.

**General Hygiene Considerations:**

Handle according to established industrial hygiene and safety practices. Consult a competent industrial hygienist to determine hazard potential and/or the PPE manufacturers to ensure adequate protection

**Section 9: PHYSICAL AND CHEMICAL PROPERTIES**

<b>Appearance:</b>	Liquefied gas.
<b>Colour:</b>	Colourless.
<b>Odour:</b>	Odourless, unless odourized with ethyl mercaptan (skunky odour, similar to boiling cabbage).
<b>Odour Threshold:</b>	4800 ppm
<b>Physical State:</b>	Gas.
<b>pH:</b>	Not available.
<b>Melting Point / Freezing Point:</b>	-188 °C (-306.4 °F)
<b>Initial Boiling Point:</b>	-42.2 °C (-44 °F)
<b>Boiling Point:</b>	-42 °C (-43.6 °F)
<b>Flash Point:</b>	-103.4 °C (-154.1 °F) (Closed Cup)
<b>Evaporation Rate:</b>	Rapid.
<b>Flammability (solid, gas):</b>	Extremely flammable gas.

## SAFETY DATA SHEET

<b>Lower Flammability Limit:</b>	2.1%
<b>Upper Flammability Limit:</b>	9.5%
<b>Vapor Pressure:</b>	1435 kPa (maximum) at 37.8 °C (100 °F)
<b>Vapor Density:</b>	1.52 (Air = 1)
<b>Relative Density:</b>	0.51 (Water = 1)
<b>Solubilities:</b>	Slight, 6.1% by volume @ 17.8°C (64 °F)
<b>Partition Coefficient: n-Octanol/Water:</b>	Not available.
<b>Auto-ignition Temperature:</b>	432 °C (809.6 °F)
<b>Decomposition Temperature:</b>	Not available.
<b>Viscosity:</b>	Not available.
<b>Percent Volatile, wt. %:</b>	Not available.
<b>VOC content, wt. %:</b>	Not available.
<b>Density:</b>	Not available.
<b>Coefficient of Water/Oil Distribution:</b>	Not available.

**Section 10: STABILITY AND REACTIVITY**

<b>Reactivity:</b>	Contact with incompatible materials. Sources of ignition. Exposure to heat.
<b>Chemical Stability:</b>	Stable under normal storage conditions.
<b>Possibility of Hazardous Reactions:</b>	Gas explodes spontaneously when mixed with chloride dioxide.
<b>Conditions to Avoid:</b>	Contact with incompatible materials. Sources of ignition. Exposure to heat.
<b>Incompatible Materials:</b>	Oxidizers. Chlorine dioxide.
<b>Hazardous Decomposition Products:</b>	Carbon dioxide. Carbon monoxide.

**Section 11: TOXICOLOGICAL INFORMATION****EFFECTS OF ACUTE EXPOSURE****Product Toxicity**

<b>Oral:</b>	Not available.
<b>Dermal:</b>	Not available.
<b>Inhalation:</b>	Not available.

### Component Toxicity

Component	CAS No.	LD <sub>50</sub> oral	LD <sub>50</sub> dermal	LC <sub>50</sub>
Propane	74-98-6	Not available.	Not available.	Not available.
Ethane	74-84-0	Not available.	Not available.	Not available.
Propylene	115-07-1	Not available.	Not available.	86000 mg/m <sup>3</sup> (rat); 4H
Butane	106-97-8	Not available.	Not available.	658000 mg/m <sup>3</sup> (rat); 4H

**Likely Routes of Exposure:** Eye contact. Skin contact. Inhalation.

**Target Organs:** Skin. Eyes. Respiratory system. Central nervous system.

### Symptoms (including delayed and immediate effects)

#### Inhalation:

May displace oxygen and cause rapid suffocation. Central nervous system depression can occur if product is present in concentrations that will reduce the oxygen content of air below 18 % (vol). Symptoms may include headache, lightheadedness, drowsiness, disorientation, vomiting and seizures. Unconsciousness and death may occur with severe oxygen deprivation. May cause respiratory irritation. Signs/symptoms may include cough, sneezing, nasal discharge, headache, hoarseness, and nose and throat pain.

**Eye:** Contact with rapidly expanding or liquefied gas may cause irritation and/or frostbite. The pain after contact with liquid can quickly subside. Permanent eye damage or blindness could result.

**Skin:** Contact with rapidly expanding or liquefied gas may cause irritation and/or frostbite. Symptoms of frostbite include change in skin colour to white or grayish-yellow. The pain after contact with liquid can quickly subside.

**Ingestion:** Not a normal route of exposure.

**Skin Sensitization:** Not available.

**Respiratory Sensitization:** Not available.

**Medical Conditions Aggravated By Exposure:** Not available.

### EFFECTS OF CHRONIC EXPOSURE (from short and long-term exposure)

**Target Organs:** Skin. Eyes. Respiratory system. Central nervous system.

**Chronic Effects:** Not available.

**Carcinogenicity:** Product is not classified as a carcinogen. See Component Carcinogenicity table below for information on individual components.

#### Component Carcinogenicity

Component	ACGIH	IARC	NTP	OSHA	Prop 65
Propylene	A4	Group 3	Not listed.	Not listed.	Not listed.

**Mutagenicity:** Not available.

**Reproductive Effects:** Not available.

**Developmental Effects**

Teratogenicity: Not available.

Embryotoxicity: Not available.

Toxicologically Synergistic Materials: Not available.

**Section 12: ECOLOGICAL INFORMATION**

Ecotoxicity: Not available.

Persistence / Degradability: Not available.

Bioaccumulation / Accumulation: Not available.

Mobility in Environment: Not available.

Other Adverse Effects: Not available.

**Section 13: DISPOSAL CONSIDERATIONS**

**Disposal Instructions:** Disposal should be in accordance with applicable regional, national and local laws and regulations. Local regulations may be more stringent than regional or national requirements.

**Section 14: TRANSPORT INFORMATION****U.S. Department of Transportation (DOT)**Proper Shipping Name: UN1075, LIQUEFIED PETROLEUM GASES, 2.1

Class: 2.1

UN Number: UN1075

Packing Group: Not applicable.

Label Code:

**Canada Transportation of Dangerous Goods (TDG)**

Proper Shipping Name: UN1075, LIQUEFIED PETROLEUM GASES, 2.1

Class: 2.1

UN Number: UN1075

Packing Group: Not applicable.

Label Code:

**Section 15: REGULATORY INFORMATION****Chemical Inventories****US (TSCA)**

The components of this product are in compliance with the chemical notification requirements of TSCA.

SAFETY DATA SHEET

Date of Preparation: September 17, 2021

**Canada (DSL)**

The components of this product are in compliance with the chemical notification requirements of the NSN Regulations under CEPA, 1999.

**Federal Regulations**

**United States**

This SDS has been prepared to meet the U.S. OSHA Hazard Communication Standard, 29 CFR 1910.1200.

**SARA Title III**

Component	Section 302 (EHS) TPQ (lbs.)	Section 304 EHS RQ (lbs.)	CERCLA RQ (lbs.)	Section 313	RCRA CODE	CAA 112(r) TQ (lbs.)
Propane	Not listed.	Not listed.	Not listed.	Not listed.	Not listed.	10000
Ethane	Not listed.	Not listed.	Not listed.	Not listed.	Not listed.	10000
Propylene	Not listed.	Not listed.	Not listed.	313	Not listed.	10000
Butane	Not listed.	Not listed.	Not listed.	Not listed.	Not listed.	10000

**State Regulations**

**Massachusetts**

US Massachusetts Commonwealth's Right-to-Know Law (Appendix A to 105 Code of Massachusetts Regulations Section 670.000)

Component	CAS No.	RTK List
Propane	74-98-6	Listed.
Ethane	74-84-0	Listed.
Propylene	115-07-1	Listed.
Butane	106-97-8	Listed.

**New Jersey**

US New Jersey Worker and Community Right-to-Know Act (New Jersey Statute Annotated Section 34:5A-5)

Component	CAS No.	RTK List
Propane	74-98-6	SHHS
Ethane	74-84-0	SHHS
Propylene	115-07-1	SHHS
Butane	106-97-8	SHHS

**Note:** SHHS = Special Health Hazard Substance

**Pennsylvania**

US Pennsylvania Worker and Community Right-to-Know Law (34 Pa. Code Chap. 301-323)

Component	CAS No.	RTK List
Propane	74-98-6	Listed.
Ethane	74-84-0	Listed.
Propylene	115-07-1	E
Butane	106-97-8	Listed.

**Note:** E = Environmental Hazard

**California Prop 65:** This product does not contain chemicals known to the State of California to cause cancer, birth defects or other reproductive harm.

**Section 16: OTHER INFORMATION****Disclaimer:**

The information contained in this document applies to this specific material as supplied. It may not be valid for this material if it is used in combination with any other materials. It is the user's responsibility to satisfy oneself as to the suitability and completeness of this information for their own particular use.

**Date of Preparation of SDS:** September 17, 2021

**Version:** 2.0

**GHS SDS Prepared by:** Deerfoot Consulting Inc.

**Phone:** (403) 720-3700

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

### SECTION 1. IDENTIFICATION

Product name : JET A/A-1 AVIATION TURBINE FUEL

Synonyms : Jet A-1; Jet A-1-DI; Aviation Turbine Kerosene (ATK); JP-8; NATO F-34; Jet F-34; Aviation Turbine Fuel, Kerosene Type (CAN/CGSB 3.23 & CAN/CGSB 3.24)

Product code : 101851, 100123

Manufacturer or supplier's details  
Petro-Canada  
P.O. Box 2844, 150 - 6th Avenue South-West  
Calgary Alberta T2P 3E3  
Canada

Emergency telephone number : Suncor Energy: +1 403-296-3000;  
Canutec Transportation: 1-888-226-8832 (toll-free) or 613-996-6666;  
Poison Control Centre: Consult local telephone directory for emergency number(s).

#### Recommended use of the chemical and restrictions on use

Recommended use : Used as aviation turbine fuel. May contain a fuel system icing inhibitor. In the arctic, Jet A-1 may also be used as diesel fuel (if it contains a lubricity additive) and heating oil.

Prepared by : Product Safety: +1 905-804-4752

### SECTION 2. HAZARDS IDENTIFICATION

#### Emergency Overview

Appearance	Clear liquid.
Colour	Clear and colourless
Odour	Kerosene-like.

#### GHS Classification

Flammable liquids : Category 3

Skin irritation : Category 2

Reproductive toxicity : Category 2

Specific target organ toxicity - single exposure : Category 3 (Central nervous system)

Aspiration hazard : Category 1

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

### GHS label elements

Hazard pictograms



Signal word

: Danger

Hazard statements

: Flammable liquid and vapour.  
May be fatal if swallowed and enters airways.  
Causes skin irritation.  
May cause drowsiness or dizziness.  
Suspected of damaging fertility or the unborn child.

Precautionary statements

: **Prevention:**  
Obtain special instructions before use.  
Do not handle until all safety precautions have been read and understood.  
Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.  
Keep container tightly closed.  
Ground and bond container and receiving equipment.  
Use explosion-proof electrical/ ventilating/ lighting/ equipment.  
Use non-sparking tools.  
Take action to prevent static discharges.  
Avoid breathing dust/ fume/ gas/ mist/ vapours/ spray.  
Wash skin thoroughly after handling.  
Use only outdoors or in a well-ventilated area.  
Wear protective gloves/ protective clothing/ eye protection/ face protection.  
**Response:**  
IF SWALLOWED: Immediately call a POISON CENTER/doctor.  
IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water.  
IF INHALED: Remove person to fresh air and keep comfortable for breathing. Call a POISON CENTER/doctor if you feel unwell.  
IF exposed or concerned: Get medical advice/ attention.  
Do NOT induce vomiting.  
If skin irritation occurs: Get medical advice/ attention.  
Take off contaminated clothing and wash it before reuse.  
In case of fire: Use dry sand, dry chemical or alcohol-resistant foam to extinguish.  
**Storage:**  
Store in a well-ventilated place. Keep container tightly closed.  
Store in a well-ventilated place. Keep cool.  
Store locked up.  
**Disposal:**  
Dispose of contents/ container to an approved waste disposal plant.

### Potential Health Effects

Primary Routes of Entry

: Eye contact  
Ingestion

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

- Inhalation  
Skin contact
- Inhalation : Inhalation may cause central nervous system effects. Symptoms and signs include headache, dizziness, fatigue, muscular weakness, drowsiness and in extreme cases, loss of consciousness.
- Skin : May irritate skin.
- Eyes : May irritate eyes.
- Ingestion : Ingestion may cause gastrointestinal irritation, nausea, vomiting and diarrhoea. Aspiration hazard if swallowed - can enter lungs and cause damage.
- Aggravated Medical Condition : None known.

### Other hazards

None known.

### IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

### ACGIH

Confirmed animal carcinogen with unknown relevance to humans

Kerosene

8008-20-6

## SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

### Hazardous components

Chemical name	CAS-No.	Concentration
kerosine (petroleum)	8008-20-6	90 - 100 %
2-(2-methoxyethoxy)ethanol	111-77-3	0 - 0.2 %

## SECTION 4. FIRST AID MEASURES

- If inhaled : Move to fresh air. Artificial respiration and/or oxygen may be necessary. Seek medical advice.
- In case of skin contact : In case of contact, immediately flush skin with plenty of water for at least 15 minutes while removing contaminated clothing

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

---

- and shoes.  
Wash skin thoroughly with soap and water or use recognized skin cleanser.  
Wash clothing before reuse.  
Seek medical advice.
- In case of eye contact : Remove contact lenses.  
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.  
Obtain medical attention.
- If swallowed : Rinse mouth with water.  
DO NOT induce vomiting unless directed to do so by a physician or poison control center.  
Never give anything by mouth to an unconscious person.  
Seek medical advice.
- Most important symptoms and effects, both acute and delayed : First aider needs to protect himself.
- 

### SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Dry chemical  
Carbon dioxide (CO<sub>2</sub>)  
Water fog.  
Foam
- Unsuitable extinguishing media : Do NOT use water jet.
- Specific hazards during fire-fighting : Cool closed containers exposed to fire with water spray.
- Hazardous combustion products : Carbon oxides (CO, CO<sub>2</sub>), nitrogen oxides (NO<sub>x</sub>), sulphur oxides (SO<sub>x</sub>), smoke and irritating vapours as products of incomplete combustion.
- Further information : Prevent fire extinguishing water from contaminating surface water or the ground water system.
- Special protective equipment for firefighters : Wear self-contained breathing apparatus for firefighting if necessary.
- 

### SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.  
Ensure adequate ventilation.  
Evacuate personnel to safe areas.  
Material can create slippery conditions.
- Environmental precautions : If the product contaminates rivers and lakes or drains inform respective authorities.

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

Methods and materials for containment and cleaning up : Prevent further leakage or spillage if safe to do so.  
Remove all sources of ignition.  
Soak up with inert absorbent material.  
Non-sparking tools should be used.  
Ensure adequate ventilation.  
Contact the proper local authorities.

### SECTION 7. HANDLING AND STORAGE

Advice on safe handling : For personal protection see section 8.  
Smoking, eating and drinking should be prohibited in the application area.  
Use only with adequate ventilation.  
In case of insufficient ventilation, wear suitable respiratory equipment.  
Avoid spark promoters. Ground/bond container and equipment. These alone may be insufficient to remove static electricity.  
Avoid contact with skin, eyes and clothing.  
Do not ingest.  
Keep away from heat and sources of ignition.  
Keep container closed when not in use.

Conditions for safe storage : Store in original container.  
Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Keep in a dry, cool and well-ventilated place.  
Keep in properly labelled containers.  
To maintain product quality, do not store in heat or direct sunlight.

### SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
kerosine (petroleum)	8008-20-6	TWA	200 mg/m <sup>3</sup> (total hydrocarbon vapor)	CA BC OEL
		TWA	200 mg/m <sup>3</sup> (total hydrocarbon vapor)	CA AB OEL
		TWA	200 mg/m <sup>3</sup> (total hydrocarbon vapor)	ACGIH

Engineering measures : Use only in well-ventilated areas.  
Ensure that eyewash station and safety shower are proximal to the work-station location.

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

### Personal protective equipment

- Respiratory protection : Use respiratory protection unless adequate local exhaust ventilation is provided or exposure assessment demonstrates that exposures are within recommended exposure guidelines. Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.
- Filter type : A NIOSH-approved air-purifying respirator with an organic vapour cartridge or canister may be permissible under certain circumstances where airborne concentrations are expected to exceed exposure limits. Protection provided by air-purifying respirators is limited. Use a positive-pressure, air-supplied respirator if there is any potential for uncontrolled release, exposure levels are unknown, or any other circumstances where air-purifying respirators may not provide adequate protection.
- Hand protection  
Material : polyvinyl alcohol (PVA), Viton(R). Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.
- Remarks : Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
- Eye protection : Wear face-shield and protective suit for abnormal processing problems.
- Skin and body protection : Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
- Protective measures : Wash contaminated clothing before re-use.
- Hygiene measures : Remove and wash contaminated clothing and gloves, including the inside, before re-use.  
Wash face, hands and any exposed skin thoroughly after handling.

---

### SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

- Appearance : Clear liquid.
- Colour : Clear and colourless
- Odour : Kerosene-like.

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

---

Odour Threshold	: No data available
pH	: No data available
Pour point	: -51 °C (-60 °F) No data available
Boiling point/boiling range	: 140 - 300 °C (284 - 572 °F)
Flash point	: > 38 °C (100 °F) Method: Tagliabue
Auto-Ignition Temperature	: 210 °C (410 °F)
Evaporation rate	: No data available
Flammability	: Flammable in presence of open flames, sparks and heat. Vapours are heavier than air and may travel considerable distance to sources of ignition and flash back. This product can accumulate static charge and ignite. May accumulate in confined spaces.
Upper explosion limit	: 5 %(V)
Lower explosion limit	: 0.7 %(V)
Vapour pressure	: 5.25 mmHg (20 °C / 68 °F)
Relative vapour density	: 4.5
Relative density	: 0.775 - 0.84 (15 °C / 59 °F)
Solubility(ies)	
Water solubility	: No data available
Partition coefficient: n-octanol/water	: No data available
Viscosity	
Viscosity, kinematic	: 1.0 - 1.9 cSt (40 °C / 104 °F)
Explosive properties	: Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition. Containers may explode in heat of fire.

---

### SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	: Hazardous polymerisation does not occur. Stable under normal conditions.
Conditions to avoid	: Extremes of temperature and direct sunlight.

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

Incompatible materials : Reactive with oxidising agents, acids and alkalis.

Hazardous decomposition products : May release CO<sub>x</sub>, NO<sub>x</sub>, SO<sub>x</sub>, aldehydes, acids, ketones, smoke and irritating vapours when heated to decomposition.

### SECTION 11. TOXICOLOGICAL INFORMATION

#### Information on likely routes of exposure

Eye contact  
Ingestion  
Inhalation  
Skin contact

#### Acute toxicity

##### Product:

Acute oral toxicity : Remarks: No data available

Acute inhalation toxicity : Remarks: No data available

Acute dermal toxicity : Remarks: No data available

##### Components:

##### **kerosine (petroleum):**

Acute oral toxicity : LD50 (Rat): > 5,000 mg/kg,

Acute inhalation toxicity : LC50 (Rat): > 5 mg/l  
Exposure time: 4 h  
Test atmosphere: dust/mist

Acute dermal toxicity : LD50 (Rabbit): > 2,000 mg/kg,

#### Skin corrosion/irritation

##### Product:

Remarks: No data available

#### Serious eye damage/eye irritation

##### Product:

Remarks: No data available

#### Respiratory or skin sensitisation

No data available

#### Germ cell mutagenicity

No data available

#### Carcinogenicity

No data available

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

### Reproductive toxicity

No data available

### STOT - single exposure

No data available

### STOT - repeated exposure

No data available

---

## SECTION 12. ECOLOGICAL INFORMATION

### Ecotoxicity

#### Product:

Toxicity to fish : Remarks: No data available

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

### Persistence and degradability

#### Product:

Biodegradability : Remarks: No data available

### Bioaccumulative potential

No data available

### Mobility in soil

No data available

### Other adverse effects

No data available

---

## SECTION 13. DISPOSAL CONSIDERATIONS

### Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.  
Offer surplus and non-recyclable solutions to a licensed disposal company.  
Waste must be classified and labelled prior to recycling or disposal.  
Send to a licensed waste management company.  
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

Contaminated packaging : Do not re-use empty containers.

### SECTION 14. TRANSPORT INFORMATION

#### International Regulations

##### IATA-DGR

UN/ID No. : UN 1863  
Proper shipping name : Fuel, aviation, turbine engine  
Class : 3  
Packing group : III  
Labels : Class 3 - Flammable Liquid  
Packing instruction (cargo aircraft) : 366

##### IMDG-Code

UN number : UN 1863  
Proper shipping name : FUEL, AVIATION, TURBINE ENGINE  
  
Class : 3  
Packing group : III  
Labels : 3  
EmS Code : F-E, S-E  
Marine pollutant : no

#### Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

#### National Regulations

##### TDG

UN number : UN 1863  
Proper shipping name : FUEL, AVIATION, TURBINE ENGINE  
  
Class : 3  
Packing group : III  
Labels : 3  
ERG Code : 128  
Marine pollutant : no

### SECTION 15. REGULATORY INFORMATION

This product has been classified according to the hazard criteria of the Hazardous Products Regulations (HPR) and the SDS contains all of the information required by the HPR.

#### The components of this product are reported in the following inventories:

##### DSL

On the inventory, or in compliance with the inventory

##### TSCA

All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.

##### EINECS

On the inventory, or in compliance with the inventory

# SAFETY DATA SHEET

## JET A/A-1 AVIATION TURBINE FUEL



000003001081

Version 2.1

Revision Date 2018/06/07

Print Date 2018/06/07

---

### SECTION 16. OTHER INFORMATION

For Copy of SDS : Internet: [www.petro-canada.ca/msds](http://www.petro-canada.ca/msds)  
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228  
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2018/06/07

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.



WHMIS (Pictograms)	WHMIS (Classification)	Protective Clothing	TDG (pictograms)
	Not controlled		

<b>Section 1. Chemical Product and Company Identification</b>			
Product Name	<b>RELIANCE AW HYDRAULIC OIL 32, 46, 68</b>	Code	490-143, RELAW32 490-144, RELAW46 490-145, RELAW68
Synonym	Not available.	Validated on	6/15/2001.
Manufacturer	PETRO-CANADA P.O. Box 2844 Calgary, Alberta T2P 3E3	In case of Emergency	Petro-Canada: 403-296-3000 Canutec Transportation: 613-996-6666 Poison Control Centre: Consult local telephone directory for emergency number(s).
Material Uses	These products are designed for use as heavy duty hydraulic power transmission fluids and for lubrication where good anti-wear and anti-oxidation properties are required. They would typically be used in high-pressure hydraulic systems, machine tools, presses, compressors, pumps, gear sets, and centralized bearing lubrication systems in industrial plants and at mining and woodlands sites.		

<b>Section 2. Composition and Information on Ingredients</b>					
			Exposure Limits (ACGIH)		
Name	CAS #	% (V/V)	TLV-TWA(8 h)	STEL	CEILING
1) Severely hydrotreated hydrocarbon oil and additives	Mixture	100	5 mg/m <sup>3</sup> (oil mist)	10 mg/m <sup>3</sup> (oil mist)	Not established
Manufacturer Recommendation	Not applicable				
Other Exposure Limits	Consult local, state, provincial or territory authorities for acceptable exposure limits.				

<b>Section 3. Hazards Identification.</b>	
Potential Health Effects	Non irritating to slight transient irritation to skin and eyes, but no permanent damage. Relatively non-toxic via ingestion. This product has a low vapour pressure and is not expected to present an inhalation exposure at ambient conditions. Upon heating to high temperatures, or mechanical actions which may produce vapours or mists, inhalation of product may cause irritation of the breathing passages. For more information, refer to Section 11.

<b>Section 4. First Aid Measures</b>	
Eye Contact	IMMEDIATELY flush eyes with running water for at least 15 minutes, keeping eyelids open. Seek medical attention.
Skin Contact	Remove contaminated clothing - launder before reuse. Wash gently and thoroughly the contaminated skin with running water and non-abrasive soap. Seek medical attention.
Inhalation	Evacuate the victim to a safe area as soon as possible. If the victim is not breathing, perform artificial respiration. Allow the victim to rest in a well ventilated area. Seek medical attention.
Ingestion	DO NOT induce vomiting because of danger of aspirating liquid into lungs. Seek medical attention.
Note to Physician	Not available

<b>Section 5. Fire-fighting Measures</b>			
Flammability	May be combustible at high temperature.	Flammable Limits	Not available.
Flash Points	OPEN CUP: $\geq 196^{\circ}\text{C}$ (384.8°F) (Cleveland)	Auto-Ignition Temperature	Not available.
Fire Hazards in Presence of Various Substances	Low fire hazard. This material must be heated before ignition will occur.	Explosion Hazards in Presence of Various Substances	Containers may explode in heat of fire. Do not cut, weld, heat, drill or pressurize empty container.
Products of Combustion	Carbon oxides (CO, CO <sub>2</sub> ), nitrogen oxides (NO <sub>x</sub> ), sulphur oxides (SO <sub>x</sub> ), smoke and irritating vapours as products of incomplete combustion.		

<b>Fire Fighting Media and Instructions</b>	NAERG96, GUIDE 171, Substances (low to moderate hazard). If tank, rail car or tank truck is involved in a fire, ISOLATE for 800 meters (0.5 mile) in all directions; also, consider initial evacuation for 800 meters (0.5 mile) in all directions. Shut off fuel to fire if it is possible to do so without hazard. If this is impossible, withdraw from area and let fire burn out under controlled conditions. Withdraw immediately in case of rising sound from venting safety device or any discoloration of tank due to fire. Cool containing vessels with water spray in order to prevent pressure build-up, autoignition or explosion. SMALL FIRE: use DRY chemicals, foam, water spray or CO2. LARGE FIRE: use water spray, fog or foam. For small outdoor fires, portable fire extinguishers may be used, and self contained breathing apparatus (SCBA) may not be required. For all indoor fires and any significant outdoor fires, SCBA is required. Respiratory and eye protection are required for fire fighting personnel.
---	---

<b>Section 6. Accidental Release Measures</b>	
<b>Material Release or Spill</b>	NAERG96, GUIDE 171, Substances (low to moderate hazard). ELIMINATE ALL IGNITION SOURCES. Avoid contact. Stop leak if without risk. Contain spill. Absorb with inert absorbents, dry clay, or diatomaceous earth. Avoid inhaling dust of diatomaceous earth for it may contain silica in very fine particle size, making this a potential respiratory hazard. Place used absorbent in closed metal containers for later disposal or burn absorbent in a suitable combustion chamber. DO NOT FLUSH TO SEWERS, STREAMS OR OTHER BODIES OF WATER. Check with applicable jurisdiction for specific disposal requirements of spilled material and empty containers. Notify the appropriate authorities immediately.

<b>Section 7. Handling and Storage</b>	
<b>Handling</b>	Avoid inhalation and skin contact especially when handling used oil. Keep away from sources of ignition. DO NOT reuse empty containers without commercial cleaning or reconditioning. Practice good personal hygiene. Wash hands after handling and before eating. Launder work clothes frequently. Discard saturated leather goods.
<b>Storage</b>	Store in tightly closed containers in cool, dry, isolated, well-ventilated area, and away from incompatibles.

<b>Section 8. Exposure Controls/Personal Protection</b>	
<b>Engineering Controls</b>	For normal application, special ventilation is not necessary. If user's operations generate vapours or mist, use ventilation to keep exposure to airborne contaminants below the exposure limit. Make-up air should always be supplied to balance air removed by exhaust ventilation. Ensure that eyewash station and safety shower are close to work-station.
<b>Personal Protection -</b>	<b>The selection of personal protective equipment varies, depending upon conditions of use.</b>
<b>Eyes</b>	Eye protection (i.e., safety glasses, safety goggles and/or face shield) should be determined based on conditions of use. If product is used in an application where splashing may occur, the use of safety goggles and/or a face shield should be considered.
<b>Body</b>	Wear appropriate clothing to prevent skin contact. As a minimum long sleeves and trousers should be worn.
<b>Respiratory</b>	Where concentrations in air may exceed the occupational exposure limits given in Section 2 (and those applicable to your area) and where engineering, work practices or other means of exposure reduction are not adequate, NIOSH approved respirators may be necessary to prevent overexposure by inhalation.
<b>Hands</b>	Wear appropriate chemically protective gloves. When handling hot product ensure gloves are heat resistant and insulated.
<b>Feet</b>	Wear appropriate footwear to prevent product from coming in contact with feet and skin.

<b>Section 9. Physical and Chemical Properties</b>			
<b>Physical State and Appearance</b>	Viscous liquid	<b>Viscosity</b>	32: 32.0 cSt @ 40°C, 5.35 cSt @ 100°C, VI=99 46: 46.0 cSt @ 40°C, 6.74 cSt @ 100°C, VI=99 68: 68.0 cSt @ 40°C, 8.69 cSt @ 100°C, VI=99
<b>Colour</b>	Pale, Light green.	<b>Pour Point</b>	32: -36°C 46: -33°C 68: -30°C
<b>Odour</b>	Hydrocarbon.	<b>Softening Point</b>	Not applicable.
<b>Odour Threshold</b>	Not available.	<b>Dropping Point</b>	Not applicable.
<b>Boiling Point</b>	Not available.	<b>Penetration</b>	Not applicable.
<b>Density</b>	0.8693 to 0.8740 kg/L @ 15°C (59°F).	<b>Oil / Water Dist. Coefficient</b>	Not available.
<b>Vapour Density</b>	Not available.	<b>Ionicity (in water)</b>	Not available
<b>Vapour Pressure</b>	Negligible at ambient temperature and pressure.	<b>Dispersion Properties</b>	Not available.
<b>Volatility</b>	Non-volatile.	<b>Solubility</b>	Insoluble in water.

**Section 10. Stability and Reactivity**

<b>Corrosivity</b>	Copper corrosion, 3h, 100°C (ASTM D0130): 1a		
<b>Stability</b>	The product is stable under normal handling and storage conditions.	<b>Hazardous Polymerization</b>	Will not occur under normal working conditions.
<b>Incompatible Substances / Conditions to Avoid</b>	Reactive with oxidizing agents and acids.	<b>Decomposition Products</b>	May release COx, SOx, H2S, POx, CaOx, ZnOx, methacrylate monomers, alkyl mercaptans, aldehydes, smoke and irritating vapours when heated to decomposition.

**Section 11. Toxicological Information**

<b>Routes of Entry</b>	Skin contact, eye contact, inhalation and ingestion.		
<b>Acute Lethality</b>	Based on toxicity of components. Acute oral toxicity (LD50): >5000 mg/kg (rat). Acute dermal toxicity (LD50): >2000 mg/kg (rabbit).		
<b>Chronic or Other Toxic Effects</b>			
Dermal Route:	Prolonged or repeated contact may cause skin irritation characterized by dermatitis or oil acne.		
Inhalation Route:	Negligible breathing hazard at normal temperatures (up to 38°C) or recommended blending temperatures. Elevated temperatures or mechanical action may form vapours, mists or fumes. Inhalation of oil mists or vapours from hot oil may cause irritation of the upper respiratory tract.		
Oral Route:	Low toxicity; has laxative effect.		
Eye Irritation/Inflammation:	Repeated or prolonged contact may cause transient irritation, but no permanent damage.		
Immunotoxicity:	Not available.		
Skin Sensitization:	This product is not expected to be a skin sensitizer, based on the available data and the known hazards of the components.		
Respiratory Tract Sensitization:	This product is not expected to be a respiratory tract sensitizer, based on the available data and the known hazards of the components.		
Mutagenic:	Based on actual test results of base oils and results of similar products, severely hydrotreated base oils give negative results when tested for: (a) Salmonella Typhimurium TA98 using the Modified Ames Assay for Petroleum Product; (b) Salmonella-Escherichia coli/Mammalian-Microsome Reverse Mutation Assay (Ames test) with a Confirmatory Assay; (c) Structural Chromosomal Aberrations in Chinese Hamster Ovary (CHO) Cells.		
Reproductive Toxicity:	This product is not expected to be a reproductive hazard, based on the available data and the known hazards of the components.		
Teratogenicity/Embryotoxicity:	This product is not expected to be a teratogen or an embryotoxin, based on the available data and the known hazards of the components.		
Carcinogenicity (ACGIH):	This product is not known to contain any chemicals at reportable quantities that are listed as A1 or A2 carcinogens by ACGIH.		
Carcinogenicity (IARC):	This product is not known to contain any chemicals at reportable quantities that are listed as group 1, 2A or 2B carcinogens by IARC.		
Carcinogenicity (NTP):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by NTP.		
Carcinogenicity (IRIS):	Not available.		
Carcinogenicity (OSHA):	This product is not known to contain any chemicals at reportable quantities that are listed as carcinogens by OSHA.		
<b>Other Considerations</b>	No additional remark.		

**Section 12. Ecological Information**

<b>Environmental Fate</b>	Not available	<b>Persistence/Bioaccumulation Potential</b>	Not available
<b>BOD5 and COD</b>	Not available.	<b>Products of Biodegradation</b>	Not available.
<b>Additional Remarks</b>	No additional remark.		

**Section 13. Disposal Considerations**

<b>Waste Disposal</b>	Spent/used/waste oil may meet the requirements of a hazardous waste. Consult your local or regional authorities. Preferred waste management priorities are: (1) recycle or reprocess; (2) incineration with energy recovery; (3) disposal at licensed waste disposal facility. Ensure that disposal or reprocessing is in compliance with government requirements and local disposal regulations.		
-----------------------	---	--	--

**Section 14. Transport Information**

<b>TDG Classification</b>	Not controlled under TDG (Canada).	<b>Special Provisions for Transport</b>	Not applicable.
---------------------------	------------------------------------	---	-----------------

**Section 15. Regulatory Information**

<b>Other Regulations</b>		<p>This product is acceptable for use under the provisions of WHMIS-CPR. All components of this formulation are listed on the CEPA-DSL (Domestic Substances List).</p> <p>All components of this formulation are listed on the US EPA-TSCA Inventory.</p> <p>All components of this product are on the European Inventory of Existing Commercial Chemical Substances (EINECS).</p> <p>This product has been classified in accordance with the hazard criteria of the Controlled Products Regulations (CPR) and the MSDS contains all of the information required by the CPR.</p> <p>Please contact Product Safety for more information.</p>																																																	
<b>DSD/DPD (Europe)</b>	Not evaluated.	<b>HCS (U.S.A.)</b>	Not controlled under the HCS (United States).																																																
<b>ADR (Europe) (Pictograms)</b>	<p>NOT EVALUATED FOR EUROPEAN TRANSPORT</p> <p>NON ÉVALUÉ POUR LE TRANSPORT EUROPÉEN.</p>	<b>DOT (U.S.A) (Pictograms)</b>																																																	
<b>HMIS (U.S.A.)</b>	<table border="1"> <tr> <td>Health Hazard</td> <td>1</td> </tr> <tr> <td>Fire Hazard</td> <td>1</td> </tr> <tr> <td>Reactivity</td> <td>0</td> </tr> <tr> <td>Personal Protection</td> <td>B</td> </tr> </table>	Health Hazard	1	Fire Hazard	1	Reactivity	0	Personal Protection	B	<b>NFPA (U.S.A.)</b>	<table border="1"> <tr> <td>Health</td> <td>1</td> <td>Fire Hazard</td> <td>0</td> <td>Reactivity</td> <td>0</td> <td>Rating</td> <td>0 Insignificant</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>1 Slight</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>2 Moderate</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>3 High</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>4 Extreme</td> </tr> </table> <p><b>Specific hazard</b></p>	Health	1	Fire Hazard	0	Reactivity	0	Rating	0 Insignificant								1 Slight								2 Moderate								3 High								4 Extreme
Health Hazard	1																																																		
Fire Hazard	1																																																		
Reactivity	0																																																		
Personal Protection	B																																																		
Health	1	Fire Hazard	0	Reactivity	0	Rating	0 Insignificant																																												
							1 Slight																																												
							2 Moderate																																												
							3 High																																												
							4 Extreme																																												

**Section 16. Other Information**

<b>References</b>	<p>Available upon request.</p> <p>* Marque de commerce de Petro-Canada - Trademark</p>
-------------------	--

<b>Glossary</b>	
<p>ACGIH - American Conference of Governmental Industrial Hygienists</p> <p>ADR - Agreement on Dangerous goods by Road (Europe)</p> <p>ASTM - American Society for Testing and Materials (</p> <p>BOD5 - Biological Oxygen Demand in 5 days</p> <p>CAN/CGA B149.2 Propane Installation Code</p> <p>CAS - Chemical Abstract Services</p> <p>CEPA - Canadian Environmental Protection Act</p> <p>CERCLA - Comprehensive Environmental Response, Compensation and Liability Act</p> <p>CFR - Code of Federal Regulations</p> <p>CHIP - Chemicals Hazard Information and Packaging Approved Supply List</p> <p>COD5 - Chemical Oxygen Demand in 5 days</p> <p>CPR - Controlled Products Regulations</p> <p>DOT - Department of Transport</p> <p>DSCL - Dangerous Substances Classification and Labeling (Europe)</p> <p>DSD/DPD - Dangerous Substances or Dangerous Preparations Directives (Europe)</p> <p>DSL - Domestic Substance List</p> <p>EEC/EU - European Economic Community/European Union</p> <p>EINECS - European Inventory of Existing Commercial Chemical Substances</p> <p>EPCRA - Emergency Planning and Community Right to Know Act</p> <p>FDA - Food and Drug Administration</p> <p>FIFRA - Federal Insecticide, Fungicide and Rodenticide Act</p> <p>HCS - Hazardous Communication System</p> <p>HMIS - Hazardous Material Information System</p> <p>IARC - International Agency for Research on Cancer</p>	<p>IRIS - Integrated Risk Information System</p> <p>LD50/LC50 - Lethal Dose/Concentration kill 50%</p> <p>LDLo/LCLo - Lowest Published Lethal Dose/Concentration</p> <p>NAERG'96 - North American Emergency Response Guide Book (1996)</p> <p>NFPA - National Fire Prevention Association</p> <p>NIOSH - National Institute for Occupational Safety &amp; Health</p> <p>NPRI - National Pollutant Release Inventory</p> <p>NSNR - New Substances Notification Regulations (Canada)</p> <p>NTP - National Toxicology Program</p> <p>OSHA - Occupational Safety &amp; Health Administration</p> <p>PEL - Permissible Exposure Limit</p> <p>RCRA - Resource Conservation and Recovery Act</p> <p>SARA - Superfund Amendments and Reorganization Act</p> <p>SD - Single Dose</p> <p>STEL - Short Term Exposure Limit (15 minutes)</p> <p>TDG - Transportation Dangerous Goods (Canada)</p> <p>TDLo/TCLo - Lowest Published Toxic Dose/Concentration</p> <p>TLm - Median Tolerance Limit</p> <p>TLV-TWA - Threshold Limit Value-Time Weighted Average</p> <p>TSCA - Toxic Substances Control Act</p> <p>USEPA - United States Environmental Protection Agency</p> <p>USP - United States Pharmacopoeia</p> <p>WHMIS - Workplace Hazardous Material Information System</p>

<b>For Copy of MSDS</b>	<b>Prepared by Product Safety - TAR on 6/15/2001.</b>
<p><b>Lubricants:</b></p> <p><b>Western Canada, telephone: 1-800-661-1199; fax: (780) 464-9564</b></p> <p><b>Ontario &amp; Central Canada, telephone: 1-800-268-5850 and (905) 822-4222; fax: 1-800-201-6285</b></p> <p><b>Quebec &amp; Eastern Canada, telephone: 1-800-576-1686; fax: 800-201-6285</b></p>	<b>Data entry by Product Safety - JDW.</b>
<b>For Product Safety Information: (905) 804-4752</b>	

*To the best of our knowledge, the information contained herein is accurate. However, neither the above named supplier nor any of its subsidiaries assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material is the sole responsibility of the user. All materials may present unknown hazards and should be used with caution. Although certain hazards are described herein, we cannot guarantee that these are the only hazards that exist.*

# Safety Data Sheet



## SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

### Delo 100 Motor Oil SAE 40

**Product Use:** Heavy Duty Motor Oil  
**Product Number(s):** 219932, 222404

#### Company Identification

Chevron Products Company  
a division of Chevron U.S.A. Inc.  
6001 Bollinger Canyon Rd.  
San Ramon, CA 94583  
United States of America  
www.chevronlubricants.com

#### Transportation Emergency Response

CHEMTREC: (800) 424-9300 or (703) 527-3887

#### Health Emergency

Chevron Emergency & Information Center: Located in the USA. International collect calls accepted. (800) 231-0623 or (510) 231-0623

#### Product Information

email : lubemsds@chevron.com  
Product Information: 1 (800) 582-3835, LUBETEK@chevron.com

## SECTION 2 HAZARDS IDENTIFICATION

#### CLASSIFICATION:

Not classified as hazardous according to 29 CFR 1910.1200 (2012).

**HAZARDS NOT OTHERWISE CLASSIFIED:** Not Applicable

## SECTION 3 COMPOSITION/ INFORMATION ON INGREDIENTS

COMPONENTS	CAS NUMBER	AMOUNT
Distillates, hydrotreated heavy paraffinic	64742-54-7	70 - 99 %weight

## SECTION 4 FIRST AID MEASURES

#### Description of first aid measures

**Eye:** No specific first aid measures are required. As a precaution, remove contact lenses, if worn, and flush eyes with water.

**Skin:** No specific first aid measures are required. As a precaution, remove clothing and shoes if contaminated. To remove the material from skin, use soap and water. Discard contaminated clothing and shoes or thoroughly clean before reuse.

**Ingestion:** No specific first aid measures are required. Do not induce vomiting. As a precaution, get medical advice.

**Inhalation:** No specific first aid measures are required. If exposed to excessive levels of material in the air, move the exposed person to fresh air. Get medical attention if coughing or respiratory discomfort occurs.

**Most important symptoms and effects, both acute and delayed**

**IMMEDIATE HEALTH EFFECTS**

**Eye:** Not expected to cause prolonged or significant eye irritation.

**Skin:** Contact with the skin is not expected to cause prolonged or significant irritation. Contact with the skin is not expected to cause an allergic skin response. Not expected to be harmful to internal organs if absorbed through the skin.

**Ingestion:** Not expected to be harmful if swallowed.

**Inhalation:** Not expected to be harmful if inhaled. Contains a petroleum-based mineral oil. May cause respiratory irritation or other pulmonary effects following prolonged or repeated inhalation of oil mist at airborne levels above the recommended mineral oil mist exposure limit. Symptoms of respiratory irritation may include coughing and difficulty breathing.

**DELAYED OR OTHER HEALTH EFFECTS:** Not classified

**Indication of any immediate medical attention and special treatment needed** Not Applicable

**SECTION 5 FIRE FIGHTING MEASURES**

**EXTINGUISHING MEDIA:** Use water fog, foam, dry chemical or carbon dioxide (CO<sub>2</sub>) to extinguish flames.

**PROTECTION OF FIRE FIGHTERS:**

**Fire Fighting Instructions:** This material will burn although it is not easily ignited. See Section 7 for proper handling and storage. For fires involving this material, do not enter any enclosed or confined fire space without proper protective equipment, including self-contained breathing apparatus.

**Combustion Products:** Highly dependent on combustion conditions. A complex mixture of airborne solids, liquids, and gases including carbon monoxide, carbon dioxide, and unidentified organic compounds will be evolved when this material undergoes combustion. Combustion may form oxides of: Boron, Nitrogen.

**SECTION 6 ACCIDENTAL RELEASE MEASURES**

**Protective Measures:** Eliminate all sources of ignition in vicinity of spilled material.

**Spill Management:** Stop the source of the release if you can do it without risk. Contain release to prevent further contamination of soil, surface water or groundwater. Clean up spill as soon as possible, observing precautions in Exposure Controls/Personal Protection. Use appropriate techniques such as applying non-combustible absorbent materials or pumping. Where feasible and appropriate, remove contaminated soil. Place contaminated materials in disposable containers and dispose of in a manner consistent with applicable regulations.

**Reporting:** Report spills to local authorities and/or the U.S. Coast Guard's National Response Center at (800) 424-8802 as appropriate or required.

**SECTION 7 HANDLING AND STORAGE**

**General Handling Information:** Avoid contaminating soil or releasing this material into sewage and drainage systems and bodies of water.

**Precautionary Measures:** Keep out of the reach of children.

**Static Hazard:** Electrostatic charge may accumulate and create a hazardous condition when handling this material. To minimize this hazard, bonding and grounding may be necessary but may not, by themselves, be sufficient. Review all operations which have the potential of generating and accumulating

an electrostatic charge and/or a flammable atmosphere (including tank and container filling, splash filling, tank cleaning, sampling, gauging, switch loading, filtering, mixing, agitation, and vacuum truck operations) and use appropriate mitigating procedures.

**Container Warnings:** Container is not designed to contain pressure. Do not use pressure to empty container or it may rupture with explosive force. Empty containers retain product residue (solid, liquid, and/or vapor) and can be dangerous. Do not pressurize, cut, weld, braze, solder, drill, grind, or expose such containers to heat, flame, sparks, static electricity, or other sources of ignition. They may explode and cause injury or death. Empty containers should be completely drained, properly closed, and promptly returned to a drum reconditioner or disposed of properly.

## SECTION 8 EXPOSURE CONTROLS/PERSONAL PROTECTION

### GENERAL CONSIDERATIONS:

Consider the potential hazards of this material (see Section 2), applicable exposure limits, job activities, and other substances in the workplace when designing engineering controls and selecting personal protective equipment (PPE). If engineering controls or work practices are not adequate to prevent exposure to harmful levels of this material, refer to PPE information below.

Factors that affect PPE include, but are not limited to: properties of the chemical, other chemicals which may contact the same PPE, physical requirements (fit & sizing, cut/puncture protection, dexterity, thermal protection, etc.), and potential allergic reactions to the PPE material. It is the responsibility of the user to read and understand all instructions and limitations supplied with the equipment since protection is usually provided for a limited time or under certain circumstances. Refer to appropriate CEN standards.

### ENGINEERING CONTROLS:

Use in a well-ventilated area.

### PERSONAL PROTECTIVE EQUIPMENT

**Eye/Face Protection:** Wear protective equipment to prevent eye contact. Selection of protective equipment may include safety glasses, chemical goggles, face shields, or a combination depending on the work operations conducted.

**Skin Protection:** Wear chemical personal protective equipment (PPE) to prevent skin contact. Selection of chemical protective clothing should be performed by an Occupational Hygienist or Safety Professional and be based upon applicable standards (ASTM F739 or EN 374). Using chemical PPE depends upon operations conducted and may include chemical gloves, boots, chemical apron, chemical suit, and complete facial protection. Refer to PPE manufacturers to obtain breakthrough time information to determine how long PPE can be used before it needs to be replaced. Unless specific glove manufacturer data indicates otherwise, the below table is based upon available industry data to assist in the glove selection process and is intended to be used as reference only.

Chemical Glove Material	Thickness (mm)	Typical Breakthrough Time (minutes)
Butyl	0.7	120
Nitrile	0.8	240
Viton Butyl	0.3	240

**Respiratory Protection:** No respiratory protection is normally required.

If user operations generate an oil mist, determine if airborne concentrations are below the occupational exposure limit for mineral oil mist. If not, wear an approved respirator that provides adequate protection from the measured concentrations of this material. For air-purifying respirators use a particulate cartridge.

Use a positive pressure air-supplying respirator in circumstances where air-purifying respirators may not provide adequate protection.

**Occupational Exposure Limits:**

Component	Agency	Form	TWA	STEL	Ceiling	Notation
Distillates, hydrotreated heavy paraffinic	ACGIH	Inhalable fraction	5 mg/m3	--	--	--
Distillates, hydrotreated heavy paraffinic	ACGIH	--	5 mg/m3	10 mg/m3	--	--
Distillates, hydrotreated heavy paraffinic	OSHA Z-1	--	5 mg/m3	--	--	--

Consult local authorities for appropriate values.

<b>SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES</b>
---

**Attention: the data below are typical values and do not constitute a specification.**

**Color:** Brown to yellow

**Physical State:** Liquid

**Odor:** Petroleum odor

**Odor Threshold:** No data available

**pH:** Not Applicable

**Vapor Pressure:** No data available

**Vapor Density (Air = 1):** No data available

**Initial Boiling Point:** No data available

**Solubility:** Soluble in hydrocarbons; insoluble in water

**Freezing Point:** No data available

**Melting Point:** No data available

**Density:** 0.8883 kg/l - 0.8892 kg/l @ 15°C (59°F) (Typical)

**Viscosity:** 131 mm<sup>2</sup>/s @ 40°C (104°F) (Typical)

**Evaporation Rate:** No data available

**Decomposition temperature:** No data available

**Octanol/Water Partition Coefficient:** No data available

**FLAMMABLE PROPERTIES:**

**Flammability (solid, gas):** Not Applicable

**Flashpoint:** (Cleveland Open Cup) 180 °C (356 °F) (Minimum)

**Autoignition:** No data available

**Flammability (Explosive) Limits (% by volume in air):** Lower: Not Applicable Upper: Not Applicable

<b>SECTION 10 STABILITY AND REACTIVITY</b>
--

**Reactivity:** May react with strong acids or strong oxidizing agents, such as chlorates, nitrates, peroxides, etc.

**Chemical Stability:** This material is considered stable under normal ambient and anticipated storage and handling conditions of temperature and pressure.

**Incompatibility With Other Materials:** Not applicable

**Hazardous Decomposition Products:** None known (None expected)

**Hazardous Polymerization:** Hazardous polymerization will not occur.

<b>SECTION 11 TOXICOLOGICAL INFORMATION</b>
---

**Information on toxicological effects**

**Serious Eye Damage/Irritation:** The material is not considered an eye irritant. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Skin Corrosion/Irritation:** The material is not considered a skin irritant. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Skin Sensitization:** The material is not considered a skin sensitizer. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Acute Dermal Toxicity:** The material is not considered a dermal toxicant. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Acute Oral Toxicity:** The material is not considered an oral toxicant. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Acute Inhalation Toxicity:** The material is not considered an inhalation toxicant. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Acute Toxicity Estimate:** Not Determined

**Germ Cell Mutagenicity:** The material is not considered a mutagen. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Carcinogenicity:** The material is not considered a carcinogen. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Reproductive Toxicity:** The material is not considered a reproductive toxicant. The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Specific Target Organ Toxicity - Single Exposure:** The material is not considered a target organ toxicant (single exposure). The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Specific Target Organ Toxicity - Repeated Exposure:** The material is not considered a target organ toxicant (repeated exposure). The product has not been tested. The statement is based on evaluation of data for similar materials or product components.

**Aspiration Hazard:** The material is not considered an aspiration hazard.

#### **ADDITIONAL TOXICOLOGY INFORMATION:**

During use in engines, contamination of oil with low levels of cancer-causing combustion products occurs. Used motor oils have been shown to cause skin cancer in mice following repeated application and continuous exposure. Brief or intermittent skin contact with used motor oil is not expected to have serious effects in humans if the oil is thoroughly removed by washing with soap and water.

This product contains petroleum base oils which may be refined by various processes including severe solvent extraction, severe hydrocracking, or severe hydrotreating. None of the oils requires a cancer warning under the OSHA Hazard Communication Standard (29 CFR 1910.1200). These oils have not been listed in the National Toxicology Program (NTP) Annual Report nor have they been classified by the International Agency for Research on Cancer (IARC) as; carcinogenic to humans (Group 1), probably carcinogenic to humans (Group 2A), or possibly carcinogenic to humans (Group 2B).

These oils have not been classified by the American Conference of Governmental Industrial Hygienists (ACGIH) as: confirmed human carcinogen (A1), suspected human carcinogen (A2), or confirmed animal carcinogen with unknown relevance to humans (A3).

## **SECTION 12 ECOLOGICAL INFORMATION**

### **ECOTOXICITY**

This material is not expected to be harmful to aquatic organisms.

The product has not been tested. The statement has been derived from the properties of the individual components.

## MOBILITY

No data available.

## PERSISTENCE AND DEGRADABILITY

This material is not expected to be readily biodegradable. The product has not been tested. The statement has been derived from the properties of the individual components.

## POTENTIAL TO BIOACCUMULATE

Bioconcentration Factor: No data available.

Octanol/Water Partition Coefficient: No data available

## SECTION 13 DISPOSAL CONSIDERATIONS

Use material for its intended purpose or recycle if possible. Oil collection services are available for used oil recycling or disposal. Place contaminated materials in containers and dispose of in a manner consistent with applicable regulations. Contact your sales representative or local environmental or health authorities for approved disposal or recycling methods.

## SECTION 14 TRANSPORT INFORMATION

The description shown may not apply to all shipping situations. Consult 49CFR, or appropriate Dangerous Goods Regulations, for additional description requirements (e.g., technical name) and mode-specific or quantity-specific shipping requirements.

**DOT Shipping Description:** NOT REGULATED AS HAZARDOUS MATERIAL UNDER 49 CFR

**IMO/IMDG Shipping Description:** NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER THE IMDG CODE

**ICAO/IATA Shipping Description:** NOT REGULATED AS DANGEROUS GOODS FOR TRANSPORT UNDER ICAO

**Transport in bulk according to Annex II of MARPOL 73/78 and the IBC code:**

Not applicable

## SECTION 15 REGULATORY INFORMATION

**EPCRA 311/312 CATEGORIES:** Not applicable

### REGULATORY LISTS SEARCHED:

01-1=IARC Group 1	05=MA RTK
01-2A=IARC Group 2A	06=NJ RTK
01-2B=IARC Group 2B	07=PA RTK
02=NTP Carcinogen	08-1=TSCA 5(e)
03=EPCRA 313	08-2=TSCA 12(b)
04=CA Proposition 65	

The following components of this material are found on the regulatory lists indicated.

Distillates, hydrotreated heavy paraffinic 05, 07

### CHEMICAL INVENTORIES:

All components comply with the following chemical inventory requirements: AIC (Australia), DSL (Canada), ENCS (Japan), KECI (Korea), NZIoC (New Zealand), PICCS (Philippines), TCSI (Taiwan), TSCA (United States).

**NEW JERSEY RTK CLASSIFICATION:**

Under the New Jersey Right-to-Know Act L. 1983 Chapter 315 N.J.S.A. 34:5A-1 et. seq., the product is to be identified as follows: PETROLEUM OIL (Motor oil)

**SECTION 16 OTHER INFORMATION**

**NFPA RATINGS:** Health: 0 Flammability: 1 Reactivity: 0

**HMIS RATINGS:** Health: 0 Flammability: 1 Reactivity: 0  
(0-Least, 1-Slight, 2-Moderate, 3-High, 4-Extreme, PPE:- Personal Protection Equipment Index recommendation, \*- Chronic Effect Indicator). These values are obtained using the guidelines or published evaluations prepared by the National Fire Protection Association (NFPA) or the National Paint and Coating Association (for HMIS ratings).

**REVISION STATEMENT:** SECTION 03 - Composition information was modified.  
SECTION 08 - Eye/Face Protection information was modified.  
SECTION 08 - General Considerations information was modified.  
SECTION 08 - Occupational Exposure Limit Table information was modified.  
SECTION 08 - Personal Protective Equipment List information was deleted.  
SECTION 08 - Personal Protective Equipment information was added.  
SECTION 08 - Skin Protection information was modified.  
SECTION 15 - Regulatory Information information was added.

**Revision Date:** May 02, 2023

**ABBREVIATIONS THAT MAY HAVE BEEN USED IN THIS DOCUMENT:**

TLV - Threshold Limit Value	TWA - Time Weighted Average
STEL - Short-term Exposure Limit	PEL - Permissible Exposure Limit
GHS - Globally Harmonized System	CAS - Chemical Abstract Service Number
ACGIH - American Conference of Governmental Industrial Hygienists	IMO/IMDG - International Maritime Dangerous Goods Code
API - American Petroleum Institute	SDS - Safety Data Sheet
HMIS - Hazardous Materials Information System	NFPA - National Fire Protection Association (USA)
DOT - Department of Transportation (USA)	NTP - National Toxicology Program (USA)
IARC - International Agency for Research on Cancer	OSHA - Occupational Safety and Health Administration
NCEL - New Chemical Exposure Limit	EPA - Environmental Protection Agency
SCBA - Self-Contained Breathing Apparatus	

Prepared according to the 29 CFR 1910.1200 (2012) by Chevron Technical Center, 6001 Bollinger Canyon Road, San Ramon, CA 94583.

**The above information is based on the data of which we are aware and is believed to be correct as of the date hereof. Since this information may be applied under conditions beyond our control and with which we may be unfamiliar and since data made available subsequent to the date hereof may suggest modifications of the information, we do not assume any responsibility for the results of its use. This information is furnished upon condition that the person receiving it shall make his own determination of the suitability of the material for his particular purpose.**

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

### SECTION 1. IDENTIFICATION

Product name : PETRO-CANADA ANTIFREEZE

Synonyms : Universal Antifreeze, Radiator Antifreeze, Diesel Antifreeze, Petro-Canada Antifreeze-Coolant, Petro-Canada Heavy Duty Antifreeze-Coolant, Pre-Mix Antifreeze, Petro-Canada Premium Radiator Antifreeze, Diesel Engine Coolant, Pre-Mixed Radiator Antifreeze/Coolant Petro-Canada.

Product code : RADDRX, RAD, RADC4U

Manufacturer or supplier's details  
Petro-Canada  
P.O. Box 2844, 150 - 6th Avenue South-West  
Calgary Alberta T2P 3E3  
Canada

Emergency telephone number : Suncor Energy: +1 403-296-3000;  
Poison Control Centre: Consult local telephone directory for emergency number(s).

#### Recommended use of the chemical and restrictions on use

Recommended use : Used as an engine antifreeze coolant.

Prepared by : Product Safety: +1 905-804-4752

### SECTION 2. HAZARDS IDENTIFICATION

#### Emergency Overview

Appearance	Clear liquid.
Colour	green
Odour	No data available
Hazard Summary	Toxic if swallowed. May cause teratogenicity/embryotoxicity

#### Potential Health Effects

Primary Routes of Entry : Eye contact  
Ingestion  
Inhalation  
Skin contact

Inhalation : May cause respiratory tract irritation.

Eyes : May cause eye irritation.

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

Ingestion : Toxic if swallowed.  
Ingestion of this product may cause Central Nervous System (CNS) Depression, symptoms of which may include; weakness, dizziness, slurred speech, drowsiness, unconsciousness and in cases of severe overexposure; coma and death.

Aggravated Medical Condition : None known.

### Other hazards

None known.

### IARC

No component of this product present at levels greater than or equal to 0.1% is identified as probable, possible or confirmed human carcinogen by IARC.

### ACGIH

No component of this product present at levels greater than or equal to 0.1% is identified as a carcinogen or potential carcinogen by ACGIH.

## SECTION 3. COMPOSITION/INFORMATION ON INGREDIENTS

Substance / Mixture : Mixture

### Hazardous components

Chemical Name	CAS-No.	Concentration
ethanediol	107-21-1	60 - 100 %

## SECTION 4. FIRST AID MEASURES

If inhaled : Move to fresh air.  
Artificial respiration and/or oxygen may be necessary.  
Seek medical advice.

In case of skin contact : In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes while removing contaminated clothing and shoes.  
Wash skin thoroughly with soap and water or use recognized skin cleanser.  
Wash contaminated clothing before reuse.  
Seek medical advice.

In case of eye contact : Remove contact lenses.  
Rinse immediately with plenty of water, also under the eyelids, for at least 15 minutes.  
Obtain medical attention.

If swallowed : Rinse mouth with water.  
DO NOT induce vomiting unless directed to do so by a physician or poison control center.

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

---

Never give anything by mouth to an unconscious person.  
Seek medical advice.

Most important symptoms and effects, both acute and delayed : First aider needs to protect himself.

---

### SECTION 5. FIREFIGHTING MEASURES

- Suitable extinguishing media : Carbon dioxide (CO<sub>2</sub>)  
Dry chemical  
Foam
- Unsuitable extinguishing media : No information available.
- Specific hazards during fire-fighting : Cool closed containers exposed to fire with water spray.
- Hazardous combustion products : Carbon oxides (CO, CO<sub>2</sub>), smoke and irritating vapours as products of incomplete combustion.
- Special protective equipment for firefighters : Wear self-contained breathing apparatus and full protective wear.  
Wear a positive-pressure supplied-air respirator with full face-piece.
- 

### SECTION 6. ACCIDENTAL RELEASE MEASURES

- Personal precautions, protective equipment and emergency procedures : Use personal protective equipment.  
Ensure adequate ventilation.  
Evacuate personnel to safe areas.  
Material can create slippery conditions.
- Environmental precautions : If the product contaminates rivers and lakes or drains inform respective authorities.
- Methods and materials for containment and cleaning up : Prevent further leakage or spillage if safe to do so.  
Remove all sources of ignition.  
Soak up with inert absorbent material.  
Non-sparking tools should be used.  
Ensure adequate ventilation.  
Contact the proper local authorities.
- 

### SECTION 7. HANDLING AND STORAGE

- Advice on safe handling : Smoking, eating and drinking should be prohibited in the application area.  
Do not ingest.  
Avoid contact with skin, eyes and clothing.  
Use only with adequate ventilation.

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

In case of insufficient ventilation, wear suitable respiratory equipment.  
Ensure all equipment is electrically grounded before beginning transfer operations.  
Keep away from heat and sources of ignition.  
Keep container closed when not in use.

Conditions for safe storage : Store in original container.  
Containers which are opened must be carefully resealed and kept upright to prevent leakage.  
Keep in a dry, cool and well-ventilated place.  
Keep in properly labelled containers.  
To maintain product quality, do not store in heat or direct sunlight.

### SECTION 8. EXPOSURE CONTROLS/PERSONAL PROTECTION

#### Components with workplace control parameters

Components	CAS-No.	Value type (Form of exposure)	Control parameters / Permissible concentration	Basis
ethanediol	107-21-1	Ceiling	100 mg/m <sup>3</sup>	CA AB OEL
		TWA (particulate)	10 mg/m <sup>3</sup>	CA BC OEL
		STEL (particulate)	20 mg/m <sup>3</sup>	CA BC OEL
		Ceiling (aerosol)	100 mg/m <sup>3</sup>	CA BC OEL
		Ceiling (Vapour)	50 ppm	CA BC OEL
		Ceiling (Vapour and mist)	50 ppm 127 mg/m <sup>3</sup>	CA QC OEL
		Ceiling (Aerosol only)	100 mg/m <sup>3</sup>	ACGIH

**Engineering measures** : Adequate ventilation to ensure that Occupational Exposure Limits are not exceeded.

#### Personal protective equipment

Respiratory protection : Use a properly fitted, air-purifying or air-fed respirator complying with an approved standard if a risk assessment indicates this is necessary.  
Respirator selection must be based on known or anticipated exposure levels, the hazards of the product and the safe working limits of the selected respirator.

Filter type : organic vapour filter

Hand protection  
Material : nitrile rubber. Consult your PPE provider for breakthrough times and the specific glove that is best for you based on your use patterns. It should be realized that eventually any

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

material regardless of their imperviousness, will get permeated by chemicals. Therefore, protective gloves should be regularly checked for wear and tear. At the first signs of hardening and cracks, they should be changed.

Remarks	: Chemical-resistant, impervious gloves complying with an approved standard should be worn at all times when handling chemical products if a risk assessment indicates this is necessary.
Eye protection	: Wear face-shield and protective suit for abnormal processing problems.
Skin and body protection	: Choose body protection in relation to its type, to the concentration and amount of dangerous substances, and to the specific work-place.
Protective measures	: Wash contaminated clothing before re-use.
Hygiene measures	: Remove and wash contaminated clothing and gloves, including the inside, before re-use. Wash face, hands and any exposed skin thoroughly after handling.

### SECTION 9. PHYSICAL AND CHEMICAL PROPERTIES

Appearance	: Clear liquid.
Colour	: green
Odour	: No data available
Odour Threshold	: No data available
pH	: No data available
Melting point/range	: -13 °C (9 °F)
Boiling point/boiling range	: 197 °C (387 °F)
Flash point	: 111 °C (232 °F) Method: closed cup
Fire Point	: No data available
Auto-Ignition Temperature	: 398 °C (748 °F)
Evaporation rate	: < 0.01
Flammability	: May be combustible at high temperature.
Upper explosion limit	: 21.6 - 22.0 %(V)
Lower explosion limit	: 3.2 %(V)

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

---

Vapour pressure	:	0.09 mmHg (20 °C / 68 °F)
Relative vapour density	:	estimated 2.14 Air = 1
Relative density	:	1.12 - 1.15 (20 °C / 68 °F) Water = 1
Solubility(ies)		
Water solubility	:	No data available
Partition coefficient: n-octanol/water	:	log Pow: -1.36 (20 °C)
Viscosity		
Viscosity, kinematic	:	estimated 18.86 mm <sup>2</sup> /s (20 °C / 68 °F)
Explosive properties	:	Do not pressurise, cut, weld, braze, solder, drill, grind or expose containers to heat or sources of ignition.

---

### SECTION 10. STABILITY AND REACTIVITY

Possibility of hazardous reactions	:	Hazardous polymerisation does not occur. Stable under normal conditions.
Conditions to avoid	:	Heat, flames and sparks. Avoid temperatures above 111°C.
Incompatible materials	:	Reactive with oxidising agents, acids and alkalis.
Hazardous decomposition products	:	May release CO <sub>x</sub> , smoke and irritating vapours when heated to decomposition.

---

### SECTION 11. TOXICOLOGICAL INFORMATION

#### Information on likely routes of exposure

Eye contact  
Ingestion  
Inhalation  
Skin contact

#### Acute toxicity

##### Product:

Acute oral toxicity	:	Remarks: No data available
Acute inhalation toxicity	:	Remarks: No data available
Acute dermal toxicity	:	Remarks: No data available

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

---

### **Components:**

#### **ethanediol:**

Acute oral toxicity : LD50 (Rat): 4,700 mg/kg,  
LD50 (Mouse): 5,500 mg/kg,  
Acute inhalation toxicity : LC50 (Rat): 2.725 mg/l  
Exposure time: 4 h  
Test atmosphere: dust/mist  
Acute dermal toxicity : LD50 (Rabbit): 9,530 mg/kg,

### **Skin corrosion/irritation**

#### **Components:**

#### **ethanediol:**

Result: Mild skin irritation

### **Serious eye damage/eye irritation**

#### **Components:**

#### **ethanediol:**

Result: Mild eye irritation

### **Respiratory or skin sensitisation**

No data available

### **Germ cell mutagenicity**

No data available

### **Carcinogenicity**

No data available

### **Reproductive toxicity**

No data available

### **STOT - single exposure**

No data available

### **STOT - repeated exposure**

No data available

---

## SECTION 12. ECOLOGICAL INFORMATION

### **Ecotoxicity**

#### **Product:**

Toxicity to fish :  
Remarks: No data available

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

---

Toxicity to daphnia and other aquatic invertebrates : Remarks: No data available

Toxicity to algae : Remarks: No data available

Toxicity to bacteria : Remarks: No data available

### Persistence and degradability

#### Product:

Biodegradability : Remarks: No data available

### Bioaccumulative potential

#### Components:

##### **ethanediol :**

Partition coefficient: n-octanol/water : log Pow: -1.36

### Mobility in soil

No data available

### Other adverse effects

#### Product:

Additional ecological information : No data available

---

## SECTION 13. DISPOSAL CONSIDERATIONS

### Disposal methods

Waste from residues : The product should not be allowed to enter drains, water courses or the soil.  
Offer surplus and non-recyclable solutions to a licensed disposal company.  
Waste must be classified and labelled prior to recycling or disposal.  
Send to a licensed waste management company.  
Dispose of as hazardous waste in compliance with local and national regulations.  
Dispose of product residue in accordance with the instructions of the person responsible for waste disposal.

---

## SECTION 14. TRANSPORT INFORMATION

### International Regulation

#### **IATA-DGR**

Not regulated as a dangerous good

# SAFETY DATA SHEET

## PETRO-CANADA ANTIFREEZE



000003000606

Version 2.0

Revision Date 2016/03/07

Print Date 2016/03/07

---

### IMDG-Code

Not regulated as a dangerous good

### Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code

Not applicable for product as supplied.

### National Regulations

### TDG

Not regulated as a dangerous good

---

## SECTION 15. REGULATORY INFORMATION

**WHMIS Classification** : D1B: Toxic Material Causing Immediate and Serious Toxic Effects  
D2A: Very Toxic Material Causing Other Toxic Effects

This product has been classified according to the hazard criteria of the CPR and the MSDS contains all of the information required by the CPR.

### The components of this product are reported in the following inventories:

**DSL** : On the inventory, or in compliance with the inventory  
**TSCA** : All chemical substances in this product are either listed on the TSCA Inventory or are in compliance with a TSCA Inventory exemption.

---

## SECTION 16. OTHER INFORMATION

For Copy of (M)SDS : Internet: [www.petro-canada.ca/msds](http://www.petro-canada.ca/msds)  
Canada-wide: telephone: 1-800-668-0220; fax: 1-800-837-1228  
For Product Safety Information: 1 905-804-4752

Prepared by : Product Safety: +1 905-804-4752

Revision Date : 2016/03/07

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

## 1. Identification

Product identifier	Lead Acid Battery Wet, Filled With Acid
Other means of identification	
Synonyms	may include gel/absorbed electrolyte type lead acid batteries
Recommended use	Electric storage battery.
Recommended restrictions	None known.
Manufacturer/Importer/Supplier/Distributor information	
Manufacturer/Supplier	East Penn Manufacturing Company, Inc.
Address	102 Deka Road, Lyon Station PA 19536
Telephone number	(610) 682-6361
Contact person	East Penn EHS Department
Emergency telephone number	USA/Canada: CHEMTREC (800) 424-9300, Outside USA 1 (703) 527-3887
E-mail	contactus@eastpenn-deka.com

## 2. Hazard(s) identification

Physical hazards	Explosive Chemical, Division 1.3	
Health hazards	Acute toxicity, oral	Category 4
	Acute toxicity, inhalation	Category 4
	Skin corrosion/irritation	Category 1A
	Serious eye damage/eye irritation	Category 1
	Carcinogenicity	Category 1A
	Reproductive toxicity	Category 1A
	Specific target organ toxicity following single exposure	Category 1 (respiratory system)
	Specific target organ toxicity following single exposure	Category 3 respiratory tract irritation
	Specific target organ toxicity following repeated exposure	Category 1 (respiratory system)
Environmental hazards	Hazardous to the aquatic environment, acute hazard	Category 1
	Hazardous to the aquatic environment, long-term hazard	Category 1

### Label elements



Signal word	Danger
Hazard statement	Harmful if swallowed. Harmful if inhaled. Causes severe skin burns and eye damage. May cause cancer. May damage fertility or the unborn child. Causes damage to organs (respiratory system). Causes damage to organs (respiratory system) through prolonged or repeated exposure. May cause respiratory irritation. Very toxic to aquatic life with long lasting effects.
Precautionary statements	
Prevention	Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not breathe dust/mist/vapours. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTRE/doctor. Wash contaminated clothing before reuse. Collect spillage.
Storage	Store in a well-ventilated place. Keep container tightly closed.
Disposal	Refer to manufacturer/supplier for information on recovery/recycling. Dispose of contents/container in accordance with local/regional/national/international regulations.
Other hazards	Under normal conditions of processing and use, exposure to the chemical constituents in this product is unlikely. The battery should not be opened or burned. Exposure to the ingredients contained within or their combustion products could be harmful.
Supplemental information	In use, may form flammable/explosive vapour-air mixture.

### 3. Composition/information on ingredients

#### Mixtures

Chemical name	CAS number	%
Lead and lead compounds (inorganic)	7439-92-1	43 - 70
Electrolyte (Sulfuric acid)	7664-93-9	20 - 44
Antimony	7440-36-0	3 - 5

Composition comments All concentrations are in percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.  
Content composition concentrations will vary with battery type/size.

### 4. First-aid measures

Inhalation	Exposure to contents of an open or damaged battery: Move injured person into fresh air and keep person under observation. Get medical attention if any discomfort continues.
Skin contact	Exposure to contents of an open or damaged battery: Immediately flush with plenty of water for at least 15 minutes while removing contaminated clothing and shoes. Get medical attention if irritation develops and persists.
Eye contact	Exposure to contents of an open or damaged battery: Flush thoroughly with water for at least 15 minutes. Hold eyelids open during flushing. If irritation persists, repeat flushing. Get medical attention if irritation develops and persists.
Ingestion	Exposure to contents of an open or damaged battery: Rinse mouth thoroughly with water. DO NOT induce vomiting because of danger of aspirating liquid into lungs. Get medical attention immediately.
Most important symptoms/effects, acute and delayed	Under normal conditions of processing and use, exposure to the chemical constituents in this product is unlikely. The battery should not be opened or burned. Exposure to the ingredients contained within or their combustion products could be harmful. Heavy lead exposure may result in central nervous system damage, encephalopathy and damage to the blood-forming (hematopoietic) tissues.
Indication of immediate medical attention and special treatment needed	Treat symptomatically.
General information	Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

### 5. Fire-fighting measures

Suitable extinguishing media	Dry chemical, foam, carbon dioxide, water fog.
Unsuitable extinguishing media	Do NOT use water on live electrical circuits.
Specific hazards arising from the chemical	Batteries evolve flammable hydrogen gas during charging and may increase fire risk. Containers may explode when heated.
Special protective equipment and precautions for firefighters	Self-contained breathing apparatus and full protective clothing must be worn in case of fire. Selection of respiratory protection for firefighting: follow the general fire precautions indicated in the workplace.
Fire fighting equipment/instructions	Use standard firefighting procedures and consider the hazards of other involved materials.
General fire hazards	Like any sealed container, battery cells may rupture when exposed to excessive heat; this could result in the release of corrosive and flammable materials.

## 6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Avoid contact with skin.
Methods and materials for containment and cleaning up	Neutralize the spilled material before disposal. Sweep up or vacuum up spillage and collect in suitable container for disposal. Dispose of waste and residues in accordance with local authority requirements.
Environmental precautions	Prevent runoff from entering drains, sewers, or streams.

## 7. Handling and storage

Precautions for safe handling	In the event of damage resulting in a leak of exposed materials, avoid contact with contents of an open or damaged cell or battery. Keep away from heat, sparks and open flame. Do not allow conductive material to touch the battery terminals. A dangerous short-circuit may occur and cause battery failure and fire.
Conditions for safe storage, including any incompatibilities	Store in original tightly closed container. Protect containers from damage. Place cardboard between layers of stacked batteries to avoid damage and short circuits.

## 8. Exposure controls/personal protection

### Occupational exposure limits

#### US. ACGIH Threshold Limit Values

Components	Type	Value	Form
Antimony (CAS 7440-36-0)	TWA	0.5 mg/m <sup>3</sup>	
Electrolyte (Sulfuric acid) (CAS 7664-93-9)	TWA	0.2 mg/m <sup>3</sup>	Thoracic fraction.
Lead and lead compounds (inorganic) (CAS 7439-92-1)	TWA	0.05 mg/m <sup>3</sup>	

#### Canada. Alberta OELs (Occupational Health & Safety Code, Schedule 1, Table 2)

Components	Type	Value	Form
Antimony (CAS 7440-36-0)	TWA	0.5 mg/m <sup>3</sup>	
Electrolyte (Sulfuric acid) (CAS 7664-93-9)	STEL	3 mg/m <sup>3</sup>	
	TWA	1 mg/m <sup>3</sup>	
Lead and lead compounds (inorganic) (CAS 7439-92-1)	TWA	0.05 mg/m <sup>3</sup>	

#### Canada. British Columbia OELs. (Occupational Exposure Limits for Chemical Substances, Occupational Health and Safety Regulation 296/97, as amended)

Components	Type	Value	Form
Antimony (CAS 7440-36-0)	TWA	0.5 mg/m <sup>3</sup>	
Electrolyte (Sulfuric acid) (CAS 7664-93-9)	TWA	0.2 mg/m <sup>3</sup>	Mist.
Lead and lead compounds (inorganic) (CAS 7439-92-1)	TWA	0.05 mg/m <sup>3</sup>	

#### Canada. Manitoba OELs (Reg. 217/2006, The Workplace Safety And Health Act)

Components	Type	Value	Form
Antimony (CAS 7440-36-0)	TWA	0.5 mg/m <sup>3</sup>	
Electrolyte (Sulfuric acid) (CAS 7664-93-9)	TWA	0.2 mg/m <sup>3</sup>	Thoracic fraction.
Lead and lead compounds (inorganic) (CAS 7439-92-1)	TWA	0.05 mg/m <sup>3</sup>	

#### Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

Components	Type	Value	Form
Antimony (CAS 7440-36-0)	TWA	0.5 mg/m <sup>3</sup>	
Electrolyte (Sulfuric acid) (CAS 7664-93-9)	TWA	0.2 mg/m <sup>3</sup>	Thoracic fraction.

Canada. Ontario OELs. (Control of Exposure to Biological or Chemical Agents)

Components	Type	Value	Form
Lead and lead compounds (inorganic) (CAS 7439-92-1)	TWA	0.05 mg/m3	

Canada. Quebec OELs. (Ministry of Labor - Regulation respecting occupational health and safety)

Components	Type	Value
Antimony (CAS 7440-36-0)	TWA	0.5 mg/m3
Electrolyte (Sulfuric acid) (CAS 7664-93-9)	STEL	3 mg/m3
Lead and lead compounds (inorganic) (CAS 7439-92-1)	TWA	1 mg/m3
	TWA	0.05 mg/m3

Biological limit values

ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
Lead and lead compounds (inorganic) (CAS 7439-92-1)	200 µg/l	Lead	Blood	*

\* - For sampling details, please see the source document.

Appropriate engineering controls Provide adequate ventilation. Provide easy access to water supply and eye wash facilities.

Individual protection measures, such as personal protective equipment

Eye/face protection None under normal conditions. Leak from a damaged or opened battery: Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection None under normal conditions. Leak from a damaged or opened battery: Wear appropriate chemical resistant gloves.

Other

None under normal conditions. Leak from a damaged or opened battery: Wear suitable protective clothing. Use of an impervious apron is recommended.

Respiratory protection

None under normal conditions.

Thermal hazards

When material is heated, wear gloves to protect against thermal burns.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

## 9. Physical and chemical properties

Appearance

Physical state Solid.

Form Sulfuric acid, liquid. Lead, solid.

Colour Not available.

Odour

Odourless.

Odour threshold

Not available.

pH

< 1

Melting point/freezing point

Not available.

Initial boiling point and boiling range

112.78 - 115.56 °C (235 - 240 °F) (Sulfuric acid)

Flash point

Below room temperature (as hydrogen gas).

Evaporation rate

< 1 (n-BuAc=1)

Flammability (solid, gas)

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 4 % (Hydrogen)

Flammability limit - upper (%)	74 % (Hydrogen)
Vapour pressure	10 mm Hg
Vapour density	> 1 (Air = 1)
Relative density	1.27 - 1.33
Solubility(ies)	
Solubility (water)	100 % (Sulfuric acid)
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	Not available.
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Explosive properties	Not explosive.
Oxidising properties	Not oxidising.

## 10. Stability and reactivity

Reactivity Chemical stability	The product is non-reactive under normal conditions of use, storage and transport.
Possibility of hazardous reactions	Stable at normal conditions. Will not occur.
Conditions to avoid	Overcharging. Ignition sources.
Incompatible materials	Strong bases. Combustible organic materials. Reducing Agents. Finely divided metals. Strong oxidizers. Water.
Hazardous decomposition products	Sulfur dioxide. Sulfur trioxide. Carbon monoxide. Sulfuric acid. Hydrogen.

## 11. Toxicological information

### Information on likely routes of exposure

Inhalation	Exposure to contents of an open or damaged battery: Harmful if inhaled. Causes severe respiratory tract irritation.
Skin contact	Exposure to contents of an open or damaged battery: Causes severe skin burns.
Eye contact	Exposure to contents of an open or damaged battery: Causes serious eye damage.
Ingestion	Exposure to contents of an open or damaged battery: Harmful if swallowed.

Symptoms related to the physical, chemical and toxicological characteristics  
Exposure to contents of an open or damaged battery: Dust may irritate the eyes and the respiratory system.

### Information on toxicological effects

Acute toxicity  
Exposure to contents of an open or damaged battery: Harmful if inhaled or swallowed.

Components	Species	Test Results
------------	---------	--------------

Electrolyte (Sulfuric acid) (CAS 7664-93-9)

#### Acute

Oral

LD50	Rat	2140 mg/kg
------	-----	------------

Skin corrosion/irritation  
Exposure to contents of an open or damaged battery: Causes severe skin burns.

Serious eye damage/eye irritation  
Exposure to contents of an open or damaged battery: Causes serious eye damage.

### Respiratory or skin sensitisation

Canada - Alberta OELs: Irritant

Antimony (CAS 7440-36-0)	Irritant
--------------------------	----------

Respiratory sensitisation  
No data available.

Skin sensitisation  
No data available.

Germ cell mutagenicity  
No data available.

<b>Carcinogenicity</b>	The International Agency for Research on Cancer (IARC) has classified "strong inorganic acid mists containing sulfuric acid" as a known human carcinogen, (IARC category 1). This classification applies only to mists containing sulfuric acid and not to sulfuric acid or sulfuric acid solutions.	
<b>ACGIH Carcinogens</b>		
Electrolyte (Sulfuric acid) (CAS 7664-93-9)		A2 Suspected human carcinogen.
Lead and lead compounds (inorganic) (CAS 7439-92-1)		A3 Confirmed animal carcinogen with unknown relevance to humans.
<b>Canada - Alberta OELs: Carcinogen category</b>		
Electrolyte (Sulfuric acid) (CAS 7664-93-9)		Suspected human carcinogen.
<b>Canada - Manitoba OELs: carcinogenicity</b>		
Electrolyte (Sulfuric acid) (CAS 7664-93-9)		Suspected human carcinogen.
Lead and lead compounds (inorganic) (CAS 7439-92-1)		Confirmed animal carcinogen with unknown relevance to humans.
<b>Canada - Quebec OELs: Carcinogen category</b>		
Lead and lead compounds (inorganic) (CAS 7439-92-1)		Detected carcinogenic effect in animals.
<b>IARC Monographs. Overall Evaluation of Carcinogenicity</b>		
Electrolyte (Sulfuric acid) (CAS 7664-93-9)		1 Carcinogenic to humans.
Lead and lead compounds (inorganic) (CAS 7439-92-1)		2B Possibly carcinogenic to humans.
<b>US. National Toxicology Program (NTP) Report on Carcinogens</b>		
Electrolyte (Sulfuric acid) (CAS 7664-93-9)		Known To Be Human Carcinogen.
Lead and lead compounds (inorganic) (CAS 7439-92-1)		Reasonably Anticipated to be a Human Carcinogen.
<b>Reproductive toxicity</b>	None under normal conditions. Exposure to contents of an open or damaged battery: May damage fertility or the unborn child.	
<b>Specific target organ toxicity - single exposure</b>	None under normal conditions. Exposure to contents of an open or damaged battery: Causes damage to organs (respiratory system).	
<b>Specific target organ toxicity - repeated exposure</b>	None under normal conditions. Exposure to contents of an open or damaged battery: Causes damage to organs through prolonged or repeated exposure: Respiratory system.	
<b>Aspiration hazard</b>	Due to the physical form of the product it is not an aspiration hazard.	
<b>Chronic effects</b>	Exposure to contents of an open or damaged battery: Heavy lead exposure may result in central nervous system damage, encephalopathy and damage to the blood-forming (hematopoietic) tissues. Chronic inhalation of sulfuric acid mist may increase the risk of lung cancer.	

## 12. Ecological information

<b>Ecotoxicity</b>	The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment. Exposure to contents of an open or damaged battery: Very toxic to aquatic life with long lasting effects.	
	<b>Components</b>	<b>Species</b>
	<hr/>	
	Lead and lead compounds (inorganic) (CAS 7439-92-1)	
	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss)
		1.17 mg/l, 96 Hours
<b>Persistence and degradability</b>	The degradation half-life of the product is not known. Lead and its compounds are highly persistent in water.	
<b>Bioaccumulative potential</b>	Bioaccumulation of lead occurs in aquatic and terrestrial animals and plants, but very little bioaccumulation occurs through the food chain.	
<b>Mobility in soil</b>	If the product enters soil, one or more constituents will or may be mobile and may contaminate groundwater.	
<b>Mobility in general</b>	The product is insoluble in water and will spread on the water surface.	
<b>Other adverse effects</b>	None known.	

## 13. Disposal considerations

<b>Disposal instructions</b>	Recycle the batteries, as the primary disposal method. Avoid discharge into water courses or onto the ground. Dispose of this material and its container to hazardous or special waste collection point. Neutralize electrolyte/sulfuric acid.
<b>Local disposal regulations</b>	Empty containers should be taken to an approved waste handling site for recycling or disposal.
<b>Hazardous waste code</b>	Spent lead-acid batteries are not regulated as hazardous waste when recycled. Depending upon circumstances, the following waste codes may apply: Spilled electrolyte/Sulfuric acid. D002: Corrosive waste

Waste from residues / unused products Avoid discharge into water courses or onto the ground.  
Contaminated packaging Since emptied containers retain product residue, follow label warnings even after container is emptied.

## 14. Transport information

### TDG

UN number UN2794  
UN proper shipping name BATTERIES, WET, FILLED WITH ACID, electric storage  
Transport hazard class(es)  
Class 8  
Subsidiary risk -  
Packing group III  
Environmental hazards No  
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.

### IATA

UN number UN2794  
UN proper shipping name Batteries, wet, filled with acid electric storage  
Transport hazard class(es)  
Class 8  
Subsidiary risk -  
Packing group -  
Environmental hazards No  
ERG Code 8L  
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.  
Packing Instruction: 870

### IMDG

UN number UN2794  
UN proper shipping name BATTERIES, WET, FILLED WITH ACID electric storage  
Transport hazard class(es)  
Class 8  
Subsidiary risk -  
Packing group -  
Environmental hazards  
Marine pollutant No  
EmS F-A, S-B  
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.  
Packing Instruction: P801

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not applicable.

## 15. Regulatory information

Canadian regulations This product has been classified in accordance with the hazard criteria of the HPR and the SDS contains all the information required by the HPR.

### Controlled Drugs and Substances Act

Not regulated.

### Export Control List (CEPA 1999, Schedule 3)

Not listed.

### Greenhouse Gases

Not listed.

### Ontario. Toxic Substances. Toxic Reduction Act, 2009. Regulation 455/09 (July 1, 2011)

Antimony (CAS 7440-36-0)

Electrolyte (Sulfuric acid) (CAS 7664-93-9)

### Precursor Control Regulations

Electrolyte (Sulfuric acid) (CAS 7664-93-9) Class B

### International regulations

#### Stockholm Convention

Not applicable.

Rotterdam Convention

Not applicable.

Kyoto Protocol

Not applicable.

Montreal Protocol

Not applicable.

Basel Convention

Not applicable.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
Taiwan	Taiwan Chemical Substance Inventory (TCSI)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

\*A "Yes" indicates this product complies with the inventory requirements administered by the governing country(s).

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information

Issue date	19-September-2017
Revision date	19-March-2018
Version No.	03
List of abbreviations	LD50: Lethal Dose 50%. LC50: Lethal Concentration 50%.
References	IARC Monographs. Overall Evaluation of Carcinogenicity Registry of Toxic Effects of Chemical Substances (RTECS)
Disclaimer	The information in this SDS was obtained from sources which we believe are reliable, but no warranty or representation as to its accuracy or completeness is hereby given. Users should consider the information herein only as a supplement to other information gathered by them and must make independent determinations of suitability and completeness of information from all sources to assure proper use and disposal, the safety and health of employees and customers and the protection of the environment.