

## PARTIAL DEMOLITION PLAN - ALONG GRID LINE '1'

## **DEMOLITION KEYNOTES**


- 1 REMOVE DOOR, FRAME, AND HARDWARE. SALVAGE FOR REINSTALLATION.
- 2 REMOVE EXTERIOR CLADDING, INSULATION, AND INTERIOR LINER PANEL.
- 3 REMOVE STRUCTURAL GIRTS.
- 4 REMOVE DOOR JAMB CHANNEL.
- (5) REMOVE PORTION OF STRUCTURAL GIRT AS SHOWN. 6 OPENING TO BE MADE AS CLOSE AS POSSIBLE TO PARTITION ON OPPOSITE SIDE OF WALL.
- 7 REMOVE STEEL ANGLE AND 38x140 FULL WIDTH. TEMPORARILY SUPPORT CLADDING UNTIL NEW SLAB IS IN PLACE
- 8 REMOVE CLADDING AND THERMAL BLOCKING WHERE SHOWN
- 9 RELOCATED FRAMING TO NEW DUCT LOCATION. SEE DWG. M1507-1.


## **GENERAL DEMOLITION NOTES**


- 1. REMOVE ITEMS C/W ALL FASTENERS.
- 3. COORDINATE REMOVALS WITH ITEMS REMAINING AND NEW WORK WHERE APPLICABLE.


2. COORDINATE REMOVALS WITH OTHER TRADES.


- 4. REMOVE ITEMS IN A MANNER THAT WILL LEAVE REMAINING SURFACES ACCEPTABLE TO RECEIVE NEW WORK.
- REMOVE COMPLETE ASSEMBLIES AT ALL AREAS TO BE DEMOLISHED (EXCEPT WHERE NOTED).
- 6. CONTRACTOR TO REMOVE AND DISPOSE OF ALL ITEMS WITHIN DEMOLITION AREA.
- 7. CONTRACTOR IS RESPONSIBLE FOR TEMPORARY REMOVAL AND SUPPORT OF ANY ITEMS FASTENED TO WALL AND ROOF, AND REATTACHMENT OF THE SAME, FOLLOWING INSTALLATION OF NEW BUILDING WALL AND ROOF ENVELOPE.
- ALL DIMENSIONS TO BE CONFIRMED ON SITE BY CONTRACTOR. REPORT ANY DISCREPANCIES TO ENGINEER.

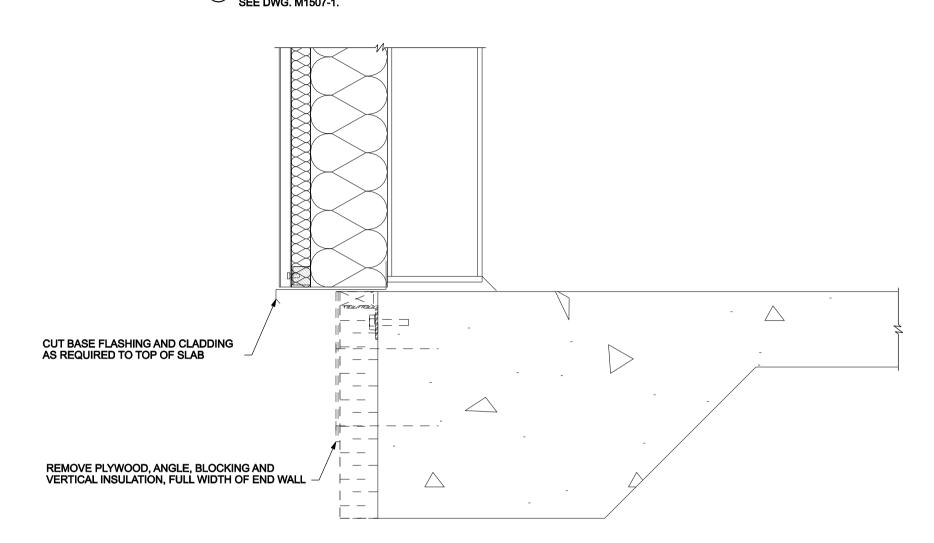

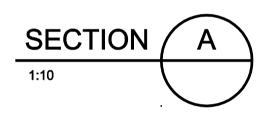

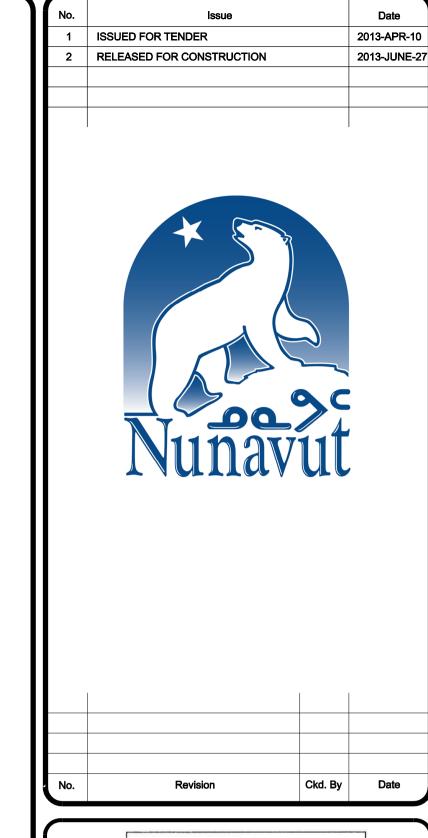

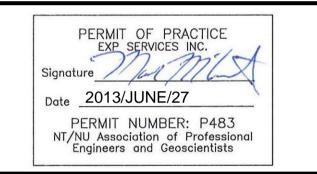

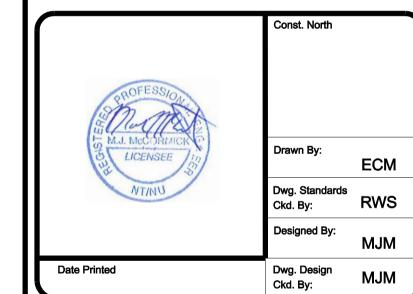

exp Services Inc. t: +1.613.688.1899 | f: +1.613.225.7330 2650 Queensview Drive, Unit 100 Ottawa, ON K2B 8H6



· INDUSTRIAL · INFRASTRUCTURE · SUSTAINABILITY ·


WASTEWATER **UPGRADE** 

**DEMOLITION PARTIAL PLAN WEST WALL ELEVATION ALONG GRID LINE '1'** 

OTT-00204430-A0 A600-1

**AS SHOWN** 

RELEASED FOR CONSTRUCTION

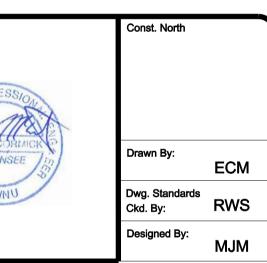

• BUILDINGS • EARTH & ENVIRONMENT • ENERGY •

TREATMENT PLANT PANGNIRTUNG, NU

exp Services Inc. © 2013