



Madison Co.
 27 Business Park Dr.
 Branford, CT 06405 US
 Phone: 203-488-4477
 Fax: 203-481-5036
 Toll-free: 800-466-5383
 Email: info@madisonco.com
 Website: <http://www.madisonco.com>

Item # M8700, Plastic Side-Mounted Switches

The M8700 side-mounted liquid level switch has a polypropylene stem and a polypropylene float. Polypropylene is typically suitable for use with acidic liquids such as those found in electroplating and metal cleaning. It is also a great option for lower temperature food operations (up to 105 degrees C) since Madison only incorporates polypropylene that is FDA approved for food contact. This material is a good choice for commercial appliances and equipment as well. Same day shipping available under our Switch-In-Time program.

Note: SPST = Single Pole, Single Throw

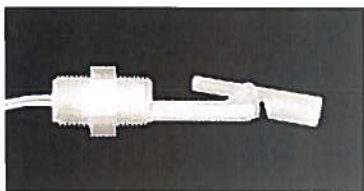

SPECIFICATIONS

Type	Side-Mounted Switch
Stem Material	Polypropylene
Float Material	Polypropylene
Max. Temperature	105 °C
Nominal Current Rating(s)	30 VA SPST Switch
Float SG	0.60
Max. Pressure	100 psig
Dwg. No.	32
Lead Wires	22 ga. MTW 24"
Approvals	CE CSA NSF International UL
Maximum Order Quantity for Switch In Time Same Day Shipment	100