

ABANDONMENT AND RESTORATION PLAN
SKYBRIDGE DEVELOPMENT
BLUE CARIBOU PROJECT

BY GORD YULE, P.GEO.
AUGUST 1, 2008

LIST OF FIGURES (APPENDED)

FIGURE 1.....	BLUE CARIBOU PROPERTY GRID LOCATION
FIGURE 2.....	BLUE CARIBOU PROPERTY AREA I – BLUE CARIBOU GRID
FIGURE 3.....	BLUE CARIBOU PROPERTY AREA II – DIAMOND BAY GRID
FIGURE 4.....	BLUE CARIBOU PROPERTY AREA III – ANOMALY 1 GRID
FIGURE 5.....	BLUE CARIBOU PROPERTY AREA IV– BEECHEY GRID

1.0 PREAMBLE

This Abandonment and Restoration (A&R) Plan has been prepared to indicate to the Board the direction and procedures that Skybridge Development Corporation intends to implement to fulfill obligations with regard to abandonment and restoration at the Blue Caribou project. The objective of the plan is to comply with current government regulations to ensure once abandonment and restoration has been completed;

- that there is no danger to public health or safety;
- that the requirement for long term maintenance and monitoring associated with all of the mineral exploration camp facilities are minimized;
- that contaminant loadings to the environment from the closed facilities which may be related to continued leaching of contaminants from tailings/waste rock areas (ore stockpiles), development of acid rock drainage and abandoned areas of chemical/materials storage are minimized or prevented;
- that the cumulative degradation of abandoned areas affected by the mining activities are prevented and to enhance the natural recovery, where appropriate, of disturbed lands, and;
- that the affected areas will be returned to a condition that is compatible with the surrounding, original undisturbed area with respect to its future potential/productivity uses.

The Spill Contingency Plan is effective from August, 1st, 2008 to December 1st, 2012 and applies to the Blue Caribou Project in the Kitikmeot District of Nunavut, north latitude 65° 15' and west longitude 106° 36'. Land Use permits with the Kitikmeot Inuit Association (KIA) and Nunavut Water Board (NWB) are currently on application.

The locations of the Blue Caribou drilling area is shown on the accompanying topographic map at 1:50,000 (Figures 1-5 appended).

The following formal distribution has been made of this plan: NWB, A.Drost, President/CEO of Skybridge and to KIA on approval.

2.0 INTRODUCTION

The Blue Caribou exploration project consists of a proposed seasonal exploration encampment supporting one diamond drill rig that will test proposed exploration targets. The exploration camp will be located on Claim CL-11/K09345 (Figure 1 appended) subject to certain terms and conditions imposed by a Land Use permit KTL308C001 issued by Kitikmeot Inuit Corporation (amendment to include proposed camp has been filed with the KIA, Land Office).

3.0 SCHEDULE

The seasonal shutdown of the exploration site should take 5-7 days to complete and will take place after the drilling activities have ceased. The plan will be applied by Skybridge personnel under the supervision of the field supervisor.

4.0 SITE INFRASTRUCTURE

A new camp is proposed to be erected. Possibly 5 -14'x16' sleep tents, 1-14'x16' office tent, 1-14'x16' "dry" tent, and one 14'x32' kitchen tent will be set up on the Sage esker. As well, an emergency shelter, a tent with emergency heat, food supplies and sleeping bags will be erected close to the drill sites as a safety haven in the event poor weather prevents access by helicopter when a drill crew is on site. All transportation will be from Sage Camp to work site using aircraft from Great Slave Helicopters. For this reason, abandonment and restoration and general cleanup is expected to be a relatively simple procedure.

Following is a list of the major components of the camp and ancillary facilities at the Blue Caribou drill site:

Camp Equipment/Facilities

Diamond drill and rods

Salt/drilling additives

Diesel Fuel Cache

Jet B Fuel Cache
5 -14'x16' sleep tents
1-14'x16' office tent,
1-14'x16' "dry" tent,
1-14'x32'kitchen tent

5.0 FINAL ABANDONMENT AND RESTORATION PLANS

5.1. BUILDINGS AND CONTENTS

All drill equipment will be remobilized to another site. Reusable equipment including tents, tent metal frames, foam rubber mats and other portable components will be packaged and flown out from project site to Yellowknife.

5.2. WATER SYSTEM

Drill supply pump, tanks and hoses will be drained, dismantled, packaged and flown out to Yellowknife or remobilized to another site.

5.3. ELECTRICAL SYSTEM

Portable diesel powered electric generator will be returned to Yellowknife.

5.4. FUEL AND CHEMICAL STORAGE FACILITIES

Fuel inventory will be managed so as to retain only a minimum quantity of fuel on site to permit closure activities to take place. On full abandonment of the site, remaining fuel will be removed from site. The fuel containers such as drums and day tanks will be scrapped and removed from site or removed from site and sold. Propane cylinders will be flown out to source.

The fuel secondary containment system will be cleaned and dismantled, and either burned or transported to Yellowknife for recycling or disposal.

Chemicals on site will consist of drill additives, oil, grease. All drill additives will be stored in a tent with floor. Upon termination of the drill program, any unused drilling

additive, oil or grease will be returned to the drilling company warehouse. Half empty containers will be taken off site to be properly disposed in an approved discharge. Empty containers will be disposed with regular garbage.

5.5. WASTE FACILITY AND INCINERATOR

Once the camp is entirely dismantled, all remaining combustible waste stored at this site will be removed to Yellowknife or burned under existing permits.

5.6. GREYWATER SUMP

All sumps will be backfilled.

5.7. BLACKWATER SUMP

Washroom needs will be addressed with the use of a portable compost toilet set up in the heated emergency tent. Unit will be checked and cleaned regularly as needed. Human waste to be properly packed and removed to proposed camp for disposal according to existing permits. Any sumps will be backfilled.

Outhouses will be dismantled and combustible material burned. Wastes will be buried.

5.8. HELICOPTER PAD

The helicopter pad will consist of a wooden platform built of a 2x4 base with plywood cover. Soil around the helicopter pad will be inspected for contamination. The wood will be burned as per other wooden structures on site.

5.9. CAMP SITE

Tent sites will be selected on sandy esker areas for minimal impact on the natural surroundings. Drill core to be racked and eventually cross piled near the proposed camp on a regular basis.

5.10. DRILLING AREA RESTORATION

The drill will be dismantled into its main components as per the drilling contractor procedure, packaged and secured along with its ancillary equipment and rods. The drill will be flown out to another project or to a storage site designated by the drilling contractor. All drill sites will be inspected for soil contamination. Any remaining waste will be taken to camp to be burned if possible or to be flown out to an approved municipal discharge. As much as possible, drill sites will be restored immediately after the drill has been moved to the next site and sumps have drained enough to be leveled. Drill casings may be left in the holes depending on the quality of mineralization intersected but will be capped to prevent water discharge.

5.11. DOCUMENTATION AND INSPECTION

Photos of drill sites prior to drilling will be taken. Monitoring will be carried out during occupancy and photo records taken. Once the site is restored, it will again be documented with photos. Soil contaminated by hydrocarbons and unnoticed before abandonment will be treated as per the spill contingency plan. A final site inspection visit with community representatives, Land Use Inspector and in collaboration with NWB staff could be organized by the permit holder.

6.0 SEASONAL SHUTDOWN AND RESTORATION PLAN

6.1. BUILDINGS AND CONTENT

Pending the results of the Phase 1 exploration diamond drilling program consisting of up to 3000m of drilling in 30-40 holes, all equipment will either be removed from the site and stored at Yellowknife or secured at the Sage Esker camp for the winter.

6.2. WATER SYSTEM

Drill pump, tanks and hoses will be drained and dismantled. Rented equipment will be flown out and returned to the owner. Hoses will be rolled and stored in the drill shack.

6.3. ELECTRICAL SYSTEM

Temporary generators will be removed from the site and returned to Yellowknife.

6.4. FUEL AND CHEMICAL STORAGE FACILITIES

An inventory of remaining fuel will be made and full drums will be inspected and secured for the winter. Empty drums will be flown out to source on a regular basis. Empty propane cylinders will be flown out to source. Chemical stored on site will consist of drill additives, oil, grease. All drill additives will be stored in or by the drill foreman supply tent and secured for the winter. Empty containers will be disposed with regular garbage. The soil of the areas will be inspected for contamination

6.5. WASTE FACILITY AND INCINERATOR

All combustibles flown to Sage Lake for incineration. Camp refuse will either be buried or flown to Yellowknife for disposal.

6.6. GREYWATER SUMP

Any sumps will be backfilled to bury any sediments.

6.7. BLACKWATER SUMP

See 5.7

6.8. HELICOPTER PAD

The helicopter pad will consist of a wooden platform built of a 2x4 base with plywood cover. Soil around the helicopter pad will be inspected for contamination.

6.9. CAMP SITE

Tent sites will be selected on sandy areas for minimal impact on the natural surroundings. Drill core to be removed from site to Sage Lake Camp for storage on a regular basis.


6.10. DRILLING AREA RESTORATION

The drill will be dismantled into its main components as per the drilling contractor procedure, packaged and secured along with its ancillary equipment and rods. The drill will be flown out to another project or to a storage site designated by the drilling contractor. All drill sites will be inspected for soil contamination. Any remaining waste will be taken to camp to be burned if possible or to be flown out to an approved municipal discharge. As much as possible, drill sites will be restored immediately after

the drill has been moved to the next site and sumps have drained enough to be leveled. Drill casings may be left in the holes depending on the quality of mineralization intersected but will be capped to prevent water discharge.


6.11. DOCUMENTATION

Equipment and buildings left on site will be inventoried. Photos of camp and drill sites prior to drilling will be taken. Monitoring will be done during occupancy and photos taken. Once the site secured for the winter, it will again be documented with photos.

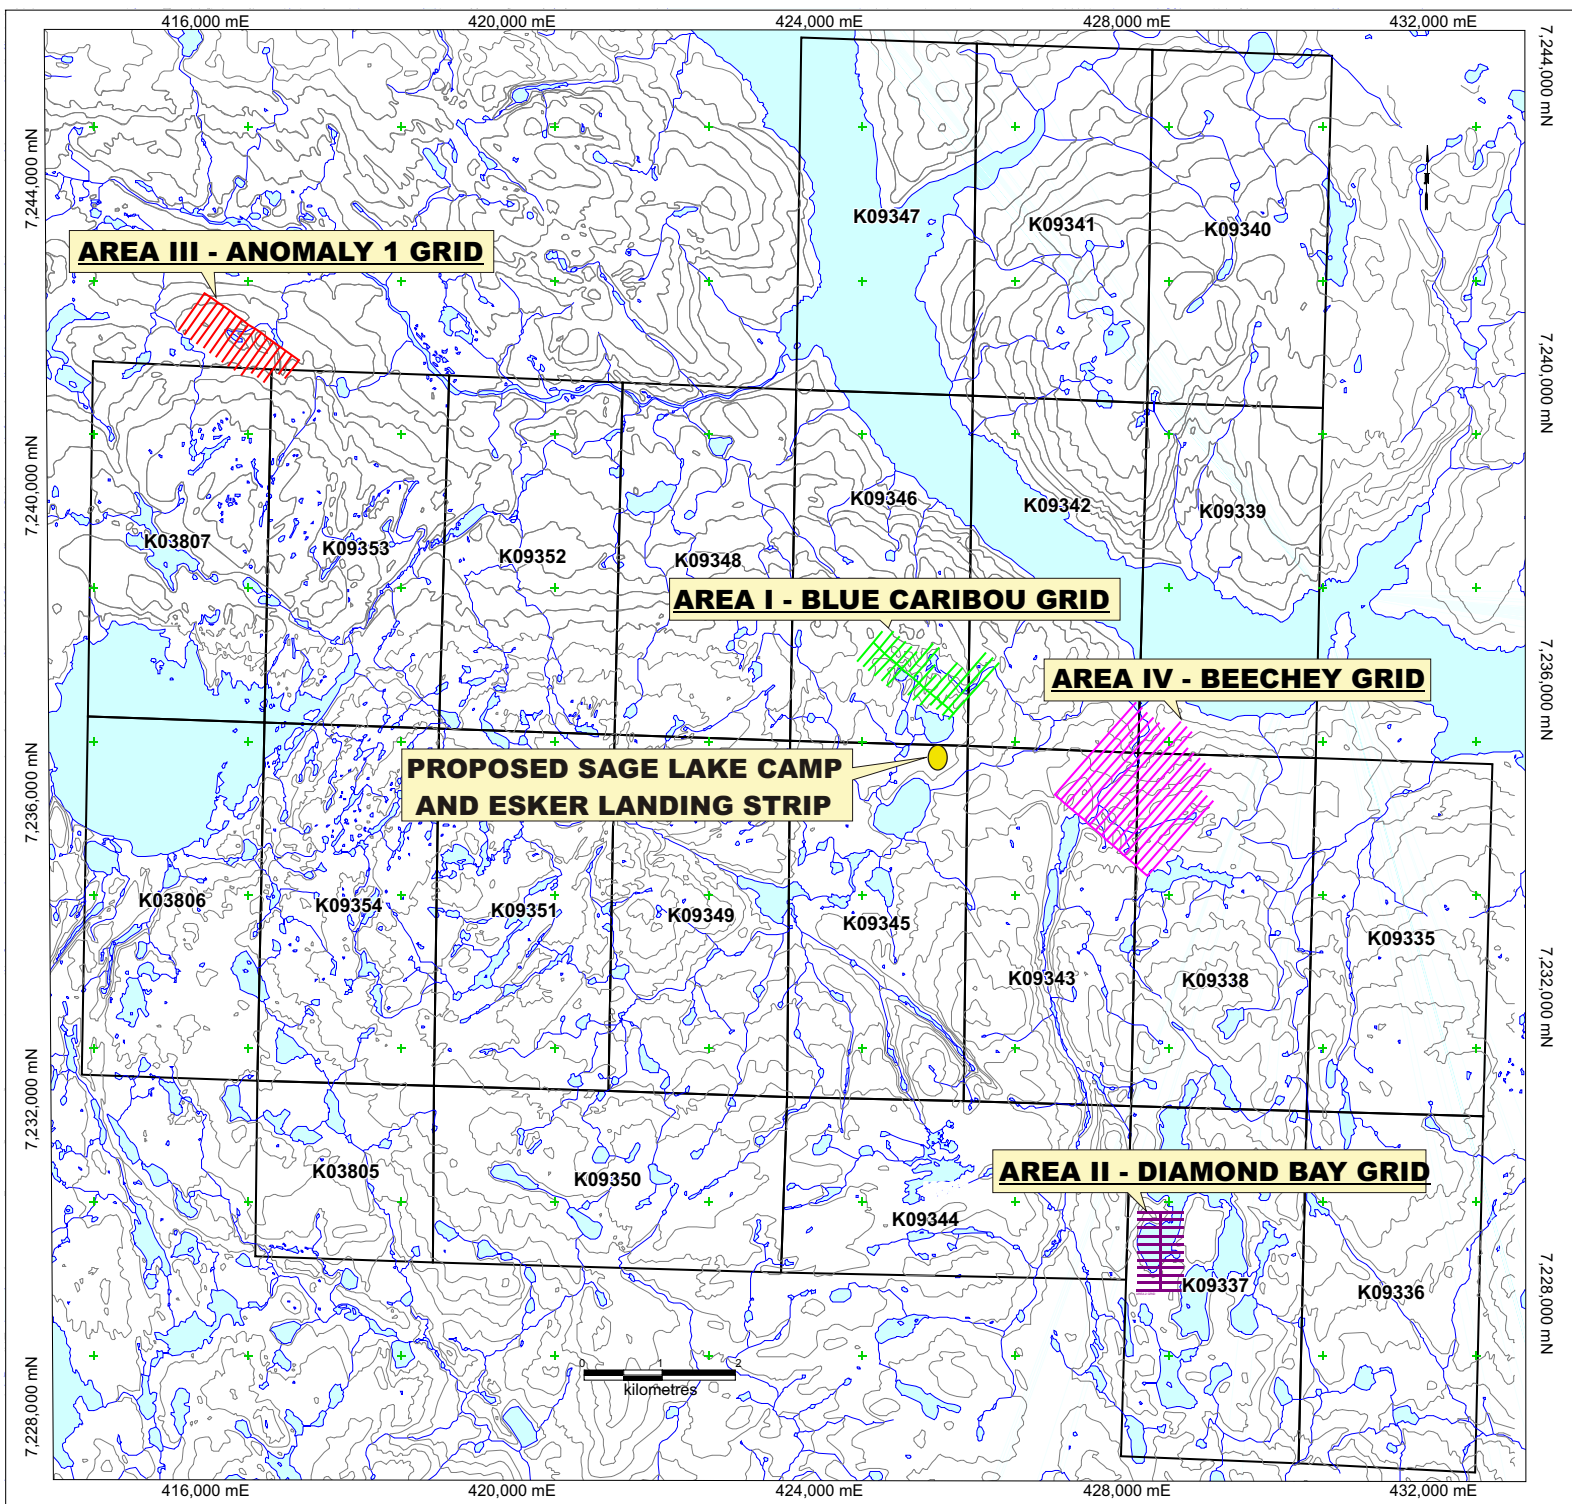


Skybridge
DEVELOPMENT CORP
ALYRIS GOLD CORP

BLUE CARIBOU PROPERTY GRID LOCATION FIGURE 1

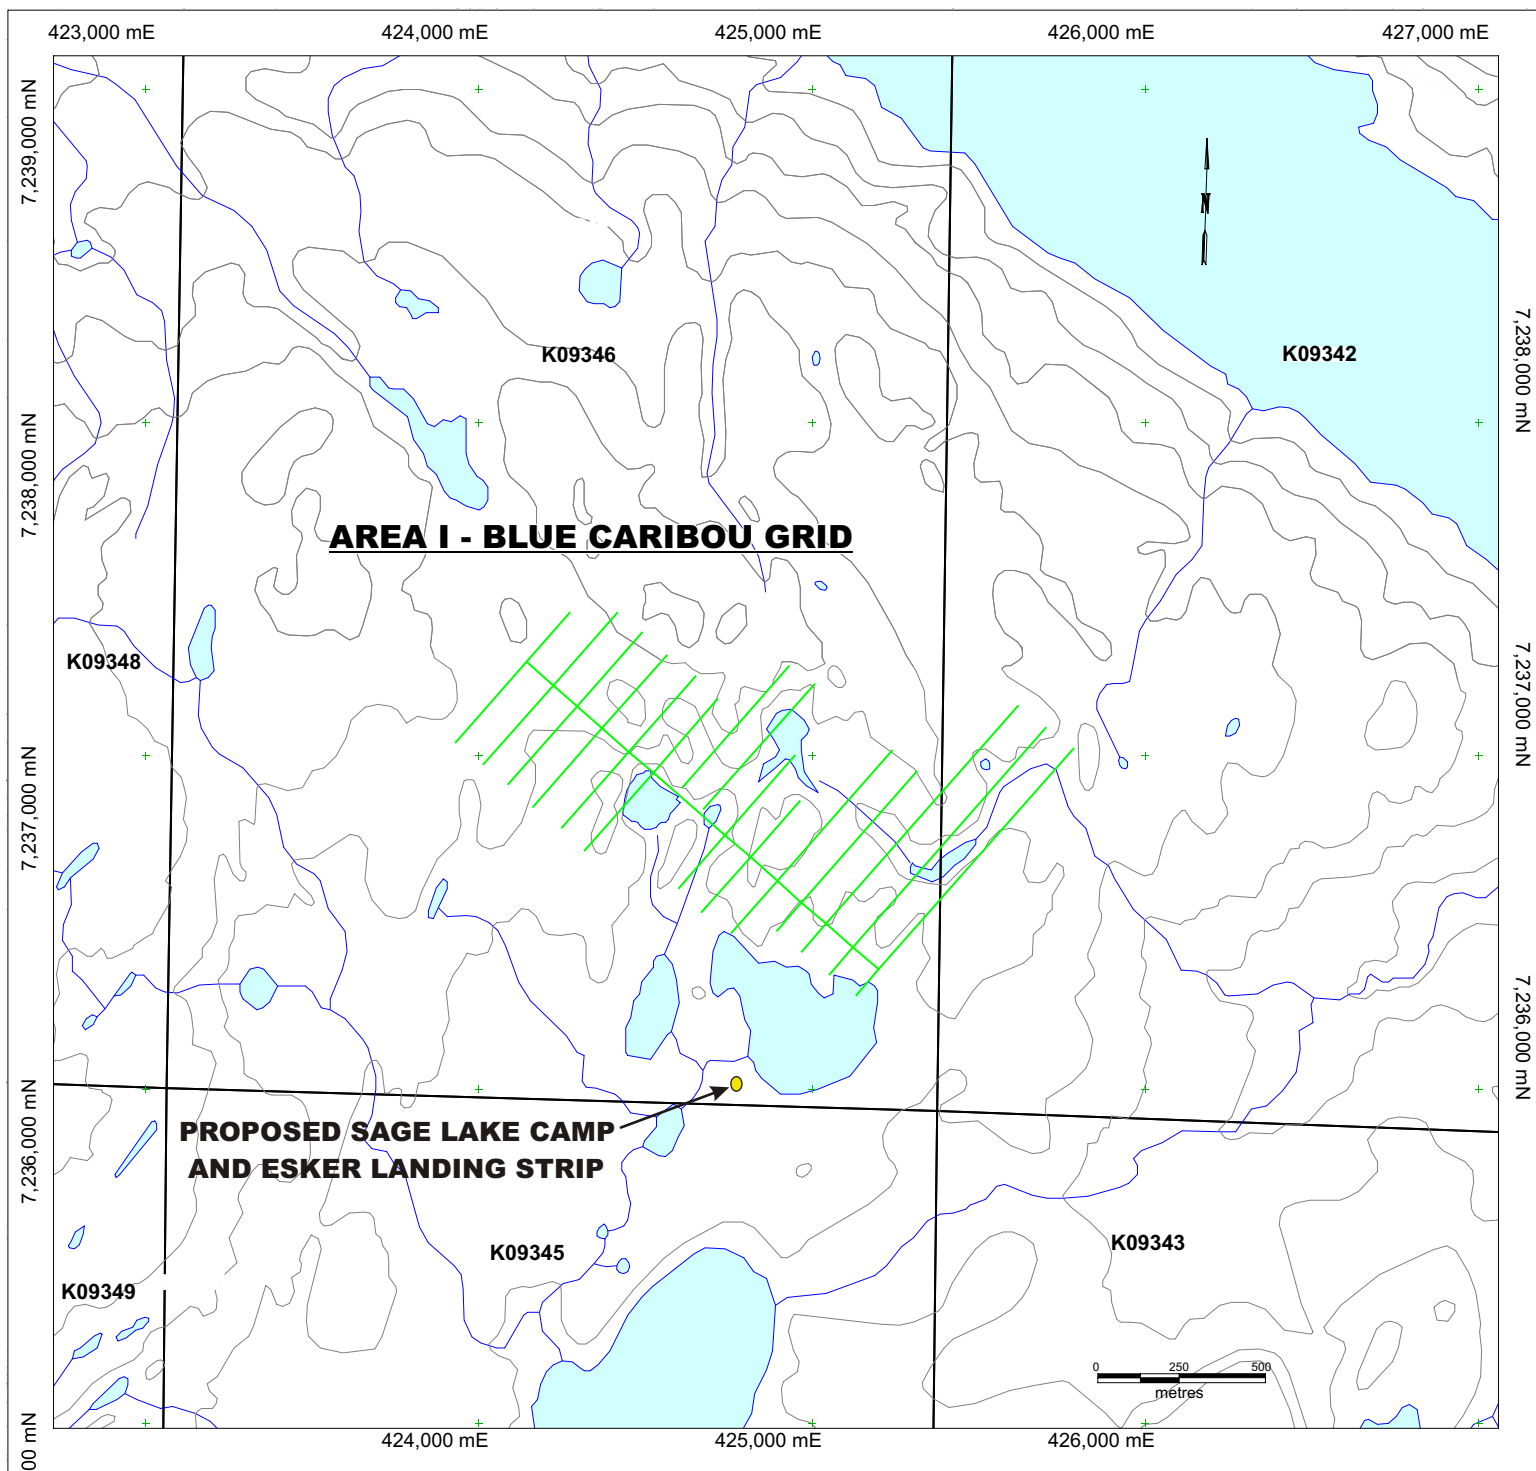


Skybridge
DEVELOPMENT CORP
ALYRIS GOLD CORP

BLUE CARIBOU PROPERTY AREA I - BLUE CARIBOU GRID FIGURE 2

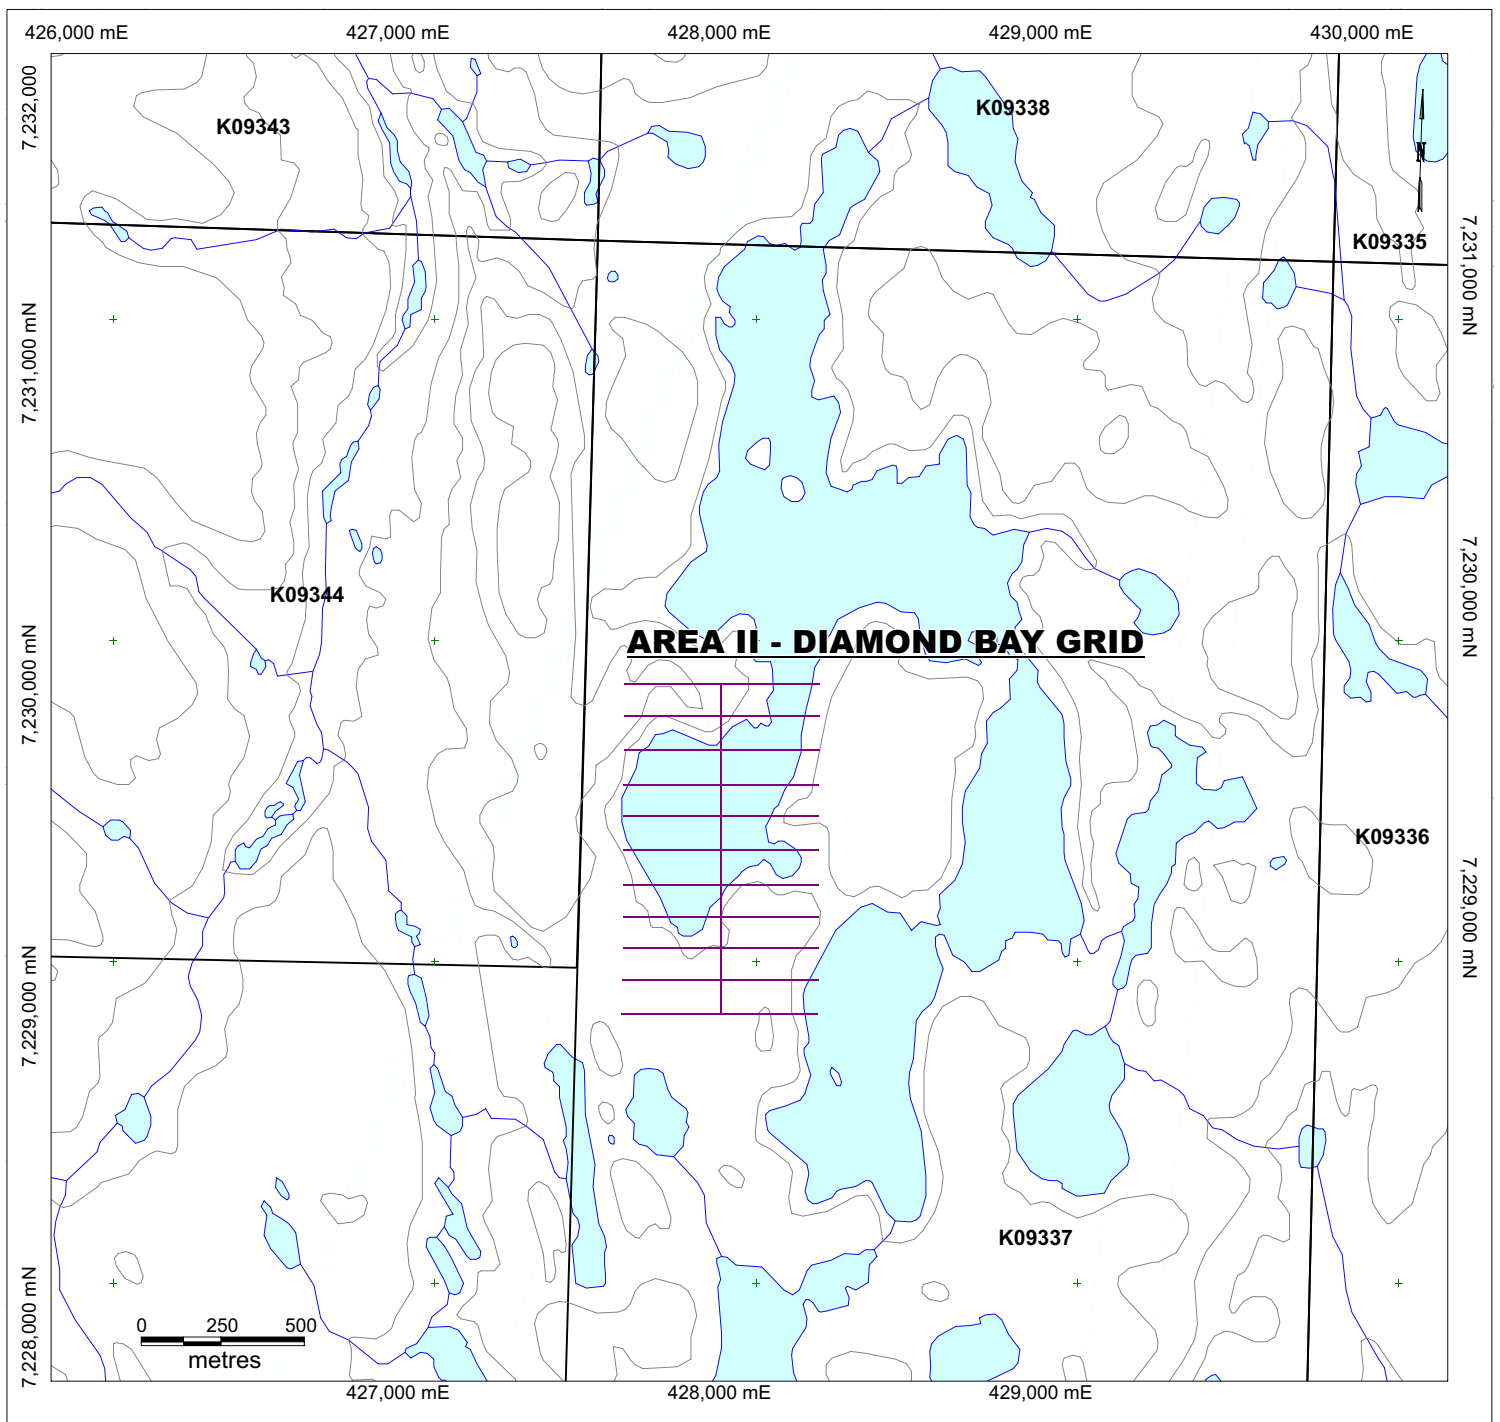


Skybridge
DEVELOPMENT CORP
ALYRIS GOLD CORP

BLUE CARIBOU PROPERTY AREA II - DIAMOND BAY GRID FIGURE 3

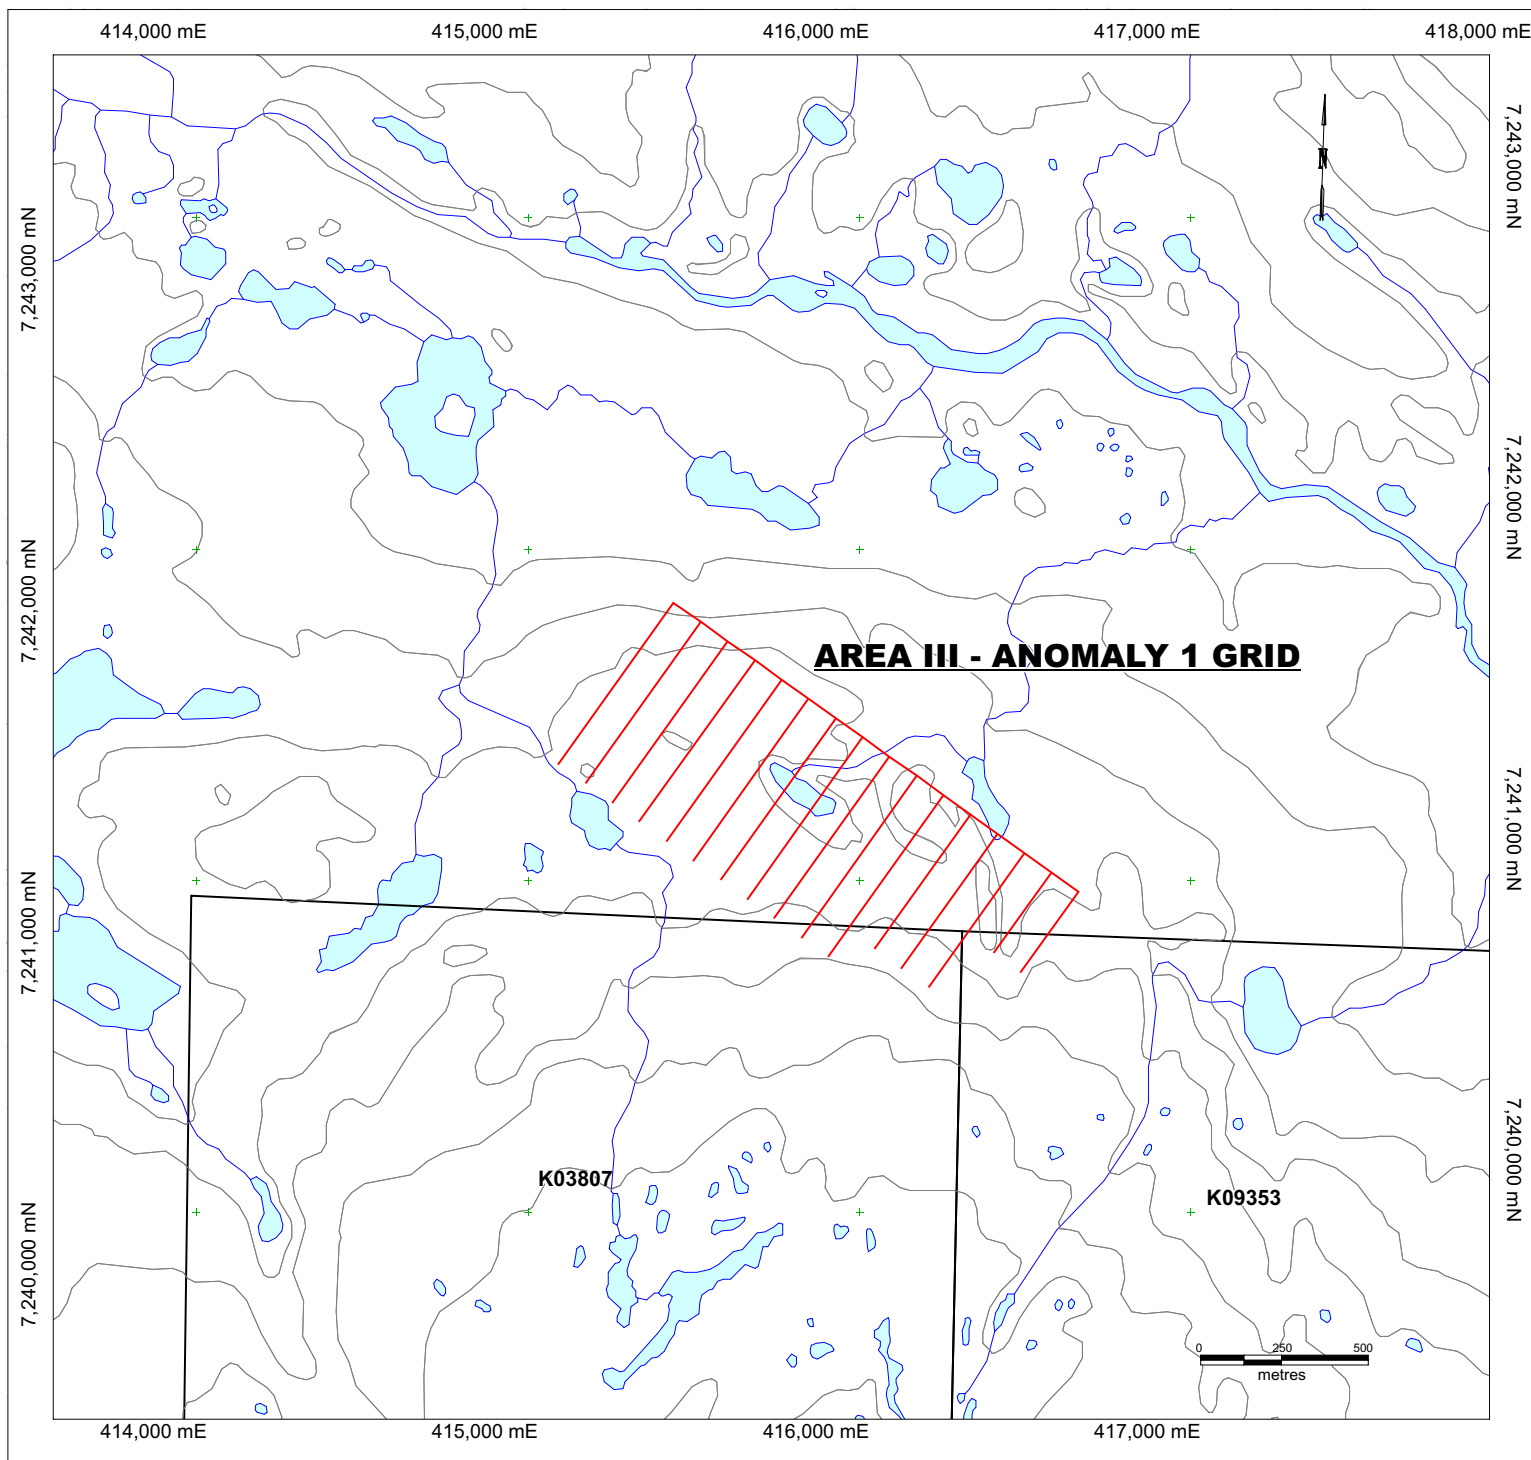

Skybridge
DEVELOPMENT CORP
ALYRIS GOLD CORP

BLUE CARIBOU PROPERTY AREA III - ANOMALY 1 GRID FIGURE 4

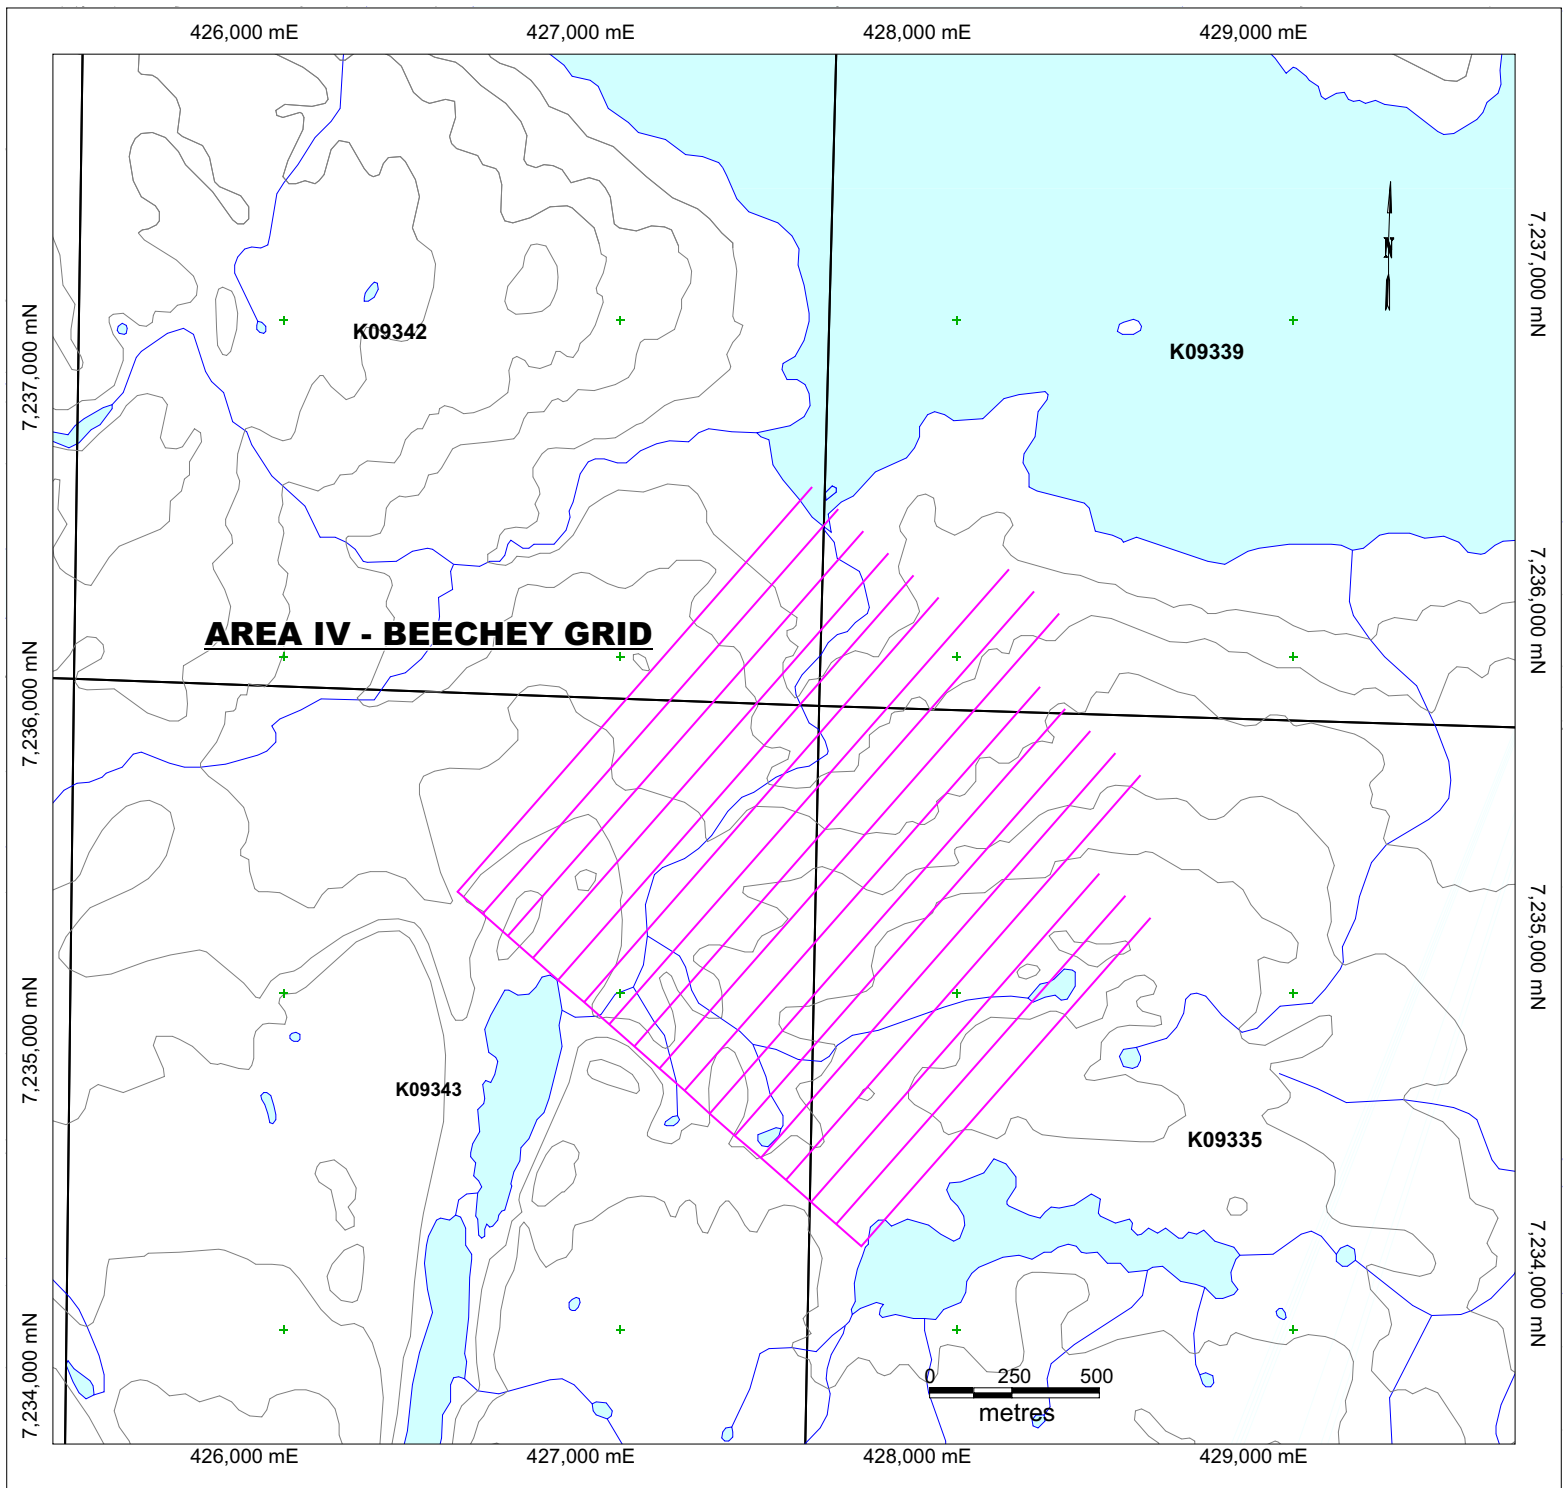

Skybridge
DEVELOPMENT CORP
ALYRIS GOLD CORP

BLUE CARIBOU PROPERTY AREA IV - BEECHEY GRID FIGURE 5