



## **ATTACHMENT 53**

### **North 40 Landfill and Waste Transfer Station Closure and Decommissioning Plan**



**DILLON**  
CONSULTING

CITY OF IQALUIT

# Closure and Decommissioning Plan

Landfill and Waste Transfer Station

# Table of Contents

1.0	Introduction	1
2.0	Site Description	2
2.1	General .....	2
2.2	Landfill .....	2
2.3	Waste Transfer Station .....	5
2.4	Groundwater and Surface Water Monitoring.....	5
3.0	Environmental Protection Plan	7
4.0	Closure and Decommissioning	8
4.1	Regulator Notification .....	8
4.2	Public Education and Notification .....	8
4.3	Signage and Access Restrictions.....	9
4.4	Structure Disassembly and Storage.....	9
4.5	Equipment Decommissioning and Salvage.....	9
4.6	Site Grading and Surface Restoration.....	10
4.7	Buffer Zone and Litter/Debris Management .....	10
4.8	Surface Water Management.....	11
4.9	Vector and Wildlife Management .....	11
4.10	Landfill Gas Management .....	11
4.11	Leachate Management .....	12
4.12	Landfill Cap.....	12
4.13	Landfill Settlement .....	13
4.14	Waste Transfer Station Closure.....	16
4.15	Closure Activity Schedule.....	16
5.0	Post-Closure Plan	18
5.1	Post-Closure Property Use.....	18
5.2	Post-Closure Site Inspection and Maintenance .....	18
5.3	Contingency Plan for Emergency Response.....	19
5.4	Closure Cost Estimate .....	19
5.5	Post-Closure Environmental Effects Monitoring and Site Inspection .....	20

**Figures**

---

Figure 2-1: Site Locations ..... 3

Figure 2-2: Landfill Site Plan ..... 4

Figure 2-3: Waste Transfer Station Site Plan ..... 6

Figure 4-1: Cap Contours ..... 14

Figure 4-2: Landfill Cap Schematic ..... 15

**Tables**

---

Table 5-1: Preliminary Cost Estimate for Common Final Closure Items ..... 19

Table 5-2: Soil Cap Preliminary Cost Estimate ..... 20

Table 5-3: Post Closure Activities Budget ..... 20

## 1.0 Introduction

Dillon Consulting Limited (Dillon) has prepared this Closure and Decommissioning Plan (Plan) for the City of Iqaluit's (City's) Landfill and Waste Transfer Station (WTS). This Plan has been prepared using the following key guidance documents:

- Solid Waste Management for Northern and Remote Communities, Planning and Technical Guidance Document, Environment and Climate Change Canada, March 2017;
- Consolidation of General Sanitation Regulations, Public Health Act, Revised Regulations of the Northwest Territories. 1990, c.P-16, 1990;
- Nunavut Solid Waste Management Plan, Government of Nunavut, October 2014; and
- Nunavut Water Regulations, SOR/2013-69, April 2013.

## 2.0 Site Description

### 2.1 General

Iqaluit is the capital of Nunavut and is its largest community. Iqaluit is located at the south end of Baffin Island, on Frobisher Bay at 64° 44' N latitude and 68° 31' E longitude. Access to Iqaluit is limited as the only year-round access is provided by commercial aircraft, while during the summer months, access is also provided by sea-lift.

The locations of the two sites addressed by the Plan are presented in Figure 2-1.


### 2.2 Landfill

Iqaluit's Landfill site (Landfill) is located approximately 6 km northwest of the City. The overall Landfill property is approximately 64 ha, with the Landfill occupying 22 ha of the property. The Landfill footprint was designed to allow for a minimum of a 30 m buffer from the property line. The current Landfill layout is presented in Figure 2-2.

The Landfill is scheduled to commence operations in 2024 and is designed to be in operation for 75 years, with a planned closure in 2099. Before delivery to the Landfill, all waste materials are directed to the WTS for weighing and initial inspection. Except for periodic mixed loads of construction and demolition debris materials, all waste materials at the WTS will be processed into wire and plastic-wrapped bales, prior to transfer and placement at the Landfill.

Leachate generated within the cells will be collected in the base granular layer of the landfill liner system and pumped to on-site holding ponds to allow for the identification and future construction of an appropriate treatment system for the effluent. The site is unserviced, requiring the use of portable generators for any electrical requirements. The Landfill will also have an attendant trailer, complete with a wood stove and composting toilet.

Stormwater at the site is intercepted and directed around the Landfill. Any stormwater generated on site is collected in on-site ditches and directed off-site to the access road ditch network. Runoff concentrates into channel flow to the east of Sylvia Grinnell Territorial Park, at which point it flows southerly toward the Iqaluit Airport, ultimately discharging to the Koojesse Inlet at Frobisher Bay.

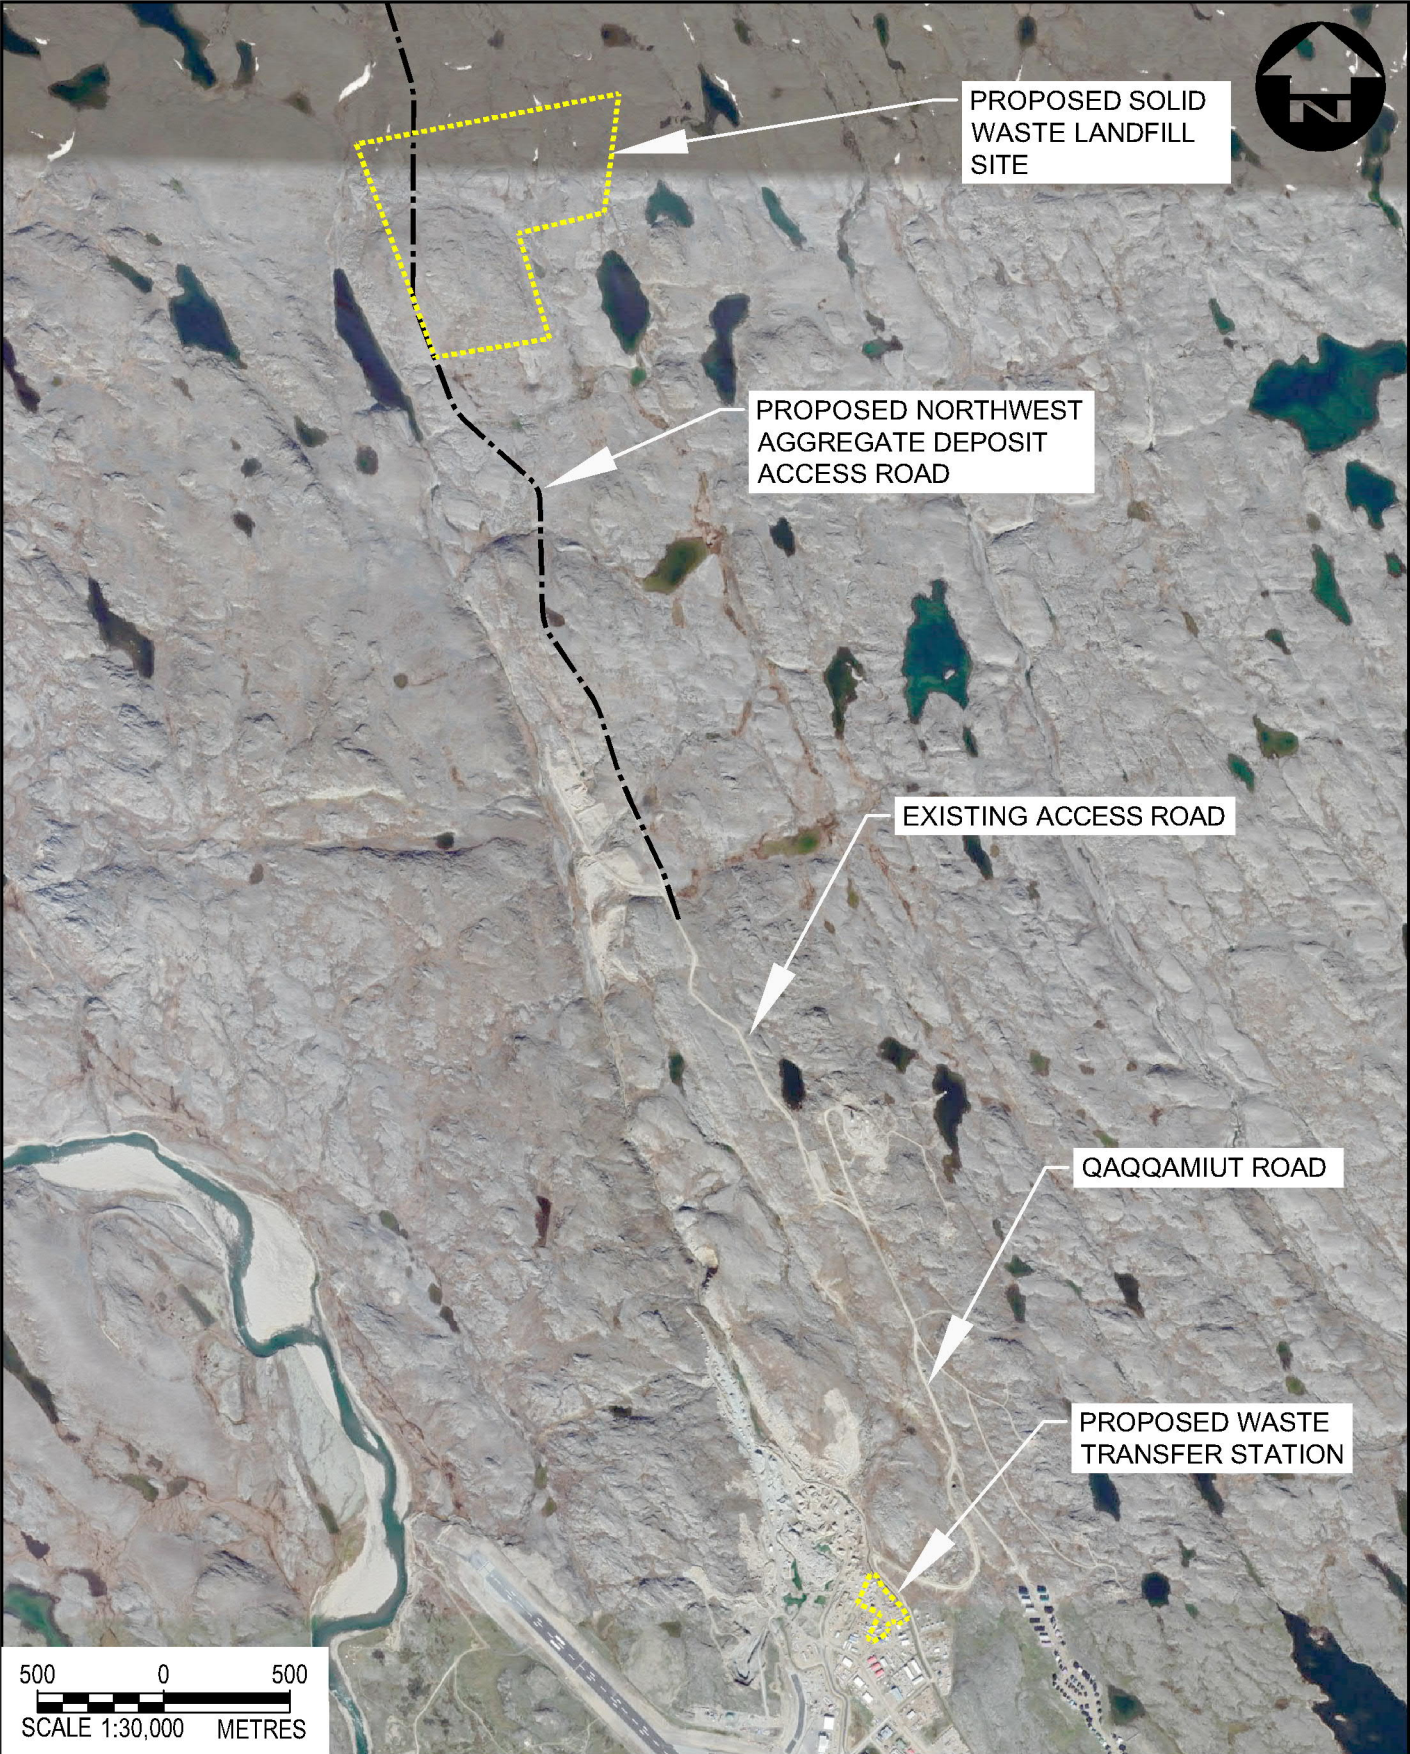

PROPOSED SOLID  
WASTE LANDFILL  
SITE

PROPOSED NORTHWEST  
AGGREGATE DEPOSIT  
ACCESS ROAD

EXISTING ACCESS ROAD

QAQQAMIUT ROAD

PROPOSED WASTE  
TRANSFER STATION

500 0 500  
SCALE 1:30,000 METRES

File Name: c:\pw\_working\_directory\projects\2019\50\dbc\dms\12727\199543-02-site-con-cover.dwg



PROJECT  
**IQUALUIT LANDFILL & WASTE TRANSFER STATION  
CLOSURE & DECOMMISSIONING PLAN**


PROJECT NO.  
**19-9543**

TITLE  
**SITE LOCATIONS**

FIGURE NO.  
**2-1**


DATE  
**AUGUST 2022**

File Name: c:\pw\working directory\projects 2019\15\0\bc\dms127273-19543-02-site-con-proposed.dwg

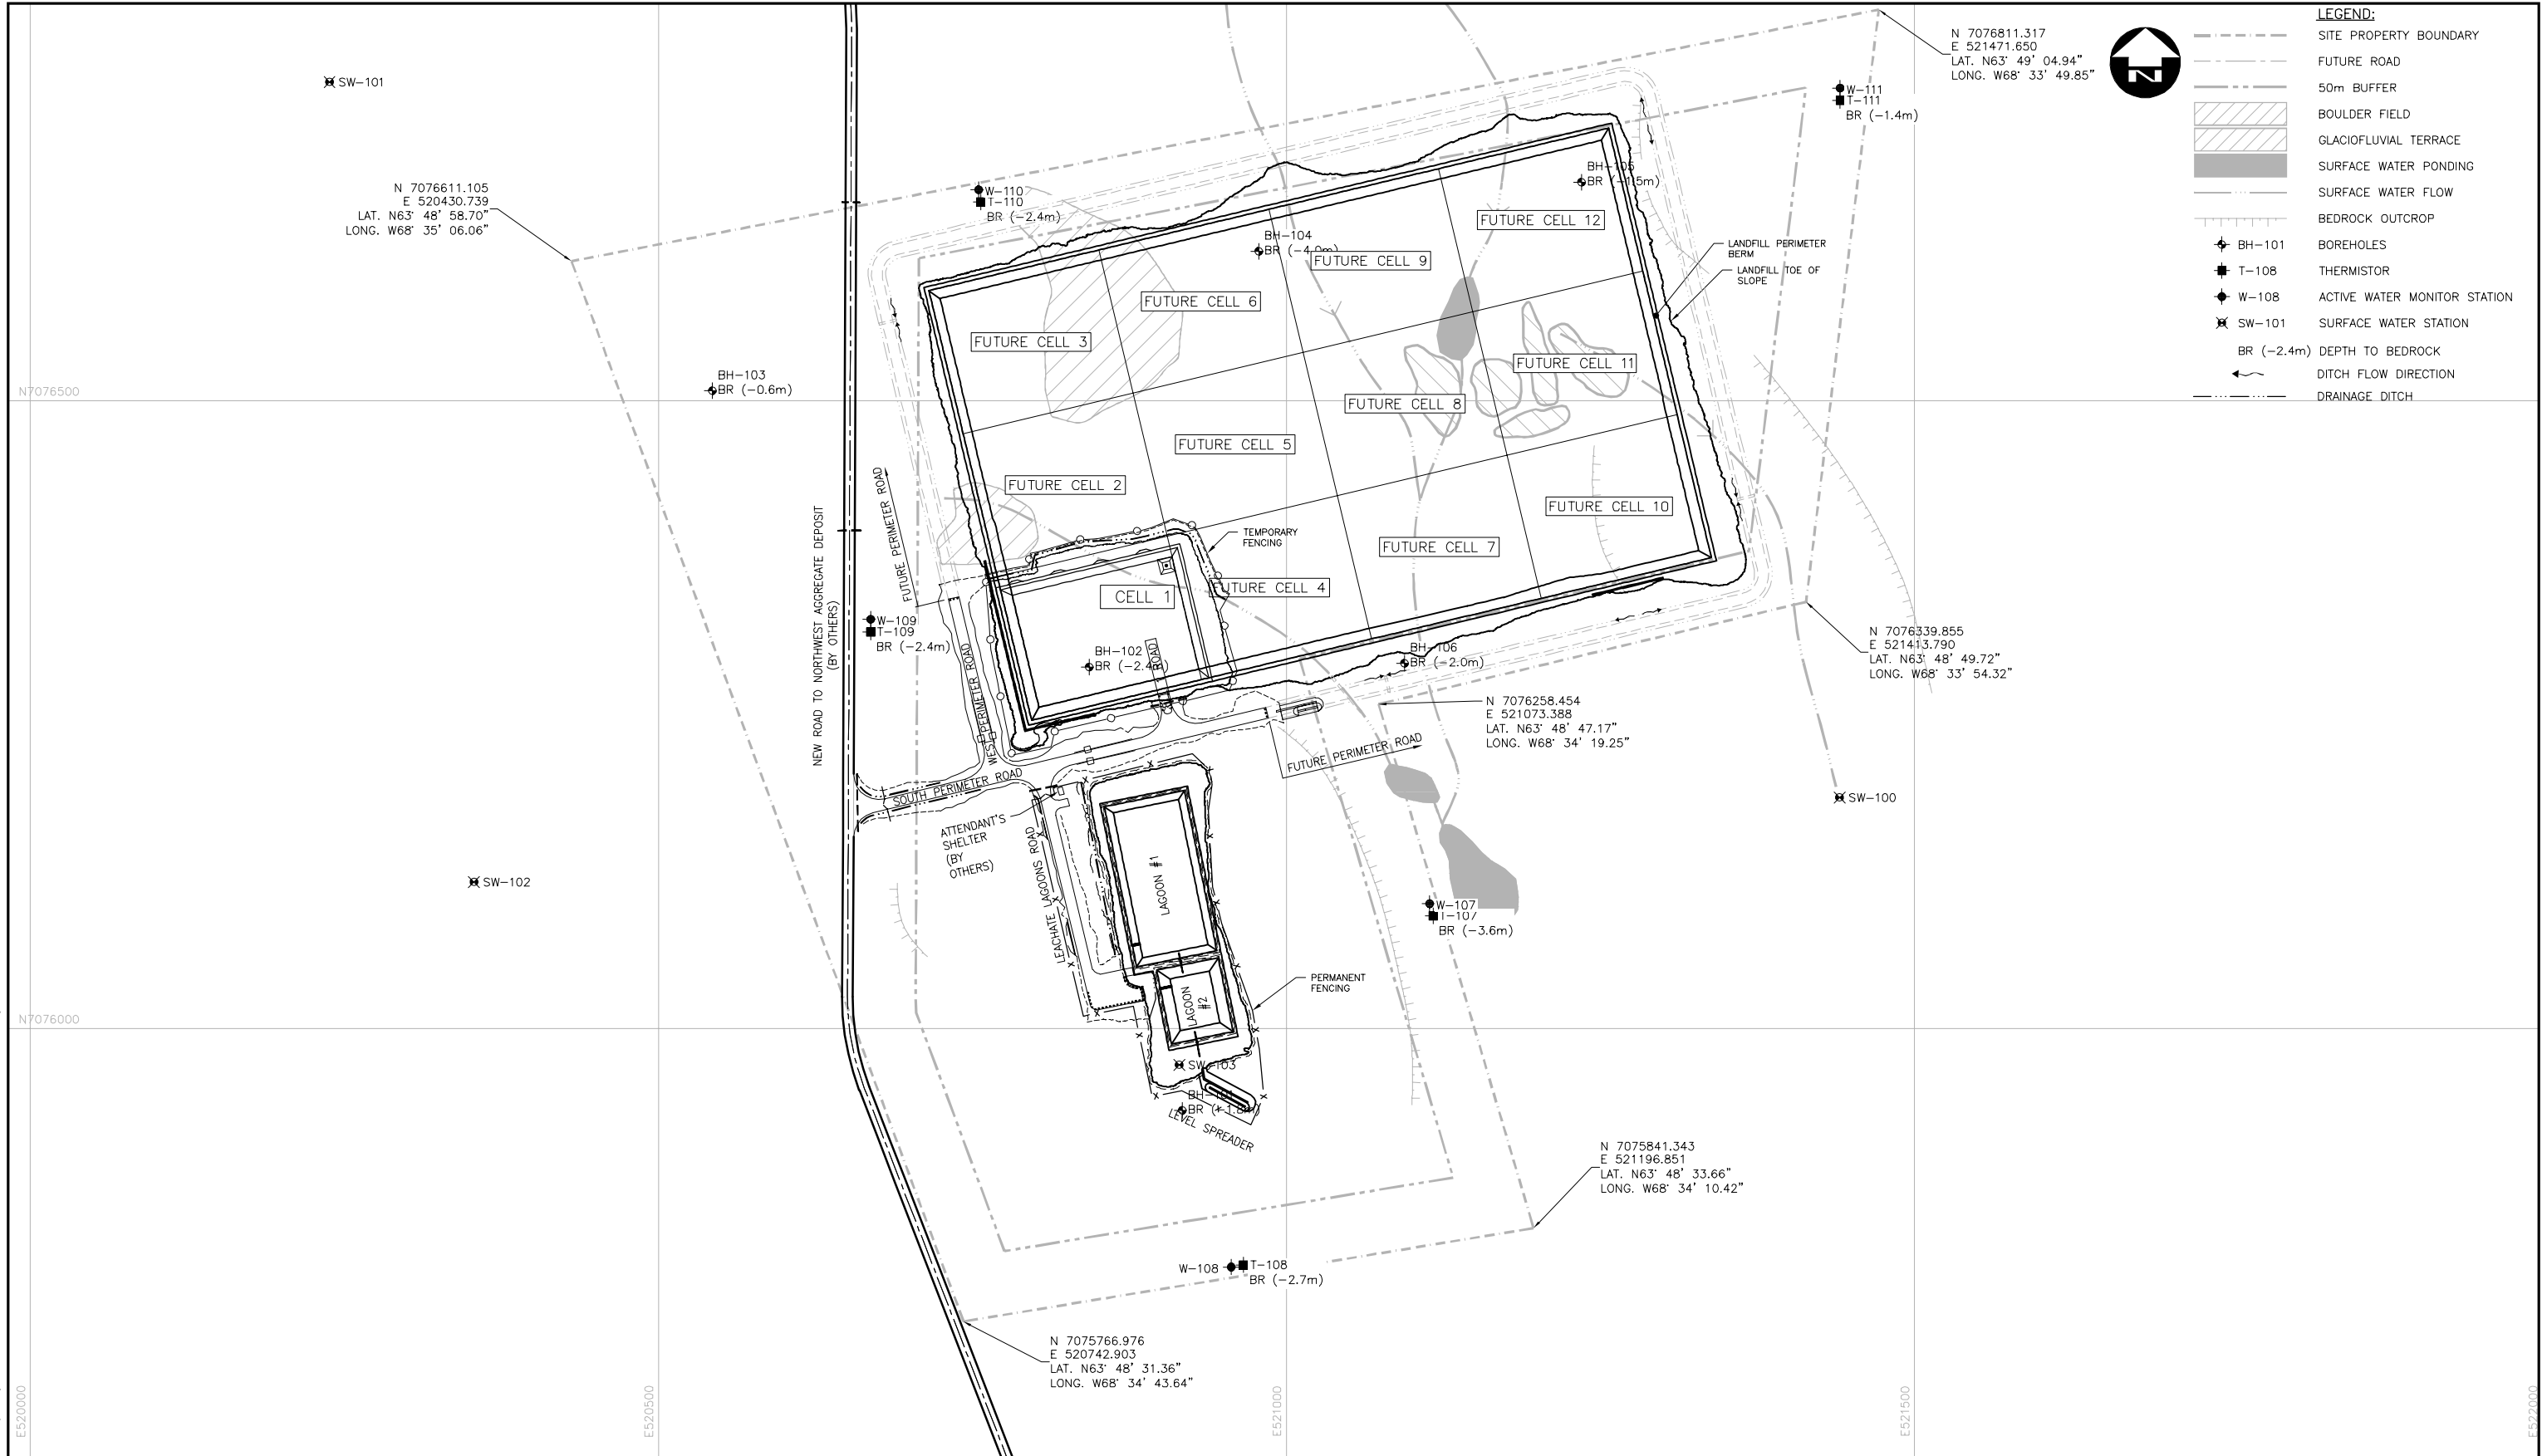

**LEGEND:**

- SITE PROPERTY BOUNDARY
- FUTURE ROAD
- 50m BUFFER
- [Hatched Box] BOULDER FIELD
- [Hatched Box] GLACIOFLUVIAL TERRACE
- [Hatched Box] SURFACE WATER PONDING
- SURFACE WATER FLOW
- BEDROCK OUTCROP
- ⊕ BH-101 BOREHOLES
- ⊕ T-108 THERMISTOR
- ⊕ W-108 ACTIVE WATER MONITOR STATION
- ⊗ SW-101 SURFACE WATER STATION
- BR (-2.4m) DEPTH TO BEDROCK
- ← DITCH FLOW DIRECTION
- DRAINAGE DITCH



 	PROJECT IQUALUIT LANDFILL & WASTE TRANSFER STATION CLOSURE & DECOMMISSIONING PLAN	PROJECT NO. <b>19-9543</b>
	TITLE <b>LANDFILL LAYOUT PLAN</b>	FIGURE NO. <b>2-2</b>
DATE AUGUST 2022		

### 2.3 Waste Transfer Station

The Waste Transfer Station (WTS) is located south of Qaggamiut Road, at the end of the Kakivak Court. The WTS site is on a 2.4 ha parcel, City Lots 3586 228/17/18/20 and 3480 220 1, located approximately one kilometre north of Iqaluit Airport.

The WTS is designed for a 75 year lifespan. Throughout that period, it is expected that ongoing maintenance and/or technology upgrades will be required. The facility will include the WTS building, complete with municipal solid waste baler, a scale house, office trailer and a household hazardous waste depot. The site layout is provided in Figure 2-3.

Municipal solid waste is collected and sorted at the WTS. Material quantities are weighed using the truck scale on both inbound and outbound trucks heading to the Landfill. The material is sorted manually by site operators on the tipping floor. Scrap metal, tires, white goods, wood, household hazardous waste, and end of life vehicles are collected and stored in designated areas of the WTS. Residual waste is collected, compressed into bales, wrapped in plastic and transferred to the site. Being situated in the industrial area of the town, the building will have access to electricity. There will be a water tank and septic tank at the WTS to provide amenities for an Office Trailer, which will include a lunchroom, washroom and locker room.



Stormwater is directed around the WTS through grading and in on-site ditches and directed off-site to the access road ditch network. Runoff from the WTS site follows the City's drainage network in a southerly direction and into Koojesse Inlet. Effluent generated from waste materials within the building is collected in a shallow floor trench and pumped to a holding tank, with subsequent delivery to the City's Wastewater Treatment Plant.



### 2.4 Groundwater and Surface Water Monitoring

A Facility Monitoring Program (FMP), reviewed and approved by the Nunavut Water Board (NWB), will be a stipulation of the operating approval for the Landfill and WTS. Developed as a standalone document supporting the overall Iqaluit waste management initiative, the FMP will define the methodology, schedule and reporting requirements associated with visual, soil temperature, surface water, active layer/groundwater and natural environment monitoring at both facility locations.

With regards to closure and decommissioning, and acknowledging the proposed 75 year life span of the Landfill and WTS, it is recommended that the specifics of a Long Term Monitoring Program (LTMP) be defined in consultation with the NWB a minimum of two years in advance of the scheduled conclusion of active operations at the two facilities.

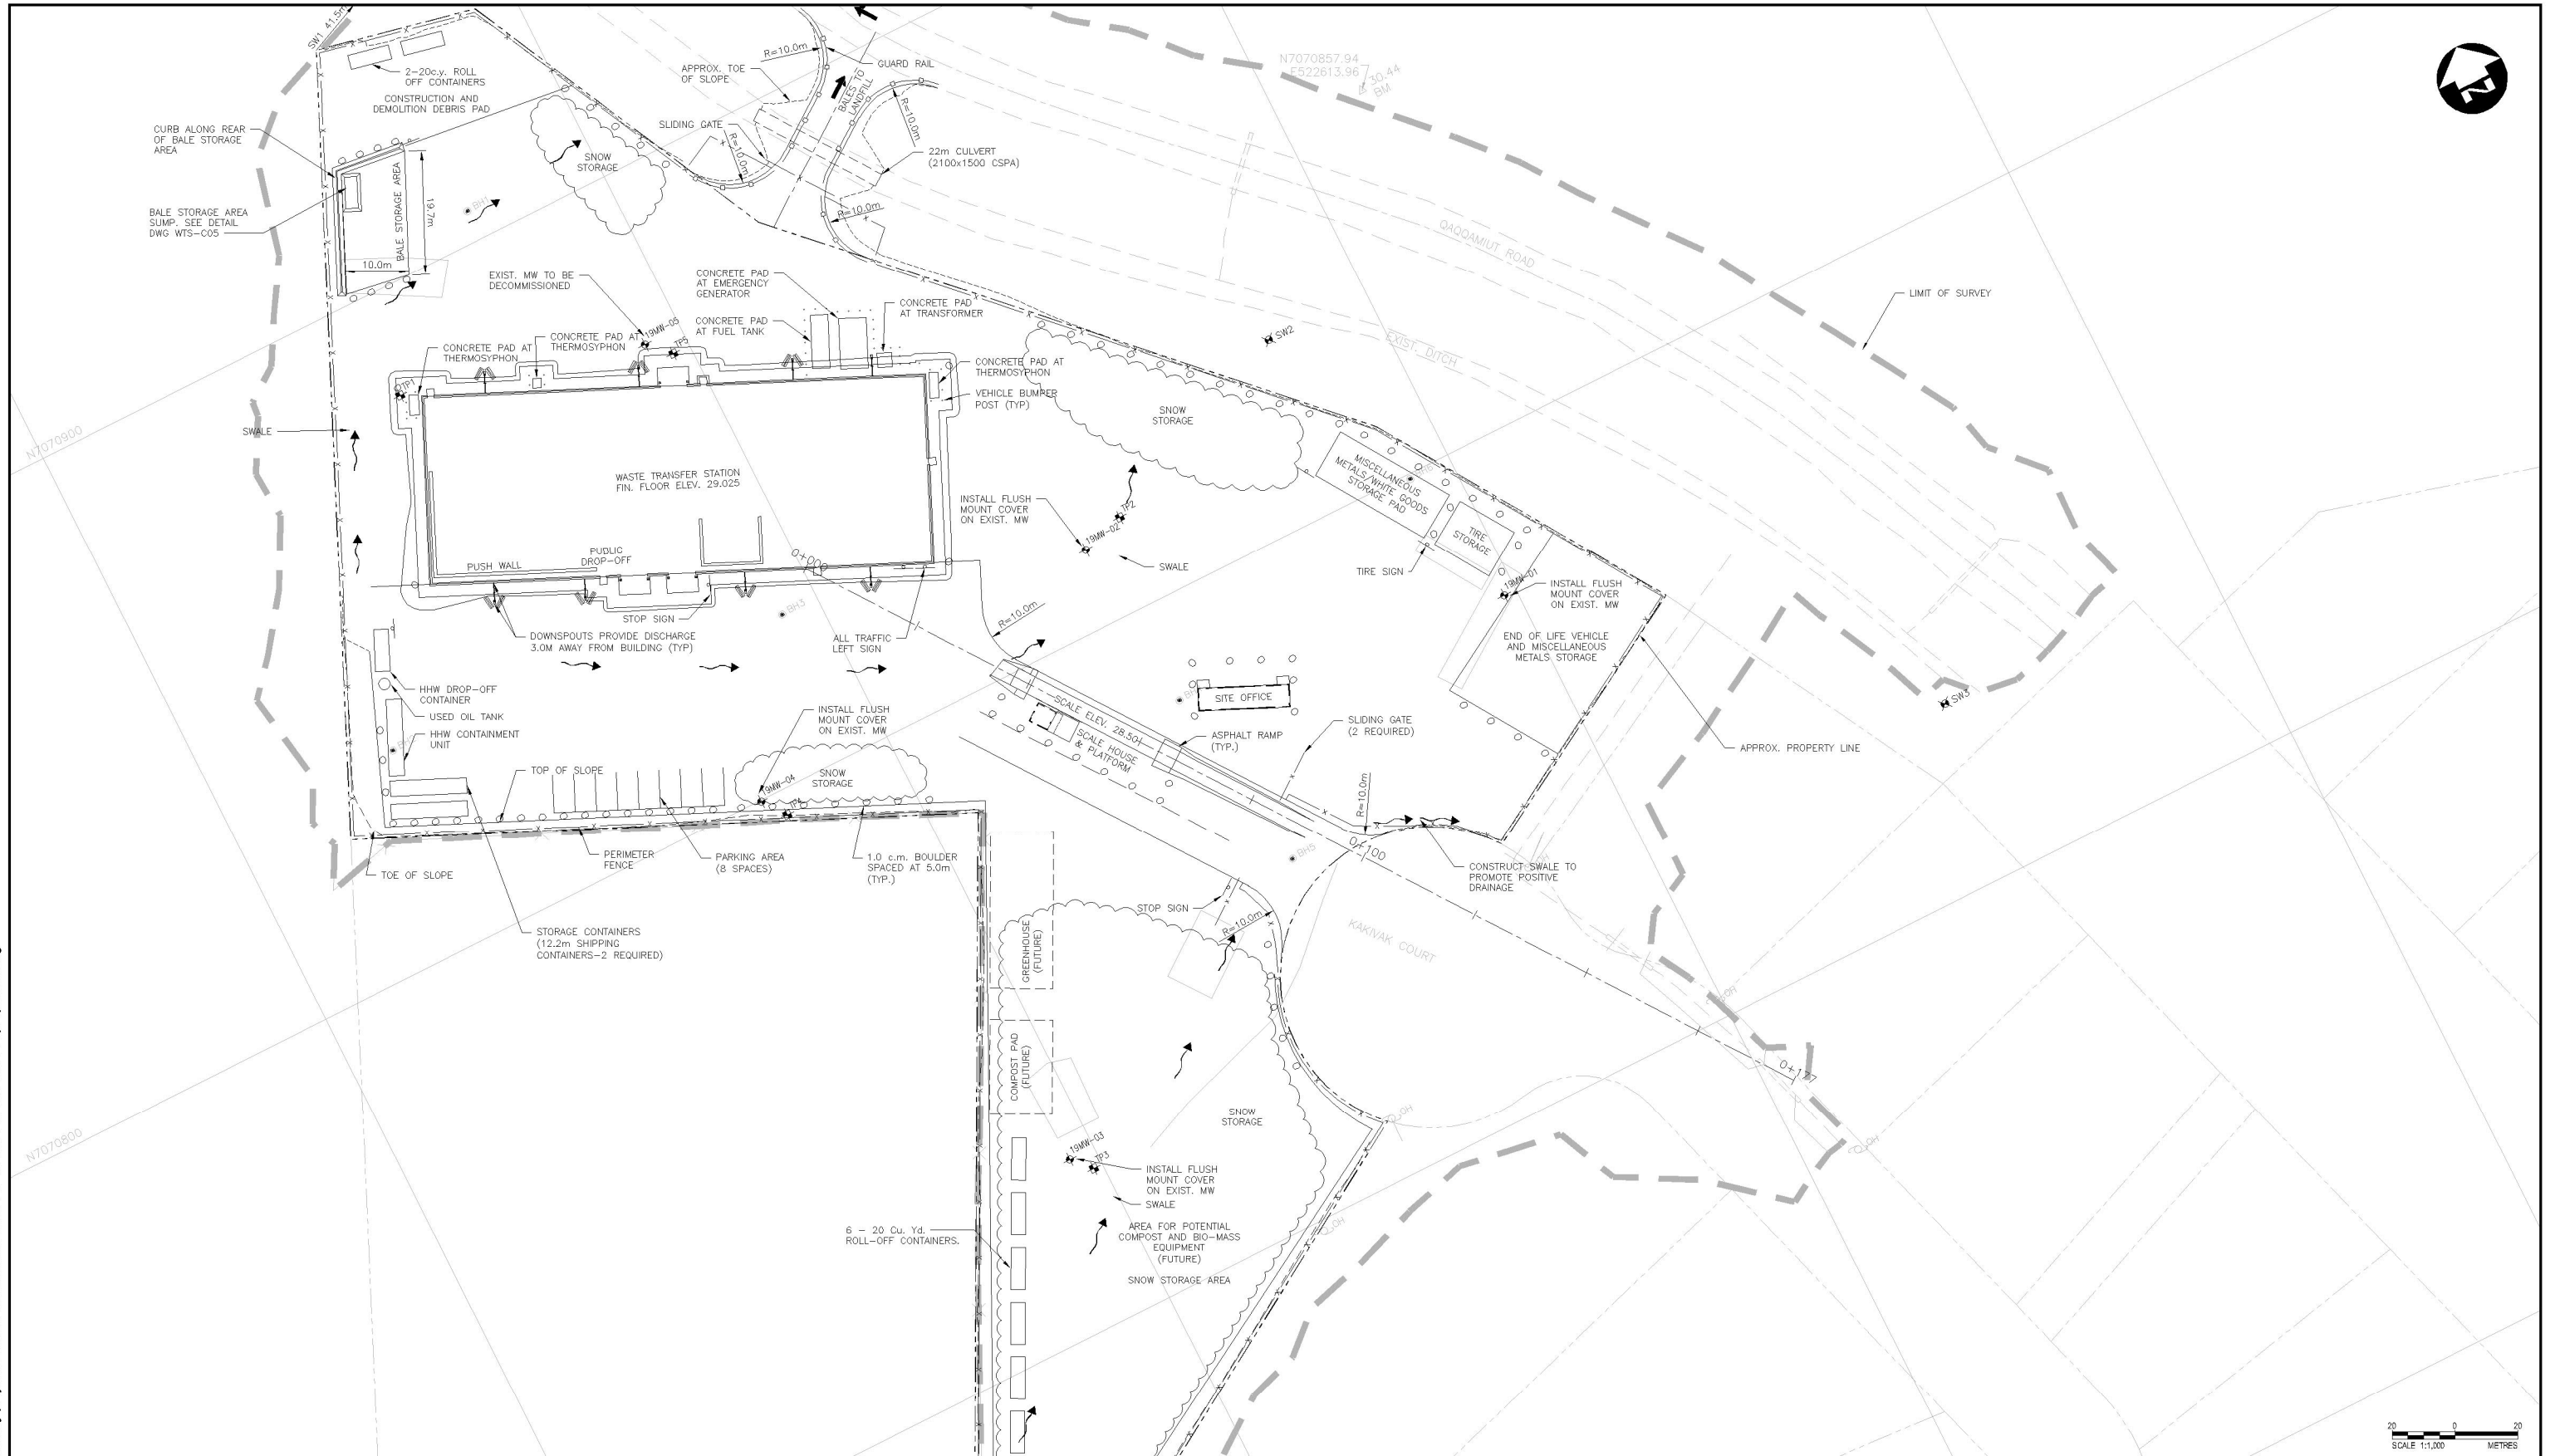File Name: c:\pw\_working\_directory\projects\2019\50\bc\dms\127281\99543-02-site-con-wts-c04\_proposed.dwg



		PROJECT <b>IQUALUIT LANDFILL &amp; WASTE TRANSFER STATION CLOSURE &amp; DECOMMISSIONING PLAN</b>	PROJECT NO. <b>19-9543</b>
		TITLE <b>WTS SITE LAYOUT PLAN</b>	FIGURE NO. <b>2-3</b>
DATE <b>AUGUST 2022</b>			

## 3.0 Environmental Protection Plan

As a component of the Environmental Management Plan (EMP) for the overall City's waste management project (as associated with the original development and subsequent operation of the Landfill and WTS), two Environmental Protection Plans (EPPs) were developed; one addressing requirements during the Construction Phase and one applicable to the Operations, Closure and Post-Closure Phase. It is anticipated that revised versions of both of these documents (as well as the overall Environmental Management Plan) will be prepared during the proposed 75 year operational life of the two facilities.

Definition of detailed requirements for Closure and Post-Closure are to be developed consistent with the latest version of the Operations, Closure and Post-Closure Phase EPP. Should the Contractor be engaged to complete select activities associated with the closure/post-closure effort, the Construction Phase EPP should also be referenced.

## 4.0 Closure and Decommissioning

The closure program has been developed to provide a cost-effective and environmentally responsible plan for closure of the Landfill and WTS. The closure plan, including scheduled dates and relevant procedures, should undergo a detailed design and be submitted to the NWB for comment and approval, prior to its implementation.

The closure plan has four distinct stages:

1. Planning.
2. Public Information and Education.
3. Implementation.
4. Monitoring and Maintenance.

The **initial planning stage** is used to assess the existing situation and to develop a process or plan to ensure the closure objectives can be met effectively and safely while striving to satisfy the objectives of all parties involved.

The second stage, public information and education, is an important component of a closure program and should be introduced early in the plan. The education program is outlined in this report; however, the development of specific materials will be completed closer to the closure timing.

The third stage, implementation, includes closure activities such as demolition, decommissioning, final grading, compacting and capping of the Landfill, as well as vector and wildlife control programs.

Stage four, monitoring and maintenance, is the post-closure period during which the site is periodically inspected. This section focuses on the assessment of the existing site, and the preparation of procedures for the implementation and maintenance phases.

### 4.1 Regulator Notification

As the facilities are nearing the end of their useful lives, the regulator will be notified, as per the requirements of the Approval. Final documentation on the proposed plan for closure, including designs, will be prepared for review and approval, prior to commencing closure.

### 4.2 Public Education and Notification

The closure of the Landfill and the WTS should be proactively communicated to the public so that members of the community are aware of the potential changes to their solid waste management services, in addition to the possibility of increased traffic as a result of construction activities. This is an important aspect of reducing the likelihood of illegal dumping and confusion about the location of services. Notice may be given in the form of flyers, e-notices, educational/outreach campaigns,

community gatherings, etc. All content should be accessible, with the content being available in multiple languages and various forms of media (i.e., electronic or print media).

### 4.3 Signage and Access Restrictions

Fence systems that restrict access to the Landfill and WTS must remain and be maintained during closure and post-closure. Signage stating the permanent closure of the facilities, as well as the new location(s) for waste disposal, will be prominently posted on the fence.

Durable signage should be established around the perimeter of the former Landfill area, confirming that disposal activities have ceased and are prohibited in this location. Suggested wording is presented below:

NO DUMPING  
 AUTHORIZED PERSONNEL  
 ONLY  
 FORMER LANDFILL AREA  
 By Order of the City of Iqaluit

### 4.4 Structure Disassembly and Storage

The only planned building at the Landfill will be the Attendant's Trailer. This building (noting that it is anticipated that it will be replaced several times during the 75 year operational period) is mobile in design and will be potentially relocated to the new disposal site or re-purposed within the City.

It is expected that the WTS building will have reached its useful life after 75 years, and will be decommissioned and disassembled. The resulting materials will be disposed of and/or reused, as per current regulations.

Where observed, hazardous materials (including wastes) and unidentified substances stored on-site after operations cease, shall be listed and relative quantities of material, types of containers, and storage conditions described. The area below, and immediately surrounding the derelict vehicle area, should be tested for possible soil contamination. If a hazard is identified, additional assessment may be required.

### 4.5 Equipment Decommissioning and Salvage

Mobile and stationary equipment at the Landfill and WTS will be assessed for future use or end-of-life disposal/salvage value. As necessary, equipment will be cleaned, temporarily stored, and then removed from the Landfill and WTS. Auxiliary equipment will include but may not be limited to:

- Truck scale
- Baler
- Waste Shredder
- Portable Tire Shear
- Forklift
- Wheel Loader
- Compact Wheel Loader
- Bale Truck
- Vehicle Baler/Logger
- Staff Truck

#### 4.6 Site Grading and Surface Restoration

Any loose municipal solid waste (MSW) will be collected and managed prior to closure. This includes materials that may be located at either the Landfill or WTS. If there is not sufficient capacity at the Landfill, the materials will be disposed of at an approved facility, depending on the types of waste. Soil stockpiles will be utilized to form a smooth final grade on the Landfill, prior to placement of the final cap (see **Section 4.12**). Excess soils will also be disposed of at an alternative approved disposal facility.

At the WTS, remaining household hazardous waste and special waste, end-of-life vehicles, bulky waste, and unclaimed items from the free store will be sorted and disposed of according to their material type. As part of building decommissioning activities, the final site will be graded to suit the future proposed use.

As the waste disposal face is filled above grade to the proposed final elevations at the Landfill, the perimeter slopes and surfaces are reclaimed. In this way, the Landfill is closed and reclaimed progressively throughout the active landfill life. The placement of soil will fill gaps between bales and will make for a smooth continuous surface, in which the final capping materials may be placed.

The proposed final grades of the Landfill maintain a minimum slope of 5% across the top of the waste fill area to allow surface water drainage off of the Landfill while maintaining integrity and stability of the soils and final cover. The side slopes will be maintained at a minimum 4:1 slope, consistent with the original engineering design.

A detailed final grading plan must be completed within the final year leading to closure and this Plan must be approved by the NWB.

#### 4.7 Buffer Zone and Litter/Debris Management

A properly developed buffer zone provides visual screening and wind protection. The 30 m buffer area around the Landfill should; therefore, be maintained. While the principal requirement for the buffer zone relates to an active operating site, it is desirable to maintain an area around former sites after closure to provide a physical barrier. It is recommended that the entire buffer area be designated a “No Hunting Area”.

The City should implement measures to collect and consolidate scattered litter and debris around the perimeter of the former Landfill and WTS area. Before the installation of the final cover, the overall landfill footprint itself, as well as the access roadways, should be inspected and cleaned of remnant litter.

#### 4.8 Surface Water Management

Acknowledging the local surficial soil conditions, and noting design elements of the Landfill and WTS, surface water management and sediment generation is not expected to be a significant ongoing challenge. The surface water management system used during operations will continue to be operational post-closure. Surface run on will be intercepted and diverted around the site. Site ditching will gather any stormwater collected on-site and carry the water to the discharge location away from the open waste face to avoid any leachate generation.

#### 4.9 Vector and Wildlife Management

Birds, rodents and other wildlife frequent municipal waste management sites because of the availability of food sources in the waste. Once delivery of waste stops, the final cover has been placed on the Landfill and the food source has been eliminated, these populations tend to decrease adjacent to the waste management facilities.

Prior to closure, a rodent baiting program could be implemented by a professional pest control company to effectively determine the presence and quantities of rodents and to prevent migration, if necessary.

#### 4.10 Landfill Gas Management

Landfill gas (LFG) will be generated throughout the life of the Landfill. Methane (CH<sub>4</sub>) and carbon dioxide (CO<sub>2</sub>) are the primary constituents of LFG and are produced by microorganisms within the buried waste. Carbohydrates from materials such as paper and cardboard are decomposed initially to sugars, acetic acid, and finally to CH<sub>4</sub> and CO<sub>2</sub>. Other components of LFG include non-methane organic compounds and inorganic compounds.

The amount of LFG generation varies with site conditions (e.g., waste composition, cover materials, design, anaerobic state), and may also vary with climatic conditions such as precipitation rates and temperatures. Due to the design and local climatic conditions of the Landfill, it is anticipated that the rate of LFG generation, as compared to traditional unprocessed MSW landfills in more southern locations, will be quite limited. The wrapping of bales will limit the moisture contact with the waste and ambient temperatures for most of the year are not conducive to LFG generation.

Because CH<sub>4</sub> is combustible, it poses a greater risk to safety than CO<sub>2</sub>. If vented in an uncontrolled manner, CH<sub>4</sub> can accumulate in enclosed spaces on, or close to, the disposal site. CH<sub>4</sub> gas is odourless and because its density is less than that of air, it rises until its movement is restricted by some

impermeable medium. Concentrations of CH<sub>4</sub> between 5 and 15% in air are explosive. However, with proper venting, CH<sub>4</sub> gas should not pose an unacceptable hazard. Research has shown that the rate of decomposition in landfills, as measured by CH<sub>4</sub> gas production, reaches a peak (within the first two years and then slowly tapers off; although continuing in many cases, can continue for periods up to 25 years or more. Therefore, CH<sub>4</sub> venting must be accommodated during and after disposal completion. Passive LFG vents, as depicted in the Landfill Engineering Drawings, are proposed to allow for the controlled discharge and periodic monitoring of this gas.

A post-closure LFG monitoring program developed for this site is discussed in **Section 5.5**. If explosive concentrations of CH<sub>4</sub> are detected during the program, the ventilation capability of the vent itself, as well as the overall spacing of vents, should be investigated. It may become necessary to consider a positive type ventilation system (such as gas extraction) if the problem is not easily remedied.

CO<sub>2</sub> gas is not considered to present a high risk to safety with regards to above ground operations. However, since it is heavier than air, carbon dioxide will collect in the bottom of manholes, poorly vented trenches and other below-ground areas. Therefore, site personnel should take appropriate precautions, such as the use of a respirator or forced ventilation, before entering these areas.

#### 4.11 Leachate Management

The Landfill's leachate collection and treatment system incorporates several components and will be required to remain operational after closure. It is anticipated that leachate management system will include a leachate collection layer within the cell liner, a collection sump with manhole, a retention pond and a potential future bioreactor pond, allowing for treatment before discharge or removal from site.

Similar to normal operations, upon the confirmation of freeze up conditions in the fall, the pump will be removed from the manhole. Assessment of leachate generation status (e.g., observations within the manhole) shall commence in the late spring, confirming when active pumping efforts should be initiated. Once the Landfill is closed and completely capped (noting that the cap will be installed in sections during the 75 year operational life, as landfill cells reach final design elevations), the amount of leachate generated should decrease significantly.

#### 4.12 Landfill Cap

The final cover design provides a protective cap over the waste fill area. The objectives of the final cover design are to:

- Provide a barrier layer over the waste to minimize infiltration of precipitation into the landfill cells to minimize leachate generation.
- Create and maintain positive drainage of precipitation off of the landfill cells and minimize erosion.
- Provide a layer of soil/gravel on which to establish an acceptable level of vegetative cover.

For the Landfill closure, the final active portion of the Landfill at the end of the 75 year operational period will require capping (assuming all previously filled portions of the Landfill have a final cap in place). If the undisturbed ground identified throughout the site (under roads, areas not surveyed, etc.) is not filled before regrading, it will be included within the cover design, to ensure proper drainage from the cap. Otherwise, areas left uncapped within the final covered footprint may collect surface water and compromise the final cover system.

The final contours of the Landfill (see Figure 4-1) have been selected to promote drainage away from the site to discourage infiltration and leachate production, while also preventing erosion. To suit these criteria, a 4H:1V slope is proposed for the side slopes with a 5% grade upwards to the crown of the Landfill, directing drainage away from the Landfill to the adjacent surface water system

The construction of the final cover, or cap, needs to be constructed to satisfy the future management and integrity of the waste fill area. Due to the lack of availability of soil, the top of the Landfill will include a granular layer. The purpose of the cap is to prevent erosion of the Landfill and maintain the integrity of the site. A cross section of the proposed cap is provided in Figure 4-2.


#### 4.13 Landfill Settlement



Settlement of MSW landfills is caused by primary consolidation and secondary compression of the soil/waste matrix. Primary consolidation occurs when the voids in the site decrease as fluids are forced out of the material under pressure. Secondary compression occurs as the number of voids decrease and the site material deforms to fill the voids. Additionally, biological decay, oxidation, combustion and corrosion can cause voids to form in the site.

Consolidation settlement generally occurs during the Operational Phase of the site and should not affect the integrity of the cover system. Settlement due to the compression of the waste layers, caused by the decrease in voids occurs over time (i.e., months to years), can cause the cover system to subside. This could lead to depressed areas and "cracking" of the top cover, which in turn will create easy access for rainwater infiltration.


To determine the degree to which the disposal site is settling, a grid survey of spot elevations tied into an established grid should be documented at known locations upon completion of site closure activities. This will provide a basis to gauge the rate of settlement and degradation, and the data will provide a baseline for which to assess future changes. As a result of bale filling operations at the site, it is anticipated that a high degree of compaction will be achieved resulting in little settlement.

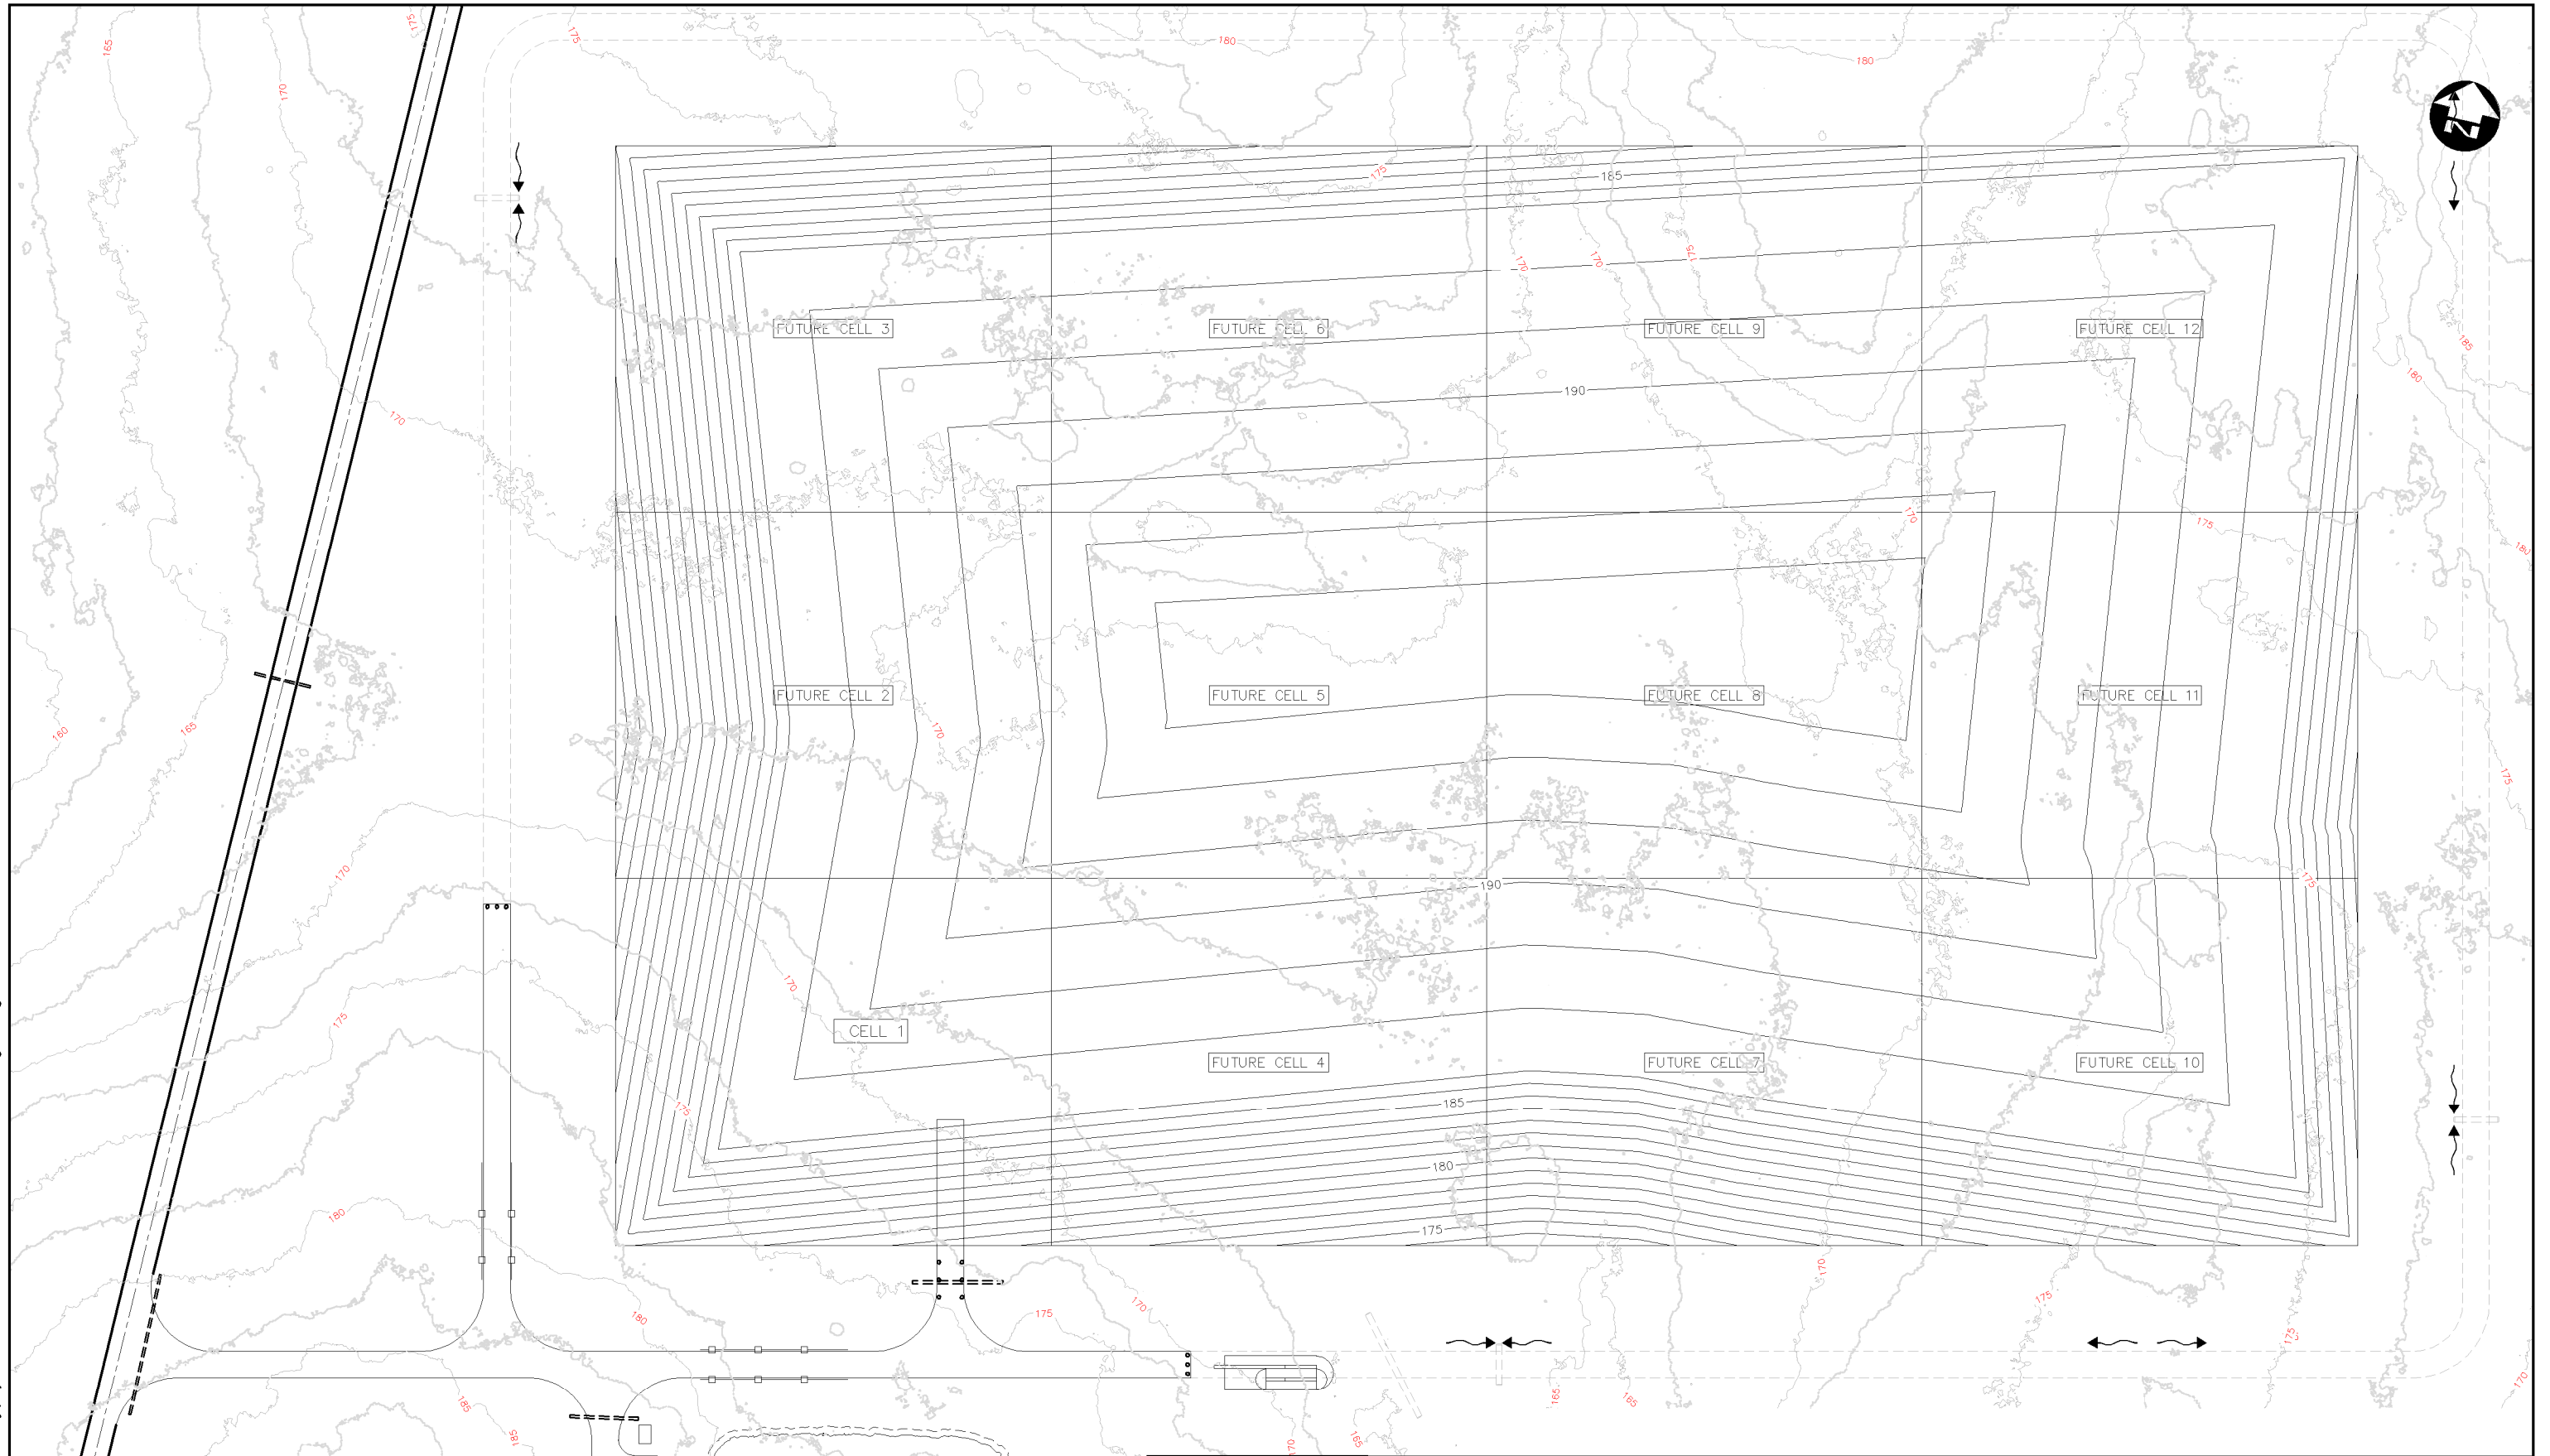File Name: c:\pw\_working\_directory\projects\2019\50\bc\dms12721\99543-02-site-con-waste fig 4-1.dwg




 Iqaluit	 DILLON CONSULTING	PROJECT <b>IQALUIT LANDFILL &amp; WASTE TRANSFER STATION CLOSURE &amp; DECOMMISSIONING PLAN</b>	PROJECT NO. <b>19-9543</b>
		TITLE <b>FINAL CAP CONTOURS</b>	FIGURE NO. <b>4-1</b>
DATE <b>AUGUST 2022</b>			

File Name: c:\pwworking\directory\projects\2019\50\dbc\dms1272729-199543-02\site-con\liner.dwg

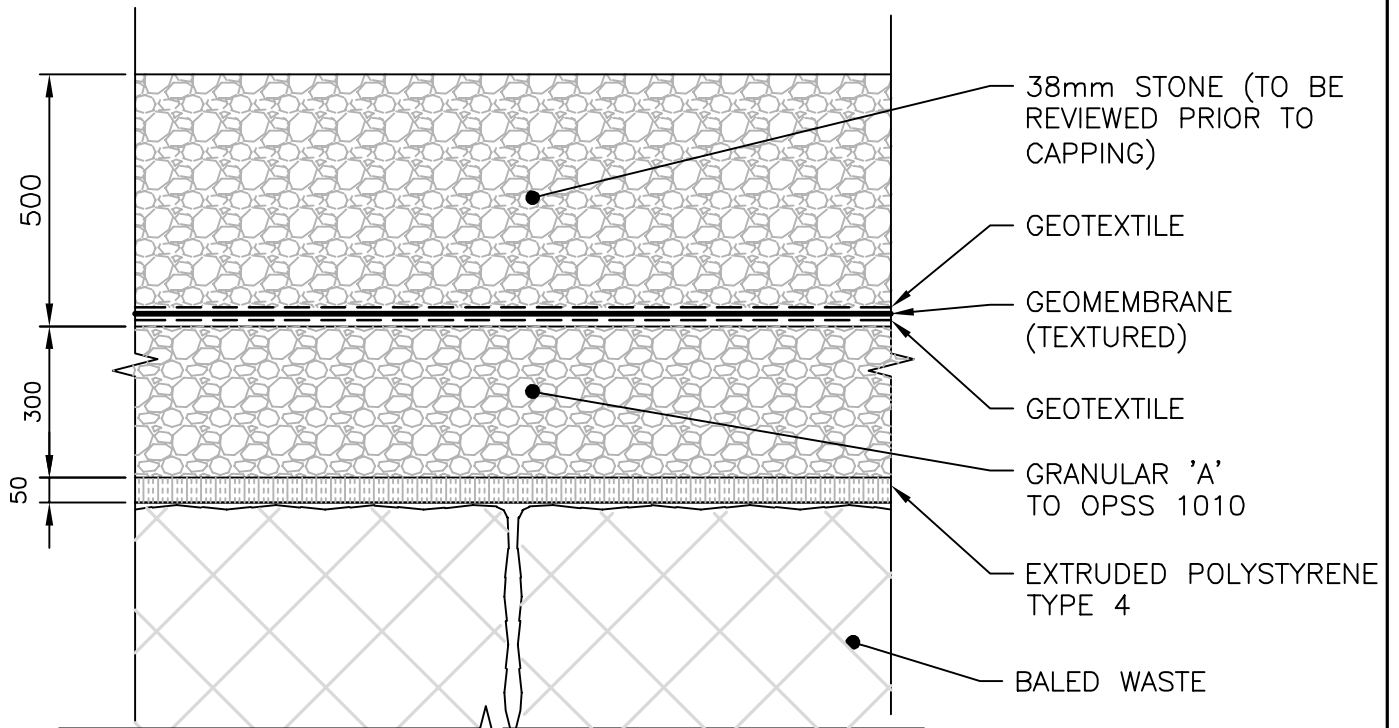

**FUTURE CAP SYSTEM SCHEMATIC**  
N.T.S.

 <b>DILLON</b> CONSULTING	PROJECT <b>IQALUIT LANDFILL &amp; WASTE TRANSFER STATION          CLOSURE &amp; DECOMMISSIONING PLAN</b>	PROJECT NO. <b>19-9543</b>
	TITLE <b>LANDFILL CAP SCHEMATIC</b>	FIGURE NO. <b>4-2</b>
DATE <b>AUGUST 2022</b>		

Additional surveys should be initially conducted on a five year basis and spot checks undertaken, if settlement at the site is observed during the routine surveys. The process of settlement, coupled with the elastic nature of the disposal site and ability to trap gases, may cause buoyant items, particularly past landfilled tires, to migrate up through the Landfill and re-emerge through the cover system. If this occurs, the items should be collected, reburied and the final cover repaired.

#### 4.14 Waste Transfer Station Closure

When the closure of the WTS is imminent, it is expected that an environmental assessment will be necessary to confirm future usage for the site. A Phase I Environmental Site Assessment (ESA) would include, at a minimum:

- Evaluation of all historical information and current land use;
- Assessment of the site for contamination of potential concern or any unsafe conditions;
- Review facility documentation including operation and company records;
- Site reconnaissance;
- Interviewing the facility operator and facility attendants; and
- Reporting.

Upon completion of the Phase I ESA, additional efforts may be necessary to clarify the potential extent of environmental concerns. Additional efforts may include:

- Initial intrusive screening level sampling;
- Determination of the presence or absence of contamination of potential concern at the site;
- If present, the type, extent, degree and approximate volume of contamination;
- Comprehensive delineation of contaminated areas;
- Remediation of contamination; and
- Confirmatory sampling investigation after remediation.

#### 4.15 Closure Activity Schedule

The closure schedule is contingent on the timing for the development of the City's future waste management facility and the waste filling option(s) selected from by the City. The closure of the Landfill may be initiated within two years of scheduled final closure, but is subject to confirmation by additional surveying of the area. Once the closure timing has been determined, several activities must be undertaken. Below is a list of the primary activities, this list should be completed in consecutive steps:

- Finalize Closure Plan Documentation in consultation with the NWB;
- Communicate with stakeholders the plan for closure;
- Commence initial closure activities (weather permitting), focusing on leachate spring repair, slope stabilization and diversion of runoff from stabilized areas;
- Prepare detailed design documents to support the implementation of the Landfill Closure Plan in consultation with NWB;
- Complete tendering activities to support the implementation of the Landfill Closure Plan;

- Complete closure activities, as presented on the detailed design documents and within the Landfill Closure Plan; and
- Ongoing: Conduct overall site monitoring activities, as required.

## 5.0 Post-Closure Plan

Post-closure is defined as the period of time after the Landfill is closed for active use when ongoing monitoring and maintenance is required. The proposed post-closure period for the Landfill is 25 years.

Post-closure activities include:

- Definition of potential property use;
- Periodic site inspections and maintenance; and
- Ongoing environmental effects monitoring.

### 5.1 Post-Closure Property Use

The ongoing decomposition of the buried waste mass could influence the character of the site and potentially cause adverse effects to the environment for some time into the future.

First, differential settlement over time could cause damage to the final cover, increasing surface water infiltration, and ultimately enhancing the generation of leachate and the eruption of leachate springs. Second, gases may be generated by the decomposition of the organic waste portion in the disposal site. Third, the exposure of debris at the surface due to slope erosion could result in physical and/or chemical hazards, due to exposure of debris at surface. Fourth, the release of contaminants directly associated with the waste mass could impact surface and/or groundwater regimes.

For these reasons, and until post-closure monitoring indicates site stability, the area within the Landfill footprint should not, under any circumstances, be used for recreational, industrial/commercial, or any other purpose including material or equipment storage. The determination of site stability should be made by a qualified professional engineer or geoscientist. The landfill cover should have a well-established grass cover and there should be no indication of differential settlement, surface erosion, gas generation, or leachate springs. Water chemistry data should indicate either general improvement or no significant change, over several consecutive sampling events. Once these conditions are achieved, the use of the property may be re-evaluated.

### 5.2 Post-Closure Site Inspection and Maintenance

During the post-closure care period, the City should inspect the final cover system at least once per year, and complete an annual report that includes a record of:

- Continue regular operations of the leachate treatment system;
- Visit the site to visually confirm that the Landfill remains in compliance with the Closure Plan Documentation;
- Assess any impact on the final cover system. This is usually present as leachate springs, erosion, subsidence or cracking in the final cap;
- Provide repairs to the final cover system, as necessary, to correct settlement, subsidence, erosion, and leachate break-out; and

- Assess structural integrity of any infrastructure, such as LFG vents and provide corrective measures, as necessary.

Given the nature of the original facility design and proposed decommissioning activities, post-closure inspection and maintenance activities are not expected to be necessary at the former WTS site.

### 5.3 Contingency Plan for Emergency Response

The Contingency Plan for Emergency Response during the post-closure period will be consistent with the requirements presented in:

- Operations and Maintenance Manual (latest revision); and
- Emergency Response Plan (latest revision).

### 5.4 Closure Cost Estimate

Final closure costs for the Landfill consist of the capital costs required to grade the final active disposal area and construct the final cap (see Table 5-1). It is expected that the Landfill will be closed as in sections over time (with appropriate incremental capping budgets being defined in advance of construction requirements during the life of the facility) with only a small remaining area will be left to cap at the final closure stage (assumed to be one hectare as noted in Table 5-2).

Table 5-1: Preliminary Cost Estimate for Common Final Closure Items

Item	Description	Estimated Budget (2020 dollars)
1	Public Education	\$10,000
2	Signage and Site Security	\$20,000
3	Buffer Zone and Litter Management	\$15,000
4	Vector and Bird Management	\$15,000
5	Site Settlement	\$10,000
6	General Site Maintenance Allowance	\$15,000
7	LFG Wells	\$30,000
8	Subtotal	\$115,000
	Total	\$138,000

Table 5-2: Soil Cap Preliminary Cost Estimate

Item	Description	Units	Estimated Quantity	Unit Price	Budget (2020 dollars)
1	Site Grading	m <sup>2</sup>	10,000	\$2	\$20,000
2	Geotextile	m <sup>2</sup>	20,000	\$3	\$600,000
3	Geomembrane	m <sup>2</sup>	10,000	\$30	\$300,000
Subtotal					\$920,000
Contingency (20% of Subtotal)					\$184,000
Engineering and Construction (10% of Subtotal)					\$92,000
Total					\$1,196,000

## 5.5 Post-Closure Environmental Effects Monitoring and Site Inspection

Typically, following the closure of a municipal waste management facility, regulatory authorities require a continuation of an environmental effects monitoring program for a minimum period of 10 to 20 years. Program development is generally founded on the requirements of the monitoring effort during the final years of active operation along with the incorporation of considerations associated with site decommissioning.

Regarding the City of Iqaluit's Landfill and WTS, and acknowledging the proposed 75 year operational life of the facilities, it is recommended that a post-closure environmental effects monitoring program (or Long Term Monitoring Program (LTMP) – see **Section 2.4**) be defined in consultation with the NWB a minimum of three years in advance of the scheduled conclusion of active operations at the two facilities. Table 5-3, presents an indicative budget of potential annual post-closure requirements at the Landfill. It is noted, however, that the annual budget for post-closure environmental effects monitoring will be dependent upon the regulatory regime and available technologies at time of closure and should thus be developed concurrently with the LTMP.

Table 5-3: Post Closure Activities Budget

Item	Description	Estimated Annual Budget (2020 dollars)
1	Site Inspection and Reporting <sup>1</sup>	\$20,000
2	Environmental Monitoring and Reporting <sup>2</sup>	\$60,000
3	Site Repair/Maintenance Allowance	\$20,000
Total		\$100,000

1. Assumes a requirement to retain a landfill specialist consultant from outside Nunavut, necessitating airfare and accommodations.

2. Based on the monitoring program as developed for initial site commissioning; to be revised based on actual site conditions at the time of closure.