

Licensee

## WATER LICENCE INSPECTION FORM

Licensee Representative

Original
 Follow-Up Report
 ☐

Hamlet of Resolute Bay			Ian Dudla		
Licence No. / Expiry			Representative's Title		
3BM-RES2025			Chief Administrative Officer		
Land / Other Authorizations			Land / Other Authorizations		
Date of Inspection			Inspector		
July 10, 2024			Joseph Mon	iteith	
Activities Inspected Camp Roads/Hauling	☐ Drilling ☐ Other: Solid Waste Facility	☐ Mining Facility, Hazardous Waste	Construction Other:	on Reclamation	Fuel Storage
Conditions:	A- Acceptable	U-Unacceptable	C-Concern	NI-Not Inspected	NA- Not applicable
PART:				Condition	Observation No.*
A: SCOPE, DEFINITIONS AND ENFORCEMENT				Α	
B: GENERAL CONDITIONS				С	
C: CONDITIONS APPL	YING TO SECURITY	NI			
D: CONDITIONS APP	LYING TO WATER US	NI			
E: CONDITIONS APPLYING TO WASTE DISPOSAL AND MANAGEMENT				Α	1-11
F: CONDITIONS APPLYING TO MODIFICATIONS				NI	
G: CONDITIONS APPLYING TO CONSTRUCTION				NI	
H: CONDITIONS APPLYING TO EMERGENCY RESPONSE AND CONTINGENCY				Α	
PLANNING					
I: CONDITIONS APPLYING TO ABANDONMENT, RECLAMATION AND				NA	
CLOSURE PLANNING					
J: CONDITIONS APPLYING TO MONITORING				Α	
SCHEDULES		Α			
	* The observat	tion number correspon	ds with specific	comments provided belo	w.

SECTION 1	Comments (s)	Non-Compliance with Act or Licence (s)	Action Required (s)
BACKGROUND			

There are three water licences for this community. The Hamlet of Resolute Bay was initially issued Licence 3BM-RES9699 for water use, sewage and solid waste disposal. In 2010, the Government of Nunavut, Community and Government Services (GN-CGS) was issued Licence 3BM-RUT1012, subsequently renewed in 2015 as 3BM-RUT1520 for the use of water and disposal of sewage through the Utilidor Systems. Currently, the Hamlet holds the expired Licence 3BM-RES9699 for the Hamlet's solid waste management. In 2003, the GN-CGS applied for and was issued the now expired Licence NWB3YRB0308, for the use of water and deposit of waste at the Hamlet's airport facility. Due to the delayed plans to refurbish the airport facilities (Licence No. 3BM-YRB0308), the Board decided to proceed and process the renewals for the Solid Waste Management Facility (Licence No. 3BM-RES9699) and the Utilidor System (Licence No. 3BM-RUT1520) independently.

Location(s): Latitude: 74°43'01"N Longitude: 94°58'10"W

The new water license 3BM-RES2025, does not authorize the use of water. The license allows the deposit of waste. Effective March 30, 2020, expires on March 29, 2025.

The relevant facilities for this license includes the community bulk metal and hazardous waste facility, the new bulk metal facility located and the burn and cap facility.

# **Inspector Statement**

Samples taken by Inspector:

] Yes 🔀 No

On July 10, 2024, A Water Licence Inspection on 3BM-RES2025 was conducted by Water Resource Officer (WRO) Joseph Monteith at the Hamlet of Resolute Bay, Qikiqtani Region, Nunavut.

## **General Condition**

On March 4, 2023 Robert Hunter, Nunavut Water Board, Licencing Administrator emailed WRO Monteith a copy of the Hamlet of Resolute Bay's 2022 Annual Report.

## Solid Waste Facility 1 (by the beach)

1. The Hamlet manages their domestic waste by burning and capping along the beach on the south side of the community approximately 206 metres from the high water mark of the ocean. The site doesn't appear to be



lined, no signs of water flowing in and out of the facility. This site was active at the time of inspection (photo 2).

- 2. No minimum 10 day notice has been given to the inspector since April 2018 for open pit burning.
- 3. A caution sign was observed cautioning the public from dumping Hazardous Material, Metals, and Rubber Tires, and Tracks. Both signs in English and in Inuktitut m(photo 1).
- 4. No signs of water entering the facility, the site is on a sloped rocky beach (photo 2).
- 5. No signs of leachate leaving the facility. Slope downgrade of burn and cap steepens. Signs of past deposits capped.

## **Metal Dump (Within Community)**

- 6. The Metal Dump facility located with the community of Resolute Bay has a mixture of white waste such as water heaters, washers, dryers, fridges, and freezers. Bulk Metal such as abandoned vehicles such as trucks and snowmobiles, pipes, and storage tanks. (See Photo 2).
- 7. Water enters the site coming out from underground and migrating through the facility (photo 2).

## **Hazardous Waste (within Community)**

- 8. The hazardous waste within the community is exposed to the elements. With some waste oil drums in a berm, while the majority of the hazardous waste outside of a berm.
- 9. Signs of leaks were observed on site at the time of the inspection.

# Domestic Waste (4 km west of the community)

- 10. Inside the new bulk metal Solid Waste Facility west of Resolute Bay (photo 3 & 4).
- 11. Battery, waste oil can observed exposed to the outside elements within the fenced area of the domestic waste facility.

The items listed below are the action's required as summarized from above to ensure compliance:

- Consolidate all hazardous waste such as paint cans and oil cans in the Bulk Metal Solid Waste Facility and Domestic Solid Waste Facility, and store in the hazardous waste section of the Solid Waste Facility to be compliant with Part D: Item 4
- Notify the inspector 10 days ahead of a planned open pit burn by emailing Water Resource Officer Joseph Monteith at: <a href="mailto:joseph.monteith@rcaanc-cirnac.gc.ca">joseph.monteith@rcaanc-cirnac.gc.ca</a>. To be compliant with Part D:Item 3
- Consult with neighbouring land owners on an agreement to mitigate the interaction of water on access to the new bulk metal solid waste facility, to be compliant with Part C:Item 2
- The Licensee is reminded to remain diligent to prevent wastes from entering water, and the environment.

# SECTION 3 Comments Non-Compliance with Act or Licence Action Required

## Part B: Item 1

The Licensee shall file an Annual Report on the Appurtenant Undertaking with the Board for review, no later than March 31st of the year following the calendar year being reported, containing the following information:

- a. tabular summaries of all data generated under the "Monitoring Program";
- b. summary of modifications to the "Monitoring Program";
- c. the monthly and yearly quantities of all Waste types disposed of at the Solid Waste Facility

# Part D: Item 3

The Licensee shall provide a minimum of ten (10) days' notice to an Inspector, of the intent to open burn municipal Waste in accordance with the Government of Nunavut's Environmental Guideline for the Burning and Incineration of Solid Waste (2012), at the designated location at the Solid Waste Facilities, including the details of the types and quantity of Waste to be burned, proposed dates, protocols to be followed, ultimate disposal of residual ash and the person responsible for the activity.

## Part D: Item 4

The Licensee shall segregate and store all hazardous waste within the Solid Waste Facilities in such a manner as to prevent the deposit of deleterious substances into any Water, until such a time that the materials have been removed for proper disposal at an approved facility.

# Part C: Item 2

The Licensee shall implement sediment and erosion control measures prior to and maintain as required during Hamlet Operations, to prevent entry of sediment into Water.

Licensee or Representative	Inspector's Name	
Ian Dudla	Joseph Monteith	
Signature	Signature	



Date	Date
	November 27, 2023

CC: Licensing Department, NWB Jeremy Fraser, Manager of Field Operations, CIRNAC
























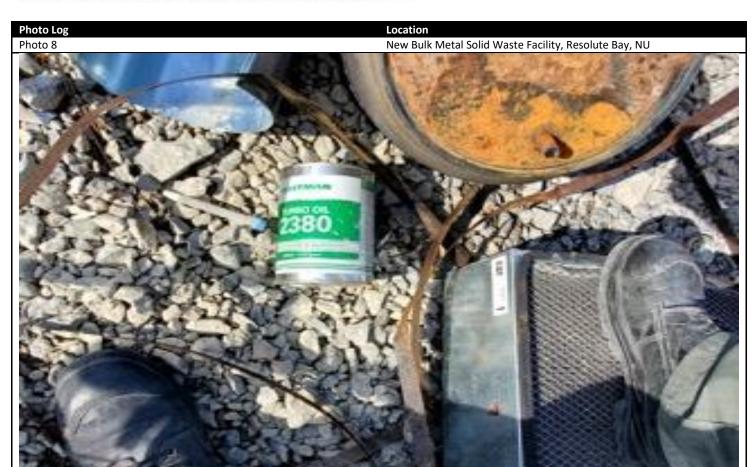

Description: Bulk Metal Facility outside the community. Hazardous Waste Oil cans







